

SUBMITTAL SHEETS


Insulation Saddles



Bronco II®



- Universal mounting feature allows secure fit on either side of channel.
- Molded with self-tapping screw location hole
- UL Classified 2043 (25/50) for use in plenums and air handling systems
- Manufactured from high-strength Polypropylene Copolymer
- Extra strength ribbed side walls
- No assembly or tools required
- Enhanced safety lip prevents insulation crushing and tearing from pipe movement
- UV resistant
- Available in black and white to match insulation
- Excellent finished appearance
- Made in the U.S.A.

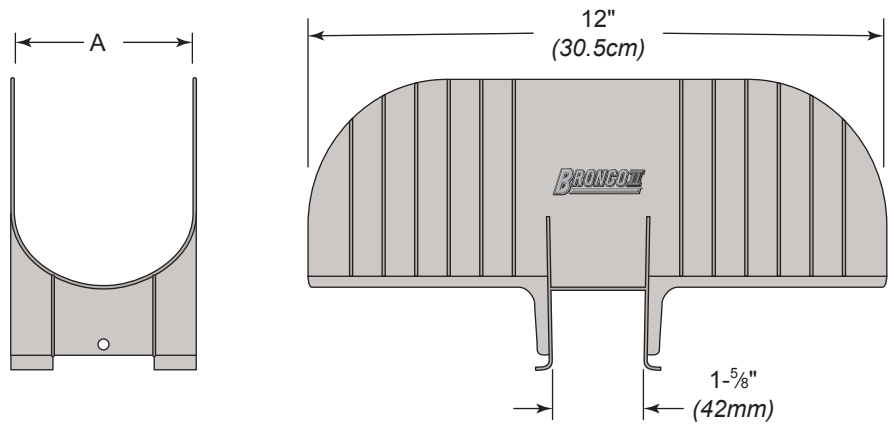

Part No.		A
Black	White	
225B2S	225W2S	2.25" (57mm)
325B2S	325W2S	3.25" (82mm)
425B2S	425W2S	4.25" (108mm)
525B2S	525W2S	5.25" (133mm)
625B2S	625W2S	6.25" (159mm)
825B2S	825W2S	8.25" (204mm)

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		



Insulation Saddles

Bronco II®



Copper Tube Size	Insulation Thickness				
	½" (13mm)	¾" (19mm)	1" (25mm)	1½" (38mm)	2" (50mm)
⅜" (9.5 mm)	225B2S	225B2S	325B2S	425B2S	525B2S
½" (13 mm)					
⅝" (16 mm)					
¾" (19 mm)					
⅞" (22 mm)					
1-⅛" (29 mm)	325B2S	325B2S	425B2S	525B2S	625B2S
1-⅜" (35 mm)					
1-⅝" (41 mm)					
2-⅛" (54 mm)	425B2S	425B2S	525B2S	625B2S	825B2S
2-⅝" (67 mm)					
3-⅛" (79 mm)	425B2S	525B2S	525B2S	625B2S	825B2S
3-⅝" (92 mm)	525B2S	525B2S	625B2S	825B2S	
4-⅛" (105 mm)		625B2S			625B2S

Available in Black (B) or White (W) to match insulation

Schedule 40/80 Pipe Size	Insulation Thickness				
	½" (13mm)	¾" (19mm)	1" (25mm)	1½" (38mm)	2" (50mm)
¼" (6.4 mm)	225B2S	225B2S	325B2S	425B2S	525B2S
⅜" (9.5 mm)					
½" (13 mm)					
¾" (19 mm)					
1" (25 mm)	325B2S	325B2S	425B2S	525B2S	625B2S
1-¼" (31 mm)					
1-½" (38 mm)					
1-½" (38 mm)	425B2S	425B2S	425B2S	525B2S	625B2S
2" (50 mm)					
2-½" (63 mm)					
2-½" (63 mm)	525B2S	525B2S	525B2S	625B2S	825B2S
3" (75 mm)					
3-½" (88 mm)					
4" (100 mm)		625B2S	625B2S	825B2S	

Available in Black (B) or White (W) to match insulation

