


Cushioned Clamps

Klo-Shure® Series 9

Patented Klo-Shure® Insulation Couplings allow sections of closed-cell, elastomeric or fiberglass insulation to be secured, eliminating most secondary operations at suspension points. It can also be used to simply join and secure two lengths of insulation.

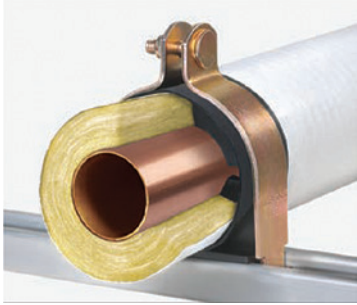

For fiberglass insulation, available in copper tube, iron pipe and mm sizing.

- All insulated copper tube and iron pipe lines are to be secured using can be insulated and secured
- Insulation is inserted inside coupling until it contacts internal wall
- Secondary operations (glue + tape) can be performed at installer's discretion
- Entire assembly can be assembled or disassembled with a single hand or power wrench
- Keep conductor runs as straight as possible.
- Overwrap of Klo-Shure coupling with insulation is not required
- Acceptable for horizontal and vertical installations

Specification Data & Guidelines:



- Made in USA
- UL Classified 2043 (25/50) for use in plenums and air handling systems
- Specified MSS-SP 58 Type 60 and Type 61
- Manufactured from high strength TPO plastic
- Superior vapor barrier
- Three times faster installation of closed-cell elastomeric and fiberglass insulation
- Dramatically improved finished appearance of insulated tubing
- UV resistant
- Eliminates insulation compression at suspension points
- Available with strut mounted clamps and clevis hangers
 - OD tube from 1/4" to 4-1/8"
 - Nominal pipe 1/2" to 3"
 - Metric sizes 25mm –110mm
- All metal components have a yellow Trivalent (non-hex) plating

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		



Cushioned Clamps

Klo-Shure® Series 9

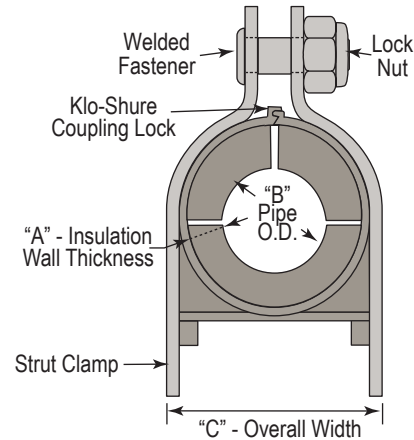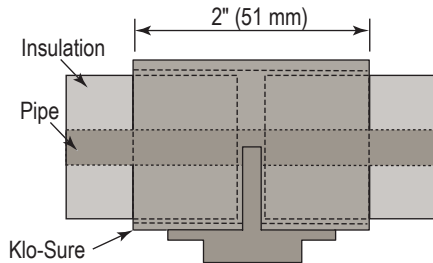


Part No.	Insulation Wall Thickness	Copper Tube O.D.	C Overall Width
924062	1/2"	5/8" OD	1.79" (45mm)
924087		7/8" OD	2.03" (51mm)
924112		1-1/8" OD	2.29" (58mm)
924137		1-3/8" OD	2.50" (64mm)
924162		1-5/8" OD	2.85" (72mm)
924212		2-1/8" OD	3.29" (83mm)
928062	1"	5/8" OD	3.01" (76mm)
928087		7/8" OD	3.01" (76mm)
928112		1-1/8" OD	3.01" (76mm)
928137		1-3/8" OD	3.64" (92mm)
928162		1-5/8" OD	3.64" (92mm)
928212		2-1/8" OD	4.14" (105mm)
928262		2-5/8" OD	4.65" (118mm)
928312		3-1/8" OD	5.14" (131mm)
928362		3-5/8" OD	5.69" (145mm)
928412		4-1/8" OD	6.87" (174mm)
928512		5-1/8" OD	7.87" (200mm)
929087	1-1/2"	7/8" OD	4.14" (105mm)
929112		1-1/8" OD	4.14" (105mm)
929137		1-3/8" OD	4.65" (118mm)
929162		1-5/8" OD	5.14" (131mm)
929212		2-1/8" OD	5.14" (131mm)
929262		2-5/8" OD	5.69" (145mm)
929312		3-1/8" OD	6.87" (174mm)
929362		3-5/8" OD	6.87" (174mm)
929412		4-1/8" OD	7.87" (200mm)
922062	2"	5/8" OD	4.65" (118mm)
922087		7/8" OD	5.14" (131mm)
922112		1-1/8" OD	5.14" (131mm)
922137		1-3/8" OD	5.7" (145mm)
922162		1-5/8" OD	5.7" (145mm)
922212		2-1/8" OD	6.87" (174mm)
922262		2-5/8" OD	6.87" (174mm)
922312		3-1/8" OD	7.87" (200mm)
922362		3-5/8" OD	7.87" (200mm)
922412		4-1/8" OD	8.87" (225mm)

Part No.	Insulation Wall Thickness	Iron Pipe O.D.	C Overall Width
924084	1/2"	1/2" OD	0.840
924105		3/4" OD	1.050
924131		1" OD	1.315
924166		1-1/4" OD	1.660
924190		1-1/2" OD	1.900
928084	1"	1/2" OD	0.840
928105		3/4" OD	1.050
928131		1" OD	1.315
928166		1-1/4" OD	1.660
928190		1-1/2" OD	1.900
928237		2" OD	2.375
928287		2-1/2" OD	2.875
928350		3" OD	3.500
928362		3-5/8" OD	3.625
928412		4-1/8" OD	4.125
928512		5-1/8" OD	5.125
929084	1-1/2"	1/2" OD	0.840
929105		3/4" OD	1.050
929131		1" OD	1.315
929166		1-1/4" OD	1.660
929190		1-1/2" OD	1.900
929262		2-1/2" OD	3.625
929312		3-1/8" OD	4.125
929350		3" OD	3.500
929362	2"	3-5/8" OD	3.625
929412		4-1/8" OD	4.125
922212		2-1/8" OD	2.125
922262		2-5/8" OD	2.625
922312		3-1/8" OD	3.125
922362		3-5/8" OD	3.625



Cushioned Clamps

Klo-Shure® Series 9

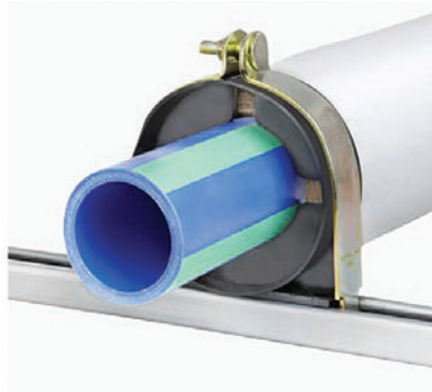

Part No.	Insulation Wall Thickness	Metric Pipe		C Overall Width
928M25	1"	25mm	0.98"	3.01 (76mm)
928M32		32mm	1.26"	3.64 (92mm)
928M40		40mm	1.57"	3.64 (92mm)
928M50		50mm	1.97"	4.14 (105mm)
928M63		63mm	2.48"	4.64 (118mm)
928M75		75mm	2.95"	5.14 (131mm)
928M90		90mm	3.54"	5.75 (146mm)
928M110		110mm	4.33"	6.87 (174mm)
929M25	1-1/2"	25mm	0.98"	4.13 (105mm)
929M32		32mm	1.26"	4.63 (118mm)
929M40		40mm	1.57"	5.14 (131mm)
929M50		50mm	1.97"	5.14 (131mm)
929M63		63mm	2.48"	5.69 (145mm)
929M75		75mm	2.95"	6.87 (174mm)
929M90		90mm	3.54"	6.87 (174mm)

