

**CUSH-A-BLOCK®**

75% FASTER STRUT INSTALL AND CHANGE-OUT



**Green Product - Not Just Because of its Color**

**Embedded Fasteners**

**No Rust on the Roof**

**Easy-carry Hand Grip**

**Simple to Lift and Carry**

**Water Flow-through**

**Helps Prevent Mold & Ice Dams**

- 100% Recycled Rubber Qualifies for LEED Credits
- Meets the Buy America Act and ARRA
- Resistant to Freeze and Thaw



- Dampens Vibrations
- Compatible with Most Rooftop Materials
- Eco-Green Reflective Safety Strip Won't Peel

**Cush-a-Block Biggie - CBB Series**


Part No.	Uniform Load
CBB	7,500 lbs (33.36 kN)



Spacing of embedded fasteners allow direct attachment of strut fittings and channel to the Biggie Block

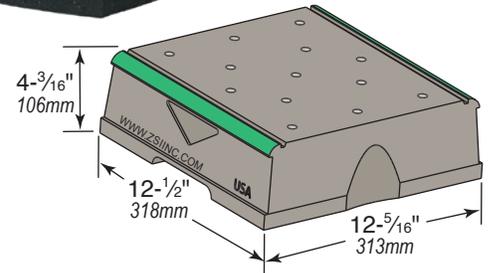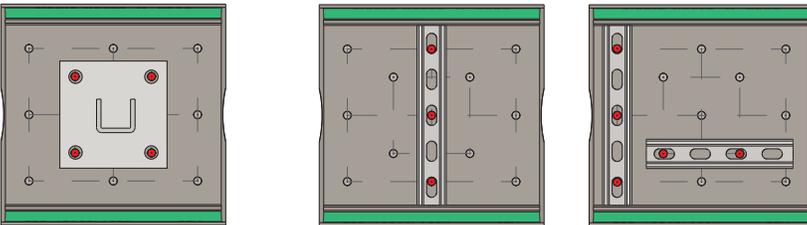


**Cush-a-Block Mini CBM Series**

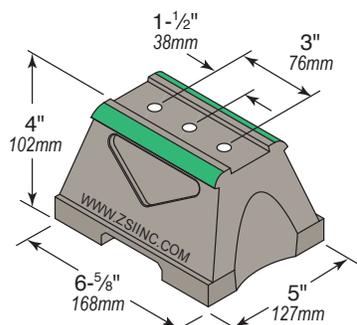

Part No.	Uniform Load
CBM	400lbs (1.78 kN)

**Cush-a-Block CBN Series**

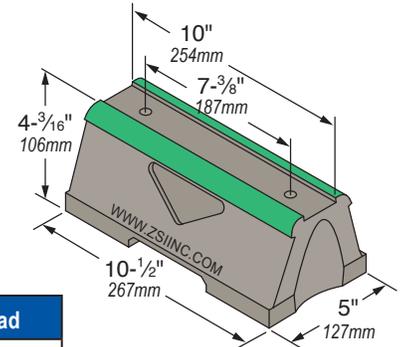


Part No.	Uniform Load
CBN	2,500 lbs (11.12 kN)



**Rooftop Support System**

**CUSH-A-BLOCK - CBN SERIES**

SUPPORT WITH METAL CHANNEL

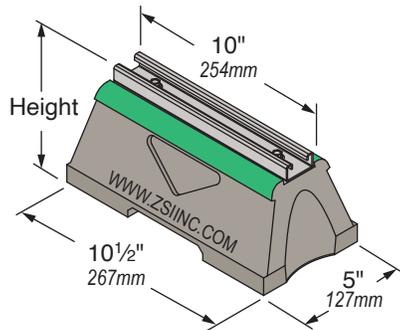

The CBN Series provides a longer mounting surface. Custom lengths are available upon request

Part No.	No. of Bases	Height	Strut Length	Total Length	Uniform Load Lbs (kN)*
<b>CBN-Support With 1<sup>3</sup>/<sub>16</sub>" (21mm) Pre-Galv. or Hot Dip Galv. Steel Channel</b>					
CBN1S	1	4- <sup>13</sup> / <sub>16</sub> " (122mm)	10" (254mm)	10- <sup>1</sup> / <sub>2</sub> " (267mm)	2,500 * (11.12 kN)
CBN2S	2		22" (559mm)	22- <sup>1</sup> / <sub>2</sub> " (572mm)	5,000 * (22.24 kN)
CBN3S	3		34" (864mm)	34- <sup>1</sup> / <sub>2</sub> " (876mm)	7,500 * (33.36 kN)
CBN4S	4		46" (1.17m)	46- <sup>1</sup> / <sub>2</sub> " (1.18m)	10,000 * (44.48 kN)
<b>CBN-Support With 1-<sup>5</sup>/<sub>8</sub>" (41mm) Pre-Galv. or Hot Dip Galv. Steel Channel</b>					
CBN1D	1	5- <sup>5</sup> / <sub>8</sub> " (143mm)	10" (254mm)	10- <sup>1</sup> / <sub>2</sub> " (267mm)	2,500 * (11.12 kN)
CBN2D	2		22" (559mm)	22- <sup>1</sup> / <sub>2</sub> " (572mm)	5,000 * (22.24 kN)
CBN3D	3		34" (864mm)	34- <sup>1</sup> / <sub>2</sub> " (876mm)	7,500 * (33.36 kN)
CBN4D	4		46" (1.17m)	46- <sup>1</sup> / <sub>2</sub> " (1.18m)	10,000 * (44.48 kN)
<b>CBN Support With 2-<sup>7</sup>/<sub>16</sub>" (62mm) Pre-Galv. or Hot Dip Galv. Steel Channel</b>					
CBN1RD	1	6- <sup>7</sup> / <sub>16</sub> " (164mm)	10" (254mm)	10- <sup>1</sup> / <sub>2</sub> " (267mm)	2,500 * (11.12 kN)
CBN2RD	2		22" (559mm)	22- <sup>1</sup> / <sub>2</sub> " (572mm)	5,000 * (22.24 kN)
CBN3RD	3		34" (864mm)	34- <sup>1</sup> / <sub>2</sub> " (876mm)	7,500 * (33.36 kN)
CBN4RD	4		46" (1.17m)	46- <sup>1</sup> / <sub>2</sub> " (1.18m)	10,000 * (44.48 kN)
* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.					


**CUSH-A-BLOCK MINI WITH RAISED STRUT**

Support with Raised 1-<sup>5</sup>/<sub>8</sub>" Pre-Galv. or Hot Dip Galv. Metal Channel



**CUSH-A-BLOCK MINI - CBM SERIES**

SUPPORT WITH METAL CHANNEL

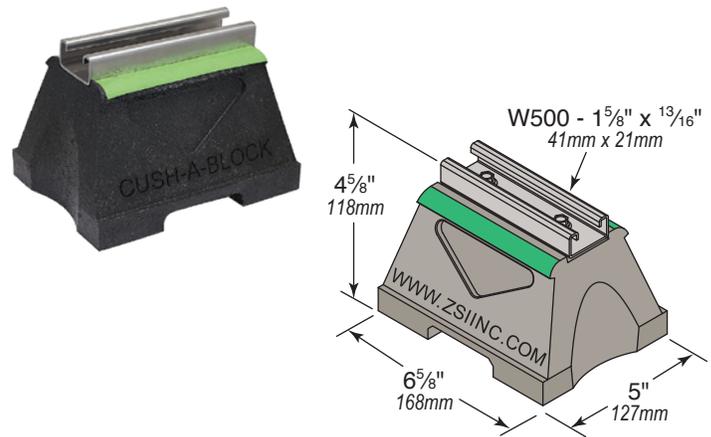

**CUSH-A-BLOCK MINI WITH RAISED CUSH-A-RING**

Support with Raised SPH Cush-A-Ring Clamp for Copper Tube or Steel Tube or Pipe

Support With Raised SPP Cush-A-Ring Clamp for PEX, CPVC, or PVC Pipe



Part No.	Uniform Load Capacity (Lbs) *
<b>CBM-Support With 1<sup>3</sup>/<sub>16</sub>" Pre-Galv. or Hot Dip Galv. Steel Channel</b>	
CBM1S	400 (11.78 kN)
<b>CBM-Support With 1-<sup>5</sup>/<sub>8</sub>" Pre-Galv. or Hot Dip Galv. Steel Channel</b>	
CBM1D	400 (11.78 kN)
* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.	