



SUPPORT SYSTEMS ENGINEERING CATALOG



Wesanco-ZSi.com

WZ-S2





The **Ideal Tridon Group** has comprehensive offerings of highly engineered critical components used in supporting, securing, and connecting the movement of air, fluid, and electricity in critical applications. We are a growing family of brands, all known for their superior subject matter expertise.

Our Products

Hose clamps • Strut & Support Systems • Hose Fittings & Couplings • & more!

Our Values

Devotion to Customers • Passion for Growth • Outstanding Quality

Our Brands

Support.	Secure.	Connect.

Product Part Number Dimension Tables

Below is an example of part number dimension tables used throughout this catalog. This table shows all three Metal Framing companies in the Ideal Tridon Group however in order to Streamline our Support Product Offerings the Versabar and Florida Strut Brands and Part Numbers are being Discontinued and Converted into the Wesanco Brand and Part Numbers.

SPECIFYING Brand & Part No.	Dimension Data Information	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W5142	3" (76mm)	VF2205A	L14
W5143	3-1/2" (89mm)	VF2205B	L15
W5144	4" (102mm)	VF2205C	L16

See page 23 for Material or Finish ordering codes for use in part numbers.

Below is an example part number dimension table used throughout this catalog. These are Wesanco or ZSI Products All parts are available thru your ITG representative.

Part No.	Nominal Pipe Size	Dimensions	
		"A"	"B"
CG-10	1/4"	1-15/16" (49mm)	1-15/16" (49mm)
CG-20	3/8"	2-3/8" (60mm)	2-3/8" (60mm)

Warranty:

Wesanco ZSI warrants that it's products are supplied in accordance with published specifications in our current general engineering catalog and that any product sold to Purchaser will be free from defects in material or workmanship at the time of delivery to the carrier.

Wesanco ZSI's sole responsibility in the event of any defect found within 30 days of acceptance of delivery of any product it produces in material or workmanship shall be at Wesanco ZSI's sole discretion to repair or replace any such defective product.

THE AFORESAID WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND WESANCO ZSI EXPRESSLY DISCLAIMS ANY OTHER WARRANTY INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. NO AGENT, EMPLOYEE OR REPRESENTATIVE OF WESANCO






















Table of Contents













INTRODUCTION 2 - 22	BRACKETS 109 - 124	Electrical Accessories 205 - 206
Pictorial Table of Contents . . . 4 - 22	Channel Brackets 110 - 112	End Caps 206 - 207
Finish/Material Ordering Codes . . 23	Shelf Brackets 113 - 116	Porc-a-Clamp® 208
Materials & Finish Specs. 24 - 25	Support Brackets 117	SPRING STEEL 209 - 240
The Metal Framing System 26	Reel Supports 118	Conduit & Cable Supports . . . 210 - 219
CHANNEL 27 - 64	Utility Brackets 119 - 124	Structural Attachment 220 - 230
Channel Selection Chart 28 - 29	BEAM CLAMPS 125 - 138	Stud Wall Apps 231 - 236
Descending Order of Strength . . . 30	All Purpose Clamps 126	Ceiling & Acoustical Apps . . . 237 - 240
Pierced Channel 31	Formed Steel Clamps 127	CONCRETE INSERTS . . . 241 - 248
Example Combination Channel . . . 32	Rod Suspension Clamps . . . 128 - 131	Spot Concrete Insert 242
Custom Channel 33	C-Type & Z-Type Clamps . . . 129 - 132	Concrete Insert Nut 242
Beam & Column Loads 34 - 37	Universal Clamps 130 - 132	Continuous Concrete
Channel 1-5/8" x 1-5/8" (41 x 41mm) . 38 - 41	Window Type Clamps 132	Inserts Overview 242 - 243
Load Data - 12 gauge 39	Strut to Beam Clamps 132 - 133	CI - 1 5/8" x 1 5/8" - 12 Gauge 244
Load Data - 14 gauge 40	U-Bolt Clamps 134 - 138	CI - 1 5/8" x 1 3/8" - 12 Gauge 245
Pre-Cut Channel 41	Purlin Clamps 135	CI - 1 5/8" x 1" - 12 Gauge 246
Channel 1-5/8" x 1-3/8" (41 x 35mm) . 42 - 43	PIPE, TUBE AND CONDUIT	CI - 1 5/8" x 7/8" - 12 Gauge 247
Load Data - 12 gauge 43	SUPPORTS 139 - 196	End Caps 248
Channel 1-5/8" x 1" (41 x 25mm) . . . 44 - 46	Strut Clamps 140 - 143	CUSH-A-BLOCK® ROOFTOP
Load Data - 12 gauge 45	Strut Serpent 140	SUPPORTS 249 - 260
Pre-Cut Channel 46	Strut Clamps 141 - 143	CBB "Biggie" Series 250 - 251
Channel 1-5/8" x 7/8" (41 x 22mm) . . 47 - 49	Tubing Clamps 144	CBN Standard Series 252 - 257
Load Data - 12 gauge 48	Pipe Hangers 145 - 150	CBM Mini Series 258 - 260
Pre-Cut Channel 49	Conduit & Loop Hangers 145	GAMMA ANTI-VIBRATION
Channel 1-5/8" x 13/16" (41 x 21mm) . 50 - 52	Cush-A-Ring Clamps 146 - 147	PADS 261 - 262
Load Data - 14 gauge 51	Pipe Riser Clamps 148	FIBERGLASS
Pre-Cut Channel 52	Parallel Pipe Clamps 148	FRAMING SYSTEM 263 - 298
Channel 1-5/8" x 2-7/16" (41 x 62mm) 53 - 55	Adjustable Clevis Hangers 149	About Fiberglass 264
Load Data - 12 gauge 54	Side Opening Hangers 149	Specifications 265
Pre-Cut Channel 55	J-Hanger 150	Fiberglass Channel 266 - 271
Channel 1-5/8" x 3-1/4" (41 x 83mm) . 56 - 59	Pipe Rollers 151 - 152	Channel 1-5/8" x 1-5/8" 268 - 269
Load Data - 12 gauge 57 - 58	Cushioned Clamps 153 - 180	Channel 1-5/8" x 1-1/8" 270 - 271
Pre-Cut Channel 59	Cush-A-Nator® 153 - 157	Channel Nuts & Hardware . . . 272 - 274
Channel 13/16" x 13/16" (21 x 21mm) . . 60 - 61	Cush-A-Clamp® 158 - 159	Flat Plate Fittings 275 - 279
Load Data - 19 Gauge 61	Premier Cushion Clamp 160 - 161	Angle Fittings 280 - 281
Channel 13/16" x 13/32" (21 x 10mm) . . 62 - 63	TITAN® Insulation Riser Clamp . . . 162	"U" Shape Fitting 281
Load Data - 19 Gauge 63	Cush-A-Therm® 163 - 165	Post Bases 282
Slotted Angle 64	Klo-Shure® Insulation 166 - 169	Beam Clamps 283 - 284
CHANNEL NUTS AND	Clevis Hanger Insulation Clamp . . 170	U-Bolts 285 - 286
HARDWARE 65 - 76	Cush-A-Claw® 171	Pipe Clamps 287 - 290
Apply Proper Torque 66	Omega Series™ 172 - 173	Pipe & Conduit Supports . . . 291 - 294
Channel Nuts Overview 67	Alpha Series™ 174 - 175	Concrete Inserts 295
Channel Nuts 68 - 73	Cush-a-Glide™ 176	Chemical Resistance Chart 296 - 298
Seismic Rod Stiffener 70	Quick-Clip & Cush-A-Grip 177	TECHNICAL DATA 299 - 339
Stud Channel Nuts 71 - 73	Cush-A-Clip® & Cush-A-Click . . . 178	Material Specs. - Special Metals . 300
Screws & Threaded Rod 73 - 75	AIRSTRIP® 179	Design & Dimension Info. 301 - 302
Nuts & Washers 75	Cush-A-Strip™ 180	Channel Engineering Data . . . 303 - 305
Swivel Fittings 76	Pipe Insulation Saddles 181 - 194	Safe Thru-Bolting and
GENERAL FITTINGS 77 - 108	Bronco II® 181 - 182	Trapeze Information 306
Flat Plate Fittings 78 - 83	Snap-A-Saddle Pro™ 183 - 184	Bolted Channel Attachment 307
90° Angle Fittings 83 - 88	Snap-A-Saddle Pro Multi™ 185 - 192	Electrical Installation 308
Angle Fittings 89 - 90	Snap-A-Cover™ 190	Beta Clamp Technical Data 309 - 310
Brace Fittings 91 - 93	SnapShock™ 191	Misc. Conversion Tables . . . 311 - 312
"Z" Shape Fittings 94 - 95	Snap-A-Clip™ 192	Fraction Conversion Table 313
"U" Shape Fittings 95 - 99	Saddle-Up 193	Versabar Cross Ref. 314 - 320
Wing Fittings 100 - 103	Snap-A-Saddle® 194	Florida Strut Cross Ref. 321 - 325
Post Bases 103 - 106	Standard Strut Beta Clamps . . . 195 - 196	Keyword Index 326 - 329
Trolley 107 - 108	ELECTRICAL FITTINGS . . 197 - 208	Part Number Index 330 - 339
	Fixture Hangers 198 - 199	CONTACT INFORMATION
	Conduit Connectors 199 - 200	Back Cover
	Raceway Splices & Boxes 200 - 203	
	Receptacle Boxes 204	

We reserve the right to make specification changes without notice. While every effort has been made to assure the accuracy of information contained in this catalog at the time of publication, we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Channel

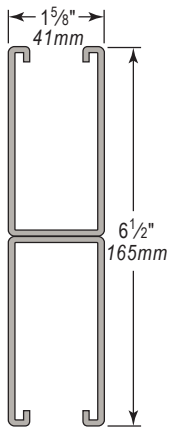Channel					
Channel Information		1 ⁵ / ₈ " x 1 ⁵ / ₈ " (41 x 41mm) 12 Gauge	1 ⁵ / ₈ " x 3 ¹ / ₄ " (41 x 83mm) 12 Gauge	1 ⁵ / ₈ " x 1 ⁵ / ₈ " (41 x 41mm) 14 Gauge	1 ⁵ / ₈ " x 3 ¹ / ₄ " (41 x 83mm) 14 Gauge
Finish or Material Ordering Codes 23 Material Specifications 24 - 25 The Metal Framing System 26 Channel Selection Chart 28 - 29 Channel in Descending Order of Strength 30 Pierced Channel 31 Example Combination Channel 32 Custom Channel 33 Beam Load Support Formulas 34 - 35 Beam - Design Fundamentals 36 Column - Design Fundamentals 37		W200 Series	W201 Series	W210 Series	W211 Series
					
		Pages 38 - 41		Pages 38 - 40	
1 ⁵ / ₈ " x 1 ³ / ₈ " (41 x 35mm) 12 Gauge	1 ⁵ / ₈ " x 2 ³ / ₄ " (41 x 70mm) 12 Gauge	1 ⁵ / ₈ " x 1" (41 x 25mm) 12 Gauge	1 ⁵ / ₈ " x 2" (41 x 51mm) 12 Gauge	1 ⁵ / ₈ " x 7 ⁷ / ₈ " (41 x 22mm) 12 Gauge	1 ⁵ / ₈ " x 1 ³ / ₄ " (41 x 44mm) 12 Gauge
W300 Series	W301 Series	W800 Series	W801 Series	W900 Series	W901 Series
					
Pages 42 - 43		Pages 44 - 46		Pages 47 - 49	
1 ⁵ / ₈ " x 1 ³ / ₁₆ " (41 x 21mm) 14 Gauge	1 ⁵ / ₈ " x 1 ⁵ / ₈ " (41 x 41mm) 14 Gauge	1 ⁵ / ₈ " x 2 ⁷ / ₁₆ " (41 x 62mm) 12 Gauge	1 ⁵ / ₈ " x 4 ⁷ / ₈ " (41 x 124mm) 12 Gauge	1 ⁵ / ₈ " x 3 ¹ / ₄ " (41 x 83mm) 12 Gauge	1 ⁵ / ₈ " x 6 ¹ / ₂ " (41 x 165mm) 12 Gauge
W500 Series	W501 Series	W100 Series	W101 Series	W150 Series	W151 Series
					
Pages 50 - 52		Pages 53 - 55		Pages 56 - 59	
1 ³ / ₁₆ " x 1 ³ / ₁₆ " (21 x 21mm) 19 Gauge	1 ³ / ₁₆ " x 1 ⁵ / ₈ " (21 x 41mm) 19 Gauge	1 ³ / ₁₆ " x 1 ³ / ₃₂ " (21 x 10mm) 19 Gauge	1 ³ / ₁₆ " x 1 ³ / ₁₆ " (21 x 21mm) 19 Gauge	Light, Medium, & Heavy Duty Slotted Angle	
W600 Series	W601 Series	W700 Series	W701 Series		
				 (Medium shown)	
Pages 60 - 61		Pages 62 - 63		Page 64	
				SLA0150 - Light Duty - 1 ¹ / ₂ " x 1 ¹ / ₂ " (38 x 38mm) SLA0225 - Medium Duty - 2 ¹ / ₄ " x 1 ¹ / ₂ " (57 x 38mm) SLA0300 - Heavy Duty - 3" x 1 ¹ / ₂ " (76 x 38mm)	

Channel Nuts & Hardware

Channel Nuts and Hardware					
Channel Nut Without Spring	Channel Nut with Standard Spring	Channel Nut with Short Spring	Channel Nut with Long Spring	Mini Nut with Standard or Short Spring	Channel Nut With Cone
W2-xWS Series	W2-x Series	W5-x Series	W1-x Series	W6-x & W7-x Series	W2-xCN Series
					
Page 68	Page 68	Page 69	Page 69	Page 69	Page 70
Twist-Nut Channel Nut	Seismic Rod Stiffener	Channel Nut Top Spring	Combination Washer & Channel Nuts	Double Conveyor Adjusting Nut	Stud Nut with Short Spring
W2-xTN Series	W2486	W2-xTL Series	W2-xNW Series	W6608	W5-3SN
					
Page 70	Page 70	Page 70	Page 70	Page 71	Page 71
Stud Nut with Standard Spring	Stud Nut with Long Spring	Stud Nut Without Spring	Scissor Square Washer Nut	Light Duty Channel Nut	Light Duty Stud Nut
W4-xSN – W10-xSN Series	W4-xSNL – W10-xSNL Series	W4-xSNWS – W10-xSNWS Series	QN25 – QN50	W6461	W4-100LDSN
					
Page 71	Page 72	Page 72	Page 73	Page 73	Page 73
Rod Coupling	Threaded Rod	Flathead Machine Screws	Hex Head Cap Screw	Roundhead Machine Screws	Slotted Indented Hex Machine Screw
W7134 – W7138	W7124 – W7131	FLMS Series	HHCS Series	RHMS Series	SLHHCS Series
					
Page 73	Page 74	Page 74	Page 74	Page 74	Page 75
Hex Nut	Square Nuts	Kep Nuts	Flat Washer	Lock Washers	Fender Washers
HN25 – HN75	SQN25 – SQN62	KN25 – KN37	FW25 – FW75	LW25 – LW62	FEN25 – FEN50
					
Page 75	Page 75	Page 75	Page 75	Page 75	Page 75
Swivel Female	Swivel Female - Female	Swivel Male	Swivel Male - Female		
W6905 & W6906	W6915 & W6916	W6910 & W6911	W6920 & W6921		
					
Page 76	Page 76	Page 76	Page 76		

Introduction

Channel

Channel Nuts & Hardware

General Fittings

Brackets

Beam Clamps

Pipe & Conduit Supports

Electrical Fittings

Spring Steel































Concrete Inserts

Roofing Supports



































Fiberglass System

Technical Data








Flat Plate Fittings













Flat Plate Fittings					
Square Washer with Channel Guide	Square Washer	Square Washer with Threaded Hole	Square Washer with Clip on Guide	2-Hole Splice Plate	2 Hole Parallel Splice Plate
W5051 – W5057	W5002 – W5006	W5053T – W5055T	W5052U – W5056U	W5007	W5013
					
Page 78	Page 78	Page 78	Page 78	Page 78	Page 79
2-Hole Perpendicular Splice Plate	3-Hole Splice Plate	2-Hole Swivel Plate	3-Hole Swivel Brace Connector	3-Hole Flat Plate	3-Hole Flat Plate
W5015	W5008	W5011	W5012	W5016	W5017
					
Page 79	Page 79	Page 79	Page 79	Page 79	Page 80
3-Hole Flat Angle Plate	3-Hole Corner Gusset Plate	3-Hole Tee Gusset Plate	4-Hole Extended Flat Angle	4-Hole Splice plate	4-Hole Tee Plate
W5021	W5030	W5031	W5025	W5009	W5022
					
Page 80	Page 80	Page 80	Page 80	Page 80	Page 81
4-Hole Parallel Splice Plate	4-Hole Corner Plate	4-Hole Triangle Flat Plate	4-Hole Double Brace Connector	4-Hole Gusset Plate	4-Hole Corner Gusset Plate
W5014	W5024	W5018	W5019	W5026	W5036
					
Page 81	Page 81	Page 81	Page 81	Page 81	Page 82
5-Hole Splice Plate	5-Hole Cross Plate	5-Hole Corner Gusset Plate	Five Hole Gusset Plate	6-Hole Gusseted Cross Connector	7-Hole Cross Gusset Plate
W5010	W5023	W5028	W5027	W5037	W5029
					
Page 82	Page 82	Page 82	Page 82	Page 82	Page 83








90° Angle Fittings

90° Angle Fittings							Introduction
1-Hole Angle Washer	2-Hole Corner Angle Washer with Threaded Hole	2-Hole End Connector	2-Hole Rack Connector	2-Hole Rack Connector with 2-End Notches	2-Hole Rack Connector with 1-End Notch	3-Hole Column Stringer Connector	Channel
W5160	W5142 – W5144	W5103	W5102	W5104	W5101	W5113	Channel Nuts & Hardware
							Channel Nuts & Hardware
Page 83	Page 83	Page 83	Page 83	Page 84	Page 84	Page 84	Channel Nuts & Hardware
3-Hole End Connector	3-Hole Rack Corner Angle	3-Hole Angle Connector, LH or RH	4-Hole Angle Connector, LH or RH	3-Hole Angle Connector, LH or RH	4-Hole Offset Corner Angle	4-Hole, 2-Column Strut Splice	General Fittings
W5112	W5115	W5136 & W5135	W5140 & W5141	W5138 & W5139	W5137	W5126	General Fittings
							General Fittings
Page 84	Page 84	Page 84	Page 85	Page 85	Page 85	Page 85	General Fittings
3-Hole Rack Splice	4-Hole Rack Splice Connector	4-Hole Corner Connector	4-Hole Rack Corner Angle	5-Hole Cross With 90° Angle Leg	4-Hole Post Stringer, LH or RH	5-Hole Right Hand Gusset Angle	Brackets
W5110	W5109	W5125	W5123	W5152	W5133 & W5134	W5118	Brackets
							Brackets
Page 85	Page 85	Page 86	Page 86	Page 86	Page 86	Page 86	Brackets
4-Hole Gusset Corner Angle, LH or RH	5-Hole Corner Splice	6-Hole, 3-Way Mid Column Connector	Universal Corner Angle	6-Hole Gusset Corner Angle, LH or RH	3-Hole Right Angle End Splice	4-Hole Right Angle End Splice	Beam Clamps
W5121 & W5122	W5117	W5154	W5124 & W5124W	W5156 & W5157	W5158	W5159	Beam Clamps
							Beam Clamps
Page 86	Page 87	Page 87	Page 87	Page 87	Page 87	Page 87	Beam Clamps
2-Hole Vertical Adjustment Angle	2-Hole Horizontal Adjustment Angle	2-Hole Adjustment Angle	2-Hole Adjustment Angle	3-Hole Adjustment Angle	3-Hole Adjustment Angle		Pipe & Conduit Supports
W5106	W5105	W5107	W5108	W5111	W5153		Pipe & Conduit Supports
							Pipe & Conduit Supports
Page 88	Page 88	Page 88	Page 88	Page 88	Page 88		Pipe & Conduit Supports



















Angle, Brace, & “Z” Shaped Fittings








Angle Fittings						
2-Hole Small Open Angle	2-Hole Open Angle	4-Hole Open Angle	2-Hole Closed Angle	4-Hole Closed Angle	3-Hole 45° Open Angle	4-Hole Angle Wing Fitting, LH or RH
W5470-x Series	W5420 – W5430	W5440 – W5450	W5460 – W5466	W5410 – W5417	W5431	W5562L & W5562R
						
Page 89	Page 89	Page 89	Page 90	Page 90	Page 90	Page 90

Brace Fittings					
2-Hole Adjustable Hinge	3-Hole Adjustable Hinge	4-Hole Adjustable Hinge	4-Hole Adjustable Angle	Single Adjustable Angle Brace	Double Adjustable Angle Brace
W5490	W5491	W5492	W5495	W5480	W5485
					
Page 91	Page 91	Page 91	Page 91	Page 91	Page 92
2-Hole Adjustable Hinge Fitting	3-Hole Adjustable Hinge Fitting	4-Hole Adjustable Hinge Fitting	45° Angular Corner Brace	Utility Vault Ladder Rung	Ladder Assembly Fitting
W5496	W5497	W5498	W5471 – W5475	W10236 – W102324	W1017B – W1017F
					
Page 92	Page 92	Page 92	Page 93	Page 93	Page 93













“Z” Shape Fittings						
2-Hole Z Fitting	2-Hole Offset Support	3-Hole Z Fitting	Z Fitting For Double Channel	2-Hole Z Connector	Adjustable Z Connector	Adjustable Z Connector
W5209 – W5215	W5203	W5212	W5210	W5224 – W5228	W5205	W5202
						
Page 94	Page 94	Page 94	Page 94	Page 94	Page 95	Page 95
















“U” Shaped & Wing Fittings

“U” Shape Fittings					
2-Hole U-Fitting Clevis W5324 – W5328	3-Hole “U” Support W5315 – W5321	5-Hole “U” Support for 1-5/8" Channel W5312	6-Hole U-Fitting for 1-5/8" Double Channel W5317	4-Hole Strap For 2-1/2" Channel W5322	1-Hole U-Fitting 2 Slot for 13/16" Channel W5305
					
Page 95	Page 95	Page 96	Page 96	Page 96	Page 96
1-Hole U-Fitting 2 Slot for 1-5/8" Channel W5307 – W5310	Connector For Double Diagonal Brace W5330	8-Hole U-Fitting for 1-5/8" Channel W5319	12-Hole U-Fitting for 3-1/4" Channel W5323	6-Hole U-Fitting for 3-1/4" Channel W5329	4-Hole “C” Fitting 3-1/4" Inside W5301
					
Page 96	Page 97	Page 97	Page 97	Page 97	Page 98
Swing Clevis W5350	Swing Clevis Adapter W5351	4-Hole U-Fitting Splice for 2-1/2" Channel W5340	4-Hole U-Fitting Splice for 2-7/16" Channel W5349	4-Hole U-Fitting Splice for 3-1/4" Channel W5348	2-Hole Splice for 13/16" Channel W5342
					
Page 98	Page 98	Page 98	Page 98	Page 98	Page 99
2-Hole U-Fitting Splice for 1-5/8" Channel W5344	3-Hole Splice for 13/16" Channel W5343	3-Hole U-Fitting Splice for 1-5/8" Channel W5346	4-Hole Splice for 13/16" Channel W5347	4-Hole U-Fitting Splice for 1-5/8" Channel W5345	 
					
Page 99	Page 99	Page 99	Page 99	Page 99	

Wing Fittings						
3-Hole Wing Fitting Single Corner, LH or RH W5511 – W5510	6-Hole, 1-Way Extended Wing, LH or RH W5146 – W5147	5-Hole Wing Fitting Corner Connector Opposed W5513	4-Hole Wing Fitting Double Corner W5512	8-Hole Wing Fitting Corner Connector Opposed W5519	6-Hole Wing Fitting Double Corner W5518	6-Hole Wing Fitting Triple Corner W5514
						
Page 100	Page 100	Page 100	Page 100	Page 100	Page 100	Page 101

Wing Fittings (cont.) & Post Bases





Wing Fittings						
10-Hole Base Wing Fitting	9-Hole Wing Fitting Triple Corner	10-Hole Wing Fitting Corner Opposed	8-Hole Wing Fitting Double Corner	12-Hole Wing Fitting Triple Corner	1-Way Extended Gusset Wing, LH or RH	8-Hole Wing Fitting Double Corner Gusset
W5524	W5517	W5523	W5515	W5522	W5148 & W5149	W5516
						
Page 101	Page 101	Page 101	Page 101	Page 101	Page 102	Page 102
10-Hole Corner Opposed Double Gusset	8-Hole Wing Fitting Double Corner Double Gusset	12-Hole Wing Fitting Triple Corner Gusset	6-Hole Wing Fitting Single Corner Gusset, LH or RH	8-Hole Double Corner Gussetted Connector		
W5520	W5531	W5521	W5524L & W5524R	W5525		
						
Page 102	Page 102	Page 102	Page 102	Page 103		









Post Bases				
Rectangular Plate 8-Hole Post Base Single Channel	Rectangular Plate 8-Hole Post Base Single Channel	Rectangular Plate 5-Hole Flush Single Channel	Rectangular Plate 8-Hole Flush Single Channel	Double Channel Stand/Wall Flush 6-Hole
W5810	W5810FL	W5813FL	W5814FL	W5815FL
				
Page 103	Page 103	Page 103	Page 103	Page 104
Double Channel Stand/Wall Flush 10-Hole Post Base	Post Base Single Channel 7-Hole Standard	Post Base Single Channel 7-Hole Square	Post Base Single Channel 10-Hole Standard	Post Base Single Channel 10-Hole Standard
W5816FL	W5813	W5813SQ	W5814	W5814SQ
				
Page 104	Page 104	Page 104	Page 104	Page 104
Post Base Double Channel 8-Hole Standard	Post Base Double Channel 8-Hole Standard	Post Base Double Channel 12-Hole Standard	Post Base Double Channel 12-Hole Square	Post Base Double Channel 14-Hole Square 3-1/2" Boxed
W5815	W5815SQ	W5816	W5816SQ	W5817
				
Page 105	Page 105	Page 105	Page 105	Page 105













Pictorial Table of Contents

























Post Bases (cont.), Rollers & Brackets

Post Bases				
Post Base Quad-Channel 20-Hole Square	Rectangular Plate 6-Hole Post Base Double Channel Short Clevis	Post Base Single Channel Gusset 8-Hole Square	5-Hole Post Base Double Channel	
W5821	W5812	W5811	W5818	
				
Page 106	Page 106	Page 106	Page 106	

Trolleys							
Trolley Support 3-Hole Standard	Trolley Support 3-Hole Heavy Duty	2-Wheel Trolley	4-Wheel Trolley	2-Wheel Trolley	4-Wheel Trolley	4-Wheel Trolley	4-Wheel Trolley with Swivel Loop
W6604	W6603	W6606	W6601 & W6605	W6602	W6600	W6607	W6610
							
Page 107	Page 107	Page 107	Page 107	Page 108	Page 108	Page 108	Page 108

Brackets					
1-Hole Wrap Around Channel Bracket, Slot Up	1-Hole Wrap Around Channel Bracket, Slot Down	2-Hole Wrap Around Channel, Slot Up or Down	1-Hole, 1-5/8" Channel Bracket Arms Slot Up	1-Hole, 1-5/8" Channel Bracket Arms Slot Down	2-Hole, 1/4" Plate with 1-5/8" Channel Bracket
W5641 & W5642	W5645 & W5646	W5647 & W5648	W5631 – W5634	W5635 – W5638	W5661 – W5664
					
Page 110	Page 110	Page 110	Page 111	Page 111	Page 112
2-Hole, 3/8" Plate with Double Channel Bracket	2-Hole Bracket Arms are 1" Channel	3-Hole Girder Style Shelf Bracket	5-Hole Girder Style Shelf Bracket	6-Hole Shelf Bracket with Brace	Twelve-Hole Wide Girder Style Bracket
W5652 – W5656	W5682 – W5688	W5669 & W5671	W5673 & W5675	W5677 – W5679	W5673D & W5675D
					
Page 112	Page 113	Page 113	Page 114	Page 114	Page 115



































Brackets (cont.)

Brackets					
Wide Shelf Bracket with Brace	Slotted Shelf Brackets	Cantilever Support Bracket	Handrail Stand-Off Bracket	Single Axle Cable Reel Support	Double Axle Cable Reel Support
W5681 – W5679D	W5601 – W5626	W5651 & W5650	W1031 – W1033	W5639L – W5640R	W5643 & W5644
					
Page 115	Page 116	Page 117	Page 117	Page 118	Page 118
Low Profile Diamond Back with Horizontal Strut Riser	Diamond Back Extended Riser Bracket	Diamond Back Extended Riser Bracket	Cross Back Extended Riser Bracket	Strap Back Extended Riser Bracket	Strap Back Extended Riser Bracket with Bottom Attached Brace
W10196 – W101924	W10106 – W101024	W10116 – W101148	W10156 – W101524	W10126 – W101224	W10136 – W101324
					
Page 119	Page 119	Page 119	Page 120	Page 120	Page 120
Strap Back Extended Riser Bracket with End Wrap Brace	Conduit Standoff Bracket	Utility Bracket	Anti-Rotation Utility Bracket	Utility Bracket Assembly	Anti-Rotation Utility Bracket Assembly
W10166 – W101624	WSF101668	W1017	W1017AR	W1017A6 – W1017A24	W1017ARA6 – W1017ARA24
					
Page 121	Page 121	Page 122	Page 122	Page 122	Page 122
Large Utility Bracket	Diamond Back Extended Riser Bracket with Horizontal Strut	Square Tube Stand Off	Extended Profile Diamond Back with Horizontal Riser Strut		
W1017E	W10076 – W100724	W102281/8 – W102212X12	W102166 – W10212424		
					
Page 123	Page 123	Page 123	Page 124		











Pictorial Table of Contents

















Beam Clamps

Beam Clamps						
All Purpose Beam Clamp	Beam Clamp with J-Hook	Beam Clamp Swivel Adapter	Swivel Nut for Beam Clamp	J-Hook Beam Clamp	Formed Steel Beam Clamp	HD Formed Steel Beam Clamp
W5750	W5752-6 – W5752-12	W5751	W5753-25 – W5753-50	W5756-4 - W5756-12	W5721 – W5729	W5731 – W5739
						
Page 126	Page 126	Page 126	Page 126	Page 126	Page 127	Page 127
Beam Clamp Anchor Strap	Beam Clamps	Malleable Iron Rod Support Beam Clamp	Wide Mouth Rod Support Beam Clamp	Rod Suspension Beam Clamp with Retainer	Strut to Beam Clamp C-Type, Parallel	Heavy Beam ½" Rod Suspension Clamp
W5781 – W5786	W5741 – W5745	BC9025 – BC9050	BC9325 – BC9350	W5792-6 – W5792-15	W5714	W5707
						
Page 127	Page 128	Page 128	Page 128	Page 129	Page 129	Page 129
Heavy Beam Rod Suspension Clamp Wide Jaw	"Handi-Clamp" Rod Suspension Clamp	Malleable Iron Universal Beam Clamps	Wide Mouth Malleable Iron Universal	Strut to Beam Clamp C-Type	Silver Claw Beam Clamp	Beam Clamp
W5746 – W5749	W5780	BC8037 – BC8075	BC81037 – BC81075	W5715 – W5717	SCL037EG	BCL
						
Page 129	Page 130	Page 130	Page 130	Page 131	Pages 131, 229	Pages 131, 230
Beam Clamp Window Type	Strut to Beam Clamp Notched	Malleable Iron Beam Clamps	Strut to Beam Clamp Z-Type	Strut to Beam Clamp Z-Type	Strut to Beam Spreader Caps	Strut to Beam Spreader Caps
W5705 – W5702	W5713	BC91025	W5712	W5779 & W5779A	W5760	W5790
						
Page 132	Page 132	Page 132	Page 132	Page 132	Page 133	Page 133
1-5/8" Strut to Beam Spreader Caps	Light Duty U-Bolt	Standard Duty U-Bolt	Square U-Bolt	Z-Purlin C-Clamp	One Piece Purlin Beam Clamp	Two Piece Purlin Beam Clamp
W5791	W6704 - W6728	W6304 - W6344	W7050A & W7050B	BCZ037EG	W5710	W5711
						
Page 133	Page 134	Page 134	Page 135	Page 135	Page 135	Page 135

Beam Clamps (Cont.) & Pipe, Tube, & Conduit Supports









Beam Clamps						
Right Angle Clamp	Strut to Beam Clamp with Square U-Bolt	Strut to Beam Clamp with Square U-Bolat	"U" Bolt Beam Clamp (Long) for 6-½" Strut	Strut to Beam Clamp with Square U-Bolt and J-Hook	Strut to Beam Clamp with Square U-Bolt and J-Hook	Strut to Beam Clamp with Square U-Bolt and J-Hook
RTA037 – RTA400	W5709	W5708	W5770	W5771-6 – W5771-18	W5761 – W5761-18	W5772-6 – W5772-18
						
Page 136	Page 136	Page 136	Page 136	Page 137	Page 137	Page 137
Strut to Beam Clamp with Two Square U-Bolts		Strut to Beam Clamp with Two Square U-Bolts		Strut to Beam Clamp with Two Square U-Bolts		
W5773-6 – W5773-15		W5774-6 – W5774-15		W5777-4 – W5777-15		
						
Page 138		Page 138		Page 138		

Pipe & Conduit Supports					
Strut Serpent® Strut Clamps	EMT Strut Clamps	Rigid Strut Clamps	O.D. Strut Clamps	Universal Strut Clamps	Copper Tube Strut Clamps
SSEMT050 – SSGRC200	W6025A – W6038A	W6125A – W6178A	W620025A – W621275A	W6056A – W6154A	W620037ACP – W620812ACP
					
Page 140	Page 141	Page 141	Page 142	Page 143	Page 143
Rigid Conduit One Piece Pipe Clamp	Pipe Strap	1-Hole O.D. Tubing Clamp	Pipe Coupling Fitting	Conduit Hangers	Loop Hangers
BMU050 – BMU400	W7826 – W7870	W7724 – W7730	W247050	SHH050 – SHH400	BHK050 – BHK800
					
Page 144	Page 144	Page 144	Page 145	Page 145	Page 145
SPH Cush-A-Ring for Copper & Steel	SPP Cush-A-Ring for PEX, CPVC, or PVC	Pipe Riser Clamps	Parallel Pipe Clamps	Standard Adjustable Clevis Hangers	Side Opening Hangers
SPH-1 – SPH-14	SPP-2 – SPP-14	RCL050 – RCL800	W6005 – W6015	SCH050 – SCH800	W4050H – W4400H
					
Page 146	Page 147	Page 148	Page 148	Page 149	Page 149

























Pictorial Table of Contents



Pipe, Tube, & Conduit Supports (cont.)

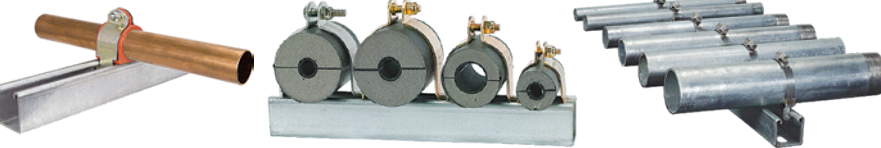Pipe & Conduit Supports					
Adjustable J-Hanger	Pipe Roller No Axle	Pipe Roller With Axle	Pipe Roller - Heavy Duty	Pipe Roller - Heavy Duty	Cush-A-Nator®
W4050 – W4400	SPR14	SPRA3 – SPRA10	SPRHD18	SPRHD24	CNx, HTx, & HITx
					
Page 150	Page 151	Page 151	Page 152	Page 152	Pages 153 - 157
Cush-A-Clamp®	Premier Cushioned Clamp	TITAN® Insulation Riser Clamp Series	Cush-A-Therm®	Klo-Shure® Insulation Couplings	Clevis Hanger Insulation Couplings
004T008 – 138N146	100025 – 200800	R087100 – R412150	UX1412 – UX41220	723025 – 929M90	703025 – 708362
					
Pages 158 - 159	Pages 160 - 161	Page 162	Pages 163 - 165	Pages 166 - 169	Page 170
Cush-A-Claw®	Omega Series™	Alpha Series™	Cush-a-Glide™	Quick-Clip	Cush-A-Grip
CL, CLS, EMT, & EMTS	004M007 – 106M114	UB1/2PA – UB6TA	CAGB04 – CAGB34	QC12 – QC34	CG-10 – CG-40
					
Page 171	Pages 172 - 173	Pages 174 - 175	Page 176	Page 177	Page 177
Cush-A-Clip®	Cush-A-Click	AIRSTrip®	Cush-A-Strip™	BRONCO II®	Snap-A-Saddle Pro™
RPC-3/8 - RPC-1-1/8	CAC12 – CAC34	AS1	S-716	225B2S – 825W2S	SAS225B – SAS825W
					
Page 178	Page 178	Page 179	Page 180	Pages 181 - 182	Pages 183 - 184
Snap-A-Saddle Pro Multi™	Snap-A-Cover™	SnapShock™	Snap-A-Clip™	Saddle-Up	Snap-A-Saddle®
SASM250G – SASM1250G	SACX25B – SACL50G	SnapShock	SASP050B – SASP225B	SD150 – SD650	SB225 – SW825
					
Pages 185 - 189	Page 190	Page 191	Page 192	Page 193	Page 194
Standard Series Beta Clamps					
	S1004 – S7048				
	Pages 195 - 196				
























Electrical Accessories

Electrical Accessories					
Hinged Fluorescent Fixture Hanger	Hinged Fluorescent Fixture Hanger	Hinged Channel Hanger	Hinged Channel Hanger	Cushion Washer for Box Fixture Hangers	Fixture Stud
W6420	W6422	W6419	W6426	RW25	W6460
					
Page 198	Page 198	Page 198	Page 198	Page 199	Page 199
1" Nipple End Cap	Fixture Spacer	Conduit Connection Plate with Hardware	Raceway Conduit Connector	Standard Raceway Stud Plate	4-Hole Tapped Splice Plate
W6401	W6402	W6442 & W6443	W6446 & W6447	W6439	W6440
					
Page 199	Page 199	Page 200	Page 200	Page 200	Page 200
Outlet Box Connection Fitting	Flush Type Raceway Splice Assemblies	Stud Type Raceway Splice Assemblies	Raceway Grounding Kit	Standard Straight Intersplice 1 to 4-Way	Raceway Box Assemblies, 1 to 4-Way
W6449	W6432 & W6435	W6404	W6403	EJ330081 & EJ330162 W6415 – W6418	W6450 – W6454
					
Page 201	Page 201	Page 201	Page 201	Page 202	Page 203
Snap-A- Box Receptacle Box	Receptacle Box	Closure Strip	Shoulder Bolt	Aluminum Wiring Stud	Nipple Assembly
W6445S	W6445	W6500 & W6500PLASTIC	W6463	W6462	W6400
					
Page 204	Page 204	Page 204	Page 205	Page 205	Page 205
Fiber Wire Retainer	End Caps	End Cap with Knock-outs	End Caps	Plastic End Caps	Porce-A-Clamp®
W6469	W5920	W5945 – W5943	W5909 – W5936	W5900 - W5935 Series	006CC018 – 072CC080
					
Page 206	Page 206	Page 206	Page 207	Page 207	Page 208




















Pictorial Table of Contents



Spring Steel

Spring Steel						Introduction
Conduit Clips	Conduit "Push In" Clips	Pipe and Conduit Hanger	Wing Clip Conduit Hanger	Multi-Function Clip with Assemblies	Multi-Function Clip Conduit "Push In" Clip	
CC6 – CCT32	CCP8 – CCP16	PCH037050 – PCH400	WC8 – WC20, WCBW	MFC6 – MFC16	MFCCCP8 – MFCCCP16	Channel
						
Page 210	Page 210	Page 211	Page 211	Page 212	Page 212	Channel Nuts & Hardware
Beam Clamp with Conduit Clip	Beam Clamp with Conduit "Push In" Clip	Flange Clip with Conduit Clip	Flange Clip with Conduit Clip	Flange Clip Side Mount w/Conduit Clip	Flange Clip Side Mount w/Conduit Clip	
BCC6HM – BCC32VM	BCLCCP8HM – BCLCCP16VM	FH24CC6 – FH912CC32	FH24CCP8 – FH912CCP16	FHS24CC6 – FHS912CC32	FHS24CCP8 – FHS912CCP16	General Fittings
						
Page 212	Page 213	Page 213	Page 214	Page 214	Page 215	Brackets
Flange Hanger with Conduit Clip	Conduit Clip to Flange	Conduit Clip with Conduit Clip	Conduit "Push In" Clip Conduit "Push In" Clip	Double Pipe and Conduit Hanger	Bridle Ring	
FHV3CC6 – FHV3CC16	CFC2D – CFC8E	CC16CC6 – CC16CC32	CCP8CCP8 – CCP16CCP16	PCH075PCH037050 – PCH075PCH125	BR1012 – BR2532WS	Beam Clamps
						
Page 215	Page 215	Page 216	Page 216	Page 217	Page 217	Pipe & Conduit Supports
Box to Conduit Support, Conduit Clips	Multi-function Clip to Box Conduit Support	Flange Clip to Box & Conduit Support	Insulated Lines Hanger System	Flange Clip	Flange Clip Side Mount	
B18 CC6 – BS18 CCP16S	MFC B18 CC6 – MFC B18 CCP16	FH24B18 CC6 – FH58B18 CCP16	TRH-2 – TRH-5	FCH24 – FCH912S	FSM24 – FSM912	Electrical Fittings
						
Page 218	Page 218	Page 219	Page 219	Page 220	Page 220	Spring Steel
Flange Hanger for Purlins and Joists	Multi-Function Clip	Rod Hanger Push Install or Rod Hanger	Flange Clip Side Mount w/Rod Hanger	Flange Clip Side Mount w/Rod Hanger	Flange Hanger with Rod Hanger	
FHV3 – FHZ	MFC – MFCS	RHP4 – RHT6	FH24RHP4 – FH912RHP6	FH24RH4T – FH912RH6	FHV3RH4 – FHZRH6	Concrete Inserts
						
Page 221	Page 221	Page 222	Page 222	Page 223	Page 223	Roofing Supports
Flange Hanger Rod Hanger Threaded	Angle Bracket	Angle Bracket & Nail Bracket Conduit Clip	Angle & Nail Bracket with Conduit Clip	Angle & Nail Bracket Pipe & Conduit Hanger	Angle Bracket Rod Hanger Push Install	
FHV3RH4T – FHZRTH6	AB04 & AB06	ABCC6 – NBCC812	ABCCP8 – NBCCP12	ABPCH & NBPCH Series	ABRH4 – ABRH6	Fiberglass System
						
Page 224	Page 224	Page 225	Page 225	Page 226	Page 226	Technical Data









Spring Steel (cont.)



Spring Steel					
Angle Bracket Rod Hanger Thread Install	Strap Hanger	Angle Bracket with Strap Hanger	Flange Clip Side Mount Strap Hanger	Flange Hanger with Strap Hanger	Pipe Sleeve Positioner
ABRH4T – ABRTH6	SHP & SHR	ABSHP	FHS24SHP – FHS912SHR	FHV3SHP – FHZSHR	PSP2-6 – FSM912
					
Page 227	Page 227	Page 227	Page 228	Page 228	Page 229
Silver Claw Beam Clamp	Light Duty Beam Clamps	Beam Clamp	Z-Bracket Adjustable Screw Gun Bracket for Studs	Electrical Box Bracket for Studs	Rigid Box Mounting Bracket
SCL037EG	BC92025EG & BC92037EG	BCL	ZBA18PG & ZBA26PG	BBSM & BBSM6	BB16SM
					
Page 229, 131	Page 230	Page 230, 131	Page 231	Page 231	Page 232
Low Voltage Mounting Plate for New Construction	Low Voltage Mounting Plate with Screws for Existing Construction	Low Voltage Mounting Plate for Existing Construction	Metal Stud Clip with Conduit Clip & Conduit Clip	Cable Support Strap for Wood or Metal Studs	Conduit Clip to Wood or Metal Stud
LVMN	LVMS	LVMP	MSCCC6 – MSCCCP16	CSSTS	CTS812 & CTS816D
					
Page 232	Page 233	Page 233	Page 234	Page 234	Page 235
Universal Stud Grommet	MC/AC Cable Clip to Metal Stud	Self Drilling and Tapping Screw	Support Clip - Troffer Lights & Lay-Ins	Twist Clip with Wing Nut	Electrical Box Hanger Box Mounting Clip
USG	CCMS	SDTSLP8X1/2	SCT15	TCB16 – TCS16	EBH24 & EBH
					
Page 235	Page 236	Page 236	Page 237	Page 237	Page 238
T-Grid Box Electrical Box Hanger HD	T-Bar Clip	T-Bar Clip with Conduit Clip	T-Bar Clip with Conduit “Push In” Clip		
EBH24HD	TBC1 & TBC2	TBC1C6 – TBC2C16	TBCSMCCP8 – TBCTMCCP16		
					
Page 238	Page 239	Page 239	Page 240		

Pictorial Table of Contents





Concrete Inserts & Rooftop Supports

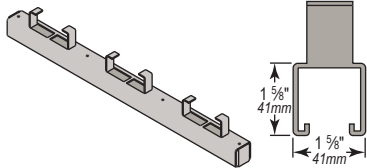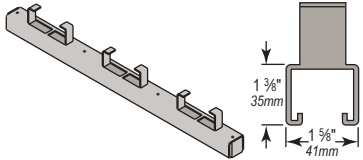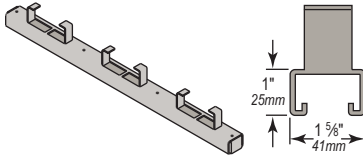
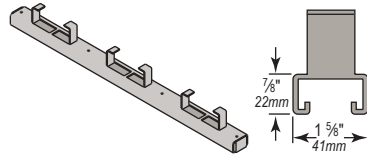


Concrete Inserts				
Spot Concrete Insert	Concrete Insert Nut	Continuous Concrete Inserts		1-5/8" x 1-5/8" 12 Gauge Channel
W7000	WCN25 – WCN87	Overview & Part Number Selection Chart		W7200 Series
				
Page 242	Page 242	Pages 242 - 243		Page 244
1-5/8" x 1-3/8" 12 Gauge Channel		1-5/8" x 1" 12 Gauge Channel		1-5/8" x 7/8" 12 Gauge Channel
W7300 Series		W7800 Series		W7900 Series
				
Page 245		Page 246		Page 247
End Caps	Polyurethane End Caps	Cover Plastic End Caps	Form Fit Plastic End Caps	Anchor End Caps
W5909 – W5936	W5920PLASTICWHT – W5925PLASTICRED	W5900PLASTIC – W5935PLASTICRED	W5900-M – W5935-M	W5952 – W5951
				
Page 248	Page 248	Page 248	Page 248	Page 248






Cush-A-Block® Rooftop Supports				
CBB "Biggie" Series Plain Base	CBN Series Plain Base	CBN-BR Bridge Series Support With Channel	CBN Series Support With Metal Channel	CBN-EX Series Support With Raised Channel
CBB	CBN	CBN28BR – CBN60BR	CBN1S – CBN4RD	CBN8EX – CBN16EX
				
Pages 250 - 251	Page 252	Page 252	Page 253	Page 254
CBNPRB Series Support with Pipe Roller	CBN-RB Series with Raised Bridge Medium Support	CBN-RB Series With Raised Channel Heavy Support	CBN-DSFW Series Fixed Width Duct Support	
CBNPRB	CBN1RB & CBN2RB	CBN3RB & CBN4RB	CBN1-DSFW – CBN16-DSFW	
				
Page 255	Page 256	Page 256	Page 257	

Rooftop (cont)., Gamma Pads, & Fiberglass Support System

























CBM Mini Block Plain Base	CBM Series Support with Metal Channel	CBM REX Support Raised 1-5/8" Metal Channel	CBMPH Series Raised Clamp for Copper or Steel Tube or Pipe	CBMPP Series Raised Clamp for PEX, CPVC, or PVC Pipe	CBMTRH Series Raised Hanger for Insulated Lines
CBM	CBM1S & CBM1D	CBM10REX & CBM12REX	CBMPH1 – CBMPH14	CBMPP2 – CBMPP12	CBMTRH2 – CBMTRH5
					
Page 258	Page 258	Page 259	Page 259	Page 260	Page 260

GAMMA Anti-Vibration Pads			
GAMMA Shield	GAMMA Standard Pad	ISO - Cube	GAMMA Extreme Pad
AR-2 – AR-18	AC-2 – AC-18	AS-2 & AS-18	AV-2 – AV-18
			
Page 262	Page 262	Page 262	Page 262



Fiberglass Channel			
1 5/8" x 1 5/8" (41 x 41mm) Solid & Slotted Channel	1 5/8" x 3 1/4" (41 x 83mm) Solid & Slotted Channel	1 5/8" x 1 1/8" (41 x 29mm) Solid & Slotted Channel	1 5/8" x 2 1/4" (41 x 57mm) Solid & Slotted Channel
W200 Series	W201 Series	W800 Series	W801 Series
			
Pages 268 - 269		Pages 270 - 271	




Fiberglass Channel Nuts and Hardware					
Channel Nuts	Channel Nuts	Stop-Lock Kit	Channel Space	Spring Nut Hex Bolts	Flanged Hex Bolts
W5-4FG – W2-8FG	W2-6WSPU – W2-12WSNY	SLK-375 & SLK-500	SPA037PVC & SPA050PVC	HHCS Series	HHFB Series
					
Page 272	Page 272	Page 272	Page 272	Page 273	Page 273
Standard Duty Polyurethane Nuts	Heavy Duty Flanged Hex Nuts	Washers	Fender Washers	Threaded Rod	Threaded Rod Couplers
HN Series	FHN Series	FW Series	FEN75X225PU	W7125VE8FT – W7131STS612FT	W7135PU – W7138S6
					
Page 274	Page 274	Page 274	Page 274	Page 274	Page 274











Fiberglass Support System (cont)



Fiberglass Flat Plate Fittings					
One Hole Washer	Two Hole Splice	Three Hole Splice	Four Hole Splice	Five Hole Splice	Three Hole Corner
W5053PF – W5056VF	W5007PF & W5007VF	W5008PF & W5008VF	W5009PF & W5009VF	W5010PF & W5010VF	W5021PF & W5021VF
					
Page 275	Page 275	Page 275	Page 276	Page 276	Page 276
Four Hole Corner	Three Hole Corner Gusset	Four Hole Corner Gusset	Four Hole Tee	Five Hole Tee	Five Hole Cross
W5025PF & W5025VF	W5020PF & W5020VF	W5024PF & W5024VF	W5022PF & W5022VF	W5022MPF & W5022MVF	W5023PF & W5023VF
					
Page 276	Page 277	Page 277	Page 277	Page 277	Page 278
Five Hole Tee Gusset	Six Hole Corner Gusset	Six Hole Tee Gusset	Seven Hole Cross Gusset	Four Hole 45° Angle	Two Hole Swivel Plate
W5027PF & W5027VF	W5028PF & W5028VF	W5032PF & W5032VF	W5029PF & W5029VF	W5035PF-375 – W5035VF-500	W5011PF – W5011VF
					
Page 278	Page 278	Page 278	Page 279	Page 279	Page 279
Fiberglass Angle & "U" Shape Fittings					
Two Hole 90° Angle	Three Hole 90° Angle	Four Hole 90° Angle	Four Hole Self 90° Angle	Universal 90° Angle	Three Hole "U" Shape Support
W5103PF & W5103VF	W5113PF & W5113VF	W5125MPF – W5125VF	W5109PF & W5109VF	W5124PF & W5124PU	W5312PF & W5312PU
					
Page 280	Page 280	Page 280	Page 281	Page 281	Page 281

Fiberglass Support System (cont)

Post Bases	
Single Post Base	Double Post Base
W5814SQPE & W5814SQPU	W5816SQPE & W5816SQPU
	
Page 282	Page 282

Beam Clips and Clamps		
Beam Clips	Large Beam Clamp	Small Beam Clamp
BC500 Series	LBC Series	SBC Series
		
Page 283	Page 284	Page 284

Cable, Pipe & Tube Clamps & Supports				
Standard U-Bolts	Extended Reach U-Bolts	Rigid Pipe Clamps	Adjustable Pipe Clamps	Two Hole Pipe Straps
W6304FG – W6322FG	W6308ERFG – W6326ERFG	W6126APU – W6174APU	APC050PU – APC300PU	W7938PU – W7870PU
				
Page 285	Page 286	Page 287	Page 288	Page 289
Adjustable Tubing Clamps	Clevis Hanger	SuperHanger™	SuperLoop™	Rack Arms
ABS Series	SCH100PE – SCH600PU	SH001 – SH010	SLH1200 – SLH2400	RA1400PU – RA2000NY
				
Page 290	Page 291	Page 292	Page 293	Page 294

Concrete Inserts	
1-5/8" x 1-1/8" Concrete Insert	1-5/8" x 1-5/8" Concrete Insert
W7565EPF & W7565EVF	W7265EPF & W7265EVF
	
Page 295	Page 295

Fiberglass Chemical Resistance Chart 296 - 298


Technical Data	299 - 339
Material Specifications - Special Metals	300
Design & Dimension Information	301 - 302
Channel Engineering Data	303 - 305
Safe Thru-Bolting & Trapeze Information	306
Bolted Channel Attachment Information	307
Electrical Installation Instructions	308
Beam Clamp Technical Data	309 - 310
Technical Data Charts	311 - 313
Versabar Cross Reference	314 - 320
Florida Strut Cross Reference	321 - 325
Keyword Index	326 - 329
Part Number Index	330 - 339

Contact Information Back Cover



Part Number Order Options

Channel Finish or Material Order Codes			
Material/Finish		SPECIFYING Brand Material/Finish Codes	Description
Electroplated		EG	Fittings and hardware supplied as "Electro-Galvanized" in accordance with ASTM B 633.
Mill-Galvanized (Pre-Galvanized)		PG	Galvanized steel used in the manufacture of channel sections conforms to ASTM A 653 GR33 G90. Uncoated edges resulted from slitting, punching and channel cut off are present.
Hot Dip Galvanized		HG	Channel and fittings which are hot dip galvanized after fabrication.
Paint-Green Powder Coating		GR	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Black Zinc Phosphate		--	The coating is a phosphate treatment meeting the requirements of ASTM F1137, providing a corrosion-resistant crystalline layer—typically zinc, iron, or manganese phosphate.
Silva-Guard: Spring Steel		SG	Approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Plain		PL	Other commercially available finishes can be supplied per specification when required to protect applications.
Yellow Zinc Chromate		YZ	Fittings and hardware supplied as "Electro-Galvanized" in accordance with ASTM B633, with a "Yellow" Dichromate conversion coat versus the clear conversion coat of the EG finish.
Stainless Steel: Channel	Type 304	S4	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	Type 316	S6	
Aluminum: Channel		AL	Aluminum alloy extruded bar, rod, wire, shape and tube.
Fiberglass: Polyester		PF	General purpose resin with good corrosion resistance for most applications. Standard color gray
Fiberglass: Vinyl Ester		VF	Premium grade resin with excellent corrosion resistance. Standard color beige
Fiberglass: Polyurethane		PU	Glass filled polyurethane which is highly corrosion resistant

Example Channel Part Number Order Chart for Different Options

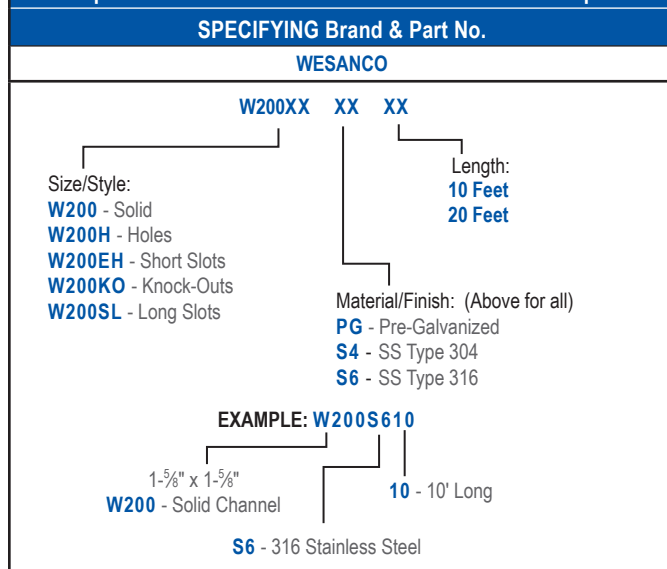

Example Fitting Part Number Order Chart for Different Options

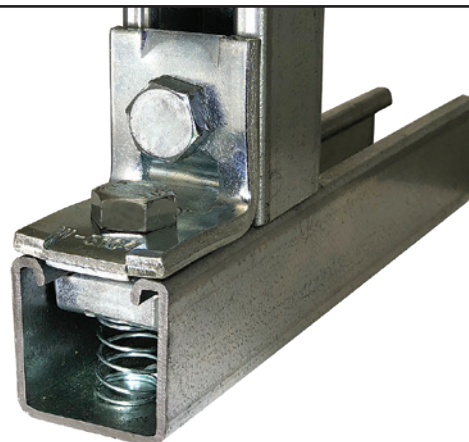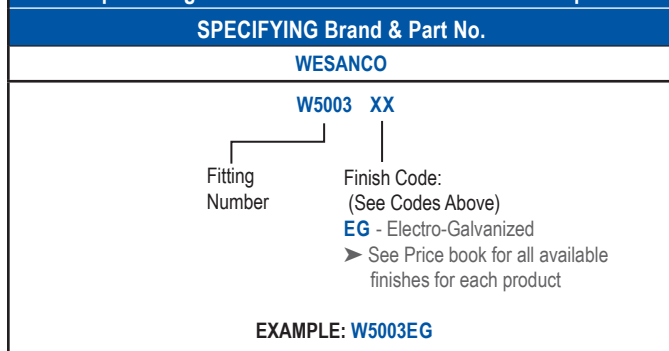

General Information

Most channels are produced in 10 and 20 foot lengths (*3m and 6m*) with a length tolerance of plus or minus $\frac{1}{16}$ ".

W600 and W700 are produced in 10 foot lengths (*3m*) only.

Channels

General

Channels are manufactured by the cold roll forming process which produces cross sections of uniform dimensions within tolerances established by the Metal Framing Manufacturer's Association, Metal Framing Standards Publication No. MFMA-4.

Material

Steel used in the manufacture of channels conforms to the ASTM specifications in this catalog.

Design

Design is based on AISI S100-2016 "Specification for the Design of Cold-Formed Steel Structural Members." Maximum bending stress used in design is 25,000 pounds per square inch (PSI). This is based upon a virgin steel minimum yield stress of 33,000 psi cold worked to an average yield stress of 42,000 psi.

Welding

Welds meet the performance requirements of section 4 of AISI S100-2016 "Specification for the design of Cold-Formed Steel Structural Members." All multiple sections of two or more single channels are resistance spot-welded approximately 2" to 3" (*51mm to 76mm*) on center.

Channel Nuts

General

Channel nuts are formed or stamped from steel bar stock and is case hardened after all forming and tapping operations have been completed. The nuts are coated with zinc to ASTM-B633 "Electrodeposited Coatings of Zinc on Iron and Steel."

Channel nuts have uniform and American coarse screw threads.

Channel nuts are available both with and without springs. Springs are made from Galvanized spring steel wire.

Material

The bar steel used in manufacture of channel nuts conforms to ASTM A575 or ASTM A576.

Weights and Dimensions

All weights given for materials are approximate shipping weights. Weights will vary somewhat due to permissible tolerances and slight variations in material thickness.

We reserve the right to change design specifications or to add or discontinue specific items without notice.

Fittings

General

Fittings are manufactured by cold forming steel in punch press dies and conform to those tolerances listed in section 5.3 of Metal Framing Standards Publication No. MFMA-4.

Material

Steel used for fittings is Hot-Rolled Pickled and Oiled strip steel or bar conforming to ASTM A 570 or ASTM A575.

Welding

Fittings having two or more component parts may be arc or resistance welded in accordance with the appropriate American Welding Society Standards.

Finishes

Electroplated Zinc or Electro-Galvanized

This coating is standard for most Wesanco products. Electro-Galvanized products meet ASTM B633 SC1 or SC3, Type III. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. The thickness of zinc applied in this method is between 0.2 mils to 0.5 mils (*5.1 μ m to 12.7 μ m*).

Mill-Galvanized (Pre-Galvanized)

ASTM A653 G-90 Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills. The coils are slit to size, fabricated by forming, shearing or punching to produce the finished product. During fabrication cut edges are not generally zinc coated. However, the zinc near the uncoated metal becomes a sacrificial anode to protect the bare areas.

Paint-Green Powder Coating

A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.

Hot Dip Galvanized After Fabrication

Channel and fittings which are hot dip galvanized after fabrication conform to one of the following specifications. ASTM A 123, ASTM A153 or ASTM A386.

Black Zinc Phosphate

The coating is a phosphate treatment meeting the requirements of ASTM F1137, providing a corrosion-resistant crystalline layer—typically zinc, iron, or manganese phosphate—suitable for use as a base for lubricants or paint. The coating is uniform, adherent, and tested in accordance with ASTM F1137 procedures.

Silva-Guard

Coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. **Silva-Guard coating is WEEE, ELV, and RoHS compliant.** It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.


Special Coatings

Other commercially available finishes can be supplied per specification when required to protect applications.


Channel Specifications		
Material	Current ASTM Designation	ASTM Description
Hot Rolled: Channel	A 1011SS GR33	Hot rolled carbon steel sheet and strip, structural quality.
Cold Rolled: Channel	A 1008SS GR33, A 1008	Cold rolled carbon sheet steel.
Pregalvanized: Channel	A 653 SS GR33	Steel sheet zinc-coated by hot dip process at mill, structural quality.
Stainless Steel: Channel	A 240 TYPE 304	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	
Aluminum: Channel	B 221 TYPE 6063 T6	Aluminum alloy extruded bar, rod, wire, shape, and tube.

Fittings & Hardware Specifications		
Material	Current ASTM Designation	ASTM Description
Bar Stock: Channel Nuts	A 36	Merchant quality hot rolled carbon steel bars. Steel bars, carbon, hot rolled special quality.
	A 29-03	
Cold Rolled: Closure Strip	A 1008 CS GR33	Cold rolled carbon sheet steel.
Pregalvanized: Closure Strip	A 653 GR33 G90	Steel sheet, zinc coated (galvanized) by the hot dipped process, commercial quality.
Bar Stock	A 569	Merchant quality hot rolled carbon steel bars.
Hot Rolled Plate	A 575	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting (Steel)	A 366	Steel carbon, cold rolled sheet, commercial quality structural steel.
	A 366	
	A 36	
Hardware	A 563	Carbon and alloy steel nuts. Carbon steel externally threaded standard fasteners.
	A 307	
Strip Steel: Pipe Clamps	A 569	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Hot Rolled: Shelf Brackets	A 569	Steel carbon, cold rolled sheet, commercial quality structural steel.



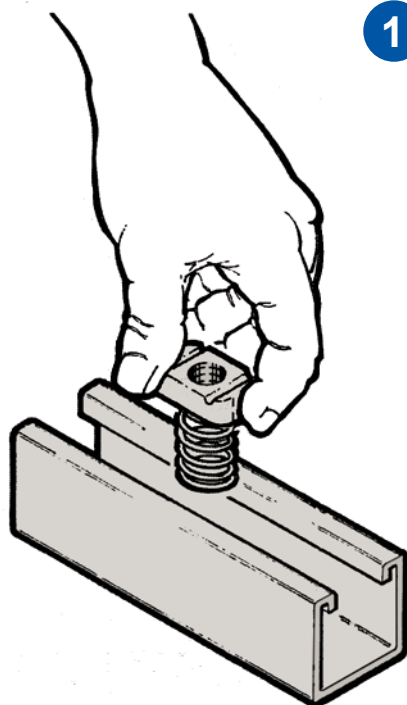


- 1 Insert the appropriate Channel Nut with spring, *parallel* to the slot edges, anywhere along the continuous open slot of the channel.

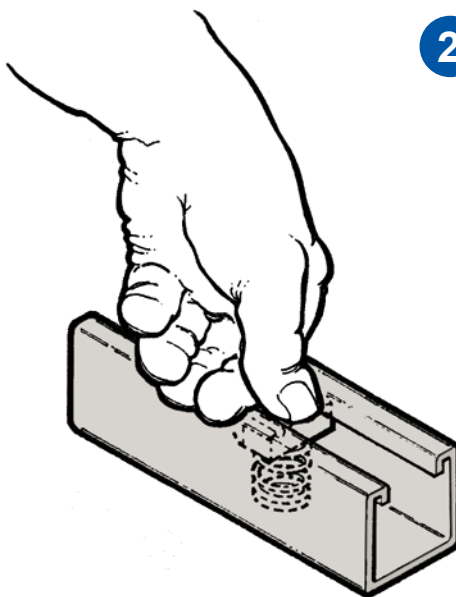

- 2 Depress the Channel Nut with spring below the in-turned channel edges. Rotate one quarter turn clock-wise, perpendicular, and release pressure on the nut.

The Nut will lock in-place, its pyramid grip enhanced grooves aligning with the underside of the channel's in-turned edges; the spring being designed to hold the nut in place during assembly.

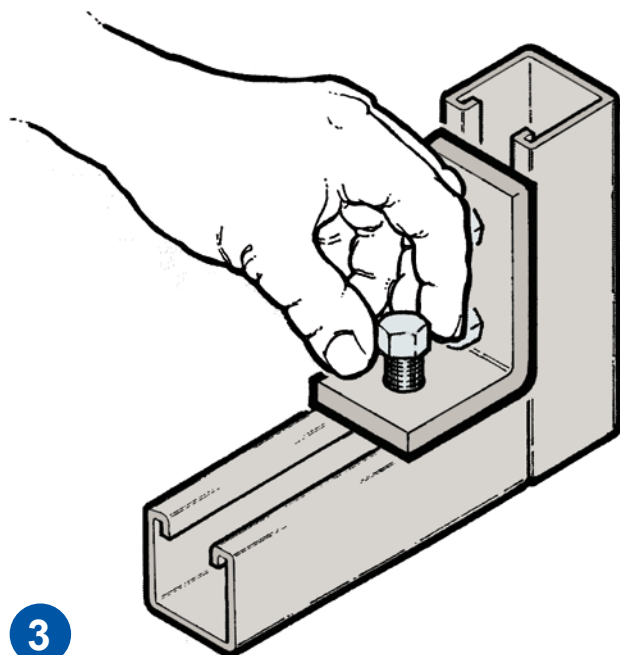

3


Fitting, bracket, or accessory, is located on the channel face over the Channel Nut with spring.

An appropriate diameter and length of bolt is inserted, and the fitting is adjusted for location at this time.

- 4 Properly torquing the bolt draws the Channel Nut with spring up against the in-turned channel lips, forming a strong, secure clamping connection.

Use caution not to bottom the bolt (select one of sufficient length, but not so long as to contact the inside back).

Do not over torque the bolt.

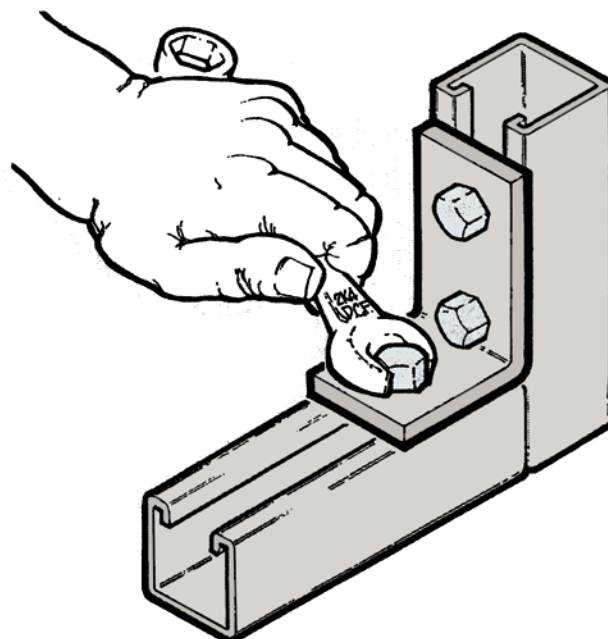

Channel Metal Framing




Channel Material Specifications		
Material	ASTM Designation	ASTM Description
Hot Rolled: Channel	A 1011SS GR33	Hot rolled carbon steel sheet and strip, structural quality.
Cold Rolled: Channel	A 1008SS GR33, A 1008	Cold rolled carbon sheet steel.
Stainless Steel: Channel	A 240 TYPE 304	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	
Aluminum: Channel	B 221 TYPE 6063 T6	Aluminum alloy extruded bar, rod, wire, shape and tube.


Channel Finish Specifications	
Finish	Description
Paint-Green Powder Coating	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Electroplated	Fittings and hardware supplied as "Electro-Galvanized" in accordance with ASTM B 633.
Mill-Galvanized (Pre-Galvanized)	Galvanized steel used in the manufacture of channel sections conforms to ASTM A 653 GR33 G90. Uncoated edges resulted from slitting, punching and channel cut off are present.
Hot Dip Galvanized After Fabrication	Channel and fittings which are hot dip galvanized after fabrication conform to one of the following specifications. ASTM A 123, ASTM A153 or ASTM A386.
Special Coatings	Other commercially available finishes can be supplied per specification when required to protect applications.

See page 23 for Material or Finish ordering codes for part numbers.

SPECIFYING Brand & Part No.	Channel Dimensions		Hole Patterns				Page	DISCONTINUED Brands & Part No.	
	Style	Height	Short Slots (EH)	Long Slots (SL)	Holes (H)	Knock Outs (KO)		VERSABAR	FLORIDA STRUT
 WESANCO									
12 Gauge Steel - 1-5/8" Width									
W150		3¼" (83mm)	◆ *	—	◆	—	56 - 59	VA11	FS12314
W151		6½" (165mm)	◆ *	—	—	—		VA11201	FS12314NSBB
W100		2⅞" (62mm)	◆	◆	◆	—	53 - 55	--	FS122716NS
W101		4⅞" (124mm)	◆	—	—	—		--	FS122716NSBB
W200		1⅝" (41mm)	◆ *	◆	◆ *	◆	38 - 41	VA1	FS12158NS
W201		3¼" (83mm)	◆ *	—	◆ *	—		VA1201	FS12158NSBB
W300		1⅜" (35mm)	◆ *	◆	◆	◆	42 - 43	VA6	FS12138NS
W301		2¾" (70mm)	◆ *	—	—	—		VA6201	FS12138NSBB
W800		1" (25mm)	◆ *	◆	◆ *	—	44 - 46	VA10	FS12100NS
W801		2" (51mm)	◆ *	—	—	—		VA10201	FS12100NSBB
W900		⅞" (23mm)	◆	◆	◆	—	47 - 49	--	FS12078NS
W901		1¾" (44mm)	◆	—	◆	—		--	FS12078NSBB
◆ Pierced Available									
* Various hole patterns available, contact representative for more information									




Channel With Short Slots




9/16" x 1 1/8" (14mm x 29mm)
Slots are punched on
2" (51mm) centers.
1 1/16" x 1 1/8" (18mm x 29mm)
Slots are punched on
2" (51mm) centers. Allows
for 5/8" (16mm) threaded rod
& bolts.

Channel With Long Slots




1 3/32" x 3" (10mm x 76mm)
Slots are punched on 4"
(102mm) centers.

Channel With Holes



1 7/32" (13.5mm) Holes are
punched on 1 1/2" (38mm)
centers.
9/16" (14mm) Holes are punched
on 1 7/8" (48mm) centers.
3/4" (19mm) Holes are punched
on 1 7/8" (48mm) centers.
1 7/32" (13.5mm) Holes are
punched on 8" (203mm)
centers.

Channel With Knock-Outs



7/8" (22mm) Knock-outs are
punched on 6" (152mm)
centers.


Channel Selection Chart




SPECIFYING Brand & Part No.	Channel Dimensions		Hole Patterns				Page	DISCONTINUED Brands & Part No.	
	Style	Height	Short Slots (EH)	Long Slots (SL)	Holes (H)	Knock Outs (KO)		VERSABAR	FLORIDA STRUT
 WESANCO									
14 Gauge Steel - 1-5/8" Width									
W210		1 5/8" (41mm)	◆ *	◆	◆ *	◆	38 - 40	VA2	FS14158NS
W211		3 1/4" (83mm)	◆ *	—	◆ *	—		VA2201	FS14158NSBB
W500		1 3/16" (21mm)	◆ *	◆	◆	◆	50 - 52	VA4	FS141316NS
W501		1 5/8" (41mm)	◆ *	—	—	—		VA4201	FS141316NSBB
19 Gauge Steel - 1 3/16" Width									
W600		1 3/16" (21mm)	—	—	—	—	60 - 61	--	--
W601		1 5/8" (41mm)	—	—	—	—		--	--
W700		1 3/32" (10mm)	—	—	—	—	62 - 63	--	--
W701		1 3/16" (21mm)	—	—	—	—		--	--
Fiberglass Channel - 0.15" Thick - 1-5/8" Width									
W200		1 5/8" (41mm)	◆	—	—	—	268 - 269	--	--
W201		3 1/4" (83mm)	◆	—	—	—		--	--
W800		1 1/8" (29mm)	◆	—	—	—	270 - 271	--	--
W801		2 1/4" (57mm)	◆	—	—	—		--	--
◆ Pierced Available									
* Various hole patterns available, contact representative for more information									

◆ Pierced Available

* Various hole patterns available, contact representative for more information




Channel With Short Slots



9/16" x 1 1/8" (14mm x 29mm)
Slots are punched on 2"
(51mm) centers.


1 1/16" x 1 1/8" (18mm x 29mm)
Slots are punched on 2"
(51mm) centers.

Channel With Long Slots



1 3/32" x 3" (10mm x 76mm)
Slots are punched on 4"
(102mm) centers.

Channel With Holes




1 7/32" (13.5mm) Holes are
punched on 1 1/2" (38mm)
centers.

9/16" (14mm) Holes are punched
on 1 7/8" (48mm) centers.


3/4" (19mm) Holes are punched
on 1 7/8" (48mm) centers.

1 7/32" (13.5mm) Holes are
punched on 8" (203mm)
centers.

Channel With Knock-Outs



7/8" (22mm) Knock-outs are
punched on 6" (152mm)
centers.

SPECIFYING Brand & Part No.	Channel Style	Area		Weight		I x		S x		Moment		Page	DISCONTINUED Brands & Part No.	
		In ²	(cm ²)	lbs / ft	(kg/m)	In ⁴	(cm ⁴)	In ³	(cm ³)	in-lbs	(N•m)		VERSABAR	FLORIDA STRUT
 WESANCO														
W151		1.804"	(11.64)	6.14	(9.1)	6.339"	(263.9)	1.951	(32.0)	48,180	(5,440)	56-59	VA11201	FS12314NSBB
W101		1.463"	(9.44)	4.98	(7.4)	2.867"	(119.3)	1.176	(19.3)	28,940	(3,270)	53-55	--	FS122716NSBB
W150		0.902"	(5.82)	3.07	(4.6)	1.113"	(46.3)	0.639	(10.5)	15,770	(1,780)	56-59	VA11	FS12314
W201		1.122"	(7.24)	3.82	(5.7)	0.954"	(39.7)	0.587	(9.6)	14,360	(1,620)	38-41	VA1201	FS12158NSBB
W301		1.017"	(6.56)	3.46	(5.1)	0.608"	(25.3)	0.443	(7.3)	10,810	(1,220)	42-43	VA6201	FS12138NSBB
W211		0.834"	(5.38)	2.84	(4.2)	0.739"	(30.8)	0.455	(7.5)	11,340	(1,280)	38-40	VA2201	FS14158NSBB
W100		0.732"	(4.72)	2.49	(3.7)	0.530"	(22.0)	0.400	(6.5)	9,820	(1,110)	53-55	--	FS122716NS
W200		0.561"	(3.62)	1.91	(2.8)	0.188"	(7.8)	0.207	(3.4)	5,070	(570)	38-41	VA1	FS12158NS
W901		0.807"	(5.21)	2.75	(4.1)	0.183"	(7.6)	0.209	(3.4)	5,060	(570)	47-49	--	FS12078NSBB
W300		0.508"	(3.28)	1.73	(2.6)	0.123"	(5.1)	0.158	(2.6)	3,840	(430)	42-43	VA6	FS12138NS
W210		0.417"	(2.69)	1.42	(2.1)	0.148"	(6.2)	0.169	(2.8)	4,060	(460)	38-40	VA2	FS14158NS
W801		0.859"	(5.54)	2.92	(4.3)	0.261"	(10.9)	0.261	(4.3)	3,610	(410)	44-46	VA10201	FS12100NSBB
W501		0.590"	(3.81)	2.01	(3.0)	0.122"	(5.1)	0.150	(2.4)	3,610	(410)	42-43	VA4201	FS141316NSBB
W800		0.430"	(2.77)	1.46	(2.2)	0.054"	(2.2)	0.093	(1.5)	3,610	(410)	44-46	VA10	FS12100NS
W900		0.403"	(2.60)	1.37	(2.0)	0.038"	(1.6)	0.074	(1.2)	1,800	(200)	47-49	--	FS12078NS
W500		0.295"	(1.90)	1.00	(1.5)	0.026"	(1.1)	0.056	(0.9)	1,360	(150)	50-52	VA4	FS141316NS
W601		0.214"	(1.38)	0.73	(1.1)	0.045"	(1.9)	0.056	(0.9)	1,390	(160)	60-61	--	--
W600		0.107"	(0.69)	0.36	(0.5)	0.009"	(0.4)	0.020	(0.3)	510	(60)	60-61	--	--
W701		0.149"	(0.96)	0.51	(0.8)	0.007"	(0.3)	0.018	(0.3)	450	(50)	62-63	--	--
W700		0.074"	(0.48)	0.25	(0.4)	0.002"	(0.1)	0.007	(0.1)	170	(20)	62-63	--	--


Pierced Channel

Channel with Holes

$\frac{17}{32}$ " (13.5mm) Holes are punched on $1\frac{1}{2}$ " (38mm) centers. **(H15)**

$\frac{9}{16}$ " (14mm) Holes are punched on $1\frac{7}{8}$ " (48mm) centers. **(H)**


$\frac{3}{4}$ " (19mm) Holes are punched on $1\frac{7}{8}$ " (48mm) centers. **(CX)**



Channel with Long Slots (SL)

$\frac{13}{32}$ " x 3" (10mm x 76mm)


Slots are punched on 4" (102mm) centers.



Channel with Short Slots


$\frac{9}{16}$ " x $1\frac{1}{8}$ " (14mm x 29mm) Slots are punched on 2" (51mm) centers. **(EH)**

$1\frac{1}{16}$ " x $1\frac{1}{8}$ " (18mm x 29mm) Slots are punched on 2" (51mm) centers. Allows for $\frac{5}{8}$ " (16mm) threaded rod and bolts. **(EH58)**



Channel with Knock-Outs (KO)


$\frac{7}{8}$ " (22mm) Knock-outs are punched on 6" (152mm) centers.



Channel with Specialty Custom Perforations


Designation is indicated by adding type of perforation from standard selection and pertinent dimensional information.

If used as a trapeze reference page 306.



Channel with Slots Wide (SW)

$1\frac{1}{16}$ " x 2" (18mm x 51mm) Slots are punched on 3" (76mm) centers. Allows for $\frac{5}{8}$ " (16mm) threaded rod and bolts.




Beam Loading of Punched Channels

Load for punched channel is obtained by multiplying the loads shown by the following reduction factors:

Channel with Short Slots	0.90
Channel with Long Slots	0.90
Channel with Holes	0.95
Knock-Out Channel	0.95


Pierced Combinations

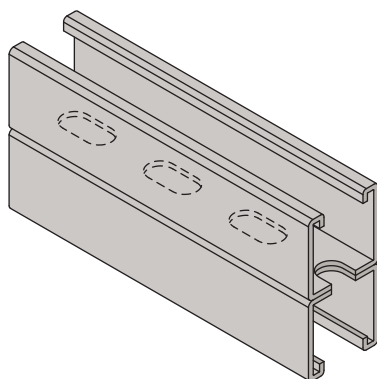

Channel with Short Slots (EH)


$\frac{9}{16}$ " x $1\frac{1}{8}$ " (14mm x 29mm) Slots are punched on 2" (51mm) centers.

$1\frac{1}{16}$ " x $1\frac{1}{8}$ " (18mm x 29mm) Slots are punched on 2" (51mm) centers.

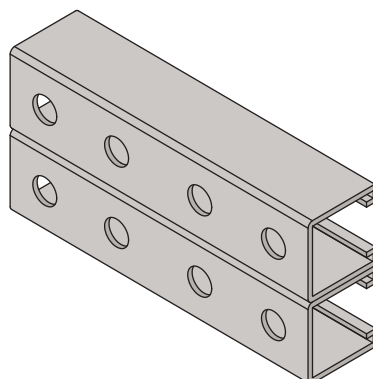

Channel with Holes (H)

$\frac{9}{16}$ " (14mm) Holes are punched on $1\frac{7}{8}$ " (48mm) centers.

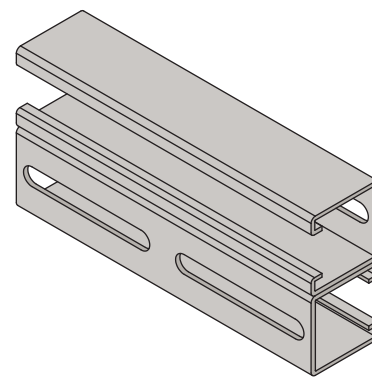

Channel with Long Slots (SL)


$\frac{13}{32}$ " x 3" (10mm x 76mm)

Slots are punched on 4" (102mm) centers.

1-5/8" x 1-5/8" (41mm x 41mm) Channel Shown


1-5/8" x 3-1/4" (41mm x 83mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W202	VA1202	--




1-5/8" x 3-1/4" (41mm x 83mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W203	VA1203	--




1-5/8" x 4-7/8" (41mm x 124mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W203B3	VA1303	--




1-5/8" x 3-1/4" (41mm x 83mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W204	VA1204	--




1-5/8" x 4-7/8" (41mm x 124mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W204A3	VA1302	--




3-1/4" x 3-1/4" (83mm x 83mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W205	VA1304	--




3-1/4" x 3-1/4" (83mm x 83mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W206	VA1308	--




3-1/4" x 3-1/4" (83mm x 83mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W207	VA1401	--




3-1/4" x 3-1/4" (83mm x 83mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W208	VA1308	--




3-1/4" x 3-1/4" (83mm x 83mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W209	VA1402	--




2-13/16" x 1-3/4" (71mm x 46mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W220	VA1209	--




4" x 1-3/4" (102mm x 46mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W221	VA1208	--




1-7/8" x 4-7/8" (48mm x 124mm)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W222	VA1405	--




Additional combination configurations are available.
Combinations can be made in other channel sizes.


Specialty Combinations



**MIG Welded To Meet
Specific Engineering
Request**

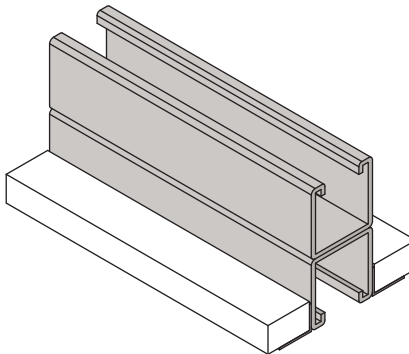

**Combination/
Ceiling Support**

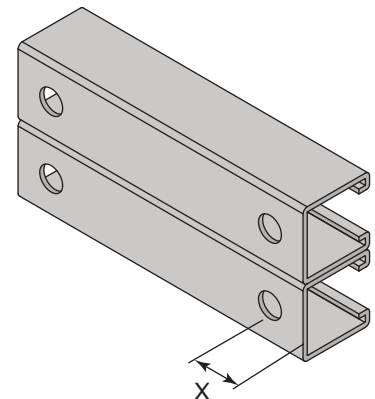


**Channel Custom
Pierced**

Channel for Trolley Systems

The trolley system moves equipment from 10 to 600 lbs. (4.5kg to 272.2kg), with reliability, ease, and economy. Trolleys can be ganged to accommodate higher loads. Trolleys, featuring corrosion-free stainless wheel bearings and steel or acetyl wheels that require no lubrication, deliver built-in value and dependability for a wide range of applications. Throughout the system, famous quality assures dependable, trouble-free performance.


Composed of three basic elements; trolleys, track, and supports. Trolley systems are efficient and economical. Different trolleys give users a wide range of weight capacities and suspension options, to allow tailoring of the system to exact application needs.

Track is available in 20 foot (6.1m) sections and can be easily field cut according to project requirements. Longer lengths are available on special order. A complete system of easy-to-use supports, including beam clamps, make installation a breeze.




Four Wheel Trolley



Four Wheel Trolley



Two Wheel Trolley




Two Wheel Trolley




See pages 107 - 108 for more trolley information


Cantilever Beams

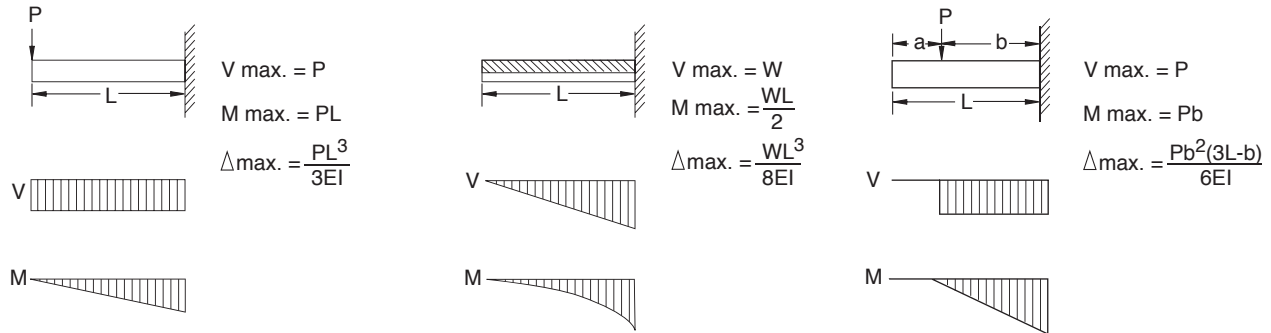


Simple Beams

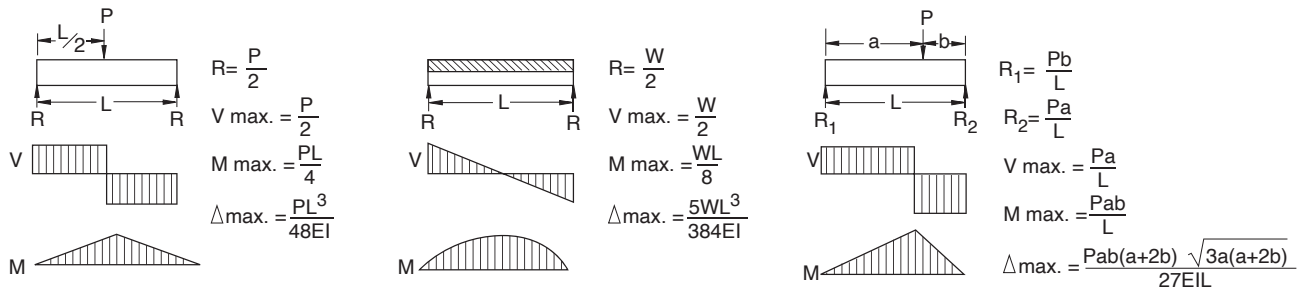

Beams Fixed At One End & Supported At The Other

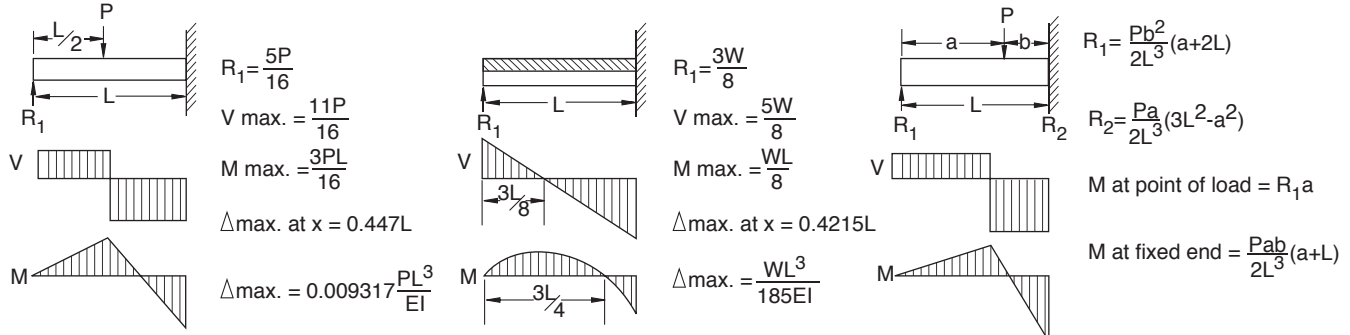

Beams Fixed At Both Ends






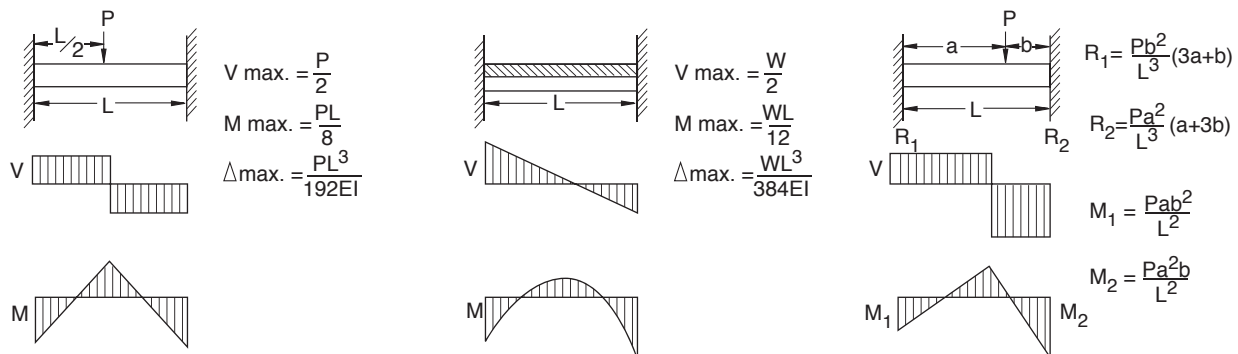


R – Reaction
 M – Moment
 P – Concentrated Load


W – Total Uniform Load
 V – Shear
 L – Length

Δ – Deflection
 E – Modulus of Elasticity
 I – Moment of Inertia

All Beam Load tables are for simple beams supported at the ends. These can be used in the majority of the cases. There are times when it is necessary to know what happens with other loading and support conditions. Some common arrangements are shown below. Simply multiply the values from the Beam Load tables by factors given below.

Load and Support Condition		Load Factor	Deflection Factor
Simple Beam Uniform Load		1.00	1.00
Simple Beam Concentrated Load at Center		0.50	0.80
Simple Beam Two Equal Concentrated Loads at 1/4 Points		1.00	1.10
Beam Fixed at Both Ends Uniform Load		1.50	0.30
Beam Fixed at Both Ends Concentrated Load at Center		1.00	0.40
Cantilever Beam Uniform Load		0.25	2.40
Cantilever Beam Concentrated Load at End		0.12	3.20
Continuous Beam Two Equal Spans - Uniform Load on One Span		1.30	0.92
Continuous Beam Two Equal Spans - Uniform Load on Both Spans		1.00	0.42
Continuous Beam Two Equal Spans - Concentrated Load at Center of One Span		0.62	0.71
Continuous Beam Two Equal Spans - Concentrated Load at Center of Both Spans		0.67	0.48

EXAMPLE I



PROBLEM:

Calculate the load and deflection of an W200 (1 $\frac{5}{8}$ " x 1 $\frac{5}{8}$ " 12 gauge) beam continuous over one support and loaded uniformly on one span.

SOLUTION:


A. From load table for W200 the load for a 60" span is 700 lbs. and deflection is 0.35".

B. Multiply by factors from Table above

Load = 700 lb. x 1.30 = 910 lbs.

Deflection = 0.35" x 0.92 = 0.322"

EXAMPLE II



PROBLEM:

Determine load and deflection of an W150 (1 $\frac{5}{8}$ " x 3 $\frac{1}{4}$ " 12 gauge) cantilever beam with a concentrated load on the end.

SOLUTION:

A. From load table for W150 the load for a 24" span is 5,360 lbs. and deflection is 0.09".


B. Multiply by factors from Table above.

Load = 5,360 lbs. x 0.12 = 643.2 lbs.

Deflection = 0.09" x 3.20 = 0.288"

Beams are structural members loaded at right angles (perpendicular) to their length. Most beams are horizontal and subjected to gravity or vertical loads, e.g. a shelf support. However a vertical member can act as a beam under certain conditions, such as, a curtain wall mullion subjected to wind loading. The bending moment developed in a beam is dependent on:


- (a) The amount of load applied
- (b) The type of loading applied
- (c) The support conditions



Beam Loading - Point Load

A load concentrated onto a very small length of the beam is a point load.

Beam Loading - Uniform Load




A load spread evenly over a relatively long length of the beam is a uniform load.

Point and uniform loads can be placed on a beam in any combination. A series of point loads can approximate a uniform loading. The load charts and tables are based on a uniform load unless identified otherwise.

Support Conditions - Simple Beam

A simple beam has supports that prevent movement left and right, or up and down, but do not restrain the beam from rotating at the supports into a natural deflected curve. Most connections produce simple beams. The load charts and tables are based on simple beams unless identified otherwise.

Support Conditions - Continuous Beam




Any simple beam that is supported at one or more intermediate points is a continuous beam. A mezzanine joist that passes over three or more columns is an example of a continuous beam.

Support Conditions - Fixed-End Beam




Supports that prevent the beam from rotating into a natural deflected curve produce a fixed-end beam. A welded end connection to very rigid support produces a fixed-end beam.

Support Conditions - Cantilever Beam



A cantilever beam is a fixed-end beam that is supported at one end only, while the other end is unsupported. Brackets are examples of cantilever beams.

Deflection



All beams deflect under load. The amount of deflection is dependent on:

- (a) The amount of load,
- (b) The support conditions,
- (c) The stiffness of the beam's cross-sectional shape,
- (d) The stiffness of the beam material

The stiffness of the beam's cross-sectional shape is measured by its "Moment Of Inertia" or "I". The larger a beam's "I", the stiffer it is and the less it will deflect. A beam's "I" can change for each major axis. The "I" of both major axes (I 1-1 and I 2-2) are provided.


The stiffness of a beam's material is measured by its "Modulus of Elasticity" or "E". The larger a material's "E", the stiffer it is and the less it deflects. For example, steel is about three times stiffer than aluminum and as a result, deflects only one-third as much. Do not confuse stiffness with strength. Two materials may have identical strengths yet still have different "E's". A high-strength aluminum may be as strong as steel and still deflect three times as much.

The load charts and tables give calculated deflections for the loads shown. In many cases, a final design will be determined by the maximum deflection, not the maximum load.

Bending Moment

A beam must not only hold up the anticipated loads, but must also have sufficient additional capacity to safely hold unforeseen variations in applied loads and material strengths. This additional capacity is called a safety factor and is usually regulated by the various design codes and standards. A beam's strength is usually measured by an allowable bending moment or an allowable stress. The traditional approach is the allowable stress method, where a beam is determined to have a maximum allowable stress (in pounds per square inch) which is not to be exceeded.

The approach of the current AISI S100-2016 "Specification For The Design Of Cold-Formed Steel Structural Members" is to use a maximum allowable bending moment (in inch-pounds) which is not to be exceeded. Bending moment divided by a beam's section modulus or "S" equals stress.

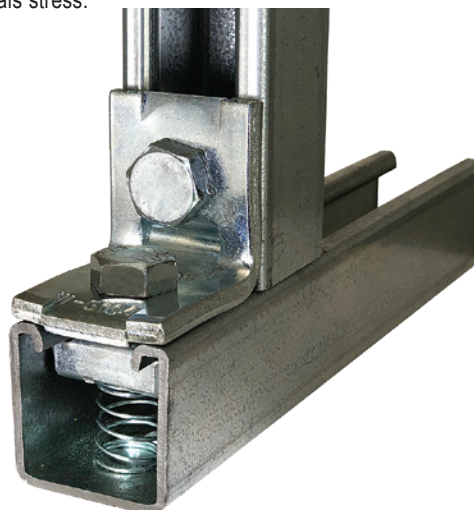

Columns are structural members that are loaded parallel to their length. Most columns are vertical and are used to carry loads from a higher level to a lower level. However, any member subjected to compression loads, such as a diagonal or prop brace, is a column.

A column fails by "buckling", which is a sudden loss of straightness and subsequent collapse. Allowable column load is dependent on:

- The length of column
- The type of loading
- The support conditions
- The column's cross-sectional shape and material.

Column Length

The column length is measured from braced point to braced point. A braced point is where the column is restrained from lateral movement (translation) in all directions.

Column Loading – Concentric Loading

Loads applied to the center of gravity of the column cross-section are considered concentric. A beam that passes over and rests on the top of a column is an example of concentric loading.

Column Loading – Eccentric Loading

Any load which is not concentric is eccentric. The amount of eccentricity (in inches) has a major effect on the load-carrying capacity of any particular column. A load that is transmitted to a column using a standard fitting bolted to the slot face, is considered eccentric.


The load tables give allowable loads for both concentric (loaded at C G) and certain eccentric (loaded at slot face) loading. Allowable loads for other eccentric loading must be determined by a qualified design professional.

Support Conditions

Based on the support conditions, an appropriate "K" value is selected. This "K" value, which mathematically describes the column end conditions, is used in the column design equations. The most common support condition combinations are as follows:

Support Conditions - Fixed Top – Fixed Bottom


Both ends are restrained against rotation and lateral movement (translation).

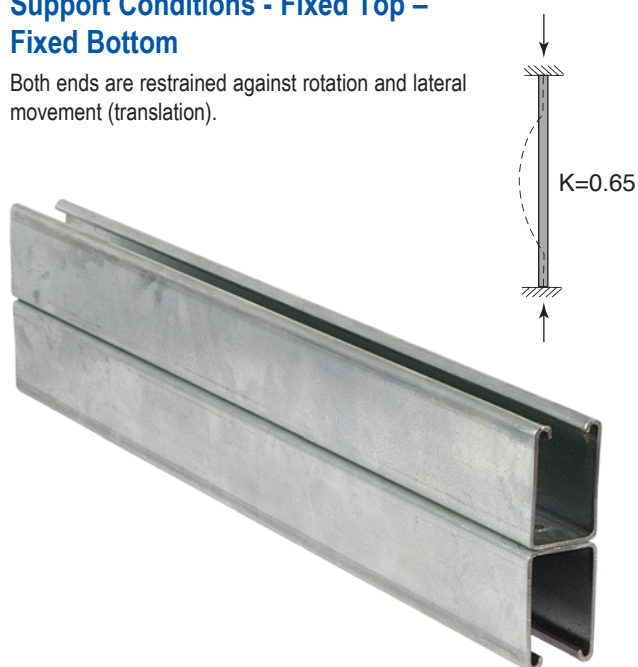

Support Conditions - Pinned Top – Fixed Bottom


The top is restrained against lateral movement (translation) but is allowed to rotate. The bottom is restrained against rotation and lateral movement.

This is a common support condition and is used to construct the allowable column load applied at the Slot Face tables.




Support Conditions - Pinned Top – Pinned Bottom

Both ends are restrained against lateral movement (translation) but, are allowed to rotate.



Support Conditions - Fixed / Free Top – Fixed Bottom

The top is restrained against rotation, but is allowed to move laterally. The bottom is restrained against rotation and lateral movement (translation).













Cross-Sectional Shape

The cross-sectional shape of a column member determines the value of its "Radius of Gyration" or "r". In general, a member with a large "r" makes a better column than a member with a small "r". Each axis of a column has a different "r". Typically the axis with the smallest "r" determines the final design.










1-5/8" x 1-5/8" (41mm x 41mm)

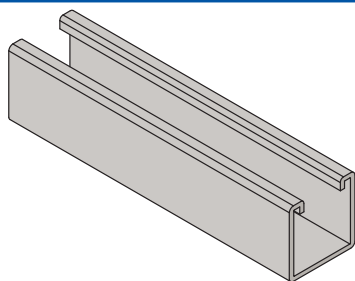

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1-5/8" x 1-5/8"
		VERSABAR	FLORIDA STRUT	
 WESANCO				
Solid Channel				
W200	12 Ga.	VA1	FS12158NS	
W210	14 Ga.	VA2	FS14158NS	
Channel with 17/32" Holes on 1-1/2" center				
W200H15	12 Ga.	VA1P15	--	
W210H15	14 Ga.	VA2P15	--	
Channel with 9/16" Holes on 1-7/8" center *				
W200H	12 Ga.	VA1P187	FS12158HS	
W210H	14 Ga.	VA2P187	FS14158HS	
Channel with 3/4" Holes on 1-7/8" center				
W200CX	12 Ga.	VA1CHD	--	
Channel with 7/8" Knock-Outs on 6" center				
W200KO	12 Ga.	VA1KO6	--	
W210KO	14 Ga.	VA2KO6	--	
Channel with 9/16" x 1-1/8" Short Slots on 2" center				
W200EH	12 Ga.	VA1PLH	FS12158EH	
W210EH	14 Ga.	VA2PLH	FS14158EH	
Channel with 11/16" x 1-1/8" Short Slots on 2" center Allows use with 5/8" threaded rod or bolts				
W200EH58	12 Ga.	VA1PLW	--	
W210EH58	14 Ga.	VA2PLW	--	
Channel with 13/32" x 3" Long Slots on 4" center				
W200SL	12 Ga.	VA1P3S	FS12158SL	
W210SL	14 Ga.	VA2P3S	FS14158SL	

1-5/8" x 3-1/4" (41mm x 83mm)

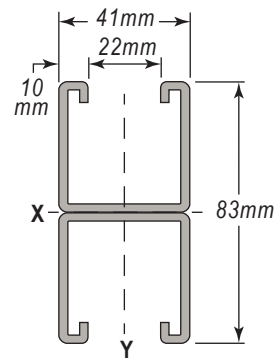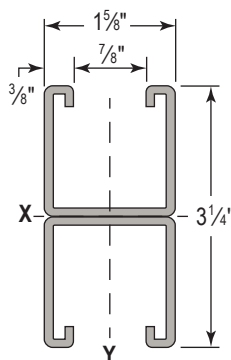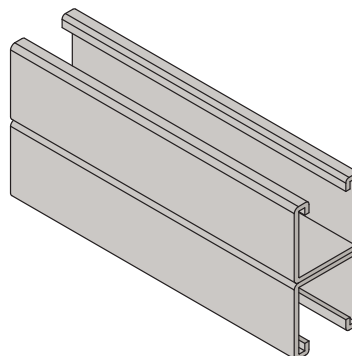

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1-5/8" x 3-1/4"
		VERSABAR	FLORIDA STRUT	
 WESANCO				
Back-to-Back Solid Channel				
W201	12 Ga.	VA1201	FS12158NSBB	
W211	14 Ga.	VA2201	FS14158NSBB	
Back-to-Back Channel with 9/16" Holes on 1-7/8" center *				
W201H	12 Ga.	VA1201P187	FS12158HSBB	
W211H	14 Ga.	VA2201P187	FS14158HSBB	
Back-to-Back with 9/16" x 1-1/8" Short Slots				
W201EH	12 Ga.	VA1201PLH	FS12158EHBB	
W211EH	14 Ga.	VA2201PLH	FS14158EHBB	
Back-to-Back with 11/16" x 1-1/8" Short Slots				
W201EH58	12 Ga.	VA1201PLW	--	
W211EH58	14 Ga.	VA2201PLW	--	

* Various patterns available, contact representative for more information

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.



1-5/8" x 1-5/8" (41mm x 41mm) Channel



12 Gauge Channel Load Data

Section Properties

12 Gauge	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis			DISCONTINUED Brands & Part No.	
SPECIFYING Brand & Part No.			lx in. ⁴ (lx cm ⁴)	Sx in. ³ (Sx cm ³)	rx. in. (rx. cm)	ly in. ⁴ (ly cm ⁴)	Sy in. ³ (Sy cm ³)	ry in. (ry cm)		
 WESANCO			VERSABAR	FLORIDA STRUT						
1 ⁵ / ₈ " x 1 ⁵ / ₈ " (41mm x 41mm) 12 Gauge Channel										
W200	1.91 (2.84)	0.561 (3.62)	0.188 (7.83)	0.207 (3.39)	0.579 (1.47)	0.238 (9.91)	0.293 (4.80)	0.652 (1.66)	VA1	FS12158NS
1 ⁵ / ₈ " x 3 ¹ / ₄ " (41mm x 83mm) 12 Gauge Back-to-Back Channel										
W201	3.82 (5.68)	1.122 (7.24)	0.954 (39.71)	0.587 (9.62)	0.922 (2.34)	0.477 (19.85)	0.587 (9.62)	0.652 (1.66)	VA1201	FS12158NSBB

1-5/8" x 1-5/8" (41mm x 41mm) 12 Gauge Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction Rate
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	
12 (305)	3,480 (15.5)	0.01 (0.25)	3,480 (15.5)	1.00
24 (610)	1,740 (7.7)	0.06 (1.52)	1,740 (7.7)	1.00
36 (914)	1,160 (5.2)	0.13 (3.30)	1,160 (5.2)	0.93
48 (1,219)	870 (3.9)	0.23 (5.84)	770 (3.4)	0.87
60 (1,524)	700 (3.1)	0.35 (8.89)	490 (2.2)	0.82
72 (1,829)	580 (2.6)	0.51 (12.95)	340 (1.5)	0.77
84 (2,134)	500 (2.2)	0.7 (17.78)	250 (1.1)	0.74
96 (2,438)	430 (1.9)	0.89 (22.61)	190 (0.8)	0.70
108 (2,743)	390 (1.7)	1.15 (29.21)	150 (0.7)	0.67
120 (3,048)	350 (1.6)	1.42 (36.07)	120 (0.5)	0.65

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	3,870 (17.2)	11,640 (51.8)
24 (610)	3,620 (16.1)	8,830 (39.3)
36 (914)	3,250 (14.5)	6,420 (28.6)
48 (1,219)	2,800 (12.5)	4,710 (21.0)
60 (1,524)	2,410 (10.7)	3,650 (16.2)
72 (1,829)	2,110 (9.4)	2,970 (13.2)
84 (2,134)	1,870 (8.3)	2,490 (11.1)
96 (2,438)	1,680 (7.5)	2,120 (9.4)
108 (2,743)	1,530 (6.8)	1,830 (8.1)
120 (3,048)	1,390 (6.2)	**

1-5/8" x 3-1/4" (41mm x 83mm) 12 Gauge Back-to-Back Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction Rate
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	
12 (305)	3,510 (15.6) *	0.00	3,510 (15.6) *	1.00
24 (610)	3,510 (15.6) *	0.02 (0.51)	3,510 (15.6) *	1.00
36 (914)	3,280 (14.6)	0.07 (1.78)	3,280 (14.6)	1.00
48 (1,219)	2,460 (10.9)	0.13 (3.30)	2,460 (10.9)	1.00
60 (1,524)	1,970 (8.8)	0.20 (5.08)	1,970 (8.8)	0.96
72 (1,829)	1,640 (7.3)	0.28 (7.11)	1,640 (7.3)	0.92
84 (2,134)	1,410 (6.3)	0.39 (9.91)	1,280 (5.7)	0.88
96 (2,438)	1,230 (5.5)	0.50 (12.70)	980 (4.4)	0.85
108 (2,743)	1,090 (4.8)	0.64 (16.26)	770 (3.4)	0.81
120 (3,048)	980 (4.4)	0.78 (19.81)	630 (2.8)	0.77

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	6,700 (29.8)	25,120 (111.7)
24 (610)	6,580 (29.3)	22,900 (101.9)
36 (914)	6,430 (28.6)	20,810 (92.6)
48 (1,219)	6,290 (28.0)	18,860 (83.9)
60 (1,524)	6,130 (27.3)	15,680 (69.7)
72 (1,829)	5,730 (25.5)	12,520 (55.7)
84 (2,134)	5,270 (23.4)	9,570 (42.6)
96 (2,438)	4,770 (21.2)	7,320 (32.6)
108 (2,743)	4,240 (18.9)	5,790 (25.8)
120 (3,048)	3,750 (16.7)	4,690 (20.9)

* Load limited by spot weld shear

** KL/r > 200

NR = Not Recommended

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.

Refer to pages 34 - 36 for other beam support conditions.

Beam Loading of Punched Channels

Load for punched channel is obtained by multiplying the loads shown by the following reduction factors:

Channel with Short Slots	0.90
Channel with Long Slots	0.90
Channel with Holes	0.95
Knock-Out Channel.	0.95



14 Gauge Channel Load Data

Section Properties

14 Gauge	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis			DISCONTINUED Brands & Part No.	
SPECIFYING Brand & Part No.			lx in. ⁴ (lx cm ⁴)	Sx in. ³ (Sx cm ³)	rx. in. (rx. cm)	ly in. ⁴ (ly cm ⁴)	Sy in. ³ (Sy cm ³)	ry in. (ry cm)		
 WESANCO			VERSABAR	FLORIDA STRUT						
1 ⁵ / ₈ " x 1 ⁵ / ₈ " (41mm x 41mm) 14 Gauge Channel										
W210	1.42 (2.11)	0.417 (2.69)	0.148 (6.16)	0.169 (2.77)	0.596 (1.51)	0.183 (7.62)	0.225 (3.69)	0.662 (1.68)	VA2	FS14158NS
1 ⁵ / ₈ " x 3 ¹ / ₄ " (41mm x 83mm) 14 Gauge Back-to-Back Channel										
W211	2.84 (4.23)	0.834 (5.38)	0.739 (30.76)	0.455 (7.46)	0.942 (2.39)	0.365 (15.19)	0.450 (7.37)	0.662 (1.68)	VA2201	FS14158NSBB

1-⁵/₈" x 1-⁵/₈" (41mm x 41mm) 14 Gauge Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	Rate
12 (305)	2,840 (12.6)	0.01 (0.25)	2,840 (12.6)	1.00
24 (610)	1,420 (6.3)	0.06 (1.52)	1,420 (6.3)	0.99
36 (914)	950 (4.2)	0.13 (3.30)	950 (4.2)	0.88
48 (1,219)	710 (3.2)	0.23 (5.84)	610 (2.7)	0.77
60 (1,524)	570 (2.5)	0.37 (9.40)	390 (1.7)	0.66
72 (1,829)	470 (2.1)	0.52 (13.21)	270 (1.2)	0.57
84 (2,134)	410 (1.8)	0.72 (18.29)	200 (0.9)	0.50
96 (2,438)	350 (1.6)	0.92 (23.37)	150 (0.7)	0.45
108 (2,743)	320 (1.4)	1.20 (30.48)	120 (0.5)	0.41
120 (3,048)	280 (1.2)	1.44 (36.58)	100 (0.4)	0.38

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	3,110 (13.8)	8,660 (38.5)
24 (610)	2,880 (12.8)	6,360 (28.3)
36 (914)	2,460 (10.9)	4,190 (18.6)
48 (1,219)	1,980 (8.8)	2,760 (12.3)
60 (1,524)	1,570 (7.0)	2,050 (9.1)
72 (1,829)	1,300 (5.8)	1,640 (7.3)
84 (2,134)	1,100 (4.9)	1,370 (6.1)
96 (2,438)	950 (4.2)	1,170 (5.2)
108 (2,743)	840 (3.7)	1,030 (4.6)
120 (3,048)	750 (3.3)	**

1-⁵/₈" x 3-¹/₄" (41mm x 83mm) 14 Gauge Back-to-Back Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	Rate
12 (305)	2,230 (9.9) *	0.00	2,230 (9.9) *	1.00
24 (610)	2,230 (9.9) *	0.02 (0.51)	2,230 (9.9) *	1.00
36 (914)	2,230 (9.9) *	0.06 (1.52)	2,230 (9.9) *	1.00
48 (1,219)	1,910 (8.5)	0.13 (3.30)	1,910 (8.5)	0.98
60 (1,524)	1,530 (6.8)	0.20 (5.08)	1,530 (6.8)	0.93
72 (1,829)	1,270 (5.6)	0.28 (7.11)	1,270 (5.6)	0.87
84 (2,134)	1,090 (4.8)	0.39 (9.91)	1,090 (4.8)	0.81
96 (2,438)	950 (4.2)	0.50 (12.70)	950 (4.2)	0.76
108 (2,743)	850 (3.8)	0.64 (16.26)	850 (3.8)	0.70
120 (3,048)	760 (3.4)	0.78 (19.81)	760 (3.4)	0.64

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	5,140 (22.9)	18,700 (83.2)
24 (610)	5,040 (22.4)	16,860 (75.0)
36 (914)	4,890 (21.8)	14,760 (65.7)
48 (1,219)	4,720 (21.0)	12,920 (57.5)
60 (1,524)	4,500 (20.0)	11,480 (51.1)
72 (1,829)	4,230 (18.8)	9,280 (41.3)
84 (2,134)	3,890 (17.3)	7,080 (31.5)
96 (2,438)	3,490 (15.5)	5,420 (24.1)
108 (2,743)	3,060 (13.6)	4,280 (19.0)
120 (3,048)	2,690 (12.0)	3,470 (15.4)

** KL/r > 200

NR = Not Recommended

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.

Refer to pages 34 - 36 for other beam support conditions.

Beam Loading of Punched Channels

Load for punched channel is obtained by multiplying the loads shown by the following reduction factors:

Channel with Short Slots	0.90
Channel with Long Slots	0.90
Channel with Holes	0.95
Knock-Out Channel	0.95




Pre-Cut Channel - 12 Gauge

1-5/8" x 1-5/8" (41mm x 41mm)




1-5/8" x 1-5/8" (41mm x 41mm)
Solid or Short Slots Channel
Pre-Cut Lengths

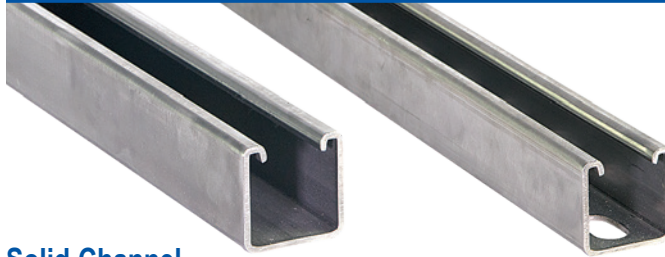


Solid Channel

Channel With Short Slots

9/16" x 1-1/8" (14mm x 29mm)
Slots are punched on
2" (51mm) centers.




1-5/8" x 3-1/4" (41mm x 83mm)
Solid Combination Channel
Pre-Cut Lengths

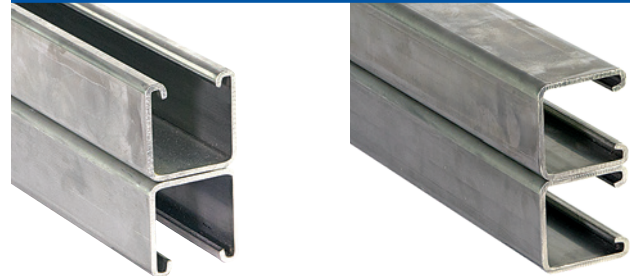

Back-to-Back

Side-to-Side



Pre-Cut Length	Part Number Order Chart for Different Options	
	SPECIFYING Brand & Part No.	
	WESANCO	
6" (15.2cm)	W200 XXXXX XXXX	
12" (0.31m)	Style: W200 - Solid W200EH - Short Slots	Length:
18" (0.45m)		06IN 48IN
24" (0.61m)		12IN 54IN
30" (0.76m)		18IN 60IN
36" (0.91m)		24IN 72IN
42" (1.07m)	Material/Finish: PG - Pre-Galvanized S4 - Stainless Steel Type 304 S6 - Stainless Steel Type 316	30IN 80IN
48" (1.22m)		36IN 96IN
54" (1.37m)		42IN
60" (1.52m)		
72" (1.83m)		
80" (2.03m)	EXAMPLE: W200S648IN	
96" (2.44m)	1-5/8" x 1-5/8"	48IN - 48" Long
10' (3.05m)	S6 - 316 Stainless Steel	
20' (6.10m)		

Note: Minimum order quantity is 100 pieces for any size under 10'.

Pre-Cut Length	Part Number Order Chart for Different Options	
	SPECIFYING Brand & Part No.	
	WESANCO	
6" (15.2cm)	W201 XXXXX XXXX	
12" (0.31m)	Style: W201 - Back-to-Back W202 - Side-to-Side	Length:
18" (0.45m)		06IN 48IN
24" (0.61m)		12IN 54IN
30" (0.76m)		18IN 60IN
36" (0.91m)		24IN 72IN
42" (1.07m)	Material/Finish: PG - Pre-Galvanized S4 - Stainless Steel Type 304 S6 - Stainless Steel Type 316	30IN 80IN
48" (1.22m)		36IN 96IN
54" (1.37m)		42IN
60" (1.52m)		
72" (1.83m)		
80" (2.03m)	EXAMPLE: W202S648IN	
96" (2.44m)	1-5/8" x 3-1/4"	48IN - 48" Long
10' (3.05m)	S6 - 316 Stainless Steel	
20' (6.10m)		

Note: Minimum order quantity is 100 pieces for any size under 10'.




Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available







Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.



1-5/8" x 1-3/8" (41mm x 35mm)









SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1-5/8" x 1-3/8"
		VERSABAR	FLORIDA STRUT	
 WESANCO				
Solid Channel				
W300	12 Ga.	VA6	FS12138NS	
Channel with 9/16" Holes on 1-7/8" center *				
W300H	12 Ga.	VA6P187	FS12138HS	
Channel with 7/8" Knock-Outs on 6" center				
W300KO	12 Ga.	VA6KO6	--	
Channel with 9/16" x 1-1/8" Short Slots on 2" center				
W300EH	12 Ga.	VA6PLH	FS12138EH	
Channel with 11/16" x 1-1/8" Short Slots on 2" center				
W300EH58	12 Ga.	VA6PLW	--	
Channel with 13/32" x 3" Long Slots on 4" center				
W300SL	12 Ga.	VA6P3S	FS12138SL	

* Various hole patterns available, contact representative for more information

* Various hole patterns available, contact representative for more information

1-5/8" x 2-3/4" (41mm x 70mm)



SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1-5⁄8" x 2-3⁄4"
		VERSABAR	FLORIDA STRUT	
 WESANCO				
Back-to-Back Solid Channel				
W301	12 Ga.	VA6201	FS12138NSBB	
Back-to-Back with 9⁄16" x 1-1⁄8" Short Slots				
W301EH	12 Ga.	VA6201PLH	FS12138EHBB	
Back-to-Back with 11⁄16" x 1-1⁄8" Short Slots				
W301EH58	12 Ga.	VA6201PLW	--	

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.



1-5/8" x 1-3/8" (41mm x 35mm) Channel



12 Gauge Channel Load Data

Section Properties

12 Gauge	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis			DISCONTINUED Brands & Part No.	
SPECIFYING Brand & Part No.			lx in. ⁴ (lx cm ⁴)	Sx in. ³ (Sx cm ³)	rx. in. (rx. cm)	ly in. ⁴ (ly cm ⁴)	Sy in. ³ (Sy cm ³)	ry in. (ry cm)		
 WESANCO										VERSABAR
1 ⁵ / ₈ " x 1 ³ / ₈ " (41mm x 35mm) 12 Gauge Channel										
W300	1.73 (2.57)	0.508 (3.28)	0.123 (5.12)	0.158 (2.59)	0.491 (1.25)	0.208 (8.66)	0.256 (4.20)	0.64 (1.63)	VA6	FS12138NS
1 ⁵ / ₈ " x 2 ³ / ₄ " (41mm x 70mm) 12 Gauge Back-to-Back Channel										
W301	3.46 (5.15)	1.017 (6.56)	0.608 (25.31)	0.443 (7.26)	0.774 (1.97)	0.416 (17.32)	0.512 (8.39)	0.64 (1.63)	VA6201	FS12138NSBB

1-5/8" x 1-3/8" (41mm x 35mm) 12 Gauge Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	Rate
12 (305)	2,650 (11.8)	0.02 (0.5)	2,650 (11.8)	1.00
24 (610)	1,320 (5.9)	0.07 (1.8)	1,320 (5.9)	1.00
36 (914)	880 (3.9)	0.15 (3.8)	880 (3.9)	0.96
48 (1,219)	660 (2.9)	0.26 (6.6)	500 (2.2)	0.91
60 (1,524)	530 (2.4)	0.41 (10.4)	320 (1.4)	0.87
72 (1,829)	440 (2.0)	0.59 (15.0)	220 (1.0)	0.84
84 (2,134)	380 (1.7)	0.81 (20.6)	160 (0.7)	0.81
96 (2,438)	330 (1.5)	1.05 (26.7)	130 (0.6)	0.78
108 (2,743)	290 (1.3)	1.31 (33.3)	100 (0.4)	0.76
120 (3,048)	260 (1.2)	1.62 (41.1)	80 (0.4)	0.74

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	3,480 (15.5)	10,550 (46.9)
24 (610)	3,260 (14.5)	8,150 (36.3)
36 (914)	2,980 (13.3)	6,180 (27.5)
48 (1,219)	2,640 (11.7)	4,760 (21.2)
60 (1,524)	2,340 (10.4)	3,720 (16.5)
72 (1,829)	2,080 (9.3)	3,010 (13.4)
84 (2,134)	1,860 (8.3)	2,470 (11.0)
96 (2,438)	1,680 (7.5)	1,890 (8.4)
108 (2,743)	1,480 (6.6)	**
120 (3,048)	1,280 (5.7)	**

1-5/8" x 2-3/4" (41mm x 70mm) 12 Gauge Back-to-Back Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	Rate
12 (305)	3,070 (13.7) *	0.00	3,070 (13.7) *	1.00
24 (610)	3,070 (13.7) *	0.03 (0.5)	3,070 (13.7) *	1.00
36 (914)	2,480 (11.0)	0.08 (1.8)	2,480 (11.0)	1.00
48 (1,219)	1,860 (8.3)	0.15 (3.8)	1,860 (8.3)	1.00
60 (1,524)	1,490 (6.6)	0.23 (5.8)	1,490 (6.6)	0.98
72 (1,829)	1,240 (5.5)	0.34 (8.6)	1,110 (4.9)	0.95
84 (2,134)	1,060 (4.7)	0.46 (11.7)	810 (3.6)	0.91
96 (2,438)	930 (4.1)	0.60 (15.2)	620 (2.8)	0.88
108 (2,743)	830 (3.7)	0.76 (19.3)	490 (2.2)	0.85
120 (3,048)	740 (3.3)	0.93 (23.6)	400 (1.8)	0.82

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	6,000 (26.7)	22,700 (101.0)
24 (610)	5,890 (26.2)	20,730 (92.2)
36 (914)	5,770 (25.7)	19,080 (84.9)
48 (1,219)	5,670 (25.2)	16,850 (75.0)
60 (1,524)	5,470 (24.3)	13,900 (61.8)
72 (1,829)	5,150 (22.9)	10,990 (48.9)
84 (2,134)	4,740 (21.1)	8,320 (37.0)
96 (2,438)	4,280 (19.0)	6,370 (28.3)
108 (2,743)	3,800 (16.9)	5,030 (22.4)
120 (3,048)	3,370 (15.0)	4,070 (18.1)

* Load limited by spot weld shear

** KL/r > 200

NR = Not Recommended

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.

Refer to pages 34 - 36 for other beam support conditions.




Beam Loading of Punched Channels

Load for punched channel is obtained by multiplying the loads shown by the following reduction factors:




Channel with Short Slots	0.90
Channel with Long Slots	0.90
Channel with Holes	0.95
Knock-Out Channel.	0.95









1-5/8" x 1" (41mm x 25mm)

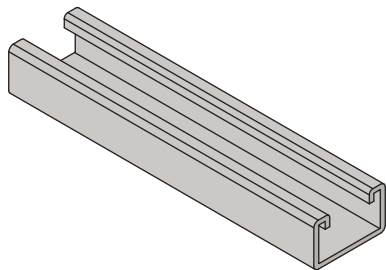




1-5/8" x 2" (41mm x 51mm)

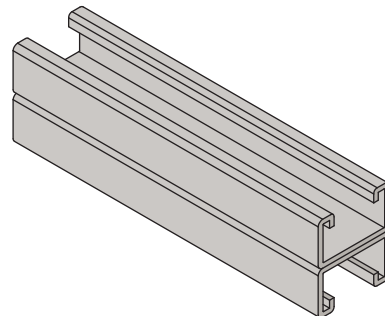

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1-5/8" x 1"
		VERSABAR	FLORIDA STRUT	
 WESANCO				
Solid Channel				
W800	12 Ga.	VA10	FS12100NS	
Channel with 9/16" Holes on 1-7/8" center *				
W800H	12 Ga.	VA10P187	FS12100HS	
Channel with 3/4" Holes on 1-7/8" center				
W800CX	12 Ga.	VA10CHD	--	
Channel with 9/16" x 1-1/8" Short Slots on 2" center				
W800EH	12 Ga.	VA10PLH	FS12100EH	
Channel with 11/16" x 1-1/8" Short Slots on 2" center				
W800EH58	12 Ga.	VA10PLW	--	
Channel with 13/32" x 3" Long Slots on 4" center				
W800SL	12 Ga.	VA10P3S	FS12100SL	

* Various hole patterns available, contact representative for more information

* Various hole patterns available, contact representative for more information

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1-5/8" x 2"	
		VERSABAR	FLORIDA STRUT		
 WESANCO					
Back-to-Back Solid Channel					
W801	12 Ga.	VA10201	FS12100NSBB		
Back-to-Back Channel with 9/16" x 1-1/8" Short Slots					
W801EH	12 Ga.	VA10201PLH	FS12100EHBB		
Back-to-Back Channel with 11/16" x 1-1/8" Short Slots					
W801EH58	12 Ga.	VA10201PLW	--		

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.



1-5/8" x 1" (41mm x 25mm) Channel



12 Gauge Channel Load Data

Section Properties

12 Gauge SPECIFYING Brand & Part No. WESANCO	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis			DISCONTINUED Brands & Part No.	
			lx in. ⁴ (lx cm ⁴)	Sx in. ³ (Sx cm ³)	rx. in. (rx. cm)	ly in. ⁴ (ly cm ⁴)	Sy in. ³ (Sy cm ³)	ry in. (ry cm)		
			VERSABAR	FLORIDA STRUT						
1 ⁵ / ₈ " x 1" (41mm x 25mm) 12 Gauge Channel										
W800	1.46 (2.17)	0.43 (2.77)	0.054 (2.25)	0.093 (1.52)	0.354 (0.90)	0.163 (6.78)	0.200 (3.28)	0.615 (1.56)	VA10	FS12100NS
1 ⁵ / ₈ " x 2" (41mm x 51mm) 12 Gauge Back-to-Back Channel										
W801	2.92 (4.35)	0.859 (5.54)	0.261 (10.86)	0.261 (4.28)	0.551 (1.40)	0.325 (13.53)	0.400 (6.55)	0.615 (1.56)	VA10201	FS12100NSBB

1-5/8" x 1" (41mm x 25mm) 12 Gauge Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction Rate
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	
12 (305)	1,560 (6.9)	0.02 (0.5)	1,560 (6.9)	1.00
24 (610)	780 (3.5)	0.09 (2.3)	780 (3.5)	1.00
36 (914)	520 (2.3)	0.20 (5.0)	390 (1.7)	1.00
48 (1,219)	390 (1.7)	0.35 (8.9)	220 (1.0)	1.00
60 (1,524)	310 (1.4)	0.55 (13.9)	140 (0.6)	1.00
72 (1,829)	260 (1.2)	0.79 (20.1)	100 (0.4)	0.97
84 (2,134)	220 (1.0)	1.07 (27.1)	70 (0.3)	0.94
96 (2,438)	200 (0.9)	1.45 (36.8)	60 (0.3)	0.91
108 (2,743)	170 (0.8)	1.75 (44.5)	40 (0.2)	0.89
120 (3,048)	160 (0.7)	2.26 (57.5)	40 (0.2)	0.86

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	2,220 (9.9)	9,350 (41.6)
24 (610)	2,150 (9.6)	7,600 (33.8)
36 (914)	2,020 (9.0)	5,370 (23.9)
48 (1,219)	1,820 (8.1)	3,320 (14.8)
60 (1,524)	1,540 (6.9)	2,120 (9.4)
72 (1,829)	1280 (5.7)	**
84 (2,134)	1,060 (4.7)	**
96 (2,438)	**	**
108 (2,743)	**	**
120 (3,048)	**	**

1-5/8" x 2" (41mm x 51mm) 12 Gauge Back-to-Back Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction Rate
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	
12 (305)	2,139 (9.5) *	0.01 (0.2)	2,139 (9.5) *	1.00
24 (610)	2,139 (9.5) *	0.05 (1.3)	2,139 (9.5) *	1.00
36 (914)	1,460 (6.5)	0.12 (2.9)	1,460 (6.5)	1.00
48 (1,219)	1,090 (4.8)	0.20 (5.2)	1,070 (4.8)	0.94
60 (1,524)	870 (3.9)	0.32 (8.1)	680 (3.0)	0.88
72 (1,829)	730 (3.2)	0.46 (11.7)	470 (2.1)	0.83
84 (2,134)	620 (2.8)	0.62 (15.8)	350 (1.6)	0.77
96 (2,438)	550 (2.4)	0.82 (20.9)	270 (1.2)	0.72
108 (2,743)	490 (2.2)	1.04 (26.5)	210 (0.9)	0.67
120 (3,048)	440 (2.0)	1.29 (32.7)	170 (0.8)	0.61

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	5,660 (25.2)	18,430 (82.0)
24 (610)	5,560 (24.7)	17,000 (75.6)
36 (914)	5,440 (24.2)	15,640 (69.6)
48 (1,219)	5,320 (23.7)	14,510 (64.5)
60 (1,524)	5,210 (23.2)	13,590 (60.5)
72 (1,829)	5,110 (22.7)	11,810 (52.5)
84 (2,134)	4,920 (21.9)	10,050 (44.7)
96 (2,438)	4,320 (19.2)	6,820 (30.3)
108 (2,743)	3,660 (16.3)	4,730 (21.0)
120 (3,048)	3,030 (13.5)	3,480 (15.5)

* Load limited by spot weld shear

** KL/r > 200

NR = Not Recommended

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.

Refer to pages 34 - 36 for other beam support conditions.

Beam Loading of Punched Channels

Load for punched channel is obtained by multiplying the loads shown by the following reduction factors:

Channel with Short Slots	0.90
Channel with Long Slots	0.90
Channel with Holes	0.95
Knock-Out Channel.	0.95






1-5/8" x 1" (41mm x 25mm)
Solid Channel
Pre-Cut Lengths



Solid Channel



Pre-Cut Length	Part Number Order Chart for Different Options	
	SPECIFYING Brand & Part No.	
	WESANCO	
6" (15.2cm)	W800 XXXXX XXXX Style: W800 - Solid Material/Finish: PG - Pre-Galvanized S4 - Stainless Steel Type 304 S6 - Stainless Steel Type 316 Length: 06IN 48IN 12IN 54IN 18IN 60IN 24IN 72IN 30IN 80IN 36IN 96IN 42IN	
12" (0.31m)		
18" (0.45m)		
24" (0.61m)		
30" (0.76m)		
36" (0.91m)		
42" (1.07m)		
48" (1.22m)		
54" (1.37m)		
60" (1.52m)		
72" (1.83m)	EXAMPLE: W800S648IN 1-5/8" x 1" W800 - Solid Channel 48IN - 48" Long S6 - 316 Stainless Steel	
80" (2.03m)		
96" (2.44m)		
10' (3.05m)		
20' (6.10m)		

Note: Minimum order quantity is 100 pieces for any size under 10'.

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.










1-5/8" x 7/8" (41mm x 22mm) Channel

Standard Finish: Pre-Galvanized (PG)






1-5/8" x 7/8" (41mm x 22mm)






SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1- ⁵ / ₈ " x ⁷ / ₈ "
		VERSABAR	FLORIDA STRUT	
 WESANCO				
Solid Channel				
W900	12 Ga.	--	FS12078NS	
Channel with ⁹ / ₁₆ " Holes on 1- ⁷ / ₈ " center *				
W900H	12 Ga.	--	FS12078HS	
Channel with ⁹ / ₁₆ " x 1- ¹ / ₈ " Short Slots on 2" center				
W900EH	12 Ga.	--	FS12078EH	
Channel with ¹³ / ₃₂ " x 3" Long Slots on 4" center				
W900SL	12 Ga.	--	FS12078SL	

* Various hole patterns available, contact representative for more information

1-5/8" x 1-3/4" (41mm x 44mm)

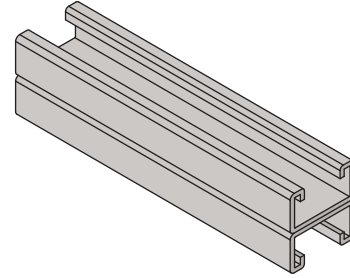

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1- ⁵ / ₈ " x 1- ³ / ₄ "
		VERSABAR	FLORIDA STRUT	
 WESANCO				
Back-to-Back Solid Channel				
W901	12 Ga.	--	FS12078NSBB	
Back-to-Back Channel with ⁹ / ₁₆ " Holes on 1- ⁷ / ₈ " center *				
W901H	12 Ga.	--	FS12078HSBB	
Back-to-Back Channel with ⁹ / ₁₆ " x 1- ¹ / ₈ " Short Slots				
W901EH	12 Ga.	--	FS121078EHBB	



12 Gauge Channel Load Data

Section Properties

12 Gauge	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis			DISCONTINUED Brands & Part No.	
SPECIFYING Brand & Part No.			lx in. ⁴ (lx cm ⁴)	Sx in. ³ (Sx cm ³)	rx. in. (rx. cm)	ly in. ⁴ (ly cm ⁴)	Sy in. ³ (Sy cm ³)	ry in. (ry cm)		
 WESANCO			VERSABAR	FLORIDA STRUT						
1 ⁵ / ₈ " x 7 ⁷ / ₈ " (41mm x 22mm) 12 Gauge Channel										
W900	1.37 (2.04)	0.403 (2.60)	0.038 (1.58)	0.074 (1.21)	0.307 (0.78)	0.147 (6.12)	0.181 (2.97)	0.604 (1.53)	--	FS12078NS
1 ⁵ / ₈ " x 1 ³ / ₄ " (41mm x 44mm) 12 Gauge Back-to-Back Channel										
W901	2.75 (4.09)	0.807 (5.21)	0.183 (7.62)	0.209 (3.42)	0.476 (1.21)	0.295 (12.28)	0.363 (5.95)	0.604 (1.53)	--	FS12078NSBB

1-5/8" x 7/8" (41mm x 22mm) 12 Gauge Channel

Allowable Beam Loads

Allowable Column Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction Rate
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	
12 (305)	1,250 (5.6)	0.03 (0.6)	1250 (5.6)	1.00
24 (610)	620 (2.8)	0.10 (2.5)	620 (2.8)	1.00
36 (914)	420 (1.9)	0.23 (5.8)	280 (1.2)	1.00
48 (1,219)	310 (1.4)	0.40 (10.1)	160 (0.7)	1.00
60 (1,524)	250 (1.1)	0.63 (15.9)	100 (0.4)	0.98
72 (1,829)	210 (0.9)	0.91 (23.1)	70 (0.3)	0.97
84 (2,134)	180 (0.8)	1.24 (31.5)	50 (0.2)	0.95
96 (2,438)	160 (0.7)	1.64 (41.8)	40 (0.2)	0.94
108 (2,743)	140 (0.6)	2.05 (52.0)	30 (0.1)	0.92
120 (3,048)	120 (0.5)	2.41 (61.2)	20 (0.1)	0.91

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	2,560 (11.4)	8,360 (37.2)
24 (610)	2,440 (10.9)	6,510 (29.0)
36 (914)	2,190 (9.7)	4,100 (18.2)
48 (1,219)	1,820 (8.1)	2,340 (10.4)
60 (1,524)	1,420 (6.3)	1,500 (6.7)
72 (1,829)	1,110 (4.9)	**
84 (2,134)	**	**
96 (2,438)	**	**
108 (2,743)	**	**
120 (3,048)	**	**

1-5/8" x 1-3/4" (41mm x 44mm) 12 Gauge Back-to-Back Channel

Allowable Beam Loads

Allowable Column Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction Rate
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	
12 (305)	1,855 (8.3) *	0.01 (0.2)	1,855 (8.3) *	1.00
24 (610)	1,750 (7.8)	0.06 (1.5)	1,750 (7.8)	1.00
36 (914)	1,170 (5.2)	0.13 (3.3)	1,170 (5.2)	1.00
48 (1,219)	880 (3.9)	0.23 (6.0)	750 (3.3)	1.00
60 (1,524)	700 (3.1)	0.37 (9.3)	480 (2.1)	0.99
72 (1,829)	580 (2.6)	0.52 (13.3)	330 (1.5)	0.97
84 (2,134)	500 (2.2)	0.72 (18.2)	240 (1.1)	0.94
96 (2,438)	440 (2.0)	0.94 (23.9)	190 (0.8)	0.92
108 (2,743)	390 (1.7)	1.19 (30.1)	150 (0.7)	0.89
120 (3,048)	350 (1.6)	1.46 (37.1)	120 (0.5)	0.87

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	4,510 (20.1)	17,780 (79.1)
24 (610)	4,470 (19.9)	17,040 (75.8)
36 (914)	4,430 (19.7)	16,110 (71.7)
48 (1,219)	4,380 (19.5)	14,760 (65.7)
60 (1,524)	4,290 (19.1)	13,260 (59.0)
72 (1,829)	4,190 (18.6)	11,680 (52.0)
84 (2,134)	4,070 (18.1)	10,090 (44.9)
96 (2,438)	3,770 (16.8)	7,090 (31.5)
108 (2,743)	3,370 (15.0)	4,920 (21.9)
120 (3,048)	2,880 (12.8)	3,620 (16.1)

* Load limited by spot weld shear

** KL/r > 200

NR = Not Recommended

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.

Refer to pages 34 - 36 for other beam support conditions.

Beam Loading of Punched Channels

Load for punched channel is obtained by multiplying the loads shown by the following reduction factors:

Channel with Short Slots	0.90
Channel with Long Slots	0.90
Channel with Holes	0.95
Knock-Out Channel	0.95



Pre-Cut Channel - 12 Gauge

1-5/8" x 7/8" (41mm x 22mm)




1-5/8" x 7/8" (41mm x 22mm)
Solid or Short Slots Channel
Pre-Cut Lengths



Solid Channel

Channel With Short Slots

9/16" x 1-1/8" (14mm x 29mm) Slots
are punched on 2" (51mm) centers.



Pre-Cut Length	Part Number Order Chart for Different Options	
	SPECIFYING Brand & Part No.	
6" (15.2cm)	W900 XXXXX XXXX	
12" (0.31m)	Style: W900 - Solid W900EH - Short Slots	
18" (0.45m)	Material/Finish: PG - Pre-Galvanized S4 - Stainless Steel Type 304 S6 - Stainless Steel Type 316	
24" (0.61m)	Length: 06IN 48IN 12IN 54IN 18IN 60IN 24IN 72IN 30IN 80IN 36IN 96IN 42IN	
30" (0.76m)		
36" (0.91m)		
42" (1.07m)		
48" (1.22m)		
54" (1.37m)		
60" (1.52m)		
72" (1.83m)		
80" (2.03m)	EXAMPLE: W900S648IN	
96" (2.44m)	1-5/8" x 7/8" W900 - Solid Channel 48IN - 48" Long	
10' (3.05m)	S6 - 316 Stainless Steel	
20' (6.10m)		

Note: Minimum order quantity is 100 pieces for any size under 10'.




Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum




Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.









1-5/8" x 13/16" (41mm x 21mm)






1-5/8" x 1-5/8" (41mm x 41mm)



SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1- ⁵ / ₈ " x 1 ³ / ₁₆ "
		VERSABAR	FLORIDA STRUT	
 WESANCO				
Solid Channel				
W500	14 Ga.	VA4	FS141316NS	
Channel with ⁹ / ₁₆ " Holes on 1- ⁷ / ₈ " center *				
W500H	14 Ga.	VA4P187	FS141316HS	
Channel with ⁷ / ₈ " Knock-Outs on 6" center				
W500KO	14 Ga.	VA4KO6	--	
Channel with ⁹ / ₁₆ " x 1- ¹ / ₈ " Short Slots on 2" center				
W500EH	14 Ga.	VA4PLH	FS141316EH	
Channel with ¹¹ / ₁₆ " x 1- ¹ / ₈ " Short Slots on 2" center				
W500EH58	14 Ga.	VA4PLW	--	
Channel with ¹³ / ₃₂ " x 3" Long Slots on 4" center				
W500SL	14 Ga.	VA4P3S	FS141316SL	

* Various hole patterns available, contact representative for more information

* Various hole patterns available, contact representative for more information

SPECIFYING Brand & Part No.		Gauge	DISCONTINUED Brands & Part No.		1-5/8" x 1-5/8"
 WESANCO	VERSABAR		FLORIDA STRUT		
Back-to-Back Solid Channel					
W501	14 Ga.	VA4201	FS141316NSBB		
Back-to-Back Channel with 9/16" x 1-1/8" Short Slots					
W501EH	14 Ga.	VA4201PLH	FS141316EHBB		
Back-to-Back Channel with 11/16" x 1-1/8" Short Slots					
W501EH58	14 Ga.	VA4201PLW	---		

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.



1-5/8" x 13/16" (41mm x 21mm) Channel



14 Gauge Channel Load Data

Section Properties

14 Gauge	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis			DISCONTINUED Brands & Part No.		
SPECIFYING Brand & Part No.			lx in. ⁴ (lx cm ⁴)	Sx in. ³ (Sx cm ³)	rx. in. (rx. cm)	ly in. ⁴ (ly cm ⁴)	Sy in. ³ (Sy cm ³)	ry in. (ry cm)			
 WESANCO										VERSABAR	FLORIDA STRUT
1 ⁵ / ₈ " x 1 ³ / ₁₆ " (41mm x 21mm) 14 Gauge Channel											
W500	1.00 (1.49)	0.295 (1.90)	0.026 (1.08)	0.056 (0.92)	0.297 (0.75)	0.109 (4.54)	0.135 (2.21)	0.609 (1.55)	VA4	FS141316NS	
1 ⁵ / ₈ " x 1 ⁵ / ₈ " (41mm x 41mm) 14 Gauge Back-to-Back Channel											
W501	2.01 (2.99)	0.59 (3.81)	0.122 (5.08)	0.15 (2.46)	0.454 (1.15)	0.219 (9.12)	0.269 (4.41)	0.609 (1.55)	VA4201	FS141316NSBB	

1 5/8" x 13/16" (41mm x 21mm) 14 Gauge Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction Rate
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	
12 (305)	930 (4.1)	0.03 (0.8)	930 (4.1)	1.00
24 (610)	470 (2.1)	0.11 (2.8)	430 (1.9)	1.00
36 (914)	310 (1.4)	0.24 (6.1)	190 (0.8)	0.98
48 (1,219)	230 (1.0)	0.43 (10.9)	110 (0.5)	0.94
60 (1,524)	190 (0.8)	0.69 (17.5)	70 (0.3)	0.91
72 (1,829)	160 (0.7)	1.01 (25.7)	50 (0.2)	0.88
84 (2,134)	130 (0.6)	1.30 (33.0)	40 (0.2)	0.86
96 (2,438)	120 (0.5)	1.79 (45.4)	30 (0.1)	0.83
108 (2,743)	100 (0.4)	2.12 (53.9)	20 (0.1)	0.81
120 (3,048)	90 (0.4)	2.62 (66.5)	10 (0.1)	0.79

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	2,010 (8.9)	6,110 (27.2)
24 (610)	1,890 (8.4)	4,650 (20.7)
36 (914)	1,680 (7.5)	2,840 (12.6)
48 (1,219)	1,330 (5.9)	1,610 (7.2)
60 (1,524)	1,020 (4.5)	**
72 (1,829)	780 (3.5)	**
84 (2,134)	**	**
96 (2,438)	**	**
108 (2,743)	**	**
120 (3,048)	**	**

1 5/8" x 1 5/8" (41mm x 41mm) 14 Gauge Back-to-Back Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction Rate
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	
12 (305)	1,100 (4.9) *	0.01 (0.2)	1,100 (4.9) *	1.00
24 (610)	1,100 (4.9) *	0.06 (1.4)	1,100 (4.9) *	1.00
36 (914)	840 (3.7)	0.14 (3.6)	840 (3.7)	1.00
48 (1,219)	630 (2.8)	0.25 (6.4)	500 (2.2)	0.99
60 (1,524)	500 (2.2)	0.39 (10.0)	320 (1.4)	0.95
72 (1,829)	420 (1.9)	0.57 (14.5)	220 (1.0)	0.92
84 (2,134)	360 (1.6)	0.78 (19.7)	160 (0.7)	0.88
96 (2,438)	310 (1.4)	1.00 (25.4)	120 (0.5)	0.84
108 (2,743)	280 (1.2)	1.28 (32.5)	100 (0.4)	0.80
120 (3,048)	250 (1.1)	1.57 (39.9)	80 (0.4)	0.77

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	3,430 (15.3)	13,000 (57.8)
24 (610)	3,390 (15.1)	12,300 (54.7)
36 (914)	3,350 (14.9)	11,590 (51.6)
48 (1,219)	3,310 (14.7)	10,520 (46.8)
60 (1,524)	3,230 (14.4)	9,340 (41.5)
72 (1,829)	3,150 (14.0)	8,110 (36.1)
84 (2,134)	3,040 (13.5)	6,900 (30.7)
96 (2,438)	2,760 (12.3)	4,680 (20.8)
108 (2,743)	2,370 (10.5)	3,250 (14.5)
120 (3,048)	2,000 (8.9)	2,390 (10.6)

* Load limited by spot weld shear

** KL/r > 200

NR = Not Recommended

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.

Refer to pages 34 - 36 for other beam support conditions.

Beam Loading of Punched Channels

Load for punched channel is obtained by multiplying the loads shown by the following reduction factors:

Channel with Short Slots	0.90
Channel with Long Slots	0.90
Channel with Holes	0.95
Knock-Out Channel.	0.95




1-5/8" x 13/16" (41mm x 21mm) Solid or Short Slots Channel Pre-Cut Lengths



Solid Channel

Channel With Short Slots

9/16" x 1-1/8" (14mm x 29mm) Slots
are punched on 2" (51mm) centers.



Pre-Cut Length	Part Number Order Chart for Different Options	
	SPECIFYING Brand & Part No.	
	 WESANCO	
6" (15.2cm)	W500 XXXXX XXXX	
12" (0.31m)	Style: W500 - Solid W500EH - Short Slots	Length: 06IN 48IN
18" (0.45m)		12IN 54IN
24" (0.61m)	Material/Finish: PG - Pre-Galvanized S4 - Stainless Steel Type 304 S6 - Stainless Steel Type 316	18IN 60IN
30" (0.76m)		24IN 72IN
36" (0.91m)	30IN 80IN 36IN 96IN 42IN	EXAMPLE: W500S648IN
42" (1.07m)		
48" (1.22m)	W500 - Solid Channel 48IN - 48" Long S6 - 316 Stainless Steel	1-5/8" x 13/16"
54" (1.37m)		
60" (1.52m)	W500 - Solid Channel 48IN - 48" Long S6 - 316 Stainless Steel	1-5/8" x 13/16"
72" (1.83m)		
80" (2.03m)	W500 - Solid Channel 48IN - 48" Long S6 - 316 Stainless Steel	1-5/8" x 13/16"
96" (2.44m)		
10' (3.05m)	W500 - Solid Channel 48IN - 48" Long S6 - 316 Stainless Steel	1-5/8" x 13/16"
20' (6.10m)		

Note: Minimum order quantity is 100 pieces for any size under 10'.

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.








1-5/8" x 2-7/16" (41mm x 62mm) Channel

Standard Finish: Pre-Galvanized (PG)






1-5/8" x 2-7/16" (41mm x 62mm)

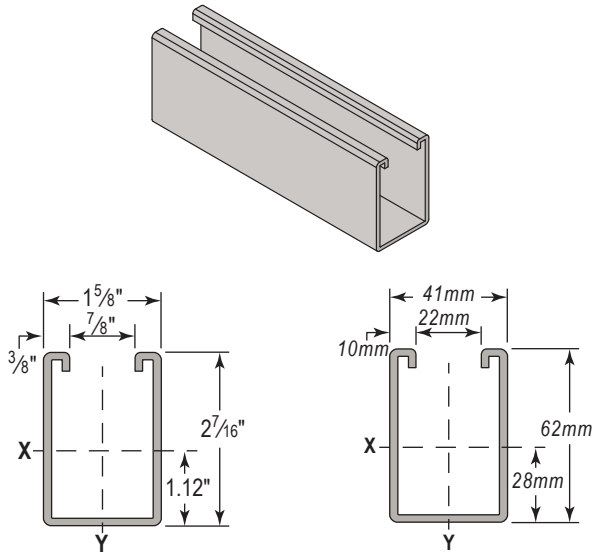

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1- ⁵ / ₈ " x 2- ⁷ / ₁₆ "
		VERSABAR	FLORIDA STRUT	
 WESANCO				
Solid Channel				
W100	12 Ga.	--	FS122716NS	
Channel with ⁹ / ₁₆ " Holes on 1- ⁷ / ₈ " center *				
W100H	12 Ga.	--	FS122716HS	
Channel with ⁹ / ₁₆ " x 1- ¹ / ₈ " Short Slots on 2" center				
W100EH	12 Ga.	--	FS122716EH	
Channel with ¹³ / ₃₂ " x 3" Long Slots on 4" center				
W100SL	12 Ga.	--	FS122716SL	

1-5/8" x 4-7/8" (41mm x 124mm)

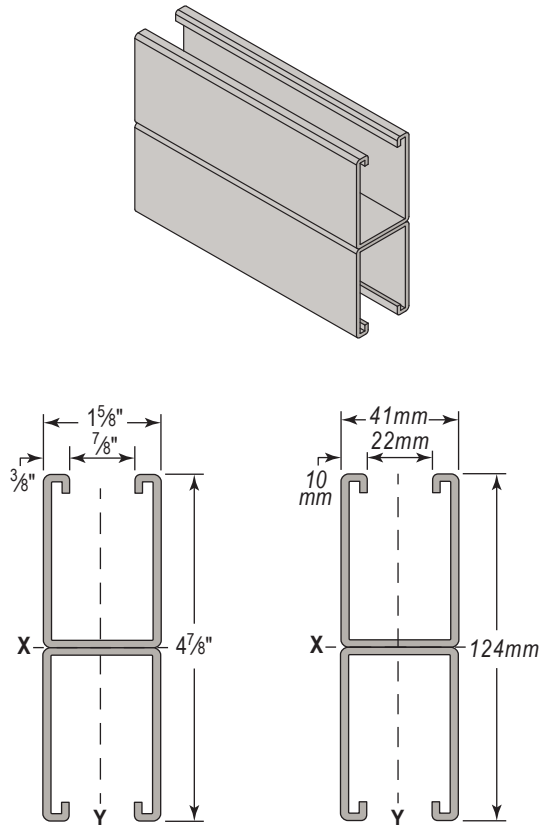

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1- ⁵ / ₈ " x 4- ⁷ / ₈ "
		VERSABAR	FLORIDA STRUT	
 WESANCO				
Back-to-Back Solid Channel				
W101	12 Ga.	--	FS122716NSBB	
Back-to-Back Channel with ⁹ / ₁₆ " x 1- ¹ / ₈ " Short Slots				
W101EH	12 Ga.	--	FS122716EHBB	

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.



Section Properties

12 Gauge	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis			DISCONTINUED Brands & Part No.		
SPECIFYING Brand & Part No.			lx in. ⁴ (lx cm ⁴)	Sx in. ³ (Sx cm ³)	rx. in. (rx. cm)	ly in. ⁴ (ly cm ⁴)	Sy in. ³ (Sy cm ³)	ry in. (ry cm)			
 WESANCO										VERSABAR	FLORIDA STRUT
1 ⁵ / ₈ " x 2 ⁷ / ₁₆ " (41mm x 62mm) 12 Gauge Channel											
W100	2.49 (3.71)	0.732 (4.72)	0.530 (22.06)	0.400 (6.55)	0.851 (2.16)	0.337 (14.03)	0.415 (6.80)	0.679 (1.72)	--	FS122716NS	
1 ⁵ / ₈ " x 4 ⁷ / ₈ " (41mm x 124mm) 12 Gauge Back-to-Back Channel											
W101	4.98 (7.41)	1.463 (9.44)	2.867 (119.3)	1.176 (19.27)	1.400 (3.56)	0.674 (28.05)	0.829 (13.58)	0.679 (1.72)	--	FS122716NSBB	

1⁵/₈" x 2⁷/₁₆" (41mm x 62mm) 12 Gauge Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	Rate
12 (305)	6,700 (29.8)	0.01 (0.3)	6,700 (29.8)	1.00
24 (610)	3,350 (14.9)	0.04 (1.0)	3,350 (14.9)	0.99
36 (914)	2,230 (9.9)	0.09 (2.3)	2,230 (9.9)	0.88
48 (1,219)	1,670 (7.4)	0.15 (3.8)	1,670 (7.4)	0.77
60 (1,524)	1,340 (6.0)	0.24 (6.1)	1,340 (6.0)	0.66
72 (1,829)	1,120 (5.0)	0.35 (8.9)	960 (4.3)	0.57
84 (2,134)	960 (4.3)	0.47 (11.9)	710 (3.2)	0.50
96 (2,438)	840 (3.7)	0.62 (15.7)	540 (2.4)	0.45
108 (2,743)	740 (3.3)	0.78 (19.8)	430 (1.9)	0.42
120 (3,048)	670 (3.0)	0.96 (24.4)	350 (1.6)	0.39

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	5,090 (22.6)	15,090 (67.1)
24 (610)	4,720 (21.0)	10,890 (48.4)
36 (914)	4,020 (17.9)	7,040 (31.3)
48 (1,219)	3,210 (14.3)	4,630 (20.6)
60 (1,524)	2,570 (11.4)	3,460 (15.4)
72 (1,829)	2,130 (9.5)	2,780 (12.4)
84 (2,134)	1,810 (8.1)	2,340 (10.4)
96 (2,438)	1,580 (7.0)	2,020 (9.0)
108 (2,743)	1,400 (6.2)	1,780 (7.9)
120 (3,048)	1,270 (5.6)	1,580 (7.0)

1⁵/₈" x 4⁷/₈" (41mm x 124mm) 12 Gauge Back-to-Back Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	Rate
12 (305)	5,200 (23.1) *	0.00	5,200 (23.1) *	1.00
24 (610)	5,200 (23.1) *	0.01 (0.25)	5,200 (23.1) *	1.00
36 (914)	5,200 (23.1) *	0.04 (1.01)	5,200 (23.1) *	1.00
48 (1,219)	4,930 (21.9)	0.08 (2.03)	4,930 (21.9)	0.98
60 (1,524)	3,940 (17.5)	0.13 (3.30)	3,940 (17.5)	0.92
72 (1,829)	3,290 (14.6)	0.19 (4.83)	3,290 (14.6)	0.87
84 (2,134)	2,820 (12.5)	0.26 (6.60)	2,820 (12.5)	0.81
96 (2,438)	2,470 (11.0)	0.34 (8.64)	2,470 (11.0)	0.75
108 (2,743)	2,190 (9.7)	0.42 (10.68)	2,190 (9.7)	0.69
120 (3,048)	1,970 (8.8)	0.52 (13.21)	1,970 (8.8)	0.64

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	8,890 (39.5)	32,840 (146.1)
24 (610)	8,730 (38.8)	29,720 (132.2)
36 (914)	8,490 (37.8)	26,150 (116.3)
48 (1,219)	8,220 (36.6)	23,020 (102.4)
60 (1,524)	7,840 (34.9)	20,590 (91.6)
72 (1,829)	7,370 (32.8)	17,300 (77.0)
84 (2,134)	6,870 (30.6)	13,530 (60.2)
96 (2,438)	6,210 (27.6)	10,370 (46.1)
108 (2,743)	5,510 (24.5)	8,190 (36.4)
120 (3,048)	4,850 (21.6)	6,640 (29.5)

* Load limited by spot weld shear

** KL/r > 200

NR = Not Recommended

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.

Refer to pages 34 - 36 for other beam support conditions.

Beam Loading of Punched Channels

Load for punched channel is obtained by multiplying the loads shown by the following reduction factors:

Channel with Short Slots	0.90
Channel with Long Slots	0.90
Channel with Holes	0.95




Pre-Cut Channel - 12 Gauge

1-⁵/₈" x 2-⁷/₁₆" (41mm x 62mm)




1-⁵/₈" x 2-⁷/₈" (41mm x 62mm)
Solid or Short Slots Channel
Pre-Cut Lengths

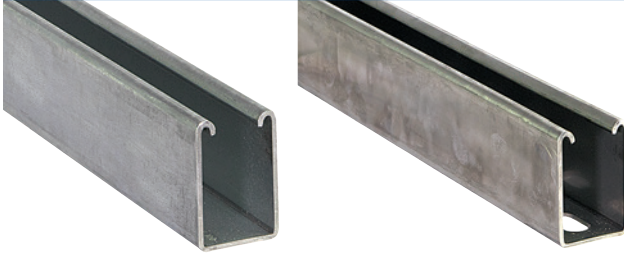

Solid Channel

Channel With Short Slots

⁹/₁₆" x 1-¹/₈" (14mm x 29mm) Slots
are punched on 2" (51mm) centers.



Pre-Cut Length	Part Number Order Chart for Different Options	
	SPECIFYING Brand & Part No.	
6" (15.2cm)	W100	XXXXX XXXX
12" (0.31m)	Style: W100 - Solid W100EH - Short Slots	Length:
18" (0.45m)		06IN 48IN
24" (0.61m)		12IN 54IN
30" (0.76m)		18IN 60IN
36" (0.91m)		24IN 72IN
42" (1.07m)	Material/Finish: PG - Pre-Galvanized S4 - Stainless Steel Type 304 S6 - Stainless Steel Type 316	30IN 80IN
48" (1.22m)		36IN 96IN
54" (1.37m)		42IN
60" (1.52m)		
72" (1.83m)		
80" (2.03m)	EXAMPLE: W100S648IN	
96" (2.44m)	1- ⁵ / ₈ " x 2- ⁷ / ₁₆ "	48IN - 48" Long
10' (3.05m)	W100 - Solid Channel	
20' (6.10m)	S6 - 316 Stainless Steel	

Note: Minimum order quantity is 100 pieces for any size under 10'.


Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available






Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.



1-5/8" x 3-1/4" (41mm x 83mm)

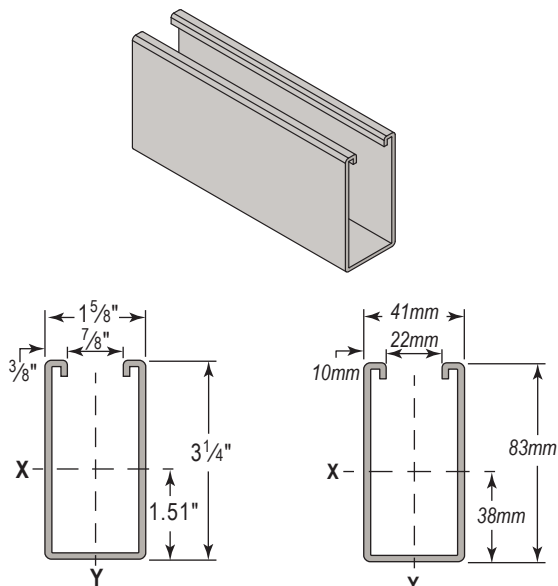





SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1-5/8" x 3-1/4"
		VERSABAR	FLORIDA STRUT	
 WESANCO				
Solid Channel				
W150	12 Ga.	VA11	FS12314NS	
Channel with 9/16" Holes on 1-7/8" center *				
W150H	12 Ga.	VA11P187	FS12314HS	
Channel with 9/16" x 1-1/8" Short Slots on 2" center				
W150EH	12 Ga.	VA11PLH	FS12314EH	
Channel with 11/16" x 1-1/8" Short Slots on 2" center				
W150EH58	12 Ga.	VA11PLW	--	
Channel with 13/32" x 3" Long Slots on 4" center				
W150SL	12 Ga.	VA11P3S	--	

* Various hole patterns available, contact representative for more information

* Various hole patterns available, contact representative for more information

1-5/8" x 6-1/2" (41mm x 165mm)

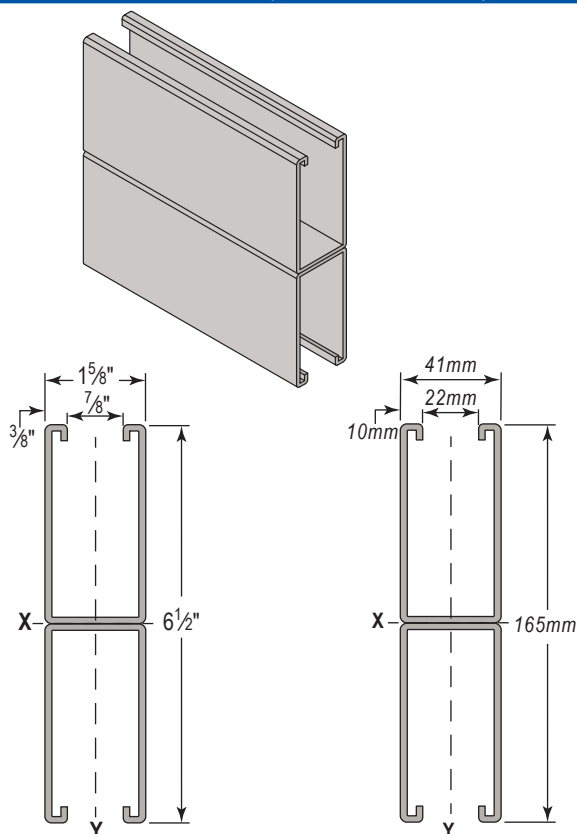

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		1'-5/8" x 6'-1/2"	
		VERSABAR	FLORIDA STRUT		
 WESANCO					
Back-to-Back Solid Channel					
W151	12 Ga.	VA11201	FS12314NSBB		
Back-to-Back Channel with 9/16" x 1-1/8" Short Slots					
W151EH	12 Ga.	VA11201PLH	FS12314EHBB		
Back-to-Back Channel with 11/16" x 1-1/8" Short Slots					
W151EH58	12 Ga.	VA11201PLW	--		

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.



1-5/8" x 3-1/4" (41mm x 83mm) Channel



12 Gauge Channel Load Data

Section Properties

12 Gauge	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis			DISCONTINUED Brands & Part No.	
SPECIFYING Brand & Part No.			lx in. ⁴ (lx cm ⁴)	Sx in. ³ (Sx cm ³)	rx. in. (rx. cm)	ly in. ⁴ (ly cm ⁴)	Sy in. ³ (Sy cm ³)	ry in. (ry cm)		
 WESANCO			VERSABAR	FLORIDA STRUT						
1 ⁵ / ₈ " x 3 ¹ / ₄ " (41mm x 83mm) 12 Gauge Channel										
W150	3.07 (4.57)	0.902 (5.82)	1.113 (46.33)	0.639 (10.47)	1.111 (2.82)	0.435 (18.11)	0.536 (8.78)	0.695 (1.77)	VA11	FS12314NS
1 ⁵ / ₈ " x 6 ¹ / ₂ " (41mm x 165mm) 12 Gauge Back-to-Back Channel										
W151	6.14 (9.14)	1.804 (11.64)	6.34 (263.85)	1.951 (31.97)	1.874 (4.76)	0.871 (36.25)	1.072 (17.57)	0.695 (1.77)	VA11201	FS12314NSBB

1-5/8" x 3-1/4" (41mm x 83mm) 12 Gauge Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction Rate
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	
12 (305)	10,720 (47.7)	0.01 (0.3)	10,720 (47.7)	1.00
24 (610)	5,360 (23.8)	0.03 (0.8)	5,360 (23.8)	0.98
36 (914)	3,570 (15.9)	0.07 (1.8)	3,570 (15.9)	0.85
48 (1,219)	2,680 (11.9)	0.12 (3.0)	2,680 (11.9)	0.70
60 (1,524)	2,140 (9.5)	0.18 (4.6)	2,140 (9.5)	0.54
72 (1,829)	1,790 (8.0)	0.27 (6.9)	1,790 (8.0)	0.44
84 (2,134)	1,530 (6.8)	0.36 (9.1)	1,490 (6.6)	0.37
96 (2,438)	1,340 (6.0)	0.47 (11.9)	1,140 (5.1)	0.33
108 (2,743)	1,190 (5.3)	0.59 (15.0)	900 (4.0)	0.29
120 (3,048)	1,070 (4.8)	0.73 (18.5)	730 (3.2)	0.27
132 (3,353)	970 (4.3)	0.89 (22.5)	600 (2.7)	0.25
144 (3,658)	890 (4.0)	1.05 (26.8)	510 (2.3)	0.24
156 (3,962)	820 (3.6)	1.23 (31.4)	430 (1.9)	0.23
168 (4,267)	770 (3.4)	1.45 (36.8)	370 (1.6)	0.22
180 (4,572)	710 (3.2)	1.64 (41.7)	320 (1.4)	0.21
192 (4,877)	670 (3.0)	1.88 (47.8)	280 (1.2)	0.20
204 (5,182)	630 (2.8)	2.12 (53.9)	250 (1.1)	0.19
216 (5,486)	600 (2.7)	2.40 (60.9)	230 (1.0)	0.19
228 (5,791)	560 (2.5)	2.63 (66.9)	200 (0.9)	0.18
240 (6,096)	540 (2.4)	2.96 (75.2)	180 (0.8)	0.18

* Load limited by spot weld shear

** KL/r > 200

NR = Not Recommended

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.

Refer to pages 34 - 36 for other beam support conditions.

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	6,230 (27.7)	18,480 (82.2)
24 (610)	5,730 (25.5)	12,890 (57.3)
36 (914)	4,740 (21.1)	7,650 (34.0)
48 (1,219)	3,590 (16.0)	4,800 (21.4)
60 (1,524)	2,740 (12.2)	3,460 (15.4)
72 (1,829)	2,160 (9.6)	2,710 (12.1)
84 (2,134)	1,760 (7.8)	2,250 (10.0)
96 (2,438)	1,500 (6.7)	1,930 (8.6)
108 (2,743)	1,310 (5.8)	1,700 (7.6)
120 (3,048)	1,170 (5.2)	1,520 (6.8)
132 (3,353)	1,070 (4.8)	1,370 (6.1)
144 (3,658)	980 (4.4)	**
156 (3,962)	910 (4.0)	**
168 (4,267)	850 (3.8)	**
180 (4,572)	**	**
192 (4,877)	**	**
204 (5,182)	**	**
216 (5,486)	**	**
228 (5,791)	**	**
240 (6,096)	**	**

Beam Loading of Punched Channels

Load for punched channel is obtained by multiplying the loads shown by the following reduction factors:

Channel with Holes	0.95
Channel with Short Slots	0.90
Channel with Long Slots	0.90



1-5/8" x 6-1/2" (41mm x 165mm) 12 Gauge Back-to-Back Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction Rate
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	
12 (305)	6,920 (30.8) *	0.00	6,920 (30.8) *	1.00
24 (610)	6,920 (30.8) *	0.01 (0.5)	6,920 (30.8) *	1.00
36 (914)	6,920 (30.8) *	0.02 (0.5)	6,920 (30.8) *	1.00
48 (1,219)	6,920 (30.8) *	0.05 (1.0)	6,920 (30.8) *	0.96
60 (1,524)	6,540 (29.1)	0.10 (1.8)	6,540 (29.1)	0.90
72 (1,829)	5,450 (24.2)	0.13 (3.3)	5,450 (24.2)	0.83
84 (2,134)	4,670 (20.8)	0.19 (4.8)	4,670 (20.8)	0.75
96 (2,438)	4,090 (18.2)	0.25 (6.4)	4,090 (18.2)	0.68
108 (2,743)	3,630 (16.1)	0.32 (8.1)	3,630 (16.1)	0.60
120 (3,048)	3,270 (14.5)	0.39 (9.9)	3,270 (14.5)	0.53
132 (3,353)	2,970 (13.2)	0.48 (12.1)	2,970 (13.2)	0.49
144 (3,658)	2,730 (12.1)	0.57 (14.4)	2,730 (12.1)	0.45
156 (3,962)	2,520 (11.2)	0.67 (16.9)	2,520 (11.2)	0.42
168 (4,267)	2,340 (10.4)	0.77 (19.6)	2,340 (10.4)	0.38
180 (4,572)	2,180 (9.7)	0.89 (22.5)	2,180 (9.7)	0.34
192 (4,877)	2,040 (9.1)	1.01 (25.5)	2,040 (9.1)	0.31
204 (5,182)	1,920 (8.5)	1.13 (28.8)	1,920 (8.5)	0.27
216 (5,486)	1,820 (8.1)	1.28 (32.4)	1,820 (8.1)	0.24
228 (5,791)	1,720 (7.7)	1.42 (36.1)	1,720 (7.7)	0.22
240 (6,096)	1,640 (7.3)	1.58 (40.1)	1,640 (7.3)	0.20

* Load limited by spot weld shear

** KL/r > 200

NR = Not Recommended

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.

Refer to pages 34 - 36 for other beam support conditions.

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	11,040 (49.1)	40,490 (180.1)
24 (610)	10,820 (48.1)	36,400 (161.9)
36 (914)	10,490 (46.7)	31,330 (139.4)
48 (1,219)	10,080 (44.8)	26,520 (118.0)
60 (1,524)	9,400 (41.8)	22,520 (100.2)
72 (1,829)	8,650 (38.5)	19,410 (86.3)
84 (2,134)	7,930 (35.3)	17,050 (75.8)
96 (2,438)	7,280 (32.4)	13,400 (59.6)
108 (2,743)	6,660 (29.6)	10,590 (47.1)
120 (3,048)	5,800 (25.8)	8,580 (38.2)
132 (3,353)	5,060 (22.5)	7,090 (31.5)
144 (3,658)	4,420 (19.7)	**
156 (3,962)	3,870 (17.2)	**
168 (4,267)	3,430 (15.3)	**
180 (4,572)	**	**
192 (4,877)	**	**
204 (5,182)	**	**
216 (5,486)	**	**
228 (5,791)	**	**
240 (6,096)	**	**

Beam Loading of Punched Channels

Load for punched channel is obtained by multiplying the loads shown by the following reduction factors:

Channel with Short Slots 0.90

Channel with Holes 0.95




Pre-Cut Channel - 12 Gauge

1-5/8" x 3-1/4" (41mm x 83mm)




1-5/8" x 3-1/4" (41mm x 83mm)
Solid or Short Slots Channel
Pre-Cut Lengths

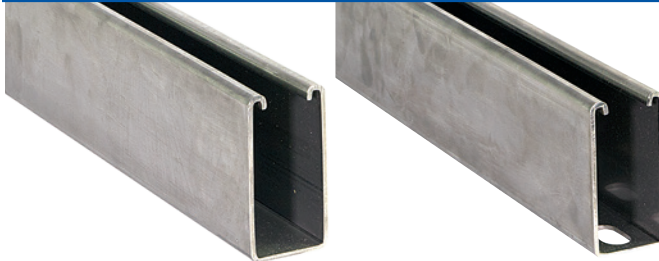

Solid Channel

Channel With Short Slots

9/16" x 1-1/8" (14mm x 29mm) Slots
are punched on 2" (51mm) centers.



Pre-Cut Length	Part Number Order Chart for Different Options	
	SPECIFYING Brand & Part No.	
	WESANCO	
6" (15.2cm)	W150 XXXXX XXXX Style: W150 - Solid W150EH - Short Slots Length: 06IN 48IN 12IN 54IN 18IN 60IN 24IN 72IN 30IN 80IN 36IN 96IN 42IN Material/Finish: PG - Pre-Galvanized S4 - Stainless Steel Type 304 S6 - Stainless Steel Type 316	
12" (0.31m)		
18" (0.45m)		
24" (0.61m)		
30" (0.76m)		
36" (0.91m)		
42" (1.07m)		
48" (1.22m)		
54" (1.37m)		
60" (1.52m)		
72" (1.83m)		
80" (2.03m)		
96" (2.44m)		
10' (3.05m)		
20' (6.10m)		
	EXAMPLE: W150S648IN 1-5/8" x 3-1/4" W150 - Solid Channel 48IN - 48" Long S6 - 316 Stainless Steel	

Note: Minimum order quantity is 100 pieces for any size under 10'.

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available



Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.







$1\frac{3}{16}" \times 1\frac{3}{16}"$ (21mm x 21mm)

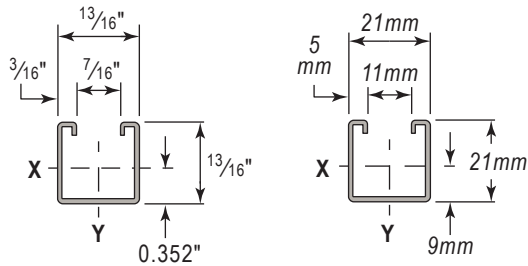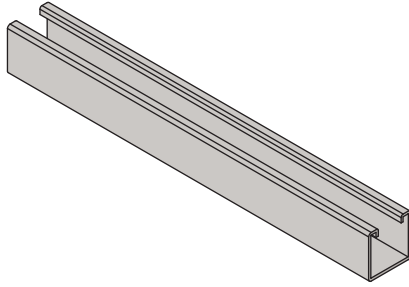

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		$1\frac{3}{16}" \times 1\frac{3}{16}"$ Solid
		VERSABAR	FLORIDA STRUT	
WESANCO				
Solid Channel				
W600	19 Ga.	--	--	

$1\frac{3}{16}" \times 1\frac{5}{8}"$ (21mm x 41mm)

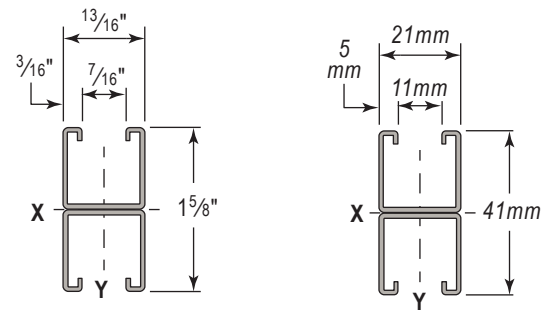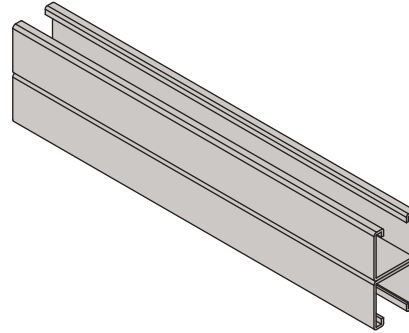

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		$1\frac{3}{16}" \times 1\frac{5}{8}"$ Solid
		VERSABAR	FLORIDA STRUT	
WESANCO				
Solid Channel				
W601	19 Ga.	--	--	

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.



19 Gauge Channel Load Data

Section Properties

19 Gauge	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis			DISCONTINUED Brands & Part No.	
SPECIFYING Brand & Part No.			lx in. ⁴ (lx cm ⁴)	Sx in. ³ (Sx cm ³)	rx. in. (rx. cm)	ly in. ⁴ (ly cm ⁴)	Sy in. ³ (Sy cm ³)	ry in. (ry cm)		
			VERSABAR	FLORIDA STRUT						
$1^{3/16}$" x $1^{3/16}$" (21mm x 21mm) 19 Gauge Channel										
W600	0.36 (0.54)	0.107 (0.69)	0.009 (0.37)	0.020 (0.33)	0.295 (0.75)	0.012 (0.50)	0.029 (0.48)	0.333 (0.85)	--	--
$1^{3/16}$" x $1^{5/8}$" (21mm x 41mm) 19 Gauge Back-to-Back Channel										
W601	0.36 (0.54)	0.107 (0.69)	0.009 (0.37)	0.020 (0.33)	0.295 (0.75)	0.012 (0.50)	0.029 (0.48)	0.333 (0.85)	--	--

$1\frac{3}{16}" \times 1\frac{3}{16}" (21mm \times 21mm)$ 19 Gauge Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	Rate
12 (305)	340 (1.5)	0.03 (0.8)	340 (1.5)	1.00
24 (610)	170 (0.8)	0.11 (2.8)	150 (0.7)	0.80
36 (914)	110 (0.5)	0.24 (6.1)	70 (0.3)	0.63
48 (1,219)	80 (0.4)	0.42 (10.7)	40 (0.2)	0.52
60 (1,524)	70 (0.3)	0.72 (18.3)	20 (0.1)	0.45
72 (1,829)	60 (0.3)	1.06 (26.9)	20 (0.1)	0.40
84 (2,134)	50 (0.2)	1.41 (35.8)	10 (0.0)	0.37
96 (2,438)	40 (0.2)	1.68 (42.7)	10 (0.0)	0.34
108 (2,743)	40 (0.2)	2.39 (60.7)	10 (0.0)	0.31
120 (3,048)	30 (0.1)	2.46 (62.5)	10 (0.0)	0.30

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	700 (3.1)	1,630 (7.3)
24 (610)	490 (2.2)	740 (3.3)
36 (914)	340 (1.5)	450 (2.0)
48 (1,219)	260 (1.2)	330 (1.5)
60 (1,524)	210 (0.9)	**
72 (1,829)	180 (0.8)	**
84 (2,134)	**	**
96 (2,438)	**	**
108 (2,743)	**	**
120 (3,048)	**	**

$1\frac{3}{16}" \times 1\frac{5}{8}" (21mm \times 41mm)$ 19 Gauge Back-to-Back Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	Rate
12 (305)	280 (1.2) *	0.00	280 (1.2) *	1.00
24 (610)	280 (1.2) *	0.04 (1.0)	280 (1.2) *	0.99
36 (914)	280 (1.2) *	0.13 (3.2)	280 (1.2) *	0.89
48 (1,219)	230 (1.0)	0.25 (6.3)	180 (0.8)	0.79
60 (1,524)	190 (0.8)	0.40 (10.2)	120 (0.5)	0.70
72 (1,829)	160 (0.7)	0.58 (14.8)	80 (0.4)	0.60
84 (2,134)	130 (0.6)	0.75 (19.2)	60 (0.3)	0.51
96 (2,438)	120 (0.5)	1.04 (26.4)	50 (0.2)	0.44
108 (2,743)	100 (0.4)	1.23 (31.3)	40 (0.2)	0.39
120 (3,048)	90 (0.4)	1.52 (38.7)	30 (0.1)	0.35

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	1,240 (5.5)	4,300 (19.1)
24 (610)	1,210 (5.4)	3,780 (16.8)
36 (914)	1,170 (5.2)	3,340 (14.9)
48 (1,219)	1,130 (5.0)	3,010 (13.4)
60 (1,524)	1,070 (4.8)	2,460 (10.9)
72 (1,829)	990 (4.4)	1,900 (8.5)
84 (2,134)	900 (4.0)	1,460 (6.5)
96 (2,438)	710 (3.2)	930 (4.1)
108 (2,743)	550 (2.4)	**
120 (3,048)	**	**

* Load limited by spot weld shear

** KL/r > 200

NR = Not Recommended

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.




Refer to pages 34 - 36 for other beam support conditions.








Standard Finish: Pre-Galvanized (PG)

$1\frac{3}{16}" \times 1\frac{3}{32}"$ (21mm x 10mm)

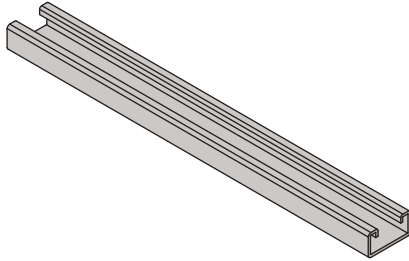

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		$1\frac{3}{16}" \times 1\frac{3}{32}"$ Solid
		VERSABAR	FLORIDA STRUT	
WESANCO				
Solid Channel				
W700	19 Ga.	--	--	

$1\frac{3}{16}" \times 1\frac{3}{16}"$ (21mm x 21mm)

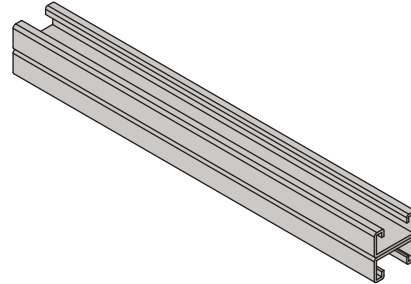

SPECIFYING Brand & Part No.	Gauge	DISCONTINUED Brands & Part No.		$1\frac{3}{16}" \times 1\frac{3}{16}"$ Solid
		VERSABAR	FLORIDA STRUT	
WESANCO				
Solid Channel				
W701	19 Ga.	--	--	

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum

Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.



19 Gauge Channel Load Data

Section Properties

19 Gauge	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis			DISCONTINUED Brands & Part No.	
SPECIFYING Brand & Part No.			lx in. ⁴ (lx cm ⁴)	Sx in. ³ (Sx cm ³)	rx. in. (rx. cm)	ly in. ⁴ (ly cm ⁴)	Sy in. ³ (Sy cm ³)	ry in. (ry cm)		
										
$^{13}/_{16}" \times ^{13}/_{32}" (21mm \times 10mm)$ 19 Gauge Channel										
W700	0.25 (0.37)	0.074 (0.48)	0.002 (0.08)	0.007 (0.11)	0.149 (0.38)	0.007 (0.29)	0.017 (0.28)	0.307 (0.78)	--	--
$^{13}/_{16}" \times ^{13}/_{16}" (21mm \times 21mm)$ 19 Gauge Back-to-Back Channel										
W701	0.51 (0.76)	0.149 (0.96)	0.007 (0.29)	0.018 (0.29)	0.222 (0.56)	0.014 (0.58)	0.034 (0.56)	0.307 (0.78)	--	--

$\frac{13}{16}" \times \frac{13}{32}" (21\text{mm} \times 10\text{mm})$ 19 Gauge Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	Rate
12 (305)	110 (0.5)	0.05 (1.3)	110 (0.5)	1.00
24 (610)	60 (0.3)	0.22 (5.6)	30 (0.1)	0.95
36 (914)	40 (0.2)	0.48 (12.2)	10 (0.0)	0.91
48 (1,219)	30 (0.1)	0.86 (21.8)	10 (0.0)	0.87
60 (1,524)	20 (0.1)	1.12 (28.4)	NR	0.83
72 (1,829)	20 (0.1)	1.94 (49.3)	NR	0.80
84 (2,134)	20 (0.1)	3.08 (78.2)	NR	0.76
96 (2,438)	10 (0.0)	2.30 (58.3)	NR	0.73
108 (2,743)	10 (0.0)	3.27 (83.1)	NR	0.70
120 (3,048)	10 (0.0)	4.49 (114.0)	NR	0.66

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	460 (2.0)	1170 (5.2)
24 (610)	330 (1.5)	410 (1.8)
36 (914)	200 (0.9)	**
48 (1,219)	**	**
60 (1,524)	**	**
72 (1,829)	**	**
84 (2,134)	**	**
96 (2,438)	**	**
108 (2,743)	**	**
120 (3,048)	**	**

$\frac{13}{16}" \times \frac{13}{16}" (21\text{mm} \times 21\text{mm})$ 19 Gauge Back-to-Back Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	Rate
12 (305)	210 (0.9) *	0.02 (0.6)	210 (0.9) *	1.00
24 (610)	150 (0.7)	0.13 (3.2)	120 (0.5)	1.00
36 (914)	100 (0.4)	0.28 (7.2)	50 (0.2)	0.93
48 (1,219)	80 (0.4)	0.53 (13.6)	30 (0.1)	0.87
60 (1,524)	60 (0.3)	0.78 (19.9)	20 (0.1)	0.80
72 (1,829)	50 (0.2)	1.13 (28.7)	10 (0.05)	0.73
84 (2,134)	40 (0.2)	1.43 (36.4)	10 (0.05)	0.67
96 (2,438)	40 (0.2)	2.14 (54.4)	10 (0.05)	0.60
108 (2,743)	30 (0.1)	2.29 (58.0)	10 (0.05)	0.54
120 (3,048)	30 (0.1)	3.13 (79.6)	NR	0.49

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	820 (3.6)	2,910 (12.9)
24 (610)	790 (3.5)	2,330 (10.4)
36 (914)	740 (3.3)	1,710 (7.6)
48 (1,219)	670 (3.0)	1,150 (5.1)
60 (1,524)	580 (2.6)	800 (3.6)
72 (1,829)	490 (2.2)	590 (2.6)
84 (2,134)	420 (1.9)	**
96 (2,438)	**	**
108 (2,743)	**	**
120 (3,048)	**	**

* Load limited by spot weld shear

** KL/r > 200


NR = Not Recommended

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.

Refer to pages 34 - 36 for other beam support conditions.




Light Duty Slotted Angle

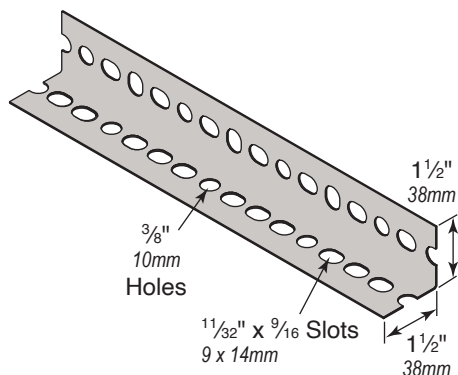


SPECIFYING Brand & Part No.	Gauge	Length	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
 WESANCO				
SLA0150	14	10 ft.	--	SA0150

Medium Duty Slotted Angle

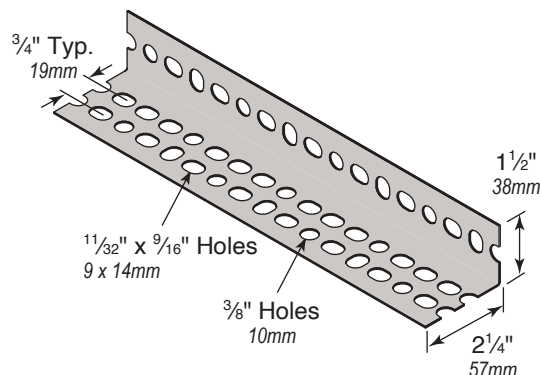

SPECIFYING Brand & Part No.	Gauge	Length	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
 WESANCO				
SLA0225	14	10 ft.	--	SA0225

Heavy Duty Slotted Angle

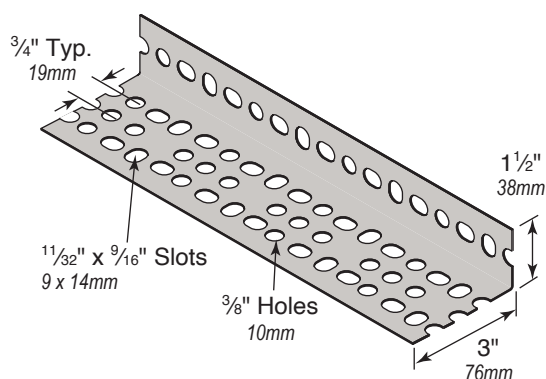


SPECIFYING Brand & Part No.	Gauge	Length	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
 WESANCO				
SLA0300	14	10 ft.	--	SA0300




Channel Nuts with Spring

Pages 68 - 69




Channel Nuts without Spring

Page 68




Stud Channel Nuts

Pages 71 - 73




Channel Nut with Top Spring

Page 70




Seismic Rod Stiffener

Page 70




Special Channel Nuts

Pages 70 - 73




Threaded Rod & Coupler

Pages 73 - 74



Screws

Pages 74 - 75




Nuts

Page 75



Washers

Page 75



Swivels


Page 76



Hardware Material Specifications		
Material	ASTM Designation	ASTM Description
Bar Stock: Channel Nuts	A 36	Merchant quality hot rolled carbon steel bars.
	A 29-03	Steel bars, carbon, hot rolled special quality.
Bar Stock	A 569	Merchant quality hot rolled carbon steel bars.
Hardware	A 563	Carbon and alloy steel nuts. Carbon steel externally threaded standard fasteners.
	A 307	
Channel Nuts Stainless Steel	B783	Sintered 316 - "Domestic Nut"
	A240	Bar Stock 316 - "Import Nut"
Aluminum Nuts	B221	Channel Nuts

See page 23 for Material or Finish ordering codes for part numbers.

Hardware Finish Specifications	
Finish	Description
Electroplated	Fittings and hardware supplied as "Electro-Galvanized" in accordance with ASTM B 633.
Mill-Galvanized (Pre-Galvanized)	Galvanized steel used in the manufacture of channel sections conforms to ASTM A 653 GR33 G90. Uncoated edges resulted from slitting, punching and channel cut off are present.
Hot Dip Galvanized After Fabrication	Channel and fittings which are hot dip galvanized after fabrication conform to one of the following specifications: ASTM A 123, ASTM A153, or ASTM A386.
Special Coatings	Other commercially available finishes can be supplied per specification when required to protect applications.

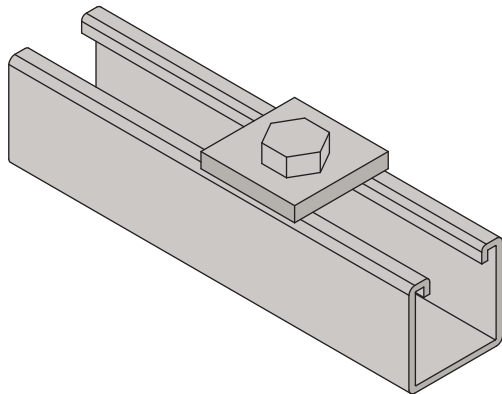

Slip And Pull-Out Load Data

Part No.		Resistance To Slip (Lbs./Bolt) Safety Factor		Resistance To Pull-Out (Lbs./Bolt) Safety Factor	
Channel	Channel Nut	3	5	3	5
W200	W2-8	1,500 (6.8kN)	900 (4.0kN)	2,000 (8.9kN)	1,200 (5.3kN)
W210	W2-8	1,000 (4.5kN)	600 (2.7kN)	1,400 (6.2kN)	840 (3.7kN)
W300	W2-8	1,500 (6.8kN)	900 (4.0kN)	2,000 (8.9kN)	1,200 (5.3kN)
W500	W5-8	1,000 (4.5kN)	600 (2.7kN)	1,400 (6.2kN)	840 (3.7kN)

Apply Proper Torque

A Channel Nut installed within the last inch of Channel (center of bolt to extreme end of Channel) cannot develop full capacity.

REDUCE ULTIMATE DESIGN LOAD BY 50%.

When installing a Channel Nut near the end of a Channel section, especially within the last inch, remember to true the legs forming the continuous Channel slot before inserting and tightening the Channel Nut.


Channel Nuts or their matching threaded fastener that may have been contaminated with oil, wax, petroleum products or any friction reducing medium, will no longer develop a proper torque rating, and may be prone to loosening. To insure proper attachment load rating, properly clean and dry any such contaminated surfaces, paying specific attention to the threaded surfaces. If proper cleaning is not possible, replace the fasteners with uncontaminated stock.

Hanging a section of All Thread Rod directly from a Channel Nut within an overhead mounted section of Channel (without securing with a Fitting or Square Washer and a Hex or Jamb Nut) (Ref. A), does not allow the Channel Nut to function at its proper capacity and could result in the attachment slipping, twisting out or even jumping free of its confinement in a vibration situation. Always capture the Rod and Channel Nut at the face of the Channel as shown (Ref. B). Use proper torque value.

Bolt torque values are given to ensure the proper connection between components. It is important to understand that there is a direct, but not necessarily consistent, relationship between bolt torque and tension in the bolt. Too much tension in the bolt can cause it to break or crush the component parts. Too little tension in the bolt can prevent the connection from developing its full load capacity. The torque values given have been developed over many years of experience and testing.


Design Bolt Torque

Bolt Size	Foot Pounds
1/4" - 20	6 Ft/Lbs (8.1 N•m)
5/16" - 18	11 Ft/Lbs (14.9 N•m)
3/8" - 16	19 Ft/Lbs (25.8 N•m)
1/2" - 13	50 Ft/Lbs (67.8 N•m)
5/8" - 11	100 Ft/Lbs (135.6 N•m)
3/4" - 10	125 Ft/Lbs (169.5 N•m)

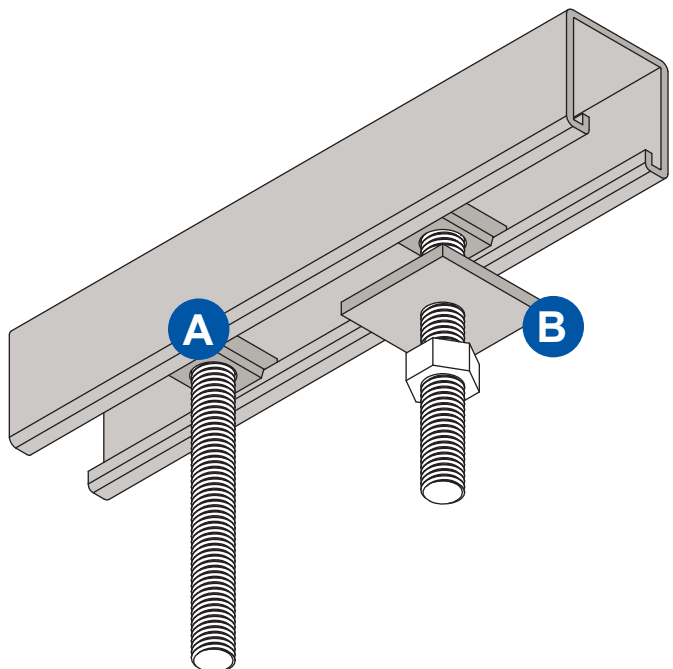

Channel Nut Overview

Standard Finish: Electro Galvanized (EG)

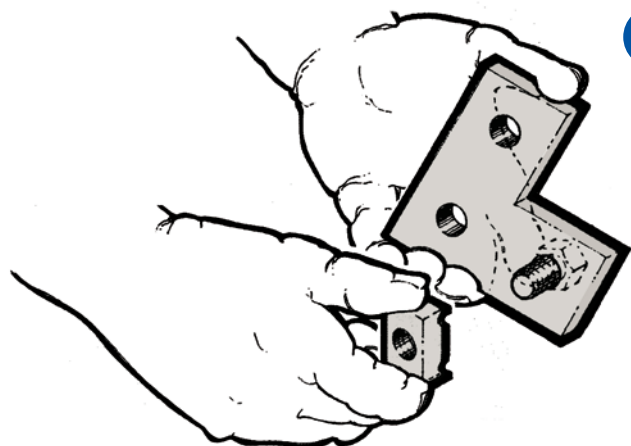


- 1 One at a time, bolts are inserted through the fitting's holes, held in place with a finger while an appropriate **Channel Nut without spring** is engaged to each bolt with one-and-a half turns, (just enough to keep them attached).


Use caution to select bolt lengths that will not bottom out in channel when fully tightened.

When the entire fitting (in at least one plane) is fitted with Channel Nuts and bolts, align Channel Nut direction (s) to correspond with channel arrangement; place fitting into position.

Channel Nuts without springs should hang below, clear of channel's in-turned edges prior to tightening the bolts.

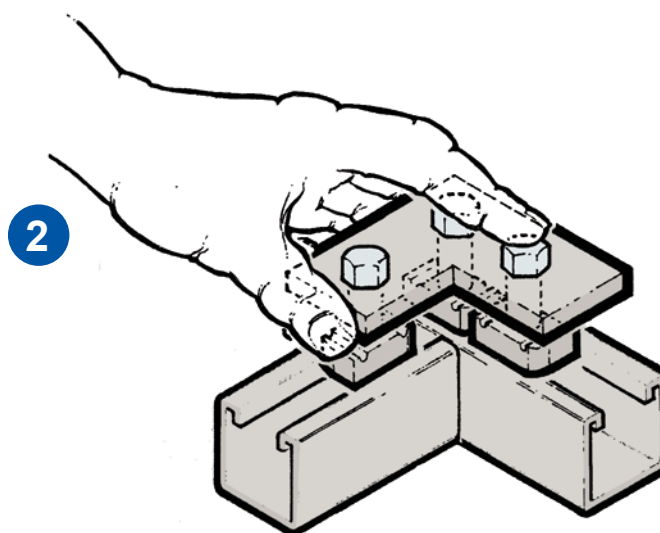

2

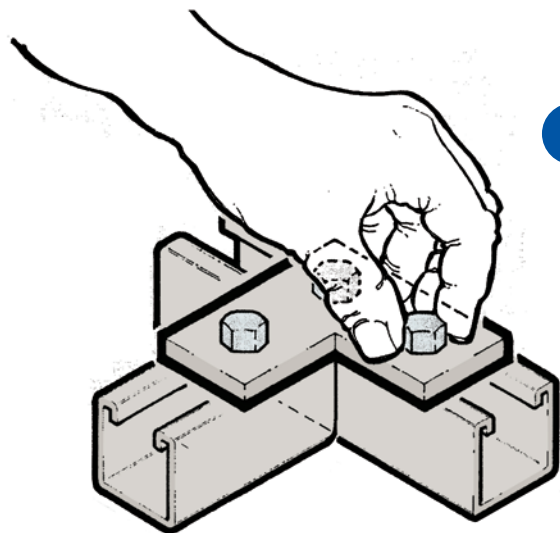


3

All Channel Nut/bolts are finger tightened by pressing down on bolt head, and turning clock-wise. Inserting fingers into channel to align is not required.

Do not tighten by grasping bolt with fingers *under the head*. If the bolt is grasped in this fashion, this will lift Channel Nut, allowing it to turn and "look" falsely into place between channel's in-turned lips.

Adjust fitting to final position; check to make sure **Channel Nuts** are still installed correctly with pyramid enhanced grooves engaging the channel's in-turned edges. Finally, fasteners are wrench tightened.


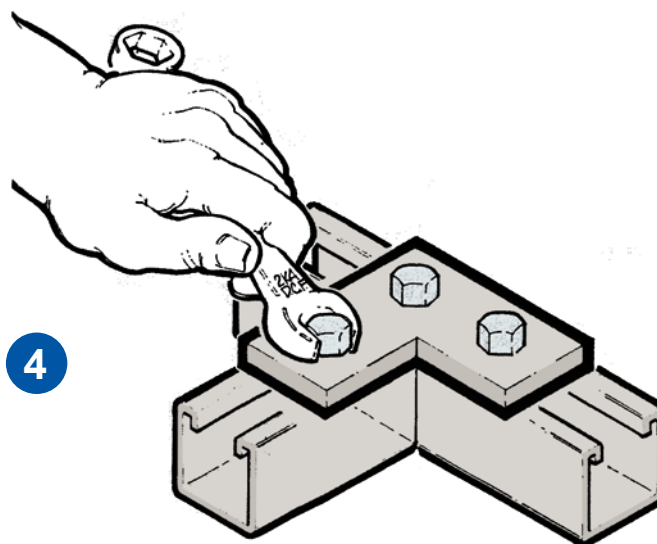


4



Channel Nut Without Spring

For most channel sizes





Wide body on W1-10WS, W2-12WS,
W5-10WS & B5-12WS only

SPECIFYING Brand & Part No.	Use	Size	Thickness	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
 WESANCO					
W2-0832WS		#8-32	$\frac{1}{4}$ " (6mm)	VN1010-0832	--
W2-1032WS		#10-32		VN10101032	--
W2-1024WS		#10-24		VN10101024	--
W2-4WS		$\frac{1}{4}$ "-20		VN1025 ***	CNN20025
W2-5WS		$\frac{5}{16}$ "-18	$\frac{3}{8}$ " (10mm)	VN1031	CNN30031
W2-6WS		$\frac{3}{8}$ "-16		VN1037 ***	CNN30037
W2-7WS		$\frac{7}{16}$ "-14		VN1044	--
W5-8WS	■	$\frac{1}{2}$ "-13		VN4050 *	CNN30050
W5-10WS	■	$\frac{5}{8}$ "-11	$\frac{1}{2}$ " (13mm)	VN4062	CNN30062
W5-12WS		$\frac{3}{4}$ "-10		VN4075	CNN30075
W2-8WS	●	$\frac{1}{2}$ "-13		VN1050 **	CNN40050
W1-10WS	◆●	$\frac{5}{8}$ "-11		VN1062 *	CNN40062
W2-12WS	●	$\frac{3}{4}$ "-10		VN1075	CNN40075

■ = Use With $\frac{13}{16}$ " Channel
 ● = Not For Use With $\frac{13}{16}$ ", and $\frac{7}{8}$ "
 ◆ = Use With $2\frac{7}{16}$ ", $2\frac{1}{2}$ ", and $3\frac{1}{4}$ "
 * Available in Stainless
 ** Available in Stainless and Aluminum
 *** Available in Stainless, Aluminum and Hot-Dipped Galv.

Channel Nut with Regular Spring

For $1\frac{3}{8}$ " (35mm) & $1\frac{5}{8}$ " (41mm) channel



Wide body on W2-10,
W2-12, & W2-14 only


SPECIFYING Brand & Part No.	Size	Thickness	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
 WESANCO				
W2-0832	#8-32	$\frac{1}{4}$ " (6mm)	VSN10100832	--
W2-1032	#10-32		VSN10101032	--
W2-1024	#10-24		VSN10101024	--
W2-4	$\frac{1}{4}$ "-20		VSN1025 **	CNR20025
W2-5025	$\frac{5}{16}$ "-18	$\frac{3}{8}$ " (10mm)	--	CNR20031
W2-6025	$\frac{3}{8}$ "-16		--	CNR20037
W2-5	$\frac{5}{16}$ "-18		VSN1031	CNR30031
W2-6	$\frac{3}{8}$ "-16		VSN1037 **	CNR30037
W2-7	$\frac{7}{16}$ "-14	$\frac{1}{2}$ " (13mm)	VSN1044	CNR30050
W2-8	$\frac{1}{2}$ "-13		VSN1050 **	CNR40050
W2-10	$\frac{5}{8}$ "-11		VSN1062 *	CNR40062
W2-12	$\frac{3}{4}$ "-10		VSN1075	CNR40075
W2-14	$\frac{7}{8}$ "-9		--	CNR40087

* Available in Stainless
 ** Available in Stainless, Aluminum and Hot-Dipped Galv.



Channel Nut with Short Spring

For $\frac{13}{16}$ ", $\frac{7}{8}$ ", & 1" channel

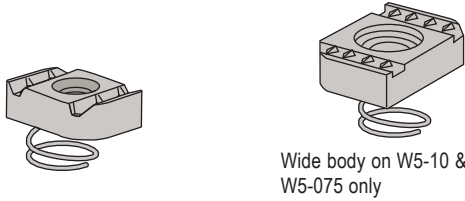


SPECIFYING Brand & Part No.	Size	Thickness	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W5-0832	#8-32	$\frac{1}{4}$ " (6mm)	VSN40100832	W5-0832
W5-1032	#10-32		VSN40101032	W5-1032
W5-1024	#10-24		VSN40101024	W5-1024
W5-4	$\frac{1}{4}$ "-20		VSN4025 *	CNS20025
W5-6025	$\frac{3}{8}$ "-16	$\frac{3}{8}$ " (10mm)	--	CNS20037
W5-5	$\frac{5}{16}$ "-18		VSN4031	CNS30031
W5-6	$\frac{3}{8}$ "-16		VSN4037 *	CNS30037
W5-044	$\frac{7}{16}$ "-14		VSN4044	--
W5-8	$\frac{1}{2}$ "-13		VSN4050 *	CNS30050
W5-10	$\frac{5}{8}$ "-11		VSN4062	CNS30062
W5-075	$\frac{3}{4}$ "-10		VSN4075	--

* Available in Stainless

Channel Nut with Long Spring

Fits 2- $\frac{1}{2}$ " (64mm) thru 3- $\frac{1}{4}$ " (83mm) channel

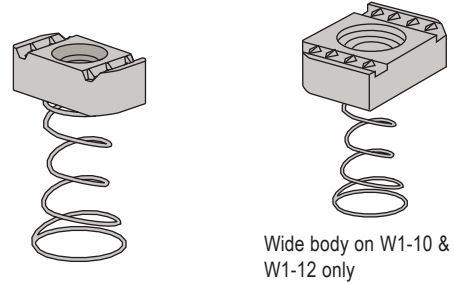


SPECIFYING Brand & Part No.	Size	Thickness	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W1-0832	#8-32	$\frac{1}{4}$ " (6mm)	VSN30100832 *	--
W1-1032	#10-32		VSN30101024 *	--
W1-1024	#10-24		VSN30101032 *	--
W1-4	$\frac{1}{4}$ "-20	$\frac{3}{8}$ " (10mm)	VSN3025	CNL20025
W1-5	$\frac{5}{16}$ "-18		VSN3031	--
W1-6	$\frac{3}{8}$ "-16		VSN3037	CNL30037
W1-7	$\frac{7}{16}$ "-14	$\frac{1}{2}$ " (13mm)	VSN3044	--
W1-8	$\frac{1}{2}$ "-13		VSN3050	CNL40050
W1-10	$\frac{5}{8}$ "-11		VSN3062	W1-10
W1-12	$\frac{3}{4}$ "-10		VSN3075	W1-12

* = Special Order

Mini Nut with Standard Spring

Use with $\frac{13}{16}$ " x $\frac{13}{16}$ " (21mm x 21mm) Channel



SPECIFYING Brand & Part No.	Size	Thickness	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W6-0836	#8 - 36	0.150" (4mm)	--	--
W6-0832	#8 - 32		--	--
W6-1032	#10 - 32		--	--
W6-1024	#10 - 24		--	--
W6-4	$\frac{1}{4}$ " - 20		--	--

Mini Nut with Short Spring

Use with $\frac{13}{16}$ " x $\frac{13}{32}$ " (21mm x 10mm) Channel




SPECIFYING Brand & Part No.	Size	Thickness	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W7-0836	#8 - 36	0.150" (4mm)	--	--
W7-0832	#8 - 32		--	--
W7-1032	#10 - 32		--	--
W7-1024	#10 - 24		--	--
W7-4	$\frac{1}{4}$ " - 20		--	--

Channel Nut with Cone



SPECIFYING Brand & Part No.	Size	Thickness	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W2-4CN	1/4" - 20	1/4" (6mm)	--	--
W2-6CN	3/8" - 16	3/8" (10mm)	--	--
W2-8CN	1/2" - 13	1/2" (13mm)	--	--



Twist-Nut Channel Nut



SPECIFYING Brand & Part No.	Size	Thickness	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W2-4TN	1/4" - 20	1/4" (6mm)	--	--
W2-6TN	3/8" - 16	3/8" (10mm)	--	--
W2-8TN	1/2" - 13	1/2" (13mm)	--	--

Seismic Bracing Rod Stiffener


Use with 3/8", 1/2" & 5/8" Threaded Rod
Available in Stainless Steel 316 & 304



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO		
W2486	VN1RS	B2486

Available in Stainless Steel 316 & 304

Channel Nut Top Spring




SPECIFYING Brand & Part No.	Use	Size	Thickness	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
W2-0832TL		#8 - 32	1/4" (6mm)	--	W2-0832TL
W2-1032TL		#10 - 32		--	W2-1032TL
W2-1024TL		#10 - 24		--	W2-1024TL
W2-4TL		1/4" - 20	3/8" (10mm)	VSN1025TMS	CNT20025
W2-5TL		5/16" - 18		VSN1031TMS	W2-5TL
W2-6TL		3/8" - 16		VSN1037TMS	CNT30037
W5-8TL		1/2" - 13		--	CNT30050
W2-8TL	c	1/2" - 13	1/2" (13mm)	VSN1050TMS	CNT40050

c = Not for use with 13/16" Channel

Combination Washer Channel Nut

- Replaces channel nut and square washer with single piece



SPECIFYING Brand & Part No.	Size	Nut Thickness	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W2-4NW	1/4" - 20	1/4" (6mm)	VF1101CN25	--
W2-6NW	3/8" - 16	3/8" (10mm)	VF1101CN37	--
W2-8NW	1/2" - 13		VF1101CN50	--





Channel Nuts

Standard Finish: Electro Galvanized (EG)




Double Conveyor Adjusting Nut

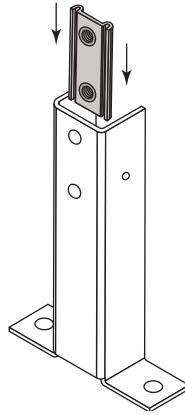

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6608	VF5803GRS	--

Stud Nut with Short Spring

Use with $\frac{13}{16}$ ", $\frac{7}{8}$ " & 1"



* Remember that you lose $\frac{1}{4}$ " (6mm) usable stud length when nut is inserted into channel


SPECIFYING Brand & Part No.	Size	Thickness	DISCONTINUED Brands & Part No.	
WESANCO			VERSABAR	FLORIDA STRUT
W5-3SN	$\frac{1}{2}$ " - 13 x $1\frac{3}{8}$ "	$\frac{3}{8}$ " (10mm)	--	--

For Applications In other Channels Consult Factory.

Stud Nut with Spring

Use with $1\frac{5}{8}$ " & $1\frac{3}{8}$ " Channel

* Remember that you lose $\frac{1}{4}$ " (6mm) usable stud length when nut is inserted into channel



SPECIFYING Brand & Part No.	Size	DISCONTINUED Brands & Part No.	
WESANCO		VERSABAR	FLORIDA STRUT
W4-075SN	$\frac{1}{4}$ " - 20 x $\frac{3}{4}$ "	SSN25075	--
W4-087SN	$\frac{1}{4}$ " - 20 x $\frac{7}{8}$ "	SSN25087	CND25087
W4-100SN	$\frac{1}{4}$ " - 20 x 1"	SSN25100	--
W4-112SN	$\frac{1}{4}$ " - 20 x $1\frac{1}{8}$ "	SSN25127	--
W4-125SN	$\frac{1}{4}$ " - 20 x $1\frac{1}{4}$ "	SSN25125	--
W4-137SN	$\frac{1}{4}$ " - 20 x $1\frac{3}{8}$ "	SSN25137	--
W4-150SN	$\frac{1}{4}$ " - 20 x $1\frac{1}{2}$ "	SSN25150	--
W4-175SN	$\frac{1}{4}$ " - 20 x $1\frac{3}{4}$ "	SSN25175	--
W4-200SN	$\frac{1}{4}$ " - 20 x 2"	SSN25200	--
W5-075SN	$\frac{5}{16}$ " - 18 x $\frac{3}{4}$ "	SSN31075	--
W5-100SN	$\frac{5}{16}$ " - 18 x 1"	SSN31100	--
W5-125SN	$\frac{5}{16}$ " - 18 x $1\frac{1}{4}$ "	SSN31125	--
W5-150SN	$\frac{5}{16}$ " - 18 x $1\frac{1}{2}$ "	SSN31150	--
W5-175SN	$\frac{5}{16}$ " - 18 x $1\frac{3}{4}$ "	SSN31175	--
W5-200SN	$\frac{5}{16}$ " - 18 x 2"	SSN31200	--
W6-075SN	$\frac{3}{8}$ " - 16 x $\frac{3}{4}$ "	SSN37075	--
W6-087SN	$\frac{3}{8}$ " - 16 x $\frac{7}{8}$ "	SSN37087	CND37112
W6-100SN	$\frac{3}{8}$ " - 16 x 1"	SSN37100	--
W6-112SN	$\frac{3}{8}$ " - 16 x $1\frac{1}{8}$ "	SSN37112	--
W6-125SN	$\frac{3}{8}$ " - 16 x $1\frac{1}{4}$ "	SSN37125	CND37125
W6-137SN	$\frac{3}{8}$ " - 16 x $1\frac{3}{8}$ "	SSN37137	--
W6-150SN	$\frac{3}{8}$ " - 16 x $1\frac{1}{2}$ "	SSN37150	--

SPECIFYING Brand & Part No.	Size	DISCONTINUED Brands & Part No.	
WESANCO		VERSABAR	FLORIDA STRUT
W6-162SN	$\frac{3}{8}$ " - 16 x $1\frac{5}{8}$ "	SSN37162	CND37162
W6-175SN	$\frac{3}{8}$ " - 16 x $1\frac{3}{4}$ "	SSN37175	--
W6-187SN	$\frac{3}{8}$ " - 16 x $1\frac{7}{8}$ "	SSN37187	--
W6-200SN	$\frac{3}{8}$ " - 16 x 2"	SSN37200	--
W6-212SN	$\frac{3}{8}$ " - 16 x $2\frac{1}{8}$ "	SSN37212	--
W6-225SN	$\frac{3}{8}$ " - 16 x $2\frac{1}{4}$ "	SSN37225	--
W6-250SN	$\frac{3}{8}$ " - 16 x $2\frac{1}{2}$ "	SSN37250	--
W8-062SN	$\frac{1}{2}$ " - 13 x $\frac{5}{8}$ "	SSN50062	--
W8-087SN	$\frac{1}{2}$ " - 13 x $\frac{7}{8}$ "	SSN50087	--
W8-112SN	$\frac{1}{2}$ " - 13 x $1\frac{1}{8}$ "	SSN50112	--
W8-137SN	$\frac{1}{2}$ " - 13 x $1\frac{3}{8}$ "	SSN50137	--
W8-162SN	$\frac{1}{2}$ " - 13 x $1\frac{5}{8}$ "	SSN50162	--
W8-187SN	$\frac{1}{2}$ " - 13 x $1\frac{7}{8}$ "	SSN50187	--
W8-212SN	$\frac{1}{2}$ " - 13 x $2\frac{1}{8}$ "	SSN50212	--
W8-225SN	$\frac{1}{2}$ " - 13 x $2\frac{1}{4}$ "	SSN50225	--
W8-250SN	$\frac{1}{2}$ " - 13 x $2\frac{1}{2}$ "	SSN50250	--
W8-275SN	$\frac{1}{2}$ " - 13 x $2\frac{3}{4}$ "	SSN50275	--
W8-300SN	$\frac{1}{2}$ " - 13 x 3"	SSN50300	--
W8-325SN	$\frac{1}{2}$ " - 13 x $3\frac{1}{4}$ "	SSN50325	--
W10-112SN	$\frac{5}{8}$ " - 11 x $1\frac{1}{8}$ "	--	--
W10-137SN	$\frac{5}{8}$ " - 11 x $1\frac{3}{8}$ "	--	--


Available in stainless steel and custom stud lengths



Stud Nut with Long Spring

Use with 2-⁷/₁₆" & 3-¹/₄" Channel

* Remember that you lose ¹/₄" (6mm) usable stud length when nut is inserted into channel

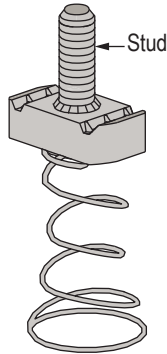


SPECIFYING Brand & Part No.	Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W4-087SNL	¹ / ₄ " - 20 x ⁷ / ₁₆ "	—	—
W4-112SNL	¹ / ₄ " - 20 x 1- ¹ / ₈ "	—	—
W4-137SNL	¹ / ₄ " - 20 x 1- ³ / ₈ "	—	—

SPECIFYING Brand & Part No.	Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6-087SNL	³ / ₈ " - 16 x ⁷ / ₁₆ "	—	—
W6-112SNL	³ / ₈ " - 16 x 1- ¹ / ₈ "	—	—
W6-137SNL	³ / ₈ " - 16 x 1- ³ / ₈ "	—	—
W6-162SNL	³ / ₈ " - 16 x 1- ⁵ / ₈ "	—	—
W6-187SNL	³ / ₈ " - 16 x 1- ⁷ / ₈ "	—	—
W6-212SNL	³ / ₈ " - 16 x 2- ¹ / ₈ "	—	—
W8-112SNL	¹ / ₂ " - 13 x 1- ¹ / ₈ "	—	—
W8-137SNL	¹ / ₂ " - 13 x 1- ³ / ₈ "	—	—
W8-162SNL	¹ / ₂ " - 13 x 1- ⁵ / ₈ "	—	—
W8-187SNL	¹ / ₂ " - 13 x 1- ⁷ / ₈ "	—	—
W8-212SNL	¹ / ₂ " - 13 x 2- ¹ / ₈ "	—	—
W10-112SNL	⁵ / ₈ " - 11 x 1- ¹ / ₈ "	—	—
W10-137SNL	⁵ / ₈ " - 11 x 1- ³ / ₈ "	—	—

Stud Nut without Spring

Use with 1-⁵/₈" & 1-³/₈" Channel

* Remember that you lose ¹/₄" (6mm) usable stud length when nut is inserted into channel



SPECIFYING Brand & Part No.	Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W4-075SNWS	¹ / ₄ " - 20 x ³ / ₄ "	SN25075	—
W4-087SNWS	¹ / ₄ " - 20 x ⁷ / ₁₆ "	SN25087	—
W4-100SNWS	¹ / ₄ " - 20 x 1"	SN25100	—
W4-112SNWS	¹ / ₄ " - 20 x 1- ¹ / ₈ "	SN25127	—
W4-125SNWS	¹ / ₄ " - 20 x 1- ¹ / ₄ "	SN25125	—
W4-137SNWS	¹ / ₄ " - 20 x 1- ³ / ₈ "	SN25137	—
W4-150SNWS	¹ / ₄ " - 20 x 1- ¹ / ₂ "	SN25150	—
W4-175SNWS	¹ / ₄ " - 20 x 1- ³ / ₄ "	SN25175	—
W4-200SNWS	¹ / ₄ " - 20 x 2"	SN25200	—
W5-075SNWS	⁵ / ₁₆ " - 18 x ³ / ₄ "	SN31075	—
W5-100SNWS	⁵ / ₁₆ " - 18 x 1"	SN31100	—
W5-125SNWS	⁵ / ₁₆ " - 18 x 1- ¹ / ₄ "	SN31125	—
W5-150SNWS	⁵ / ₁₆ " - 18 x 1- ¹ / ₂ "	SN31150	—
W5-175SNWS	⁵ / ₁₆ " - 18 x 1- ³ / ₄ "	SN31175	—
W5-200SNWS	⁵ / ₁₆ " - 18 x 2"	SN31200	—
W6-075SNWS	³ / ₈ " - 16 x ³ / ₄ "	SN37075	—
W6-087SNWS	³ / ₈ " - 16 x ⁷ / ₁₆ "	SN37087	—
W6-100SNWS	³ / ₈ " - 16 x 1"	SN37100	—
W6-0112SNWS	³ / ₈ " - 16 x 1- ¹ / ₈ "	SN37112	—
W6-125SNWS	³ / ₈ " - 16 x 1- ¹ / ₄ "	SN37125	—
W6-137SNWS	³ / ₈ " - 16 x 1- ³ / ₈ "	SN37137	—
W6-150SNWS	³ / ₈ " - 16 x 1- ¹ / ₂ "	SN37150	—
W6-162SNWS	³ / ₈ " - 16 x 1- ⁵ / ₈ "	SN37162	—

SPECIFYING Brand & Part No.	Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6-175SNWS	³ / ₈ " - 16 x 1- ³ / ₄ "	SN37175	—
W6-187SNWS	³ / ₈ " - 16 x 1- ⁷ / ₈ "	SN37187	—
W6-200SNWS	³ / ₈ " - 16 x 2"	SN37200	—
W6-212SNWS	³ / ₈ " - 16 x 2- ¹ / ₈ "	SN37212	—
W6-225SNWS	³ / ₈ " - 16 x 2- ¹ / ₄ "	SN37225	—
W6-250SNWS	³ / ₈ " - 16 x 2- ¹ / ₂ "	SN37250	—
W8-062SNWS	¹ / ₂ " - 13 x ⁵ / ₈ "	SN50062	—
W8-087SNWS	¹ / ₂ " - 13 x ⁷ / ₁₆ "	SN50087	—
W8-112SNWS	¹ / ₂ " - 13 x 1- ¹ / ₈ "	SN50112	—
W8-137SNWS	¹ / ₂ " - 13 x 1- ³ / ₈ "	SN50137	—
W8-162SNWS	¹ / ₂ " - 13 x 1- ⁵ / ₈ "	SN50162	—
W8-187SNWS	¹ / ₂ " - 13 x 1- ⁷ / ₈ "	SN50187	—
W8-212SNWS	¹ / ₂ " - 13 x 2- ¹ / ₈ "	SN50212	—
W8-225SNWS	¹ / ₂ " - 13 x 2- ¹ / ₄ "	SN50225	—
W8-250SNWS	¹ / ₂ " - 13 x 2- ¹ / ₂ "	SN50250	—
W8-275SNWS	¹ / ₂ " - 13 x 2- ³ / ₄ "	SN50275	—
W8-300SNWS	¹ / ₂ " - 13 x 3"	SN50300	—
W8-325SNWS	¹ / ₂ " - 13 x 3- ¹ / ₄ "	SN50325	—
W10-112SNWS	⁵ / ₈ " - 11 x 1- ¹ / ₈ "	—	—
W10-137SNWS	⁵ / ₈ " - 11 x 1- ³ / ₈ "	—	—

Available in stainless steel and custom stud lengths




Channel Nuts & Hardware

Standard Finish: Electro Galvanized (EG)




Scissor Square Washer Nut

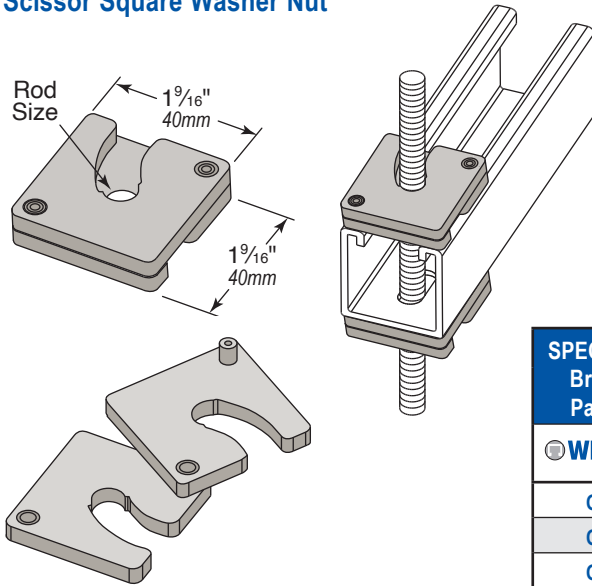

- Unique scissor action closes at any desired position on the threaded rod.
- Ideal for Retro-Fit applications where existing rod ends are not accessible.
- Functions as a hex nut and square washer combination which reduces the number of components needed for installation.


SPECIFYING Brand & Part No.	Rod Size	Thread Size UNC	Design Load Lbs	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
QN25	1/4" (6.4mm)	1/4" -20	150 (0.67 kN)	VF1101QN25	--
QN37	3/8" (9.5mm)	3/8" -16	590 (2.62 kN)	VF1101QN37	--
QN50	1/2" (12.7mm)	1/2" -13	850 (03.78 kN)	VF1101QN50	--

Light Duty Channel Nut




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO		
W6461	VN1	--

Light Duty Stud Nut

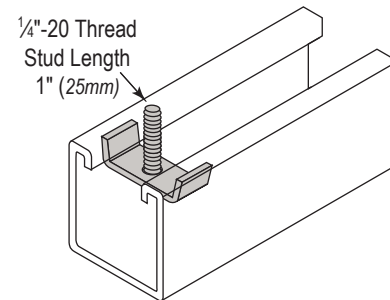

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO		
W4-100LDSN	VN1ST	--

Rod Coupling



SPECIFYING Brand & Part No.	Hole Size	Length	Hex Size	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
W7134	1/4" - 20	7/8" (22mm)	3/8" (10mm)	VTRC25	RC0025
W7134A	5/16" - 18		-	VTRC31	--
W7135	3/8" - 16	1-3/4" (44mm)	9/16" (14mm)	VTRC37	RC0037
W7136	1/2" - 13		11/16" (18mm)	VTRC50	RC0050
W7137	5/8" - 11	2-1/8" (54mm)	-	VTRC62	--
W7138	3/4" - 10	2-1/4" (57mm)	-	VTRC75	--


* Available in stainless steel



Threaded Rod

Nominal Rod Dia. - UNC	Max. Safe Load @ Temp. 650°F (343°C)
1/4" - 20	240 lbs (1.07kN)
3/8" - 16	730 lbs (3.25kN)
1/2" - 13	1,350 lbs (6.01kN)
5/8" - 11	2,160 lbs (9.61kN)
3/4" - 10	3,230 lbs (14.37kN)
1" - 8	5,900 lbs (26.24kN)

* Loading data for piping applications based on MSS SP-58 for rod conforming to ASTM A575 & A576



Base Part Number: W7124_6
Length: 6 - 6 foot, 10 - 10 foot, 12 - 12 foot
Material/Finish: EG - Electro-Galvanized, S4 - Stainless Steel Type 304, S6 - Stainless Steel Type 316

SPECIFYING Brand & Part No.	Nominal Rod Dia. - UNC	Length	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W7124_6	1/4" - 20	6' (1.83m)	VTR256	--
W7124_10		10' (3.05m)	VTR2510	--
W7124_12		12' (3.66m)	VTR2512	--
W7125_6	3/8" - 16	6' (1.83m)	VTR376	--
W7125_10		10' (3.05m)	VTR3710	--
W7125_12		12' (3.66m)	VTR3712	--
W7126_6	1/2" - 13	6' (1.83m)	VTR506	--
W7126_10		10' (3.05m)	VTR5010	--
W7126_12		12' (3.66m)	VTR5012	--
W7127_6	5/8" - 11	6' (1.83m)	VTR626	--
W7127_10		10' (3.05m)	VTR6210	--
W7127_12		12' (3.66m)	VTR6212	--
W7128_10	3/4" - 10	10' (3.05m)	VTR7510	--
W7131_10	1" - 8	10' (3.05m)	--	--


* Available in stainless steel Type 304 (S4) or Type 316 (S6)

Flathead Machine Screws



SPECIFYING Brand & Part No.	Size UNC	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
FLMS25X062	1/4" x 5/8"	25X62FLMS	--
FLMS25X075	1/4" x 3/4"	25X75FLMS	--
FLMS31X100	5/16" x 1"	--	--
FLMS37X100	3/8" x 1"	37X1FLMS	--
FLMS37X200	3/8" x 2"	37X2FLMS	--
FLMS37X225	3/8" x 2-1/4"	37X225FLMS	--
FLMS37X250	3/8" x 2-1/2"	37X250FLMS	--

Hex Head Cap Screw



SPECIFYING Brand & Part No.	Size UNC	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
HHCS25X050	1/4" x 1/2"	25X50HHCS	--
HHCS25X075	1/4" x 3/4"	25X75HHCS	HCS2507
HHCS25X100	1/4" x 1"	25X1HHCS	HCS2510
HHCS25X125	1/4" x 1-1/4"	25X125HHCS	HCS2512
HHCS25X150	1/4" x 1-1/2"	25X150HHCS	HCS2515
HHCS37X075	3/8" x 3/4"	37X75HHCS	HCS3707
HHCS37X100	3/8" x 1"	37X1HHCS	HCS3710
HHCS37X125	3/8" x 1-1/4"	37X125HHCS	HCS3712
HHCS37X150	3/8" x 1-1/2"	37X150HHCS	HCS3715
HHCS37X200	3/8" x 2"	37X200HHCS	HCS3720
HHCS37X225	3/8" x 2-1/4"	37X225HHCS	--
HHCS37X250	3/8" x 2-1/2"	37X250HHCS	--
HHCS50X093	1/2" x 15/16"	50X93HHCS	--
HHCS50X100	1/2" x 1"	--	HCS5010
HHCS50X125	1/2" x 1-1/4"	50X125HHCS	HCS5012
HHCS50X150	1/2" x 1-1/2"	50X150HHCS	HCS5015
HHCS50X175	1/2" x 1-3/4"	50X175HHCS	HCS5017
HHCS50X200	1/2" x 2"	50X200HHCS	HCS5020
HHCS50X225	1/2" x 2-1/4"	50X225HHCS	--
HHCS50X250	1/2" x 2-1/2"	50X250HHCS	--
HHCS50X350	1/2" x 3-1/2"	50X350HHCS	--

* Available in stainless steel

Roundhead Machine Screws




SPECIFYING Brand & Part No.	Size UNC	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
RHMS25X050	1/4" x 1/2"	25X50RHMS	--
RHMS25X075	1/4" x 3/4"	25X75RHMS	W7470
RHMS25X100	1/4" x 1"	25X1RHMS	W7471
RHMS25X125	1/4" x 1-1/4"	25X125RHMS	W7472
RHMS31X100	5/16" x 1"	31X1RHMS	W7473
RHMS31X125	5/16" x 1-1/4"	31X125RHMS	W7474
RHMS31X150	5/16" x 1-1/2"	31X150RHMS	W7475
RHMS37X100	3/8" x 1"	37X1RHMS	W7476
RHMS37X125	3/8" x 1-1/4"	37X125RHMS	W7477
RHMS37X150	3/8" x 1-1/2"	37X150RHMS	W7478
RHMS37X250	3/8" x 2-1/2"	37X250RHMS	W7479



Standard Finish: Electro Galvanized (EG)

Slotted Indented Hex Machine Screw



SPECIFYING Brand & Part No.	Size UNC	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
SLHHCS25X075	1/4" x 3/4"	25X75SLHHCS	--
SLHHCS31X100	5/16" x 1"	31X1SLHHCS	--
SLHHCS37X125	3/8" x 1-1/4"	37X125SLHHCS	--

Hex Nut



SPECIFYING Brand & Part No.	Size UNC	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
HN25	1/4"	25HN	HN0025
HN31	5/16"	31HN	--
HN37	3/8"	37HN	HN0037
HN50	1/2"	50FN	HN0050
HN62	5/8"	62FN	HN0062
HN75	3/4"	--	HN0075

* Available in stainless steel

Square Nuts



SPECIFYING Brand & Part No.	Size UNC	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
SQN25	1/4"	25SQN	--
SQN31	5/16"	31SQN	--
SQN37	3/8"	37SQN	--
SQN50	1/2"	50SQN	--
SQN62	5/8"	62SQN	--

Kep Nuts



SPECIFYING Brand & Part No.	Size UNC	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
KN25	1/4"	--	--
KN31	5/16"	--	--
KN37	3/8"	--	--

Flat Washer



SPECIFYING Brand & Part No.	Size	OD	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
FW25	1/4"	3/4" (19mm)	25FW	FW0025
FW31	5/16"		31FW	--
FW37	3/8"	1" (25mm)	37FW	FW0037
FW50	1/2"	1-3/8" (35mm)	50FW	FW0050
FW62	5/8"	1-3/4" (44mm)	62FW	FW0062
FW75	3/4"	2" (51mm)	--	FW0075

* Available in stainless steel


Lock Washers



SPECIFYING Brand & Part No.	Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
LW25	1/4"	25LW	FLW0025
LW31	5/16"	31LW	--
LW37	3/8"	37LW	FLW0037
LW50	1/2"	50LW	FLW0050
LW62	5/8"	62LW	FLW0062

* Available in stainless steel


Fender Washers



SPECIFYING Brand & Part No.	Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
FEN25	1/4" x 1-1/4"	FEN25	--
FEN31	5/16" x 1-1/4"	FEN31	--
FEN37	3/8" x 1-1/2"	FEN37	--
FEN50	1/2" x 1-1/2"	FEN50	--



Swivel Female




SPECIFYING Brand & Part No.	A Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6905	3/8"-16	VXE237	SW100037
W6906	1/2"-13	VXE250	SW100050

Swivel Female - Female




SPECIFYING Brand & Part No.	A Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6915	3/8"-16	VXE137	SW120037
W6916	1/2"-13	VXE150	SW120050

Swivel Male



SPECIFYING Brand & Part No.	A Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6910	3/8"-16	VXE437	SW110037
W6911	1/2"-13	VXE450	SW110050

Swivel Male - Female



SPECIFYING Brand & Part No.	A Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6920	3/8"-16	VXE337	SW130037
W6921	1/2"-13	VXE350	SW130050




General Fittings




Flat Plate Fittings

Pages 78 - 83




90° Angle Fittings

Pages 83 - 88




Angle Fittings

Pages 89 - 90




Brace Fittings

Pages 91 - 93




“Z” Fittings

Pages 94 - 95




“U” Shape Fittings

Pages 95 - 99




Wing Fittings

Pages 100 - 103




Post Bases

Pages 103 - 106



Trolley

Pages 107 - 108




Fittings Specifications		
Material	ASTM	ASTM Description
Hot Rolled Plate	A 575, A 1011, A 1018, A 576, A638	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting: Steel	A 366, A 36	Steel carbon, cold rolled sheet, commercial quality structural steel.
Strip Steel: Pipe Clamps	A 569	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Stainless Steel	A 240 TYPE 304	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	
Aluminum	B 221	Aluminum alloy extruded bar, rod, wire, shape and tube.

Fitting Finish Specifications	
Finish	Description
Paint-Green Powder Coating	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Electroplated	Fittings and hardware supplied as "Electro-Galvanized" in accordance with ASTM B 633.
Mill-Galvanized (Pre-Galvanized)	Galvanized steel used in the manufacture of channel sections conforms to ASTM A 653 GR33 G90. Uncoated edges resulted from slitting, punching and channel cut off are present.
Hot Dip Galvanized After Fabrication	Channel and fittings which are hot dip galvanized after fabrication conform to one of the following specifications. ASTM A 123, ASTM A153, or ASTM A386.
Special Coatings	Other commercially available finishes can be supplied per specification when required to protect applications.


See page 23 for Material or Finish ordering codes for part numbers.

Square Washer without Channel Guide




SPECIFYING Brand & Part No.	Bolt Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5051	1/4" (6.4mm)	VF110125	F100025
W5052	5/16" (7.9mm)	VF110125	F090031
W5053	3/8" (9.5mm)	VF110137	F110037
W5054	1/2" (12.7mm)	VF110150	F120050
W5055	5/8" (15.9mm)	VF110162	F130062
W5056	3/4" (19.1mm)	VF110175	F140075
W5057	7/8" (22.2mm)	VF110187	F150087

Square Washer with Channel Guide




SPECIFYING Brand & Part No.	Bolt Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5002	1/4" (6.4mm)	VF1101N25	F200025
W5002	5/16" (7.9mm)	VF1101N25	W5002
W5003	3/8" (9.5mm)	VF1101N37	F210037
W5004	1/2" (12.7mm)	VF1101N50	F220050
W5005	5/8" (15.9mm)	VF1101N62	F230062
W5006	3/4" (19.1mm)	VF1101N75	F240075

Square Washer with Clip on Guide




SPECIFYING Brand & Part No.	Bolt Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5052U	1/4"-20 (6.4mm)	VF110225	--
W5053U	3/8"-16 (9.5mm)	VF110237	--
W5054U	1/2"-13 (12.7mm)	VF110250	--
W5055U	5/8"-11 (15.9mm)	VF110262	--
W5056U	3/4"-10 (19.1mm)	VF110275	--

Square Washer with Threaded Hole



SPECIFYING Brand & Part No.	Bolt Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5053T	3/8"-16 (9.5mm)	VF1107A	--
W5055T	5/8"-11 (15.9mm)	VF1107C	--

2-Hole Splice Plate




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO		
W5007	VF1201	F30

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

2-Hole Parallel Splice Plate




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5013	VF1204	F34

2-Hole Perpendicular Splice Plate

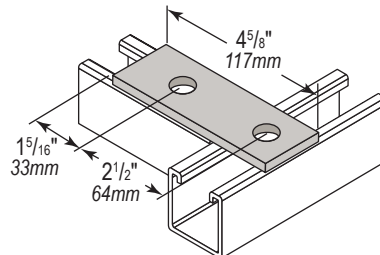


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5015	VF1211	--

3-Hole Splice Plate




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5008	VF1302	F31

2-Hole Swivel Plate




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5011	VF1203	F40

3-Hole Swivel Brace Connector



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5012	VF1310	F41

3-Hole Flat Plate

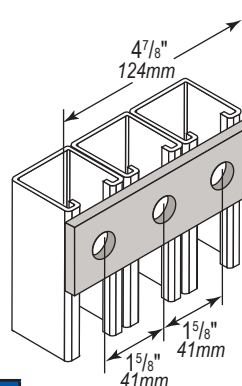


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5016	VF1306	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




3-Hole Flat Plate

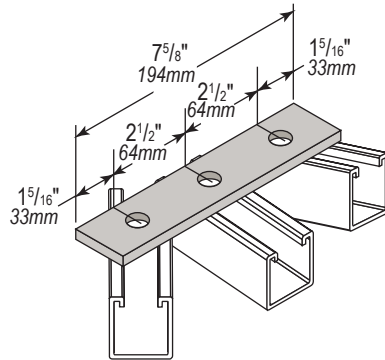


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5017	VF1316	--

3-Hole Flat Angle Plate




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5021	VF1301	F50

3-Hole Corner Gusset Plate




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5030	VF1304	F52

3-Hole Tee Gusset Plate




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5031	VF1305	F61

4-Hole Extended Flat Angle



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5025	VF1406A	F51

4-Hole Splice plate



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5009	VF1402	F32

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Flat Plate Fittings




Standard Finish: Electro Galvanized (EG)

4-Hole Tee Plate

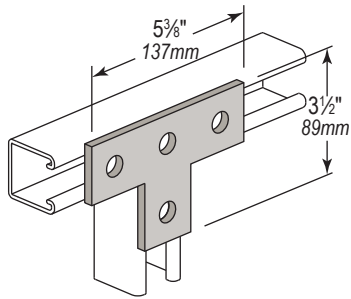


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5022	VF1401	F60

4-Hole Parallel Splice Plate




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5014	VF1412	F35

4-Hole Corner Plate




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5024	VF1406	F53

4-Hole Triangle Flat Plate




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5018	VF1403	--

4-Hole Double Brace Connector

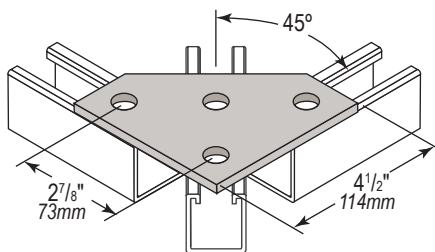

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5019	VF1411	--

4-Hole Gusset Plate

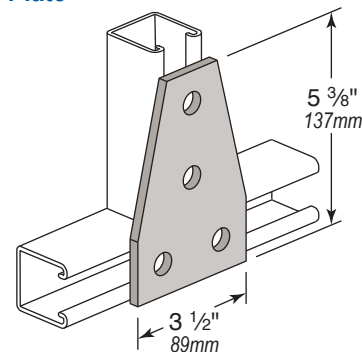


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5026	VF1404	F62

Hole Diameter: 5/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

4-Hole Corner Gusset Plate

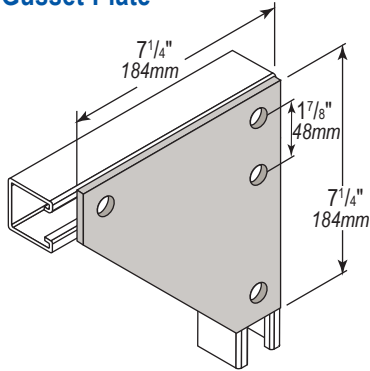


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5036	VF1419	--

5-Hole Splice Plate

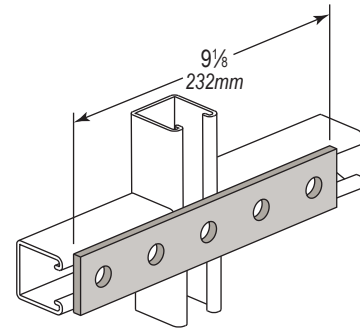


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5010	VF1506	F33

5-Hole Cross Plate

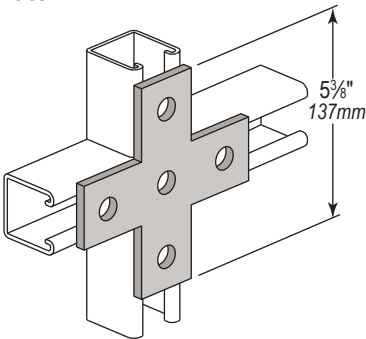


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5023	VF1501	F70

5-Hole Corner Gusset Plate




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5028	VF1505	F54

5-Hole Gusset Plate

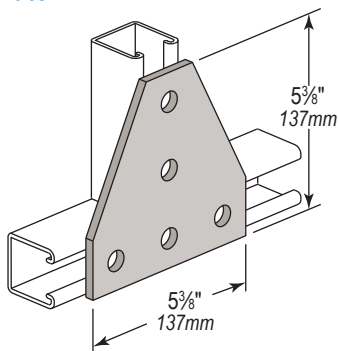

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5027	VF1504	F63

6-Hole Gusseted Cross Connector

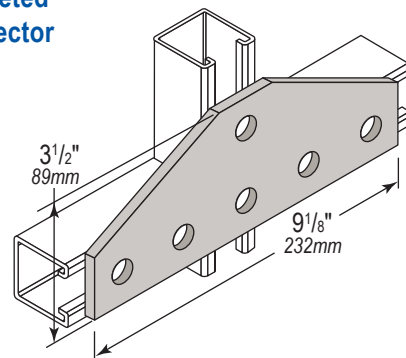

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5037	VF1602	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Flat Plate & 90° Angle Fittings




Standard Finish: Electro Galvanized (EG)

7-Hole Cross Gusset Plate

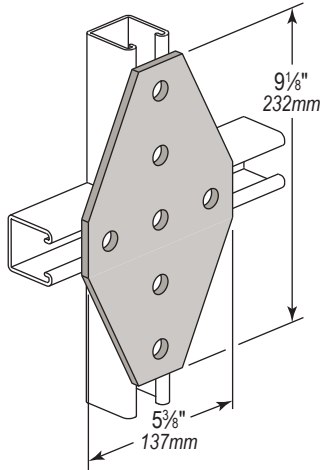


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5029	VF1704	F71

1-Hole Angle Washer




SPECIFYING Brand & Part No.	Height	DISCONTINUED Brands & Part No.	
WESANCO		VERSABAR	FLORIDA STRUT
W5160	3-7/8" (98mm)	VF2121	L70

2-Hole Corner Angle Washer




SPECIFYING Brand & Part No.	Height	DISCONTINUED Brands & Part No.	
WESANCO		VERSABAR	FLORIDA STRUT
W5142	3" (76mm)	VF2205A	L14
W5143	3-1/2" (89mm)	VF2205B	L15
W5144	4" (102mm)	VF2205C	L16

2-Hole End Connector



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5103	VF2201	L11

2-Hole Rack Connector

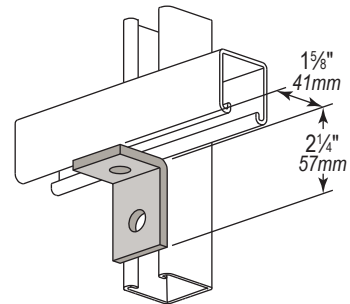


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5102	VF2202	L20

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

2-Hole Rack Connector with Two End Notches




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5104	VF2204N	L10

2-Hole Rack Connector with One End Notch




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5101	VF2209N	--

3-Hole End Connector




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5113	VF2305	L12

3-Hole Column Stringer Connector




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5112	VF2304	L21

3-Hole Rack Corner Angle



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5115	VF2308	L30

3-Hole Angle Connector, Left or Right Hand

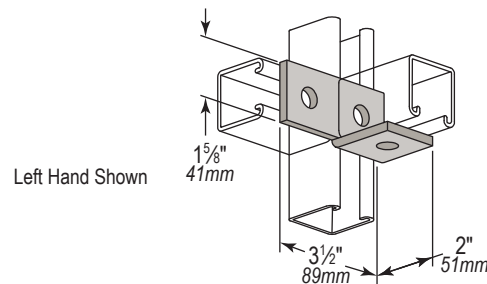


SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
 WESANCO		VERSABAR	FLORIDA STRUT
W5136	Left Handed	VF2315L	--
W5135	Right Handed	VF2315R	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)



Standard Finish: Electro Galvanized (EG)


4-Hole Angle Connector, Left or Right Hand

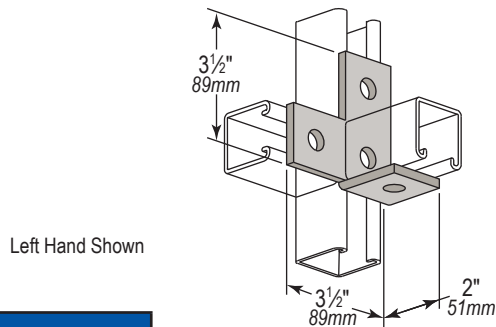

Left Hand Shown

SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W5140	Left Handed	VF2402L	L51
W5141	Right Handed	VF2402R	L52


3-Hole Angle Connector, Left or Right Hand

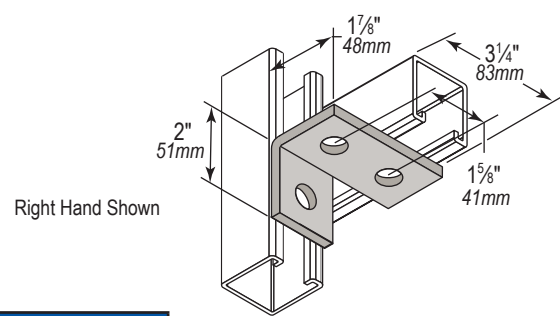

Right Hand Shown


SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W5138	Left Hand	VF2301L	--
W5139	Right Hand	VF2301R	--

4-Hole Offset Corner Angle




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5137	VF2401	L50

4-Hole, Two Column Strut Splice Connector

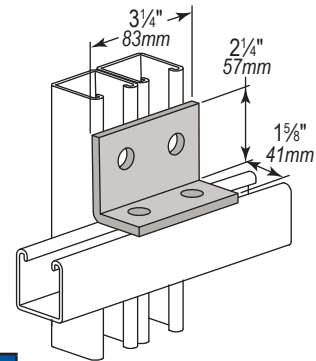


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5126	VF2417	--

3-Hole Rack Splice Connector

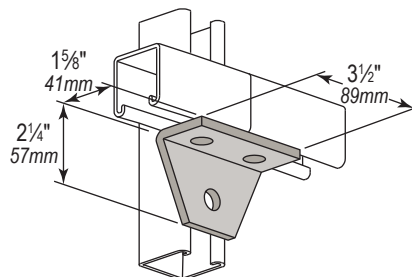

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5110	VF2310	L22

4-Hole Rack Splice Connector

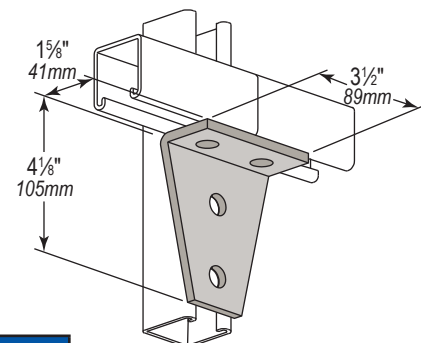


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5109	VF2410	L24

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




4-Hole Corner Connector

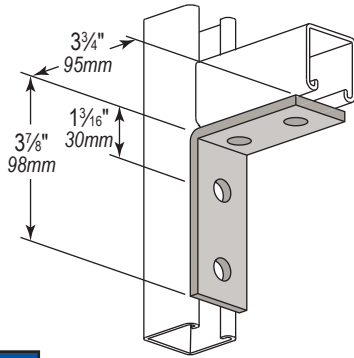


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5125	VF2403	L13

4-Hole Rack Corner Angle

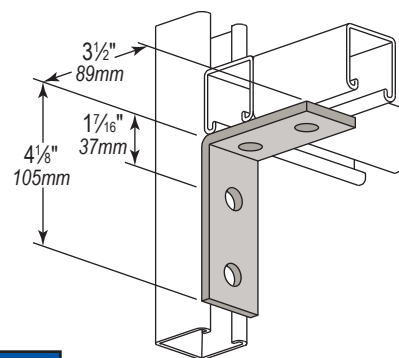


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5123	VF2407	L31

5-Hole Cross With 90° Angle Leg

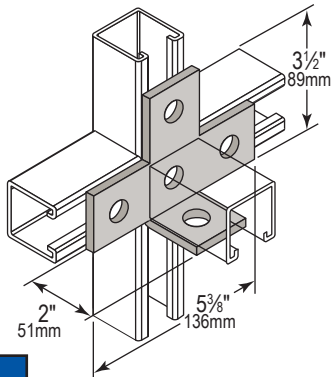


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5152	VF2506	--

4-Hole Post/Stringer Connector, Left or Right Hand

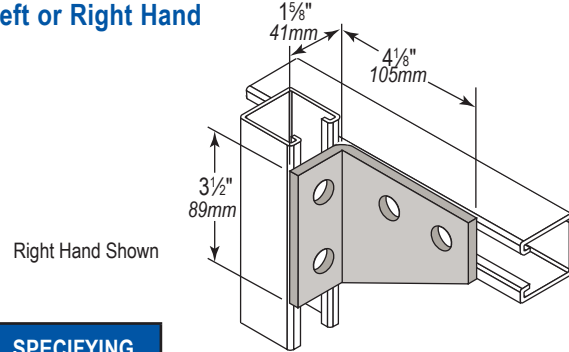


SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
 WESANCO		VERSABAR	FLORIDA STRUT
W5133	Left Hand	VF2411L	--
W5134	Right Hand	VF2411R	--

5-Hole Right Hand Gusset Angle Connector

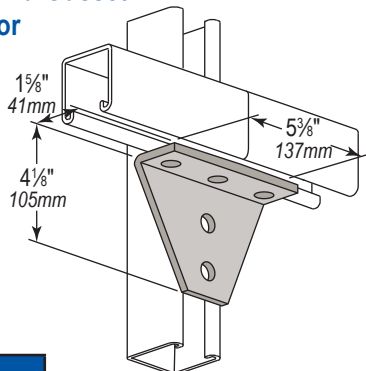

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5118	VF2512	L23

4-Hole Gusset Corner Angle, Left or Right Hand

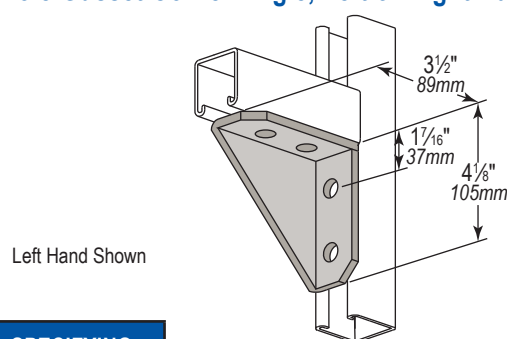


SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
 WESANCO		VERSABAR	FLORIDA STRUT
W5121	Left Hand	VF2426L	L35
W5122	Right Hand	VF2426R	L36

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

5-Hole Corner Splice Connector

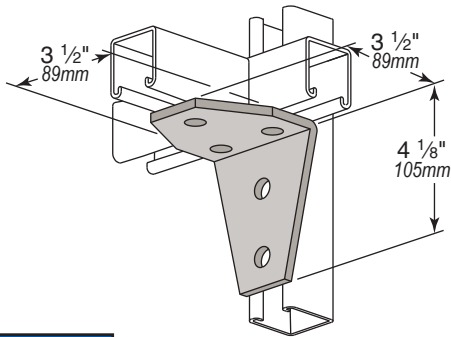


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5117	VF2510	L33

6-Hole, 3-Way Mid Column Connector

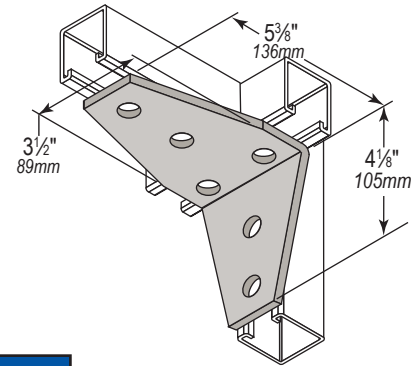


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5154	VF2604	--

Universal Corner Angle

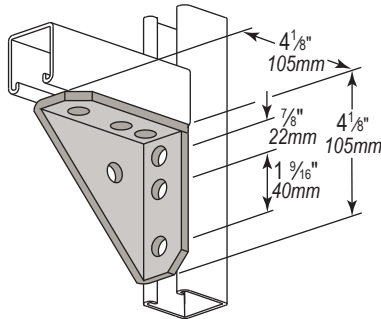


SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
WESANCO		VERSABAR	FLORIDA STRUT
W5124	Plain	VF2708	L34
W5124W	Welded	VF2708W	L34W

6-Hole Gusset Corner Angle, Left or Right Hand

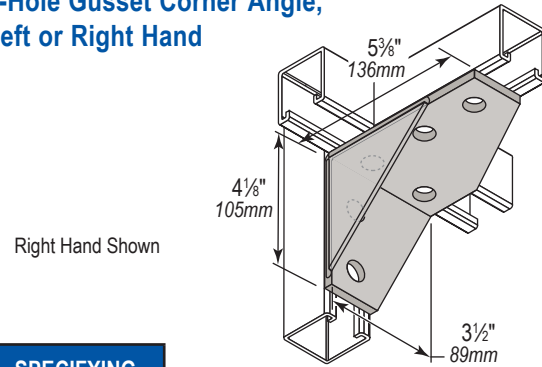


SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
WESANCO		VERSABAR	FLORIDA STRUT
W5156	Left Hand	VF2703L	--
W5157	Right Hand	VF2703R	--

3-Hole Right Angle End Splice

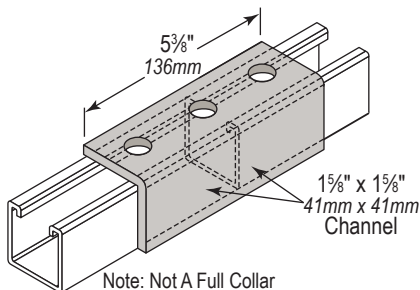

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5158	VF2320	--

4-Hole Right Angle End Splice

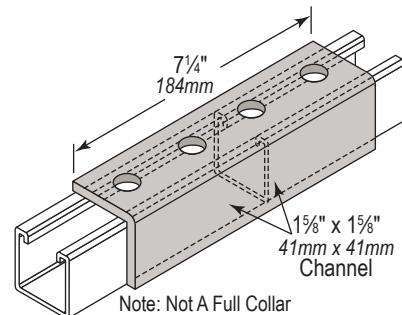


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5159	VF2418	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

2-Hole Vertical Adjustment Angle




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5106	VF2228A	L40

2-Hole Horizontal Adjustment Angle




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5105	VF2217	--

2-Hole Adjustment Angle




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5107	VF2208	L41

2-Hole Adjustment Angle




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5108	VF2208A	L42

3-Hole Adjustment Angle



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5111	VF2507	L43

3-Hole Adjustment Angle

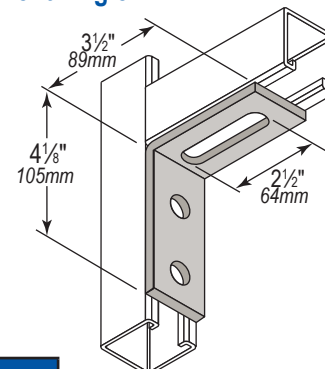

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5153	VF2511	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Angle Fittings




Standard Finish: Electro Galvanized (EG)

2-Hole Small Open Angle



SPECIFYING Brand & Part No.	A	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5470-825	82-½°	VF32488250	–
W5470-75	75°	VF324875	–
W5470-675	67-½°	VF32486750	–
W5470-60	60°	VF324860	–
W5470-525	52-½°	VF324852150	–
W5470-45	45°	VF324845	–
W5470-375	37-½°	VF32483750	–
W5470-30	30°	VF324830	–
W5470-225	22-½°	VF32482250	–
W5470-15	15°	VF324815	--
W5470-075	7-½°	VF3248750	--


2-Hole Open Angle



"A" is available in any angle up to 90°. Dimensions shown may vary based on specified angle.

SPECIFYING Brand & Part No.	A	B	C	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
W5420	82½°	3½" (89mm)	1¾" (44mm)	VF32078250	–
W5421	75°	3½" (89mm)	1¾" (44mm)	VF320875	–
W5422	67½°	3½" (89mm)	1¾" (44mm)	VF32106750	–
W5423	60°	3¾" (86mm)	1⅞" (48mm)	VF320660	--
W5424	52½°	3¼" (83mm)	2⅛" (52mm)	VF32115250	–
W5425	45°	3" (76mm)	2⅝" (59mm)	VF230345	L60
W5426	37½°	3½" (89mm)	1¾" (44mm)	VF32123750	–
W5427	30°	3¼" (83mm)	2⅛" (52mm)	VF321430	–
W5428	22½°	3⅝" (100mm)	2⅛" (52mm)	VF32152250	–
W5429	15°	3⅝" (100mm)	2⅛" (52mm)	VF321615	–
W5430	7½°	3⅝" (100mm)	2⅛" (52mm)	VF3217750	–

4-Hole Open Angle

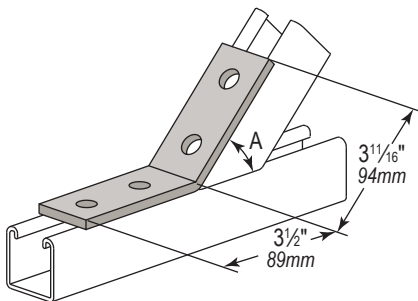


"A" is available in any angle up to 90°. Dimensions shown may vary based on specified angle.

SPECIFYING Brand & Part No.	A	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5440	82-½°	VF34028250	–
W5441	75°	VF340275	–
W5442	67-½°	VF34026750	–
W5443	60°	VF340260	--
W5444	52-½°	VF34025250	–
W5445	45°	VF340245	L62
W5446	37-½°	VF34023750	–
W5447	30°	VF340230	--
W5448	22-½°	VF34022250	–
W5449	15°	VF340215	–
W5450	7-½°	VF3402750	–

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




2-Hole Closed Angle

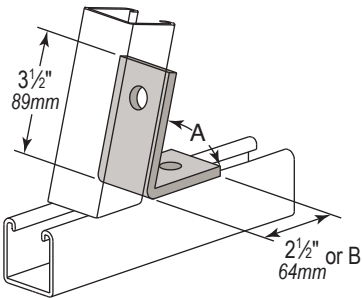

"A" is available in any angle up to 90°. Dimensions shown may vary based on specified angle.

SPECIFYING Brand & Part No.	A	B (W & FS)	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
W5460	82-1/2°	—	VF32188250	—
W5461	75°	—	VF321975	—
W5462	67-1/2°	—	VF32206750	—
W5463	60°	2-25/32" (71mm)	VF320560	—
W5464	52-1/2°	—	VF32215250	—
W5465	45°	3-1/16" (78mm)	VF320245	L61
W5466	37-1/2°	—	VF32223750	—


4-Hole Closed Angle

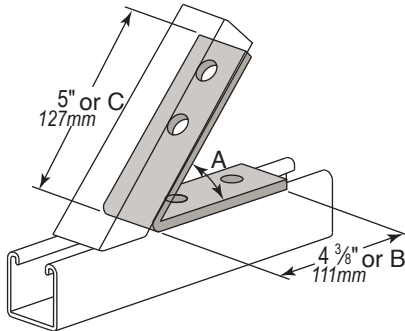

"A" is available in any angle up to 90°. Dimensions shown may vary based on specified angle.

SPECIFYING Brand & Part No.	A	B (W & FS)	C (W & FS)	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
W5410	82-1/2°	—	—	VF34248250	—
W5411	75°	—	—	VF342575	—
W5412	67-1/2°	—	—	VF34266750	—
W5413	60°	4-21/32" (118mm)	4-5/8" (117mm)	VF342760	—
W5414	52-1/2°	—	—	VF34285250	—
W5415	45°	4-15/16" (125mm)	4-11/32" (110mm)	VF342945	L63
W5416	37-1/2°	—	—	VF34303750	—
W5417	30°	—	—	—	—


3-Hole 45° Open Angle

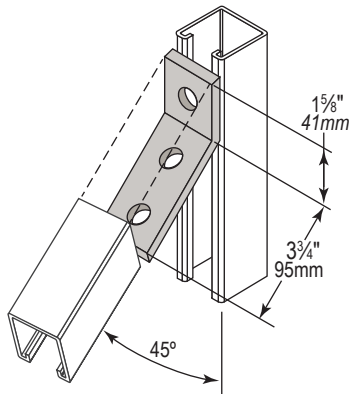

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5431	VF330145	—

4-Hole 45° Angle Wing Fitting, Left or Right Hand

Right Hand Shown
Collar fits: 1-5/8" x 1-5/8" Channel

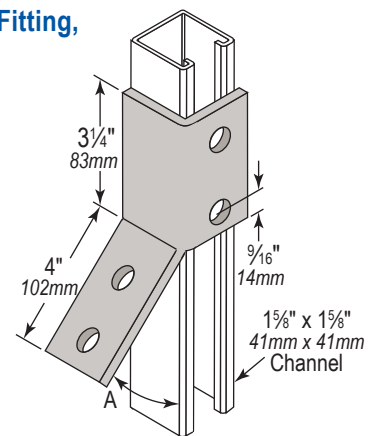


SPECIFYING Brand & Part No.	Description	A	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
W5562L	Left Hand	45°	VF6409L45	—
W5562R	Right Hand		VF6409R45	—

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

2-Hole Adjustable Hinge Connection




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5490	--	--

3-Hole Adjustable Hinge Connection

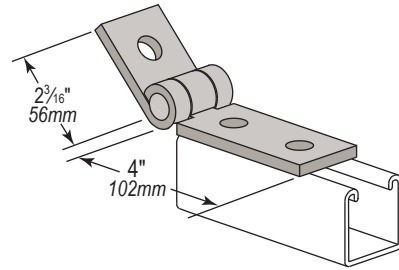


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5491	--	--

4-Hole Adjustable Hinge Connection

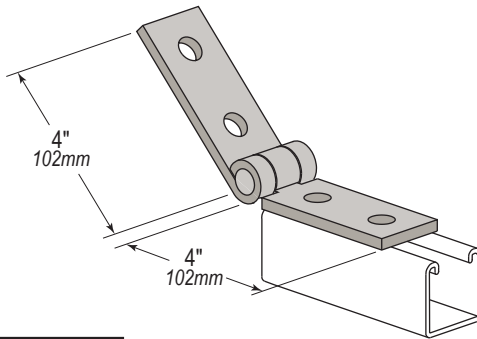


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5492	--	--

4-Hole Adjustable Angle Fitting

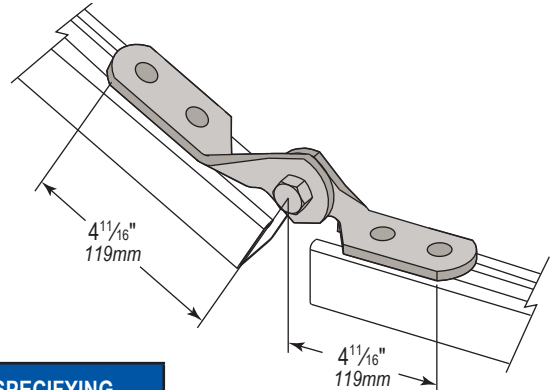

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5495	--	--

Single Adjustable Angle Brace Fitting

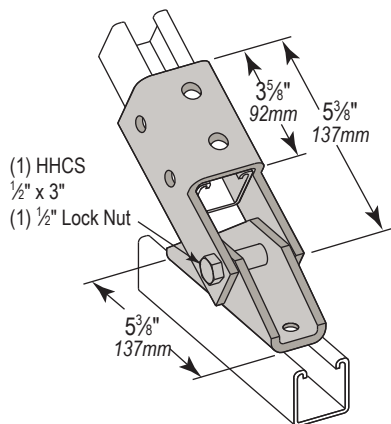


Wrap around clevis designed to accommodate 1-5/8" channel.

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5480	VF7046	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Double Adjustable Angle Brace Fitting

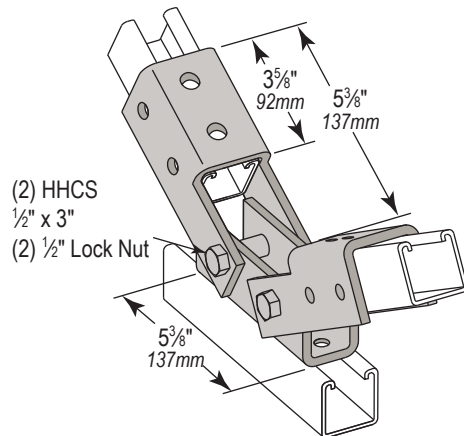

Wrap around clevis designed to accommodate 1-5/8" channel.

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5485	VF7047	--


2-Hole Adjustable Hinge Fitting for Seismic Bracing and General Construction

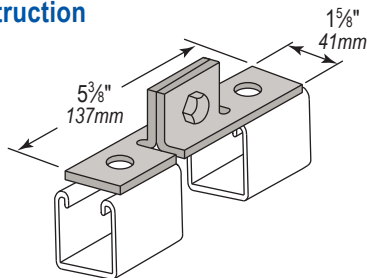

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5496	VF1201H	--

Available in stainless steel


3-Hole Adjustable Hinge Fitting for Seismic Bracing and General Construction

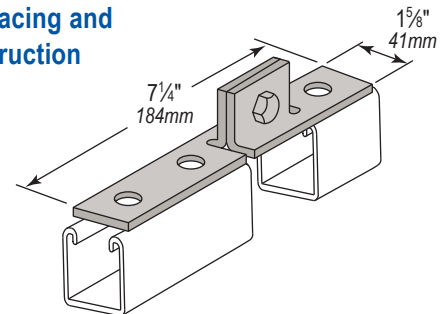

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5497	VF1302H	--

Available in stainless steel


4-Hole Adjustable Hinge Fitting for Seismic Bracing and General Construction

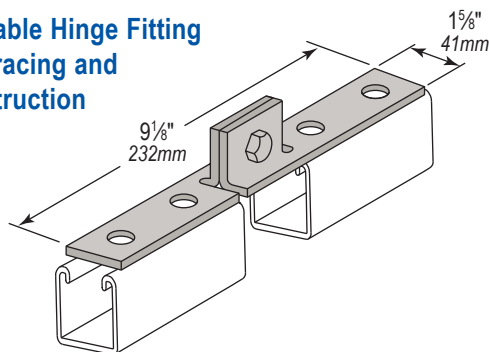

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5498	VF1402H	--

Available in stainless steel

Allows adjustable tension through full range of motion

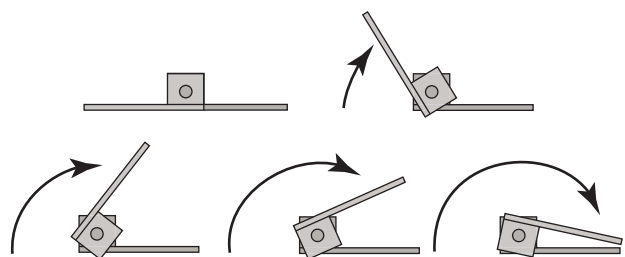

These fittings allow a full range of motion, and are compatible with all 1-5/8" standard channels.

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Brace Fittings




Standard Finish: Electro Galvanized (EG)

45° Angular Corner Brace

SPECIFYING Brand & Part No.	A	B	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
W5471	8" (203mm)	7-1/2" (191mm)	VF32508	L80
W5472	12" (305mm)	10-1/8" (257mm)	VF325012	L81
W5473	16-5/8" (422mm)	13-3/8" (340mm)	--	L82
W5474	18" (457mm)	14-3/8" (365mm)	VF325018	L83
W5475	24" (610mm)	18-3/8" (473mm)	VF325024	L84

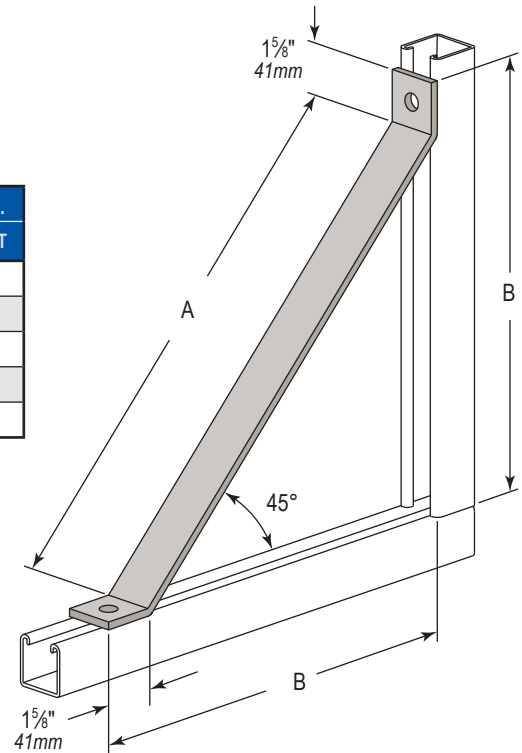


Utility Vault Ladder Rung

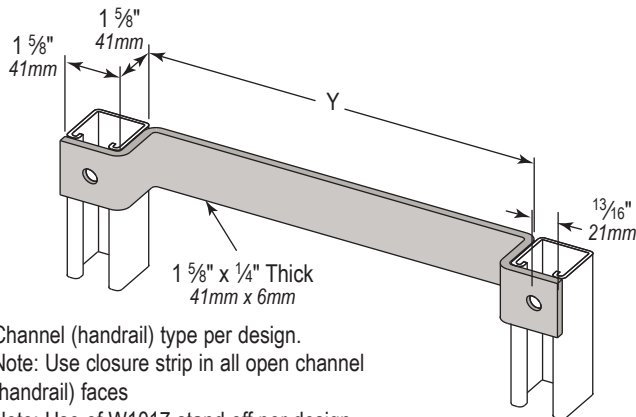

Channel (handrail) type per design.
Note: Use closure strip in all open channel (handrail) faces
Note: Use of W1017 stand off per design

SPECIFYING Brand & Part No.	Y	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W10236	6" (152mm)	--	--
W10238	8" (203mm)	--	--
W102310	10" (254mm)	--	--
W102312	12" (305mm)	VF6108	--
W102316	16" (406mm)	--	--
W102318	18" (457mm)	VF6110	--
W102324	24" (610mm)	--	--

Ladder Assembly Fitting

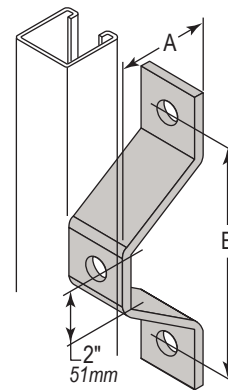


SPECIFYING Brand & Part No.	A	B	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
W1017B	2-3/8" (60mm)	6" (152mm)	VF6111	--
W1017C	4-3/8" (111mm)	8" (203mm)	VF6112	--
W1017D	6-3/8" (162mm)	10" (254mm)	VF6113	--
W1017E	8-3/8" (213mm)	12" (305mm)	VF6114	--
W1017F	10-3/8" (263mm)	14" (356mm)	VF6115	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




2-Hole Z Fitting

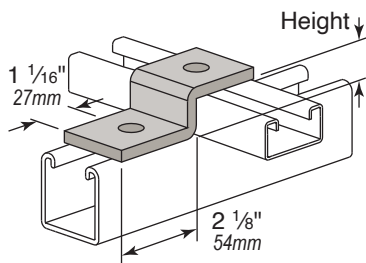


SPECIFYING Brand & Part No.	Height Use with Channel	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5209	4- ⁷ / ₈ " (124mm)	VF4205	--
W5211	2- ⁷ / ₁₆ " (62mm)	--	Z12
W5214	2- ¹ / ₂ " (64mm)	VF43013	--
W5213	1- ³ / ₈ " (35mm)	VF43016	--
W5218	1" (25mm)	VF430110	Z14
W5215	¹³ / ₁₆ " (21mm)	VF43014	Z10

2-Hole Offset Support

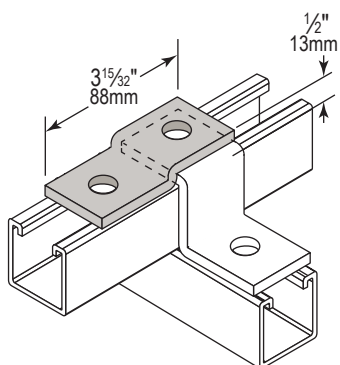


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO		
W5203	VF4202	Z20

3-Hole Z Fitting

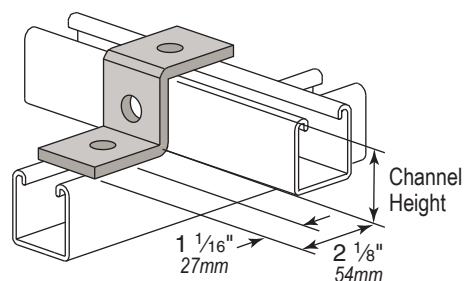


SPECIFYING Brand & Part No.	Height Use with Channel	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5212	1- ⁵ / ₈ " (41mm)	VF4301	--

3-Hole Z Fitting For Double Square Channel

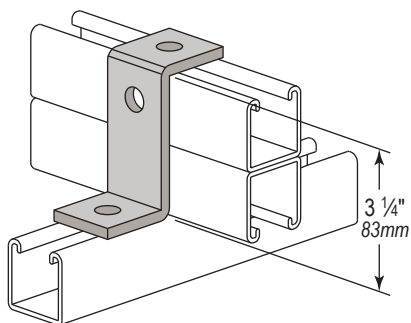

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO		
W5210	VF4302	--

2-Hole Z Connector



SPECIFYING Brand & Part No.	Height Use with Channel	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5224	4" (102mm)	VF4204A	Z30
W5225	5" (127mm)	VF4204B	Z31
W5226	6" (152mm)	VF4204C	Z32
W5227	7" (178mm)	VF4204D	Z33
W5228	8" (203mm)	VF4204E	Z34

Hole Diameter: ⁹/₁₆" (14mm); Hole Spacing - From End: ¹³/₁₆" (21mm); Hole Spacing - On Center: 1-⁷/₈" (48mm); Width: 1-⁵/₈" (41mm); Thickness: ¹/₄" (6mm)




"Z" & "U" Shape Fittings




Standard Finish: Electro Galvanized (EG)

Adjustable Z Connector

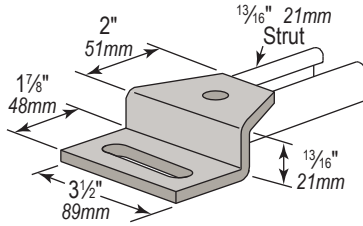


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5205	VF43034	--

Adjustable Z Connector

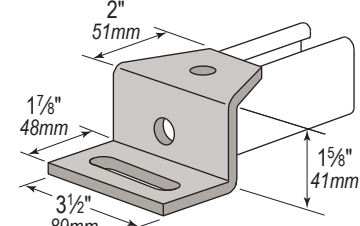


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5202	VF4303	Z60

2-Hole U-Fitting Clevis



SPECIFYING Brand & Part No.	X	DISCONTINUED Brands & Part No.	
WESANCO		VERSABAR	FLORIDA STRUT
W5324	4" (102mm)	VF5203A	U600400
W5325	5" (127mm)	VF5203B	U600500
W5326	6" (152mm)	VF5203C	U600600
W5327	7" (178mm)	VF5203D	U600700
W5328	8" (203mm)	VF5203E	U600800

3-Hole "U" Support

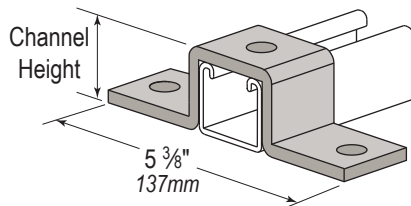


SPECIFYING Brand & Part No.	Channel Height	DISCONTINUED Brands & Part No.	
WESANCO		VERSABAR	FLORIDA STRUT
W5315	1 3/16" (21mm)	VF64024	U10
W5318	1" (25mm)	VF640210	--
W5313	1-3/8" (35mm)	VF64026	--
W5320	2-1/2" (64mm)	VF64023	--
W5311	2-7/16" (62mm)	--	U12
W5316	3-1/4" (62mm)	VF6317	U13
W5314	4-7/8" (124mm)	VF6319	U14
W5321	5" (127mm)	--	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

5-Hole "U" Support for 1-5/8" Channel

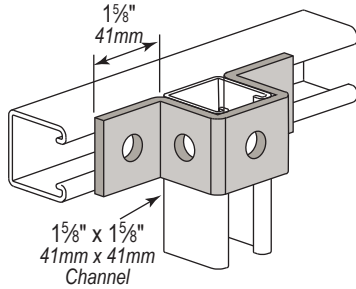


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5312	VF6402	U11

6-Hole U-Fitting for 1-5/8" Double Channel

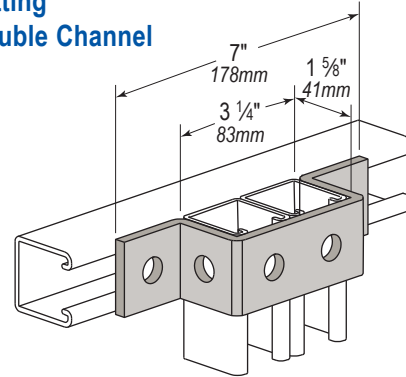


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5317	VF6401	U16

4-Hole Strap for 2-1/2" Channel

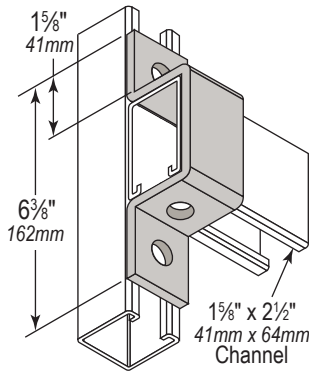


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5322	VF64023U	--

1-Hole U-Fitting 2 Slot for 13/16" Channel

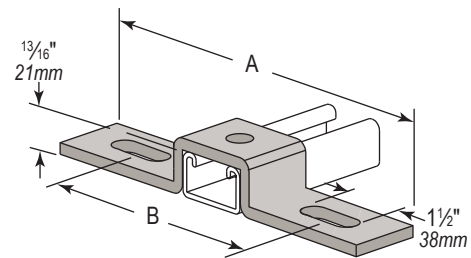

SPECIFYING Brand & Part No.	A	B	DISCONTINUED Brands & Part No.	
 WESANCO			VERSABAR	FLORIDA STRUT
W5305	8-1/2" (216mm)	5-3/8" (136mm)	VF63034	--

1-Hole U-Fitting 2 Slot for 1-5/8" Channel

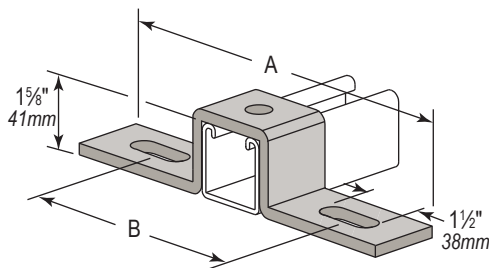

SPECIFYING Brand & Part No.	A	B	DISCONTINUED Brands & Part No.	
 WESANCO			VERSABAR	FLORIDA STRUT
W5307	7-1/4" (184mm)	4-1/8" (105mm)	VF6302	U20
W5308	8-1/2" (216mm)	5-3/8" (136mm)	VF6303	U21
W5310	10-3/8" (264mm)	7-1/4" (184mm)	VF6304	U22

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




"U" Shape Fittings



Standard Finish: Electro Galvanized (EG)


5-Hole Connector For Double Diagonal Brace

For 1-5/8" x 1-5/8" channel.

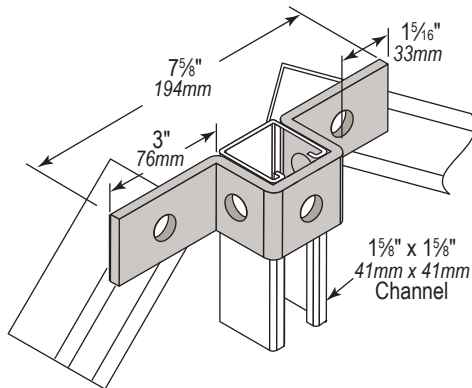


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5330	VF6403	--

8-Hole U-Fitting for 1-5/8" Channel

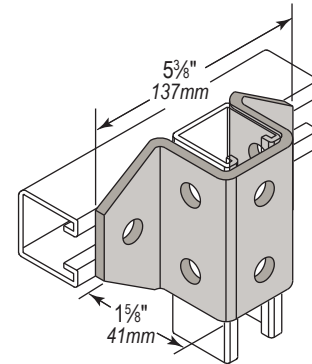


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5319	VF6618	U15

12-Hole U-Fitting for 3-1/4" Channel

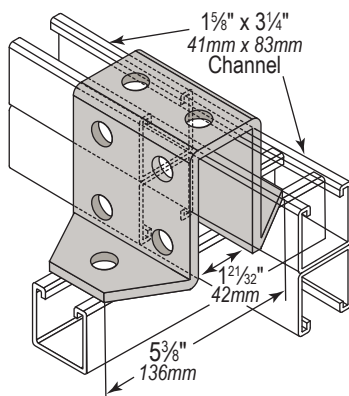

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5323	VF6619	--

6-Hole U-Fitting for 3-1/4" Channel

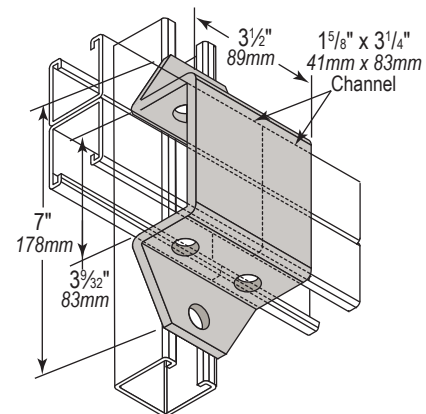


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5329	VF6802	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

4-Hole "C" Fitting 3-1/4" Inside



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5301	VF5401	--

Swing Clevis




Side Holes are 7/16" 11mm Dia.
Base Hole is 9/16" 14mm Dia.

Includes 3/8"-16 x 2-1/4" HHCS
and 3/8" Dia. Hex Nut

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5350	VX1099	--


Swing Clevis Adapter

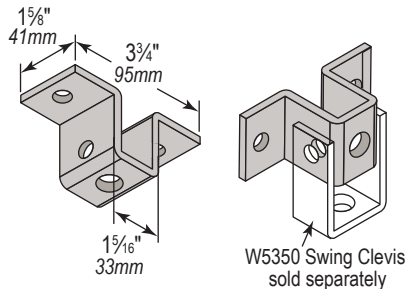

Side Holes are 7/16" (11mm) Dia.
Base Hole is 9/16" (14mm) Dia.


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5351	VX6402OH	--

4-Hole U-Fitting Splice for 2-1/2" Channel

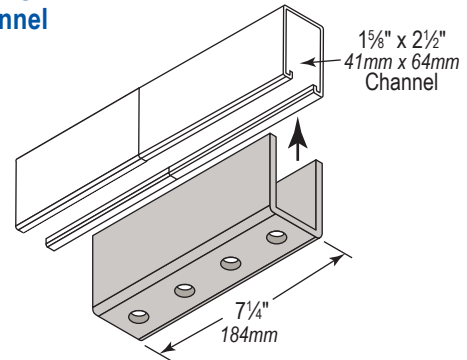


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5340	VF54023	--

4-Hole U-Fitting Splice for 2-7/16" Channel

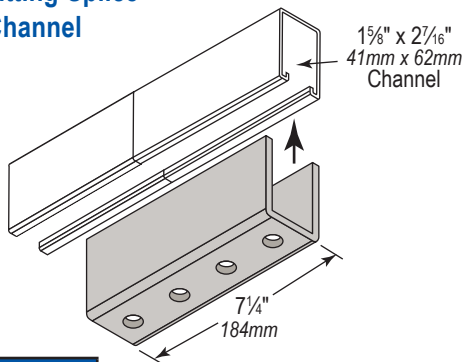

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5349	--	--

4-Hole U-Fitting Splice for 3-1/4" Channel

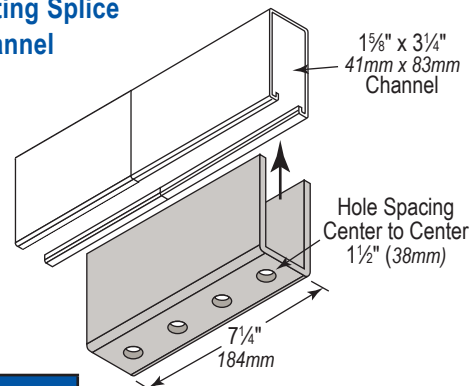

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5348	VF540211	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1-3/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




"U" Shape Fittings




Standard Finish: Electro Galvanized (EG)

2-Hole Splice for $1\frac{3}{16}$ " Channel




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5342	VF52044	--

2-Hole U-Fitting Splice for $1\frac{5}{8}$ " Channel

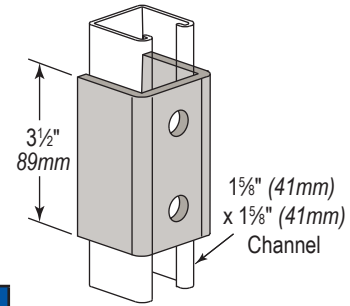


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5344	VF5204	U30

3-Hole Splice for $1\frac{3}{16}$ " Channel




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5343	VF53044	--

3-Hole U-Fitting Splice for $1\frac{5}{8}$ " Channel

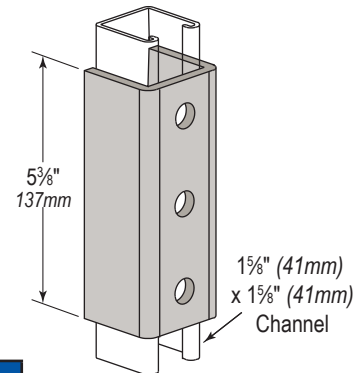


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5346	VF5304	U31

4-Hole Splice for $1\frac{3}{16}$ " Channel

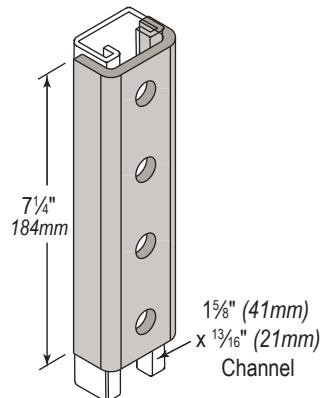

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5347	VF54024	U33

4-Hole U-Fitting Splice for $1\frac{5}{8}$ " Channel

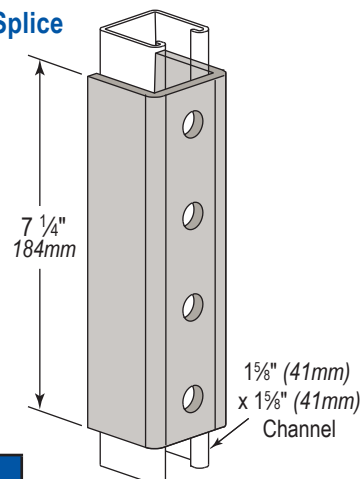


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5345	VF5402	U32

Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $1\frac{3}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)




3-Hole Wing Fitting Single Corner, Left or Right Hand

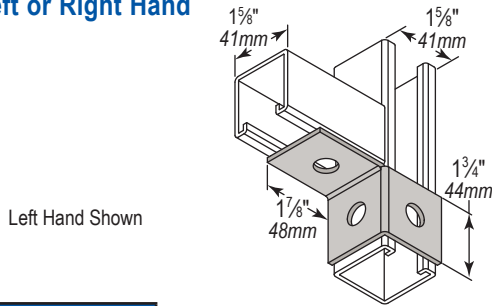


SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W5511	Left Hand	VF2216L	W11
W5510	Right Hand	VF2216R	W10

6-Hole, 1-Way Extended Wing, Left or Right Hand

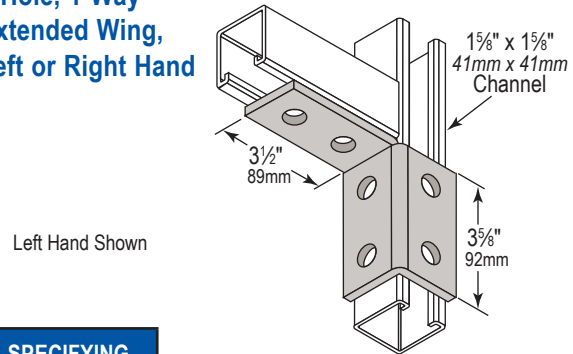


SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W5146	Left Hand	VF2419L	--
W5147	Right Hand	VF2419R	--

5-Hole Wing Fitting Corner Connector Opposed

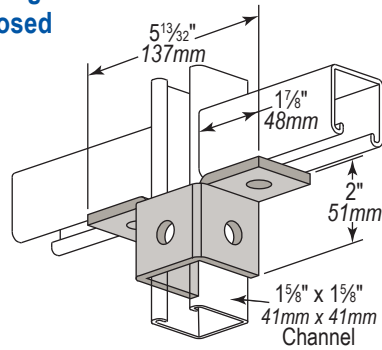


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5513	VF2504	W30

4-Hole Wing Fitting Double Corner

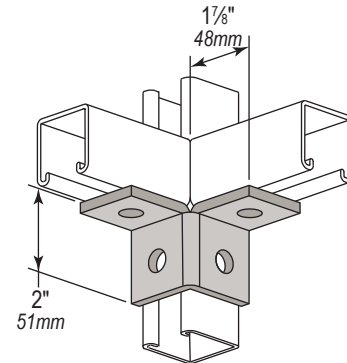


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5512	VF3405	W20

8-Hole Wing Fitting Corner Connector Opposed

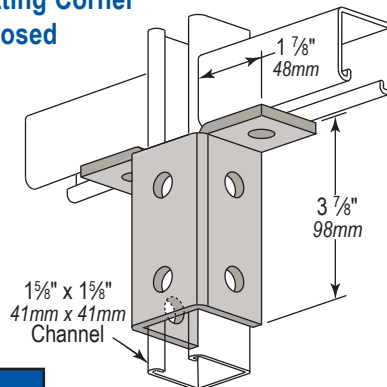

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5519	VF6801	W31

6-Hole Wing Fitting Double Corner

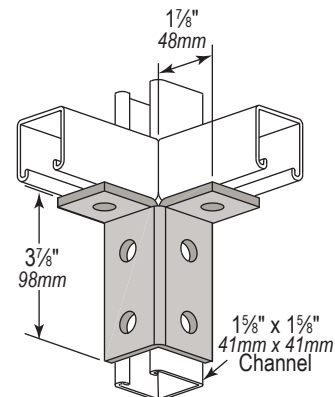


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5518	VF3601	W21

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

6-Hole Wing Fitting Triple Corner

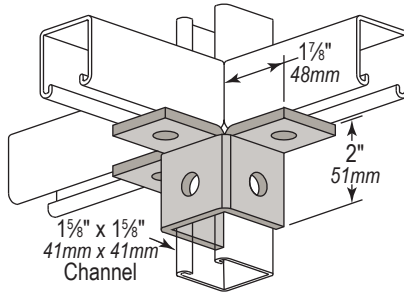


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5514	VF3602	W40

10-Hole Base Wing Fitting

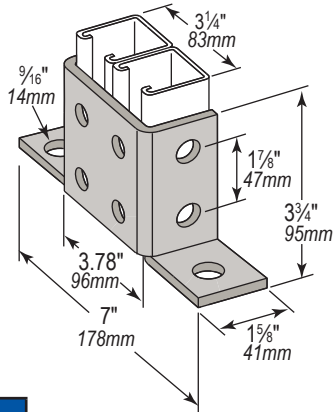


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5524	--	--

9-Hole Wing Fitting Triple Corner

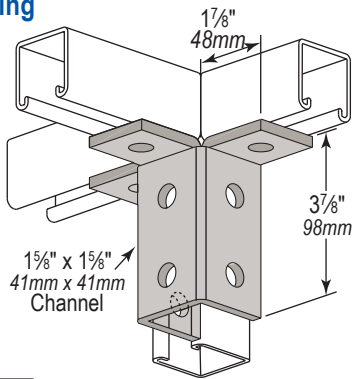


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5517	VF3901	W41

10-Hole Wing Fitting Corner Connector Opposed

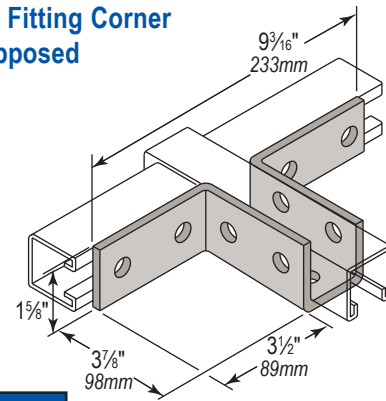


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5523	VF61002	W32

8-Hole Wing Fitting Double Corner

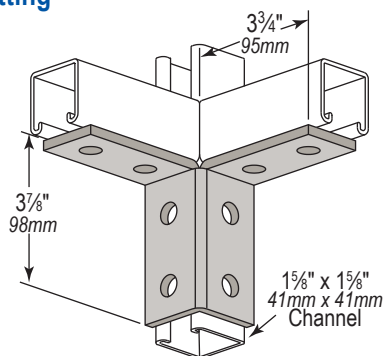

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5515	VF3802	W22

12-Hole Wing Fitting Triple Corner

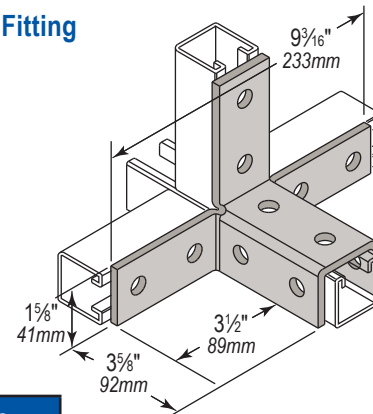


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5522	VF31201	W42

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




1-Way Extended Gusset Wing, Left or Right Hand

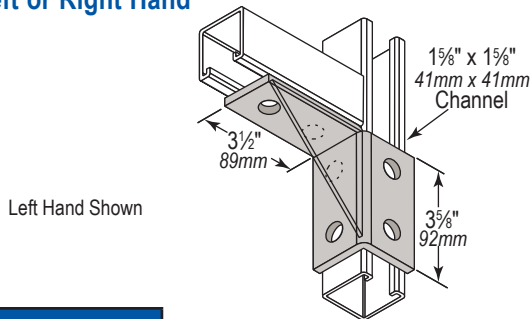


SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W5148	Left Hand	VF2420L	--
W5149	Right Hand	VF2420R	--

8-Hole Wing Fitting Double Corner Gusset

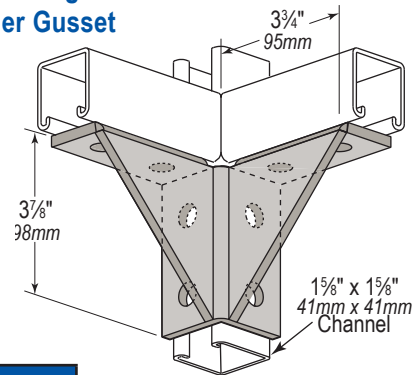


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5516	VF3803	W23

10-Hole Wing Fitting Corner Connector Opposed Double Gusset

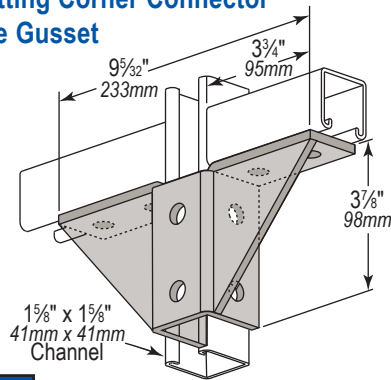


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5520	VF210010	W33

8-Hole Wing Fitting Double Corner Double Gusset

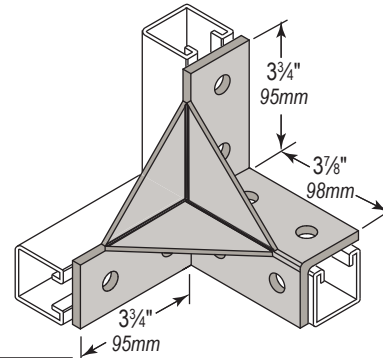


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5531	--	W24

12-Hole Wing Fitting Triple Corner Gusset

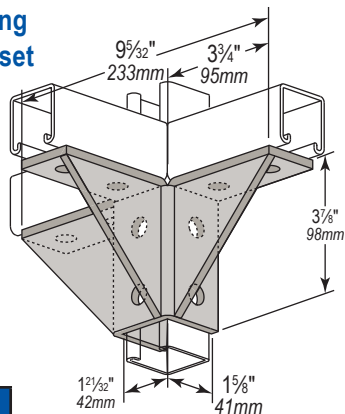

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5521	VF31202	W43

6-Hole Wing Fitting Single Corner Gusset, Left or Right Hand

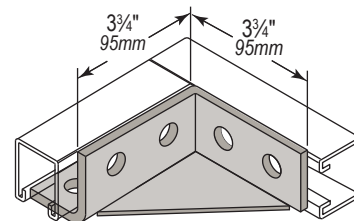


SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W5524L	Left Hand	--	W15
W5524R	Right Hand	--	W14

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

8-Hole Double Corner Gussetted Connector

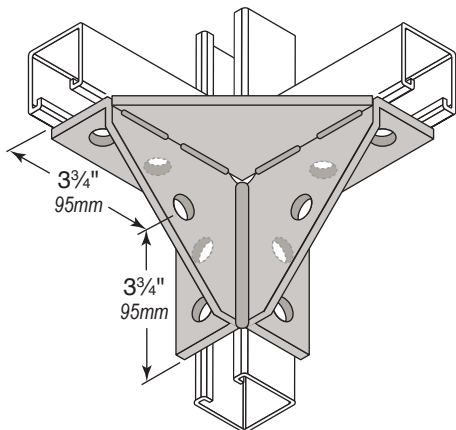


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5525	VF3807	--

Rectangular Plate 8-Hole Post Base Single Channel Tall Clevis

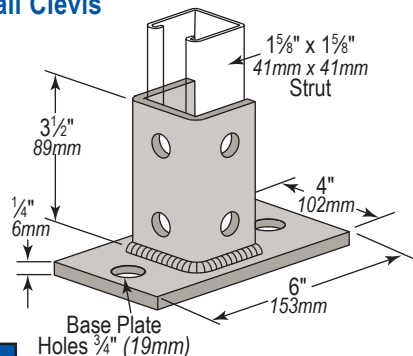


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5810	--	P10

Rectangular Plate 8-Hole Post Base Single Channel Tall Clevis

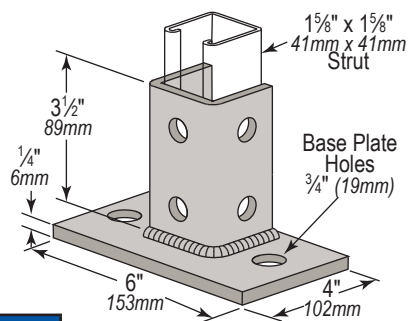


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5810FL	--	P11

Rectangular Plate 5-Hole Post Base Flush Single Channel



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5813FL	VF9601AFL	--

Rectangular Plate 8-Hole Post Base Flush Single Channel

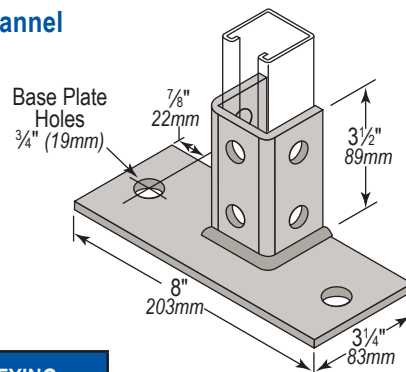


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5814FL	VF9601FL	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

Double Channel Stand/Wall Flush 6-Hole Post Base

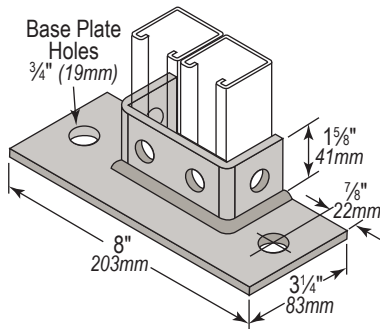


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5815FL	VF9602AFL	--

Double Channel Stand/Wall Flush 10-Hole Post Base

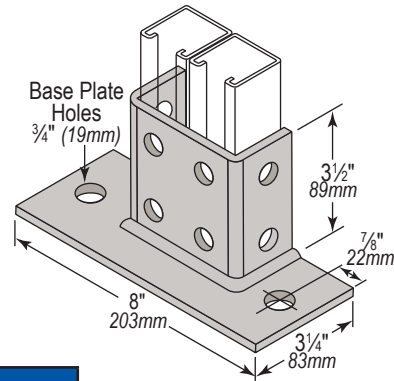


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5816FL	VF9602FL	--

Post Base Single Channel 7-Hole Standard

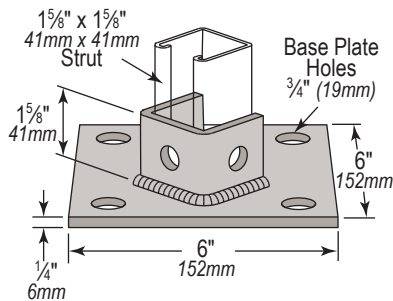


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5813	VF9601A	P12

Post Base Double Channel 7-Hole Square

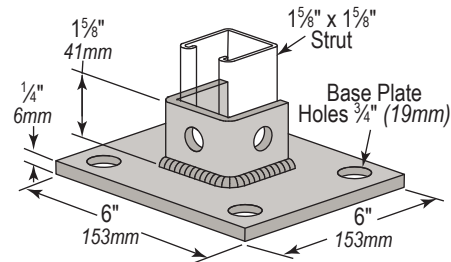


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5813SQ	VF9601ASQ	P22

Post Base Single Channel 10-Hole Standard

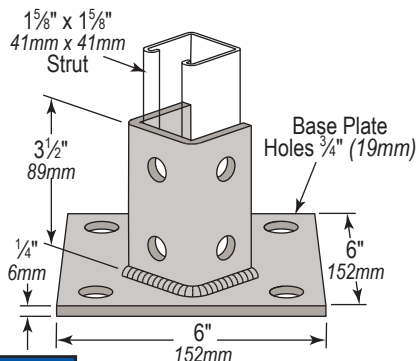

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5814	VF9601	P13

Post Base Double Channel 10-Hole Standard

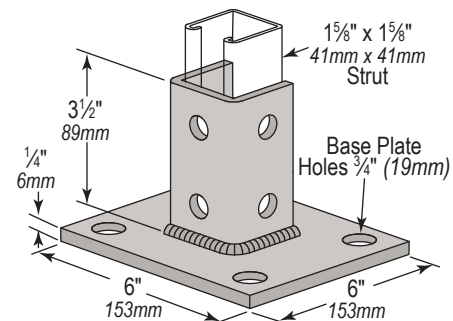


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5814SQ	VF9601SQ	P14

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Electro Galvanized (EG)

Post Base Double Channel 8-Hole Standard

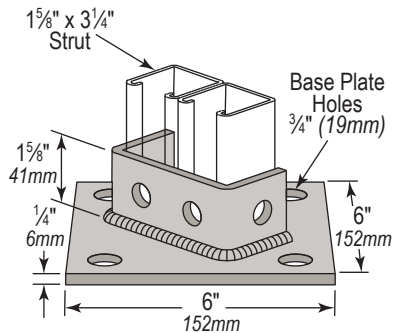


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5815	VF9602A	P18

Post Base Double Channel 8-Hole Standard

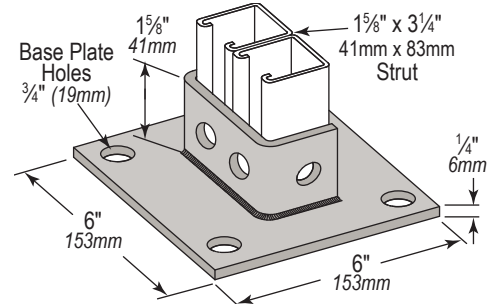


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5815SQ	VF9602ASQ	--

Post Base Double Channel 12-Hole Standard

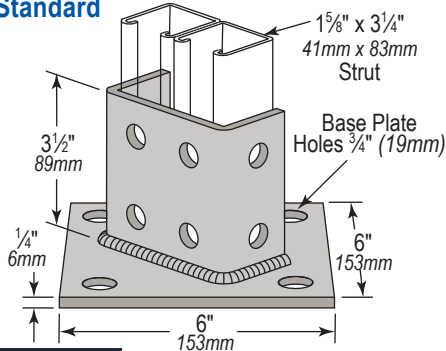


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5816	VF9602	P19

Post Base Double Channel 12-Hole Square

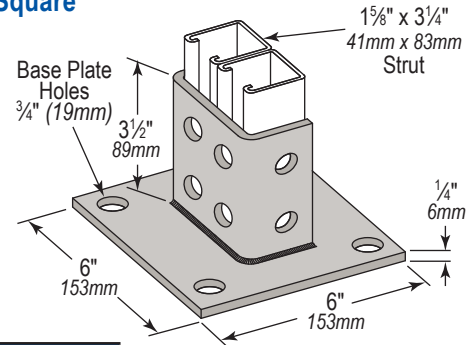

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5816SQ	VF9602SQ	P20

Post Base Double Channel 14-Hole Square 3-1/2" Boxed

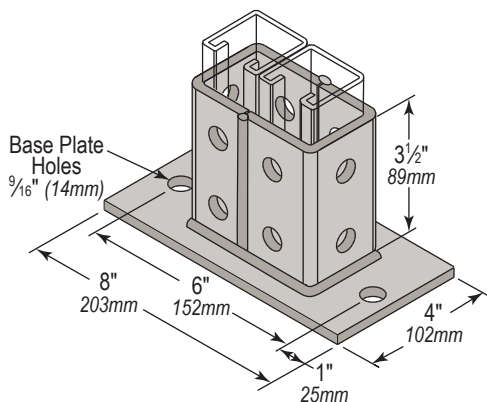


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W5817	--	P17

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Post Base Quad-Channel 20-Hole Square

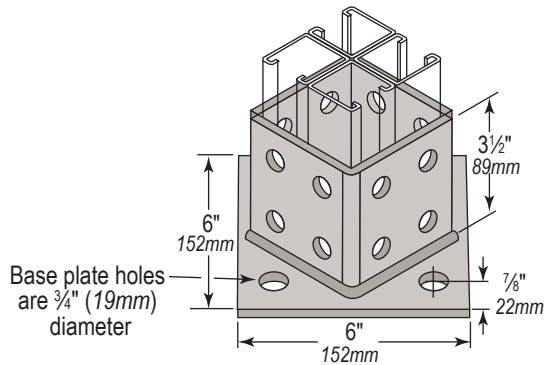


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5821	VF9605	---

Rectangular Plate 6 Hole Post Base Double Channel Short Clevis

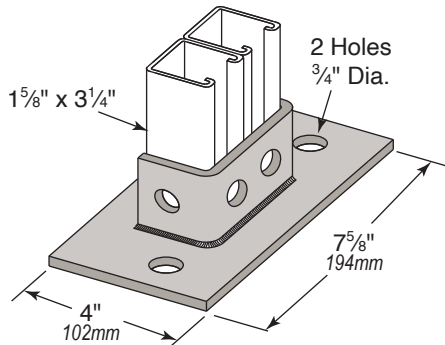


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5812	---	---

Post Base Single Channel Gusset 8-Hole Square

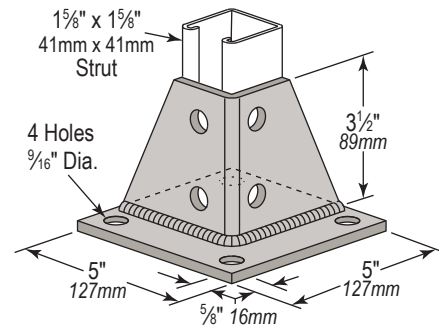

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5811	VF7803	P15

Post Base Double Channel 5-Hole

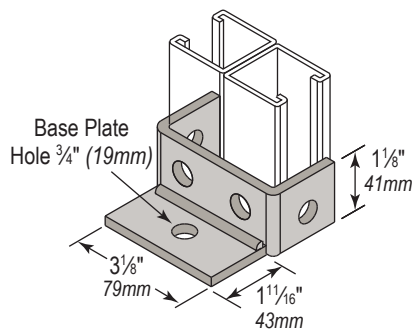

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5818	VF9311	P16


Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)



Standard Finish: Electro Galvanized (EG)

U-Fitting Trolley Support 3 Hole Standard


Permits suspension of 1-5/8" square channel and free passage of trolley unit.



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6604	VF7101	U40


U-Fitting Trolley Support 3 Hole Heavy Duty

Permits suspension and splicing of 1-5/8" square channel and free passage of trolley unit.

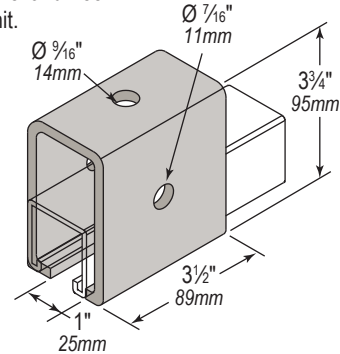


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6603	VF7101A	U41

Two Types of Trolley Support [Wheel w/Support in Strut Bend & Full Wheel]



Wheel w/Support in Strut Bend
The wider portion of the wheel sets on the inturned edge of the Strut
Just like the Full Wheel
The narrow portion of the wheel sets in the space provided by the inturned edge.



- Tolerance on the face of the wheel
- Tolerance on the Inturned edge
- Less weight allowed on the trolley since the trolley within inturned edge does not carry a load



FULL Wheel sets on the inturned edge of the Strut

- Single tolerance on the face of the wheel
- Greater weight allowed on the trolley with the single edge on wheel



Two Wheel Trolley [Wheel w/Support]

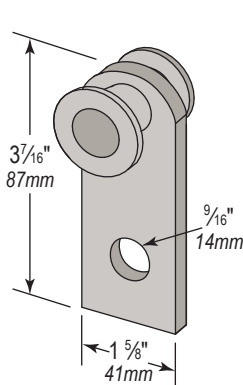

Allowable load
300lbs (2.00 kN) max.

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6606	--	--

Four Wheel Trolley [Wheel w/Support]

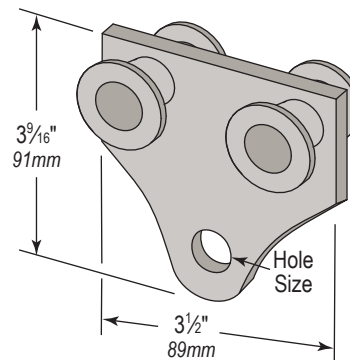

Allowable Load
600lbs (2.67 kN) max.



SPECIFYING Brand & Part No.	Hole Size	DISCONTINUED Brands & Part No.	
WESANCO		VERSABAR	FLORIDA STRUT
W6601	1-1/8" (29mm)	--	--
W6605	9/16" (14mm)	--	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)



Standard Finish: Electro Galvanized (EG)



Two Wheel Trolley [Full Wheel]

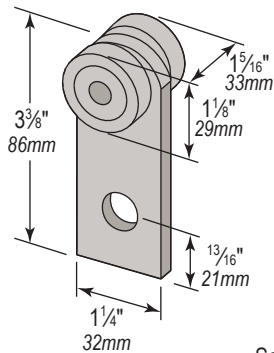

Safe load rating for steel bearing Trolley
 437 lbs. (1.94 kN) @ 100 rpm
 225 lbs. (1.00 kN) @ 300 rpm
 150 lbs. (0.67 kN) @ 600 rpm

SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6602	All Steel Components	VX7026	R10
W6602N	Steel Trolley, Nylon Plain Bearings	VX7026N	--
W6602NSS	Stainless Steel Trolley, Nylon Plain Bearings	VX7026NSS	--
All Trolleys have carbon steel axles			



Four Wheel Trolley [Full Wheel]

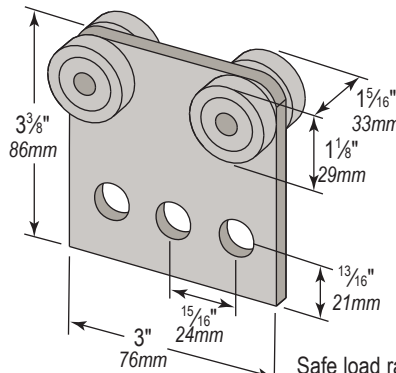

Safe load rating for steel bearing Trolley
 600 lbs. (2.67 kN) @ 100 rpm
 450 lbs. (2.00 kN) @ 300 rpm
 300 lbs. (1.33 kN) @ 600 rpm

SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6600	All Steel Components	VX7027	R11
W6600N	Steel Trolley, Nylon Plain Bearings	VX7027N	--
W6600NSS	Stainless Steel Trolley, Nylon Plain Bearings	VX7027NSS	--
All Trolleys have carbon steel axles			




Four Wheel Trolley [Full Wheel]

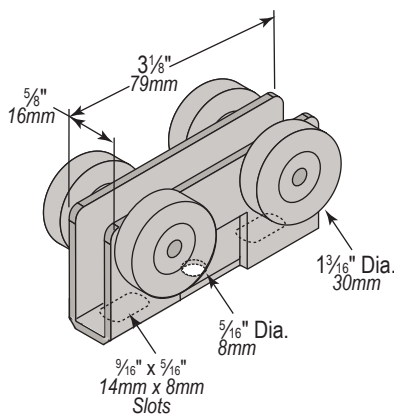

Safe load rating for
 Steel bearing Trolley - 100 lbs. (0.44 kN)
 Nylon bearing Trolley - 20 lbs. (0.09 kN)

SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6607	All Steel Components	VX7029	--
W6607N	Steel Trolley, Nylon Plain Bearings	VX7029N	--

Four Wheel Trolley [Full Wheel] with Swivel Loop

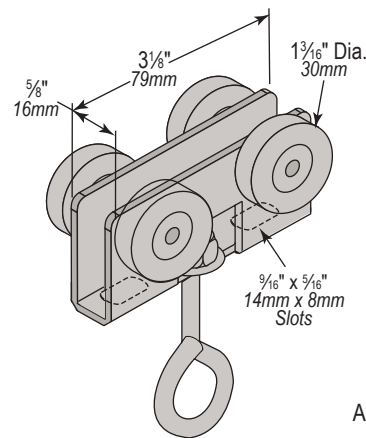

Safe load rating for
 Steel bearing Trolley - 100 lbs. (0.44 kN)
 Nylon bearing Trolley - 20 lbs. (0.09 kN)

SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6610	All Steel Components	VX7028	--
W6610N	Steel Trolley, Nylon Plain Bearings	VX7028N	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Brackets




Channel Brackets

Pages 110 - 112



Shelf Brackets


Pages 113 - 116

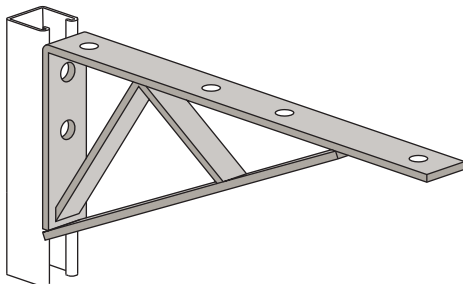

Fittings Specifications		
Material	ASTM	Description
Hot Rolled Plate	A 575, A 1011, A 1018, A 576, A638	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting: Steel	A 366, A 36	Steel carbon, cold rolled sheet, commercial quality structural steel.
Strip Steel: Pipe Clamps	A 569	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Stainless Steel	A 240 TYPE 304	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	
Aluminum	B 221	Aluminum alloy extruded bar, rod, wire, shape and tube.


Support Brackets

Page 117




Reel Supports

Page 118



Utility Brackets

Pages 119 - 124

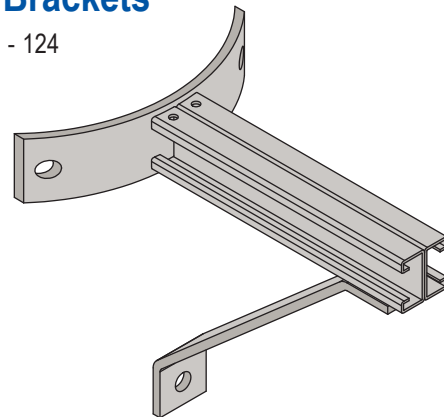


Fitting Finish Specifications	
Finish	Description
Paint-Green Powder Coating	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Electroplated	Fittings and hardware supplied as "Electro-Galvanized" in accordance with ASTM B 633.
Mill-Galvanized (Pre-Galvanized)	Galvanized steel used in the manufacture of channel sections conforms to ASTM A 653 GR33 G90. Uncoated edges resulted from slitting, punching and channel cut off are present.
Hot Dip Galvanized After Fabrication	Channel and fittings which are hot dip galvanized after fabrication conform to one of the following specifications. ASTM A 123, ASTM A153, or ASTM A386.
Special Coatings	Other commercially available finishes can be supplied per specification when required to protect applications.

See page 23 for Material or Finish ordering codes for part numbers.

1-Hole Wrap Around Channel Bracket, Slot Up

SPECIFYING Brand & Part No.	A	Design Uniform Load Lbs. (kN)		DISCONTINUED Brands & Part No.	
		1-5/8" - 12 Gauge Channel	1-5/8" - 14 Gauge Channel	VERSABAR	FLORIDA STRUT
W5641	6" (152mm)	1,600 (7.12 kN)	1,200 (5.34 kN)	VB1060	W5641
W5642	12" (305mm)	800 (3.56 kN)	600 (2.67 kN)	VB1120	W5642


Design Uniform Load when attached to listed upright column.
Do not install in inverted position.
Safety Factor: 2-1/2

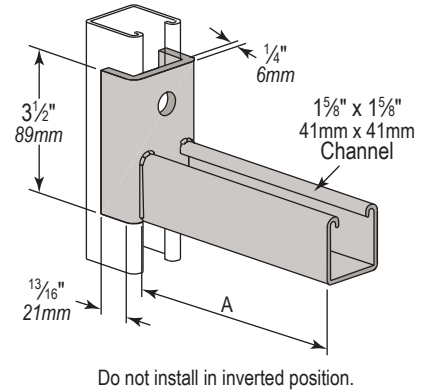

1-Hole Wrap Around Channel Bracket, Slot Down

SPECIFYING Brand & Part No.	A	Design Uniform Load Lbs. (kN)		DISCONTINUED Brands & Part No.	
		1-5/8" - 12 Gauge Channel	1-5/8" - 14 Gauge Channel	VERSABAR	FLORIDA STRUT
W5645	6" (152mm)	1,600 (7.12 kN)	1,200 (5.34 kN)	VB1060D	W5645
W5646	12" (305mm)	800 (3.56 kN)	600 (2.67 kN)	VB1120D	W5646

Design Uniform Load when attached to listed upright column.
Safety Factor: 2-1/2

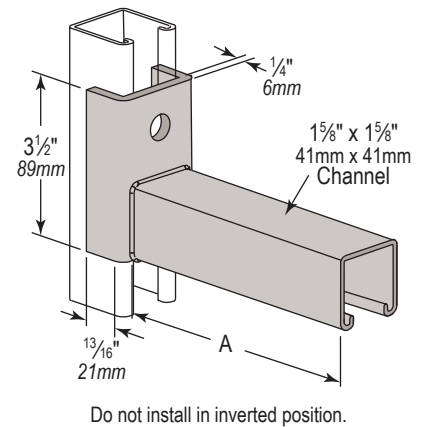


2-Hole Wrap Around Channel Bracket, Use Slot Up or Slot Down

Illustrated With Channel Up Bracket Arms are 1-5/8" Channel

SPECIFYING Brand & Part No.	A	Design Uniform Load Lbs. (kN) Used With 1-5/8" - 12 Gauge Channel	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
W5647	18" (457mm)	500 (2.22 kN)	VB1180	BR411800
W5648	24" (610mm)	350 (1.56 kN)	VB1240	BR412400

Design Uniform Load when attached to listed upright column.

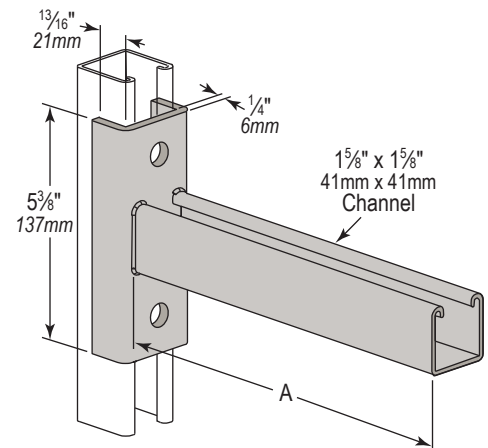

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)



Channel Brackets




Standard Finish: Electro Galvanized (EG)

Bracket Arms are 1-5/8" Channel

SPECIFYING Brand & Part No.	A	Design Uniform Load Lbs. (kN)	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W5631	6" (152mm)	1,250 (5.56 kN)	VB1060X	BR430600
W5632	12" (305mm)	750 (3.34 kN)	VB1120X	BR431200
W5633M	14" (305mm)	500 (2.22 kN)	--	--
W5633	18" (457mm)	500 (2.22 kN)	VB1180X	BR431800
W5634	24" (610mm)	350 (1.56 kN)	VB1240X	BR432400


Design Uniform Load when attached to listed upright column.

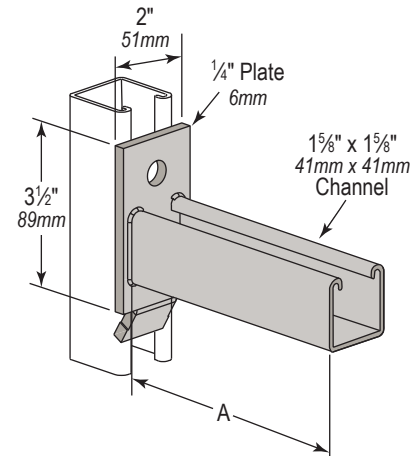

Bracket Arms are 1-5/8" Channel

SPECIFYING Brand & Part No.	A	Design Uniform Load Lbs. (kN)	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W5635	6" (152mm)	1,250 (5.56 kN)	VB1060XD	BR440600
W5636	12" (305mm)	750 (3.34 kN)	VB1120XD	BR441200
W5637	18" (457mm)	500 (2.22 kN)	VB1180XD	BR441800
W5638	24" (610mm)	350 (1.56 kN)	VB1240XD	BR442400


Design Uniform Load when attached to listed upright column.

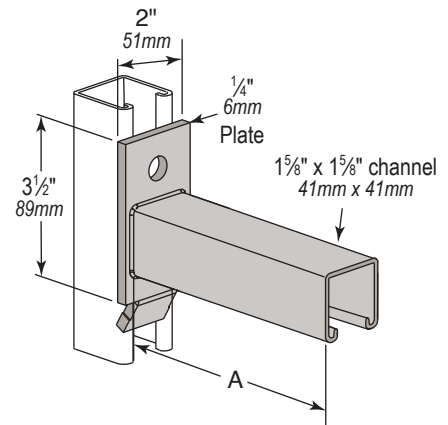

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




2-Hole, 1/4" Plate with 1-5/8" Channel Bracket Arms

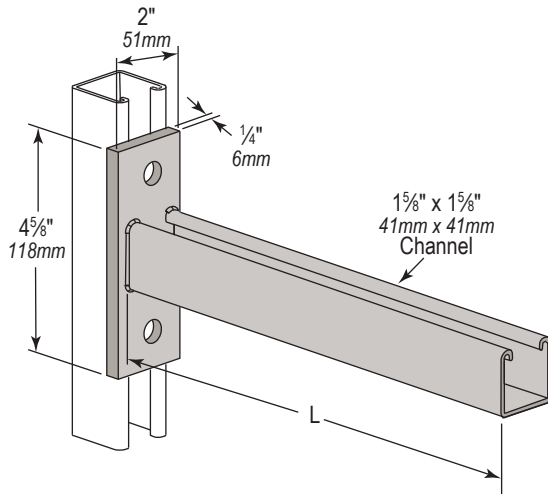

SPECIFYING Brand & Part No.	L	Design Uniform Load Lbs. (kN)	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W5661	6" (152mm)	1,250 (5.56 kN)	VB1060FP	BR400600
W5661M9	9" (229mm)	1,100 (4.45 kN)	--	BR400900
W5662	12" (305mm)	750 (3.34 kN)	VB1120FP	BR401200
W5663	18" (457mm)	500 (2.22 kN)	VB1180FP	BR401800
W5664	24" (610mm)	350 (1.56 kN)	VB1240FP	BR402400

Design Uniform Load when attached to listed upright column.

2-Hole, 3/8" Plate with Double 1-5/8" Channel Bracket Arms

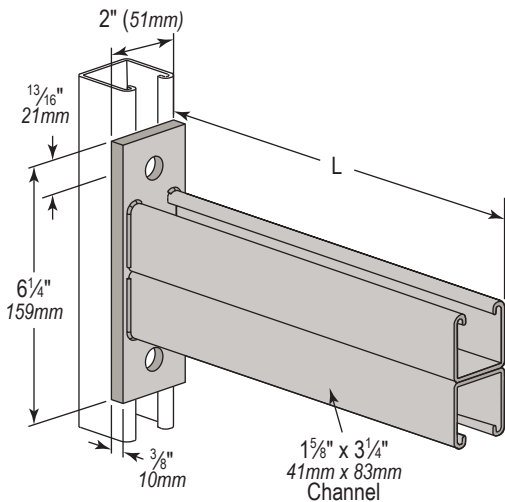


SPECIFYING Brand & Part No.	L	Design Uniform Load Lbs. (kN)	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W5652	12" (305mm)	1,800 (8.01 kN)	VB11120	BR421200
W5653	18" (457mm)	1,200 (5.34 kN)	VB11180	BR421800
W5654	24" (610mm)	1,000 (4.45 kN)	VB11240	BR422400
W5655	30" (762mm)	800 (3.56 kN)	VB11300	BR423000
W5656	36" (914mm)	660 (2.94 kN)	VB11360	BR423600

Design Uniform Load when attached to listed upright column.

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)



2-Hole Bracket Arms are 1" Channel

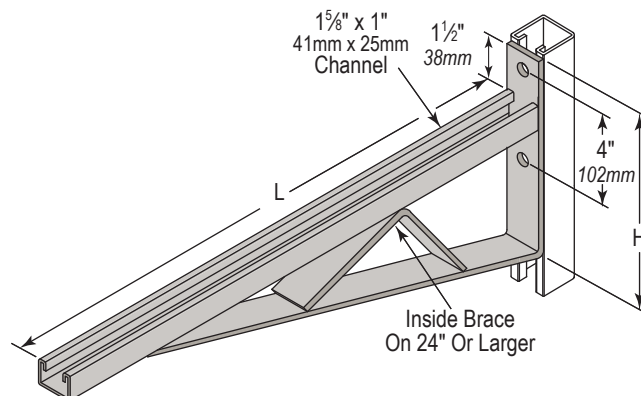

SPECIFYING Brand & Part No.	L	H	Design Uniform Load Lbs. (<i>kN</i>) 1- ⁵ / ₈ " x 1- ⁵ / ₈ " 12 Gauge Channel	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
 WESANCO					
W5682	12" (305mm)	8- ³ / ₄ " (222mm)	1,580 (7.02kN)	VB4120	BR451200
W5683	18" (475mm)	8- ³ / ₄ " (222mm)	1,000 (4.45kN)	VB4180	BR451800
W5684	24" (610mm)	8- ³ / ₄ " (222mm)	996 (4.43kN)	VB4240	BR452400
W5685	30" (762mm)	11- ¹ / ₄ " (286mm)	924 (4.11kN)	VB4300	BR453000
W5686	36" (914mm)	11- ¹ / ₄ " (286mm)	864 (3.84kN)	VB4360	BR453600
W5687	42" (1067mm)	16" (406mm)	580 (2.58kN)	VB4420	BR454200
W5688	48" (1219mm)	16" (406mm)	500 (2.22kN)	VB4480	BR454800

Design Uniform Load when attached to listed upright column.

Technical drawing of a 1/2 inch thick L-bracket. The vertical leg is 4 inches (102mm) high and 1 3/16 inch (30mm) wide. The horizontal leg is 6 1/8 inches (156mm) long and 1 5/8 inch (41mm) thick. The bracket is made of 5/16 inch (8mm) thick material. Dimensions are given in inches and millimeters.


SPECIFYING Brand & Part No.	L	Design Load Lbs. (kN) with 12 Ga. Strut	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
 WESANCO				
W5669	8-1/2" (216mm)	850 (3.78 kN)	VB4085	BR200850
W5671	10-1/2" (267mm)		VB4105	BR201050

Design Uniform Load when attached to listed upright column.

Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)




5-Hole Girder Style Bracket

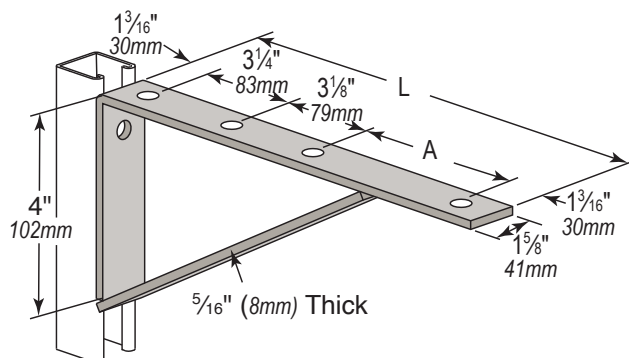

SPECIFYING Brand & Part No.	A	L	Design Load Lbs. (kN) with 12 Ga. Strut	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
W5673	3-3/4" (95mm)	12-1/2" (318mm)	900 (4.00 kN)	VB4125	BR211250
W5675	5-3/4" (146mm)	14-1/2" (369mm)		VB4145	BR211450

Design Uniform Load when attached to listed upright column.

6-Hole Bracket with Brace

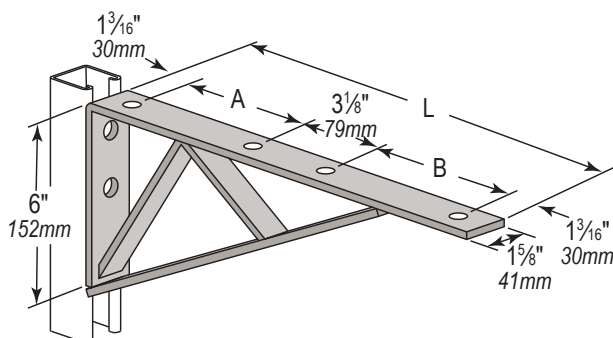

SPECIFYING Brand & Part No.	A	B	L	Design Load Lbs. (kN) with 12 Ga. Strut	DISCONTINUED Brands & Part No.	
					VERSABAR	FLORIDA STRUT
W5677	5-1/4" (133mm)	5-3/4" (146mm)	16-1/2" (419mm)	1,200 (5.34 kN)	VB4165	BR221650
W5678	5-1/4" (133mm)	7-3/4" (197mm)	18-1/2" (470mm)	1,100 (4.89 kN)	VB4185	BR221850
W5679	7-1/4" (184mm)	7-3/4" (197mm)	20-1/2" (521mm)	900 (4.00 kN)	VB4205	BR222050

Design Uniform Load when attached to listed upright column.

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Shelf Bracket



Standard Finish: Electro Galvanized (EG)


12-Hole Wide Girder Style Bracket

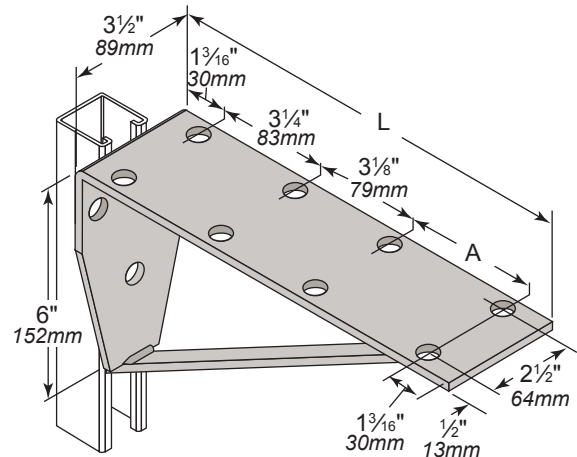

SPECIFYING Brand & Part No.	A	L	Design Load Lbs. (kN) with 12 Ga. Strut	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
W5673D	3- ³ / ₄ " (95mm)	12- ¹ / ₂ " (318mm)	900 (4.00 kN)	VB4125D	--
W5675D	5- ³ / ₄ " (146mm)	14- ¹ / ₂ " (369mm)		VB4145D	--

Design Uniform Load when attached to listed upright column.

Wide Bracket with Brace

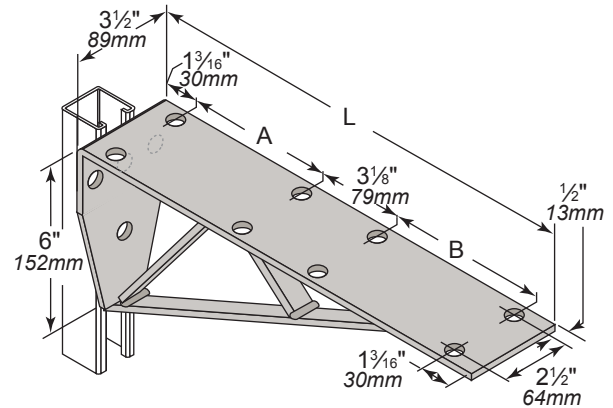

SPECIFYING Brand & Part No.	A	B	L	Design Load Lbs. (kN) with 12 Ga. Strut	DISCONTINUED Brands & Part No.	
					VERSABAR	FLORIDA STRUT
W5681	5- ¹ / ₄ " (133mm)	5- ³ / ₄ " (146mm)	16- ¹ / ₂ " (419mm)	1,200 (5.34 kN)	VB4165D	--
W5678D	5- ¹ / ₄ " (133mm)	7- ³ / ₄ " (197mm)	18- ¹ / ₂ " (470mm)	1,200 (5.34 kN)	VB4185D	--
W5679D	7- ¹ / ₄ " (184mm)	7- ³ / ₄ " (197mm)	20- ¹ / ₂ " (521mm)	1,200 (5.34 kN)	VB4205D	--




Design Uniform Load when attached to listed upright column.

Hole Diameter: ⁹/₁₆" (14mm); Hole Spacing - From End: ¹³/₁₆" (21mm); Hole Spacing - On Center: 1-⁷/₈" (48mm); Width: 1-⁵/₈" (41mm); Thickness: ¹/₄" (6mm)



Slotted Shelf Brackets

Brackets are 12ga steel, electro-galvanized.
Furnished with $\frac{3}{8}$ " x 1" (10mm x 25mm) slotted holes and $\frac{7}{32}$ " (7mm) round holes

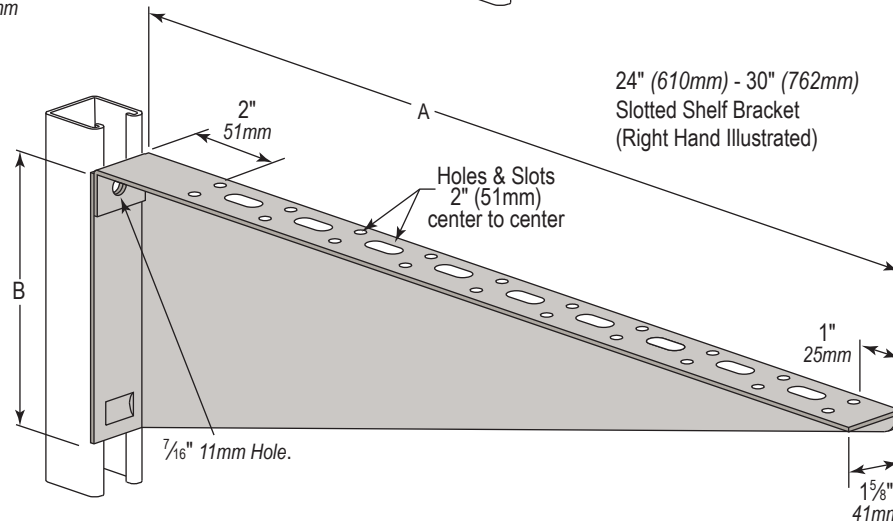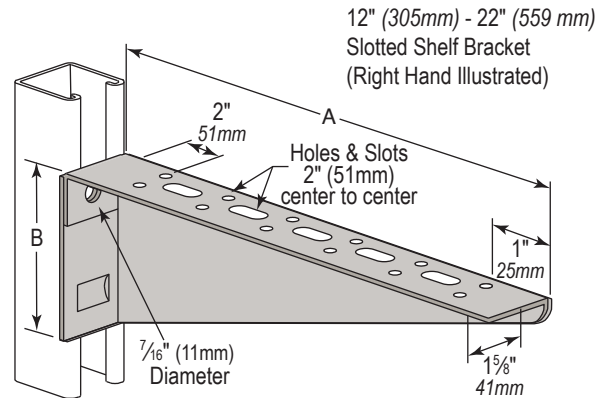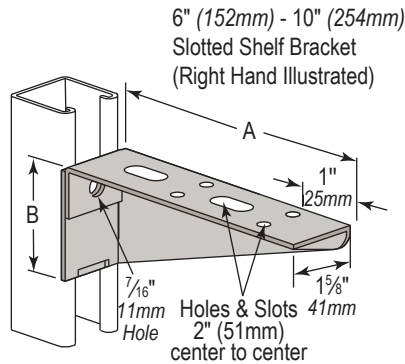

Left Hand			Right Hand			A	B	Design Uniform Load Lbs. (kN)	
SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.		SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.				1- ⁵ / ₈ " 12 Ga.	1- ⁵ / ₈ " 14 Ga.
 WESANCO	VERSABAR	FLORIDA STRUT	 WESANCO	VERSABAR	FLORIDA STRUT				
W5601	VB2106LSL	BR8L0600	W5602	VB2106RSL	BR8R0600	6" (152mm)	1- ¹⁵ / ₁₆ " (49mm)	300 (1.33 kN)	250 (1.11 kN)
W5603	VB2108LSL	BR8L0800	W5604	VB2108RSL	BR8R0800	8" (203mm)	2- ⁷ / ₁₆ " (62mm)		
W5605	VB2110LSL	BR8L1000	W5606	VB2110RSL	BR8R1000	10" (254mm)	2- ¹⁵ / ₁₆ " (75mm)		
W5607	VB2112LSL	BR8L1200	W5608	VB2112RSL	BR8R1200	12" (305mm)	3- ⁷ / ₁₆ " (87mm)	300 (1.33 kN)	250 (1.11 kN)
W5609	VB2114LSL	BR8L1400	W5610	VB2114RSL	BR8R1400	14" (356mm)	3- ¹⁵ / ₁₆ " (100mm)		
W5611	VB2116LSL	BR8L1600	W5612	VB2116RSL	BR8R1600	16" (406mm)	4- ⁷ / ₁₆ " (113mm)		
W5613	VB2118LSL	BR8L1800	W5614	VB2118RSL	BR8R1800	18" (457mm)	4- ¹⁵ / ₁₆ " (125mm)		
W5615	VB2120LSL	BR8L2000	W5616	VB2120RSL	BR8R2000	20" (508mm)	5- ⁷ / ₁₆ " (138mm)		
W5617	VB2122LSL	BR8L2200	W5618	VB2122RSL	BR8R2200	22" (559mm)	5- ¹⁵ / ₁₆ " (151mm)	300 (1.33 kN)	250 (1.11 kN)
W5619	VB2124LSL	BR8L2400	W5620	VB2124RSL	BR8R2400	24" (610mm)	6- ⁷ / ₁₆ " (164mm)		
W5621	VB2126LSL	BR8L2600	W5622	VB2126RSL	BR8R2600	26" (660mm)	6- ¹⁵ / ₁₆ " (176mm)		
W5623	VB2128LSL	BR8L2800	W5624	VB2128RSL	BR8R2800	28" (711mm)	7- ⁷ / ₁₆ " (189mm)		
W5625	VB2130LSL	BR8L3000	W5626	VB2130RSL	BR8R3000	30" (762mm)	7- ¹⁵ / ₁₆ " (202mm)		

Design Uniform Load when attached to listed upright column.

Safety Factor 2- $\frac{1}{2}$


Note: When brackets are used for mechanical supports, load capacities should conform to American Standard Code for Pressure Piping.

Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: 1- $\frac{7}{8}$ " (48mm); Width: 1- $\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)



Standard Finish: Electro Galvanized (EG)


Cantilever Support Bracket

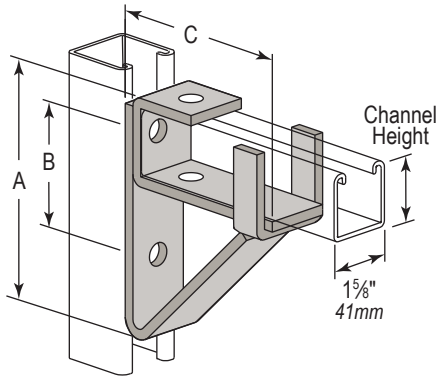

SPECIFYING Brand & Part No.	Channel Height	A	B	C	Design Load Lbs. (kN) with 12 Ga. Strut	DISCONTINUED Brands & Part No.	
						VERSABAR	FLORIDA STRUT
W5651	1-5/8" (41mm)	5-7/8" (149mm)	3" (76mm)	4-3/4" (121mm)	5,800 (655 kN)	VF7301	BR30
W5650	3-1/4" (83mm)	7-1/2" (191mm)	4-5/8" (118mm)		12,500 (1412 kN)	VF7301B	BR31

Max load applies to bracket only, not the strength of the strut arm.

Handrail Stand-Off Bracket

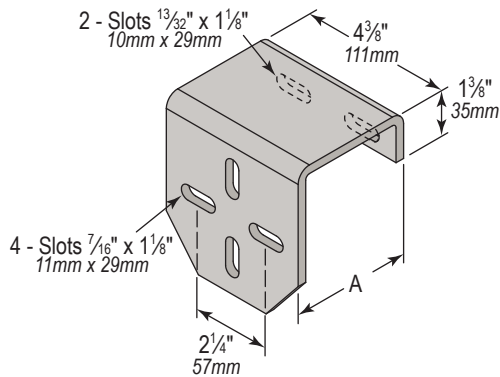


SPECIFYING Brand & Part No.	Channel Usage	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W1031	3-1/2" (89mm)	--	--
W1032	3" (76mm)	--	--
W1033	2" (51mm)	--	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)



Single Axle Cable Reel Support




Right Hand Shown

SPECIFYING Brand & Part No.	A	Axle	Description	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
W5639L	3" (76mm)	1-1/4" (32mm)	Left Hand	VF7207L	--
W5640L	3-5/8" (92mm)	2" (51mm)		VF7208L	--
W5639R	3" (76mm)	1-1/4" (32mm)	Right Hand	VF7207R	--
W5640R	3-5/8" (92mm)	2" (51mm)		VF7208R	--

Design Uniform Load when attached to listed upright column.

Double Axle Cable Reel Support

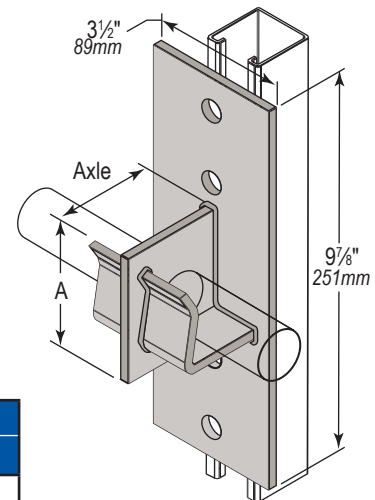

SPECIFYING Brand & Part No.	A	Axle	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W5643	3-1/4" (83mm)	2-5/8" (67mm)	VF7407	--
W5644	3-1/8" (79mm)	3-1/2" (89mm)	VF7408	--

Design Uniform Load when attached to listed upright column.

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Standard Finish: Hot Dip Galvanized (HG)

Low Profile Diamond Back with Horizontal Strut Riser.


Standard channel 4" square plate horizontally radiused (5-⁵/₁₆" nominal corner to corner).

Welded top and bottom at apex of radiused back plate.

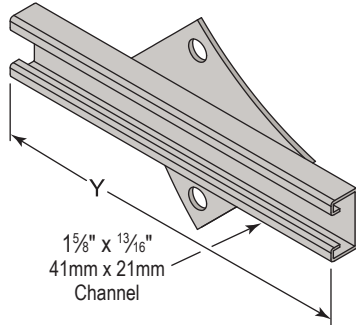


SPECIFYING Brand & Part No.	Y	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W10196	6" (152mm)	--	--
W10198	8" (203mm)	--	--
W101910	10" (254mm)	--	--
W101912	12" (305mm)	--	--
W101916	16" (406mm)	--	--
W101918	18" (457mm)	--	--
W101924	24" (610mm)	--	--

Diamond Back Extended Riser Bracket

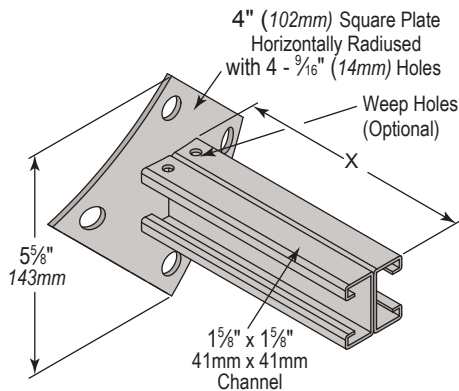

SPECIFYING Brand & Part No.	X	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W10106	6" (152mm)	--	--
W10108	8" (203mm)	--	--
W101010	10" (254mm)	--	--
W101012	12" (305mm)	--	--
W101015	15" (381mm)	--	--
W101016	16" (406mm)	--	--
W101018	18" (457mm)	--	--
W101024	24" (610mm)	--	--

Diamond Back Extended Riser Bracket

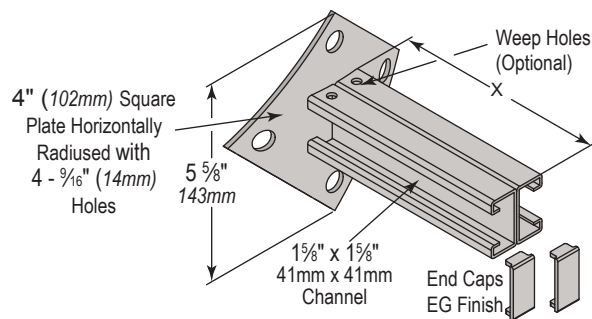


SPECIFYING Brand & Part No.	X	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W10116	6" (152mm)	--	--
W10118	8" (203mm)	--	--
W101110	10" (254mm)	--	--
W101112	12" (305mm)	--	--
W101116	16" (406mm)	--	--
W101118	18" (457mm)	--	--
W101124	24" (610mm)	--	--
W101130	30" (762mm)	--	--
W101136	36" (914mm)	--	--
W101140	40" (1,016mm)	--	--
W101148	48" (1,219mm)	--	--

Hole Diameter: ⁹/₁₆" (14mm); Hole Spacing - From End: ¹³/₁₆" (21mm); Hole Spacing - On Center: 1-⁷/₈" (48mm); Width: 1-⁵/₈" (41mm); Thickness: ¹/₄" (6mm)
Typical: Weep Holes top and bottom (optional), Appropriate (hot dipped galvanized) end caps available on any unit (optional)




Cross Back Extended Riser Bracket

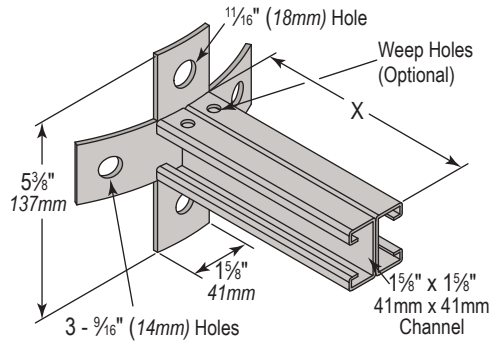


SPECIFYING Brand & Part No.	X	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W10156	6" (152mm)	--	--
W10158	8" (203mm)	--	--
W101510	10" (254mm)	--	--
W101512	12" (305mm)	--	--
W101516	16" (406mm)	--	--
W101518	18" (457mm)	--	--
W101520	20" (508mm)	--	--
W101524	24" (610mm)	--	--

Strap Back Extended Riser Bracket

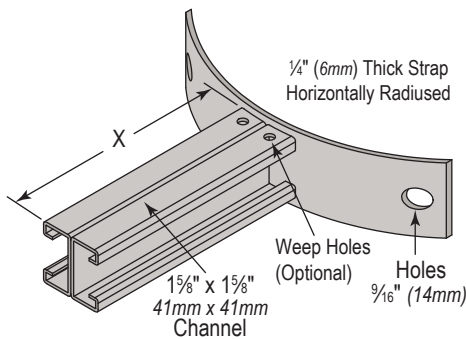

SPECIFYING Brand & Part No.	X	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W10126	6" (152mm)	--	--
W10128	8" (203mm)	--	--
W101210	10" (254mm)	--	--
W101212	12" (305mm)	--	--
W101216	16" (406mm)	--	--
W101218	18" (457mm)	--	--
W101224	24" (610mm)	--	--

Strap Back Extended Riser Bracket with Bottom Attached Brace.

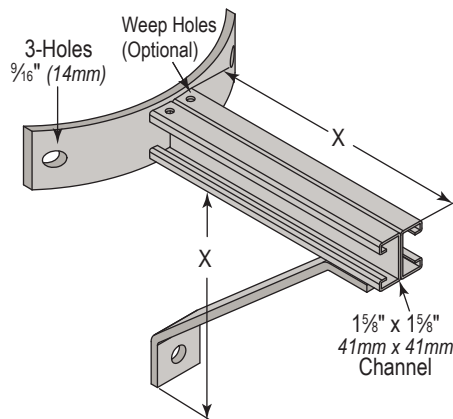


SPECIFYING Brand & Part No.	X	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W10136	6" (152mm)	--	--
W10138	8" (203mm)	--	--
W101310	10" (254mm)	--	--
W101312	12" (305mm)	--	--
W101316	16" (406mm)	--	--
W101318	18" (457mm)	--	--
W101324	24" (610mm)	--	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)
Typical: Weep Holes top and bottom (optional), Appropriate (hot dipped galvanized) end caps available on any unit (optional)




Standard Finish: Hot Dip Galvanized (HG)

Strap Back Extended Riser Bracket with End Wrap Brace

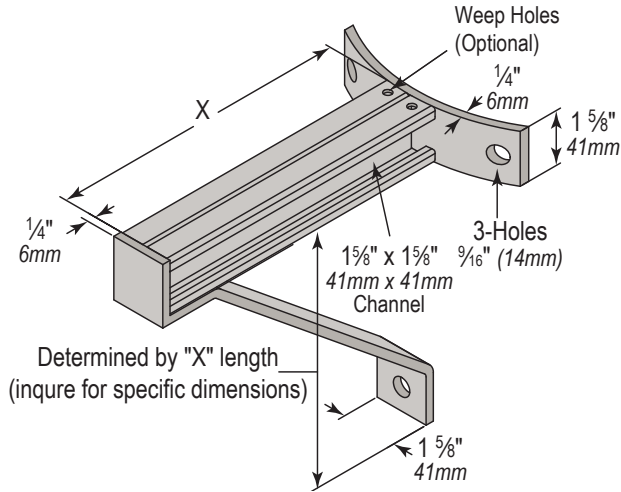

SPECIFYING Brand & Part No.	X	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W10166	6" (152mm)	--	--
W10168	8" (203mm)	--	--
W101610	10" (254mm)	--	--
W101612	12" (305mm)	--	--
W101616	16" (406mm)	--	--
W101618	18" (457mm)	--	--
W101624	24" (610mm)	--	--

Conduit Standoff Bracket

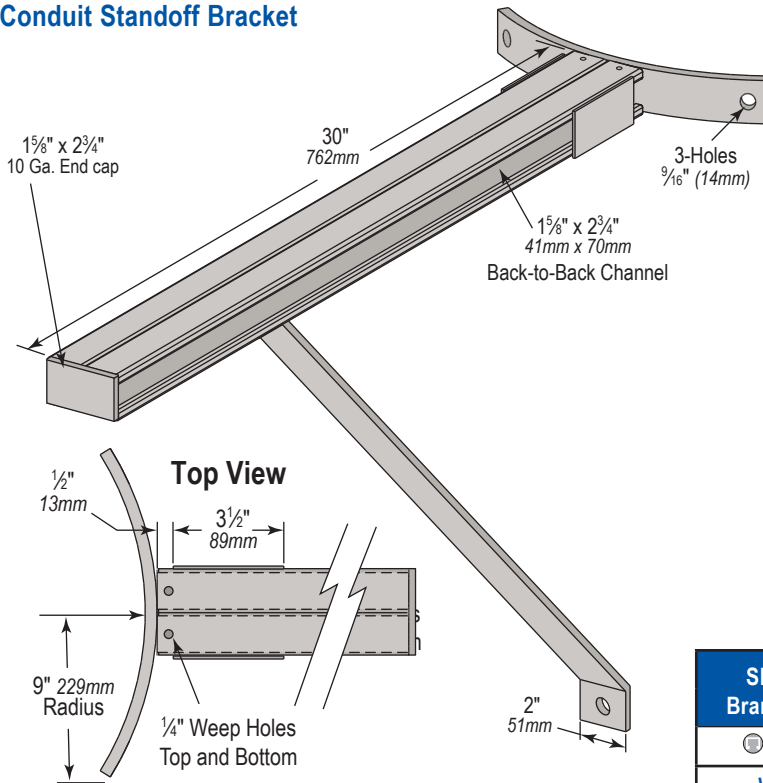


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WSF101668	--	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)
Typical: Weep Holes top and bottom (optional), Appropriate (hot dipped galvanized) end caps available on any unit (optional)




Bracket

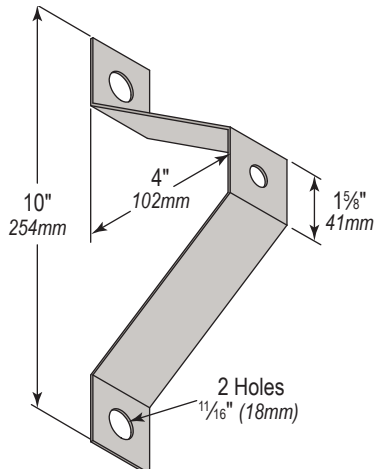


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W1017	--	--

Anti-Rotation Bracket

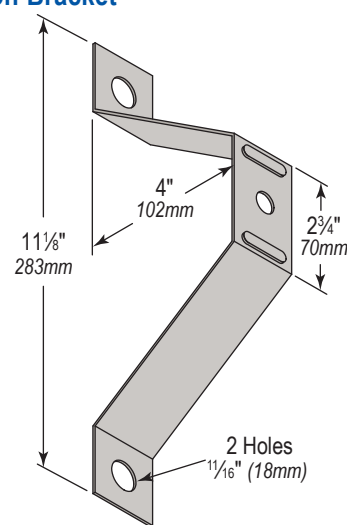


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W1017AR	--	--

Bracket Assembly

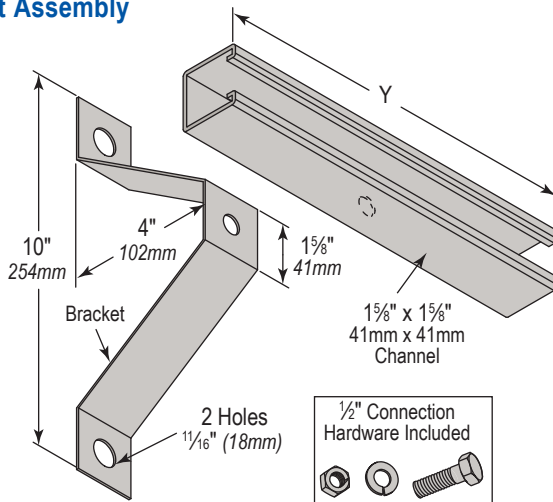

SPECIFYING Brand & Part No.	Y	DISCONTINUED Brands & Part No.	
 WESANCO		VERSABAR	FLORIDA STRUT
W1017A6	6" (152mm)	--	--
W1017A8	8" (203mm)	--	--
W1017A10	10" (254mm)	--	--
W1017A12	12" (305mm)	--	--
W1017A16	16" (406mm)	--	--
W1017A18	18" (457mm)	--	--
W1017A24	24" (610mm)	--	--

Anti-Rotation Bracket Assembly

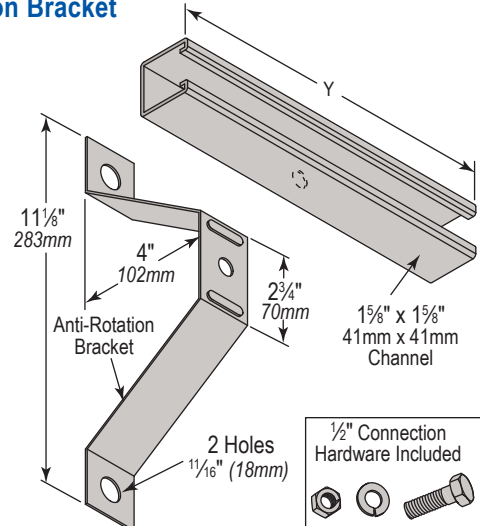


SPECIFYING Brand & Part No.	Y	DISCONTINUED Brands & Part No.	
 WESANCO		VERSABAR	FLORIDA STRUT
W1017ARA6	6" (152mm)	--	--
W1017ARA8	8" (203mm)	--	--
W1017ARA10	10" (254mm)	--	--
W1017ARA12	12" (305mm)	--	--
W1017ARA16	16" (406mm)	--	--
W1017ARA18	18" (457mm)	--	--
W1017ARA24	24" (610mm)	--	--

Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)
 Typical: Weep Holes top and bottom (optional), Appropriate (hot dipped galvanized) end caps available on any unit (optional)



Standard Finish: Hot Dip Galvanized (HG)


Large Bracket

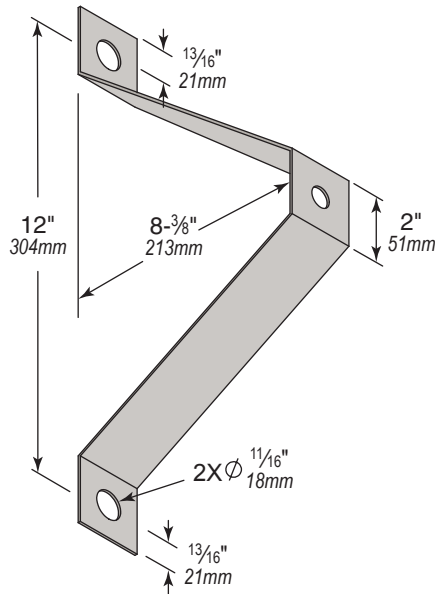

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W1017E	VF6114	--



Diamond Back Extended Riser Bracket with Horizontal Strut

Also available W1007 E-Y with (3) W6162-HG; each clamp with Everdur hardware

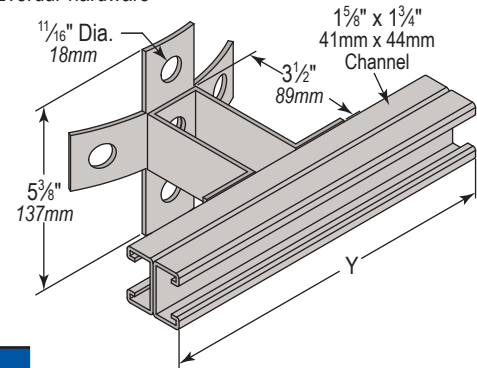

SPECIFYING Brand & Part No.	Y	DISCONTINUED Brands & Part No.	
WESANCO		VERSABAR	FLORIDA STRUT
W10076	6" (152mm)	--	--
W10078	8" (203mm)	--	--
W100710	10" (254mm)	--	--
W100712	12" (305mm)	--	--
W100716	16" (406mm)	--	--
W100718	18" (457mm)	--	--
W100724	24" (610mm)	--	--

Square Tube Stand Off

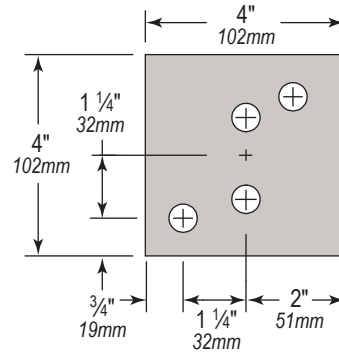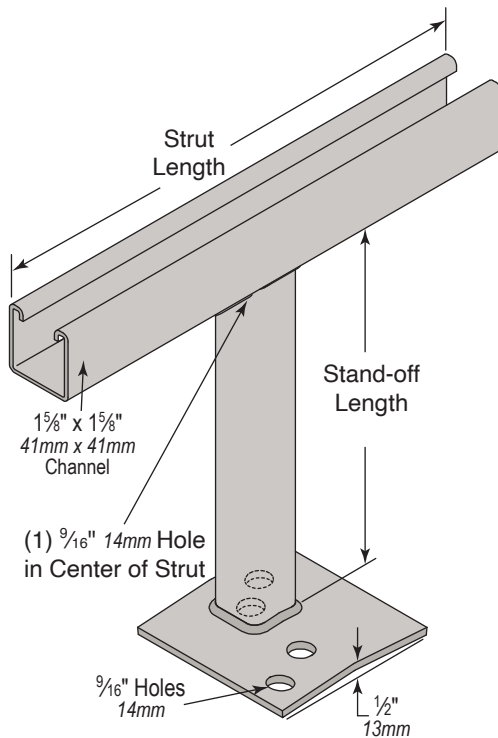


SPECIFYING Brand & Part No.	Stand-off Length	Strut Length	DISCONTINUED Brands & Part No.	
WESANCO			VERSABAR	FLORIDA STRUT
W102281/8	8 1/8" (206mm)	12" (305mm)	--	--
W102281/8M	8 1/8" (206mm)	16" (406mm)	--	--
W102210X12	10" (254mm)	12" (305mm)	--	--
W102210X16	10" (254mm)	16" (406mm)	--	--
W102212X12	12" (305mm)	12" (305mm)	--	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)
Typical: Weep Holes top and bottom (optional), Appropriate (hot dipped galvanized) end caps available on any unit (optional)



Extended Profile Diamond Back with Horizontal Riser Strut

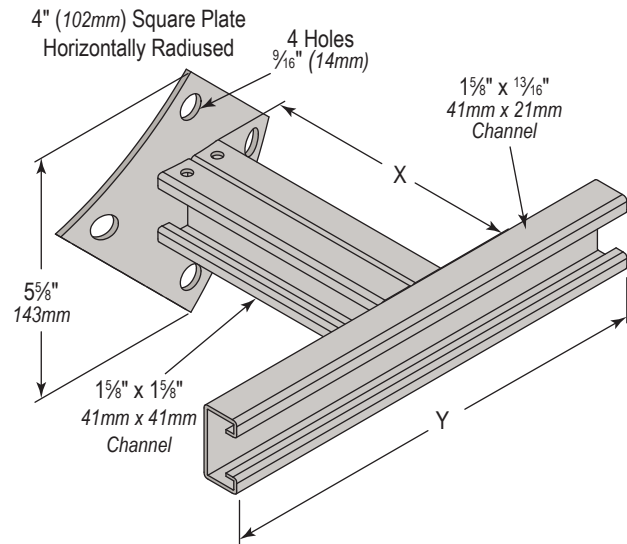

SPECIFYING Brand & Part No.	X	Y	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
 WESANCO				
W102166	6" (152mm)	6" (152mm)	--	--
W102168		8" (203mm)	--	--
W1021610		10" (254mm)	--	--
W1021612		12" (305mm)	--	--
W1021616		16" (406mm)	--	--
W1021618		18" (457mm)	--	--
W1021624		24" (610mm)	--	--
W102186	8" (203mm)	6" (152mm)	--	--
W102188		8" (203mm)	--	--
W1021810		10" (254mm)	--	--
W1021812		12" (305mm)	--	--
W1021816		16" (406mm)	--	--
W1021818		18" (457mm)	--	--
W1021824		24" (610mm)	--	--
W1021106	10" (254mm)	6" (152mm)	--	--
W1021108		8" (203mm)	--	--
W10211010		10" (254mm)	--	--
W10211012		12" (305mm)	--	--
W10211016		16" (406mm)	--	--
W10211018		18" (457mm)	--	--
W10211024		24" (610mm)	--	--
W1021126	12" (305mm)	6" (152mm)	--	--
W1021128		8" (203mm)	--	--
W10211210		10" (254mm)	--	--
W10211212		12" (305mm)	--	--
W10211216		16" (406mm)	--	--
W10211218		18" (457mm)	--	--
W10211224		24" (610mm)	--	--

SPECIFYING Brand & Part No.	X	Y	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
 WESANCO				
W1021166	16" (406mm)	6" (152mm)	--	--
W1021168		8" (203mm)	--	--
W10211610		10" (254mm)	--	--
W10211612		12" (305mm)	--	--
W10211616		16" (406mm)	--	--
W10211618		18" (457mm)	--	--
W10211624		24" (610mm)	--	--
W1021186	18" (457mm)	6" (152mm)	--	--
W1021188		8" (203mm)	--	--
W10211810		10" (254mm)	--	--
W10211812		12" (305mm)	--	--
W10211816		16" (406mm)	--	--
W10211818		18" (457mm)	--	--
W10211824		24" (610mm)	--	--
W1021246	24" (610mm)	6" (152mm)	--	--
W1021248		8" (203mm)	--	--
W10212410		10" (254mm)	--	--
W10212412		12" (305mm)	--	--
W10212416		16" (406mm)	--	--
W10212418		18" (457mm)	--	--
W10212424		24" (610mm)	--	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)
Typical: Weep Holes top and bottom (optional), Appropriate (hot dipped galvanized) end caps available on any unit (optional)




Beam Clamps




All Purpose Beam Clamps

Page 126




Formed Steel Beam Clamps

Page 127




Rod Suspension Beam Clamps

Pages 128 - 130




Universal Beam Clamps

Pages 130 - 132




C-Type & Z-Type Beam Clamps

Pages 131 - 132




Notched or Window Type Beam Clamps

Page 132




Strut to Beam Spreader Caps

Pages 132 - 133




Purlin Beam Clamps

Page 135



U-Bolt Beam Clamps

Pages 134 - 138




Fittings Specifications		
Material	ASTM	ASTM Description
Hot Rolled Plate	A 575, A 1011, A 1018, A 576, A638	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting: Steel	A 366, A 36	Steel carbon, cold rolled sheet, commercial quality structural steel.
Strip Steel: Pipe Clamps	A 569	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Stainless Steel	A 240 TYPE 304	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	
Aluminum	B 221	Aluminum alloy extruded bar, rod, wire, shape and tube.

Fitting Finish Specifications	
Finish	Description
Electroplated	Fittings and hardware supplied as "Electro-Galvanized" in accordance with ASTM B 633.
Mill-Galvanized (Pre-Galvanized)	Galvanized steel used in the manufacture of channel sections conforms to ASTM A 653 GR33 G90. Uncoated edges resulted from slitting, punching and channel cut off are present.
Hot Dip Galvanized After Fabrication	Channel and fittings which are hot dip galvanized after fabrication conform to one of the following specifications. ASTM A 123, ASTM A153, or ASTM A386.
Special Coatings	Other commercially available finishes can be supplied per specification when required to protect applications.

See page 23 for Material or Finish ordering codes for part numbers.

Standard Finish: Electro Galvanized (EG)

All Purpose Beam Clamp

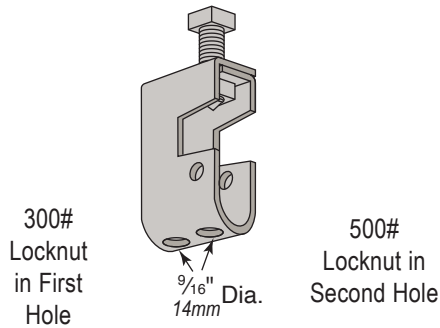


Provides for hanging rod directly below set screw. A 20° swivel is possible using 1/4" or 3/8" rod. Alternate use provides 1/4", 3/8" or 1/2" rod to be extended from the top to the bottom of the clamp on the end opposite the set screw. A 1/4" flat washer must be used with 1/4" rod.

Position	Design Load
A	500 Lbs. (2.22 kN)
B	300 Lbs. (1.33 kN)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W5750	VX1000A	BC10

Beam Clamp Formed Steel with J-Hook

Includes: Clamp, J-Hook, 3/8" hex nut and clip.

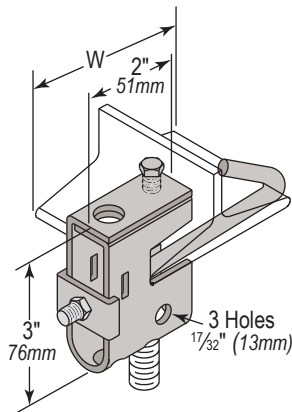


SPECIFYING Brand & Part No.	W	DISCONTINUED Brands & Part No.	
 WESANCO		VERSABAR	FLORIDA STRUT
W5752-6	3" thru 6" (76 to 152mm)	VX1000B	BC110600
W5752-9	6" thru 9" (152 to 228mm)	--	BC110900
W5752-10	6" thru 10" (152 to 254mm)	VX1000C	--
W5752-12	9" thru 12" (228 to 305mm)	--	BC111200

Beam Clamp Swivel Adapter


For use with 1/4", 3/8" or 1/2" rod (6mm, 8mm or 10mm).

If swivel is required use W5753-25 - W5753-50 Swivel Nut.

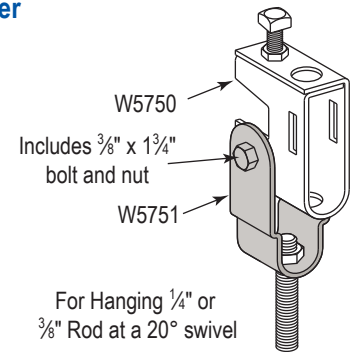

SPECIFYING Brand & Part No.	Design Load	DISCONTINUED Brands & Part No.	
 WESANCO		VERSABAR	FLORIDA STRUT
W5751	500 Lbs. (2.22 kN)	VX1090A	BC14

Swivel Nut for use with All Purpose Beam Clamp




SPECIFYING Brand & Part No.	Rod Size	DISCONTINUED Brands & Part No.	
 WESANCO		VERSABAR	FLORIDA STRUT
W5753-25	1/4"-20	--	BC120025
W5753-37	3/8"-16	--	BC120037
W5753-50	1/2"-13	--	BC120050

J-Hook Beam Clamp

Housing Unit with 2 Hex Nuts and J-Hook

1/2"-13 Threaded Rod & Hex Nut Sold Separately

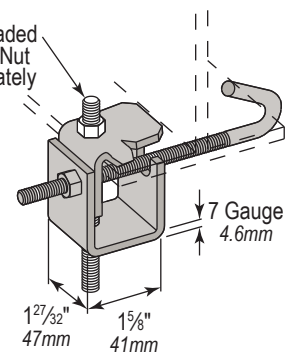

SPECIFYING Brand & Part No.	Accommodates I-Beam Sizes	Maximum Flange Thickness	Design Load Safety Factor of 5
 WESANCO			
W5756-4EG	3" to 6" (76 to 152mm)	5/8" (16mm)	500 Lbs (2.22kN)
W5756-6EG	5" to 9" (127 to 229mm)		
W5756-9EG	8" to 12" (203 to 305mm)		
W5756-12EG	11" to 15" (279 to 381mm)		


Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam. It is recommended that the beam be dimpled at set screw contact location.



Standard Finish: Electro Galvanized (EG)

Formed Steel Beam Clamp

Maximum flange thickness $\frac{7}{8}$ " 22mm




Bottom Rod against Beam (recommended)

SPECIFYING		A	B	Set Screw	Allowable Load Lbs. (kN) (ea.)	DISCONTINUED Brands & Part No.	
Brand & Part No.	WESANCO					VERSABAR	FLORIDA STRUT
W5721	$\frac{1}{4}$ "-20	$\frac{1}{8}$ " (3mm)	$\frac{3}{16}$ " (5mm)	$\frac{3}{8}$ " x 1- $\frac{1}{2}$ "	650 (2.89 kN)	VX7002A	--
W5722	$\frac{5}{16}$ "-18					VX7003A	--
W5723	$\frac{3}{8}$ "-16					VX7004A	BC150037
W5724	$\frac{3}{8}$ "-16	$\frac{1}{4}$ " (6mm)	$\frac{1}{2}$ " x 1- $\frac{1}{2}$ "	$\frac{1}{2}$ " x 1- $\frac{1}{2}$ "	1,100 (4.89 kN)	VX7005A	BC160037
W5725	$\frac{1}{2}$ "-13					VX7006A	BC150050
W5726	$\frac{1}{2}$ "-13	$\frac{5}{16}$ " (8mm)	$\frac{5}{8}$ " x 1- $\frac{1}{2}$ "	$\frac{5}{8}$ " x 1- $\frac{1}{2}$ "	1,600 (7.12 kN)	VX7007A	BC160050
W5727	$\frac{5}{8}$ "-11					VX7008A	BC150062
W5728	$\frac{5}{8}$ "-11					VX7009A	BC160062
W5729	$\frac{3}{4}$ "-10					VX7010A	--

Formed Steel Heavy Duty Beam Clamp

For $\frac{3}{4}$ " thru 1- $\frac{5}{8}$ " (19 thru 41mm) flange thickness

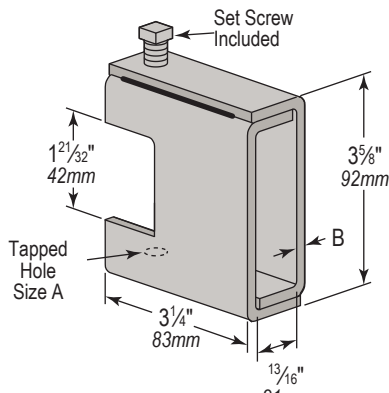


Bottom Rod against Beam (recommended)

SPECIFYING		A	B	Set Screw	Allowable Load Lbs. (kN) (ea.)	DISCONTINUED Brands & Part No.	
Brand & Part No.	WESANCO					VERSABAR	FLORIDA STRUT
W5731	$\frac{1}{4}$ "-20	$\frac{1}{8}$ " (3mm)	$\frac{3}{8}$ " x 2"	$\frac{3}{8}$ " x 2"	800 (3.56 kN)	VX7011A	--
W5732	$\frac{5}{16}$ "-18					VX7012A	--
W5733	$\frac{3}{8}$ "-16					VX7013A	BC170037
W5734	$\frac{3}{8}$ "-16	$\frac{1}{4}$ " (6mm)	$\frac{1}{2}$ " x 2"	$\frac{1}{2}$ " x 2"	1,300 (5.78 kN)	VX7014A	--
W5735	$\frac{1}{2}$ "-13					VX7015A	BC170050
W5736	$\frac{1}{2}$ "-13	$\frac{5}{16}$ " (8mm)	$\frac{5}{8}$ " x 2"	$\frac{5}{8}$ " x 2"	1,900 (8.45 kN)	VX7016A	--
W5737	$\frac{5}{8}$ "-11					VX7017A	BC170062
W5738	$\frac{5}{8}$ "-11					VX7018A	--
W5739	$\frac{3}{4}$ "-10					VX7019A	--

Beam Clamp Anchor Strap

Straps can be used as a secondary method of securing clamp to beam. After inserting strap and mounting clamp to beam, excess length is then bent back up and over beam.

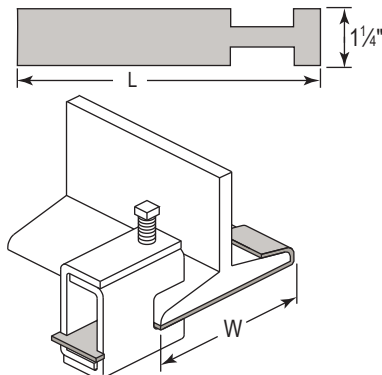

SPECIFYING Brand & Part No.		W * (Max)	L	DISCONTINUED Brands & Part No.	
 WESANCO				VERSABAR	FLORIDA STRUT
W5781	7" (178mm)	10" (254mm)	VX1006	--	
W5782	9" (228mm)	12" (305mm)	VX1007	BC130900	
W5783	11" (279mm)	14" (356mm)	VX1008	--	
W5784	12" (305mm)	15" (381mm)	--	BC131200	
W5785	13" (330mm)	16" (406mm)	VX1009	--	
W5786	15" (381mm)	18" (457mm)	VX1010	BC131500	


* For beam flange thickness greater than 3⁄4" (19mm) use next larger flange width size.

* For beam flange thickness greater than $\frac{3}{4}$ " (19mm) use next larger flange width size.

Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam. It is recommended that the beam be drilled at set screw contact location.



Beam Clamps




"Bottom Rod" Against Beam (Recommended)

SPECIFYING Brand & Part No.	Rod Size	B	Allowable Load Lbs. (kN)	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
W5741	3/8"-16	3/4" (19mm)	400 (1.78 kN)	VX111137	W5741
W5742	1/2"-13		500 (2.22 kN)	VX111150	W5742
W5743	5/8"-11		550 (2.45 kN)	VX111162	W5743
W5744	3/4"-10		600 (2.67 kN)	VX111175	W5744
W5745	7/8"-9	1-1/16" (27mm)	900 (4.00 kN)	VX111187	W5745

* For clamp with Locknut, add "N" to the part number ex: VX111137N


Malleable Iron Rod Support Beam Clamps

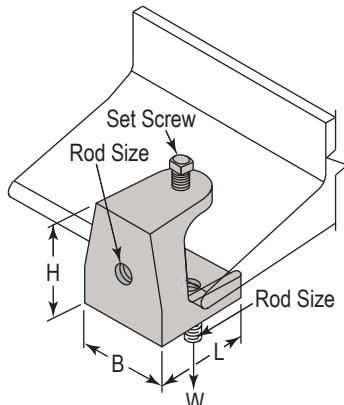

- Material: Malleable Iron
- Finish: Electrogalvanized (EG)
- Maximum flange thickness of 1/2" (13mm)
- Stainless 316 available by special order

SPECIFYING Brand & Part No.	Rod Size	Set Screw Size	B	L	H	Max Load (W) lbs	DISCONTINUED Brands & Part No.	
							VERSABAR	FLORIDA STRUT
BC9025	1/4"-20	5/16"-18	1 3/16" (33 mm)	1 3/8" (35 mm)	1 3/8" (35 mm)	335 (1.49kN)	VX9004	BC900025
BC9037	3/8"-16	1/2"-13	2 1/16" (52 mm)	1 7/8" (48 mm)	1 3/4" (44 mm)	525 (2.34kN)	VX9005	BC900037
BC9050	1/2"-13	1/2"-13	2 1/2" (64 mm)	2 3/8" (60 mm)	2 3/16" (56 mm)	750 (3.34kN)	VX9006	BC900050

Wide Mouth Rod Suspension Beam Clamps Accepts up to 3" Thick Flanges

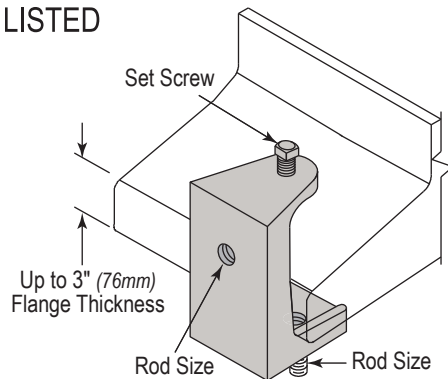

- Material: Malleable Iron
- Finish: Bright Zinc
- Maximum flange thickness of 3" (76mm)

SPECIFYING Brand & Part No.	Rod Size	Set Screw Size	Max Work Load lbs kN	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
BC9325	1/4"-20	5/16"-18 x 2 1/2"	200 (0.89kN)	VX9004WM	--
BC9337	3/8"-16	3/8"-16 x 2 1/2"	300 (1.33kN)	VX9005WM	--
BC9350	1/2"-13	1/2"-13 x 2 1/2"	400 (1.78kN)	VX9006WM	--

Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam.
It is recommended that the beam be dimpled at set screw contact location.



Beam Clamps




Standard Finish: Electro Galvanized (EG)

Rod Suspension Beam Clamps with Retainer

Stock Thickness on retainer strap is 14 ga. .075" (1.91)

Set Screw Diameter is 1/2"-13 x 1-1/4"

Includes: Clamp & Set Screw, J-Hook, & 1/2"-13 Hex Head Cap Screw
(Threaded rod sold separately).

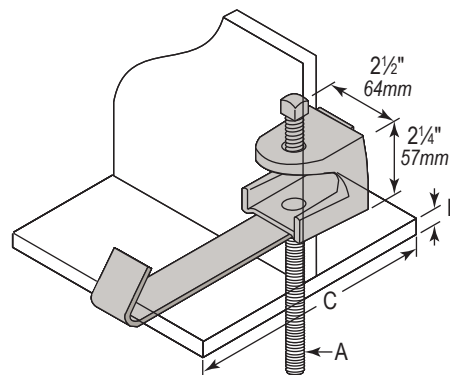


Retainer is supplied flat. Hammer end of retainer up and over beam after clamp is securely attached to beam flange

SPECIFYING Brand & Part No.	Rod Size A	B Beam Thickness	C Flange Width	Design Load lbs (kN)	DISCONTINUED Brands & Part No.	
					VERSABAR	FLORIDA STRUT
W5792-6	1/2"-13	3/8" to 13/16" (9 to 21mm)	4" thru 6" (102 thru 152mm)	400 (1.8kN)	VX9000	--
W5792-9			7" thru 9" (178 thru 229mm)		VX9001	--
W5792-12			10" thru 12" (254 thru 305mm)		VX9002	--
W5792-15			13" thru 15" (330 thru 381mm)		VX9003	--


Strut to Beam Clamp C-Type, Parallel

3/8" 10mm material thickness



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
W5714	VX7002AL	BC22

Heavy Beam 1/2" Rod Suspension Clamps

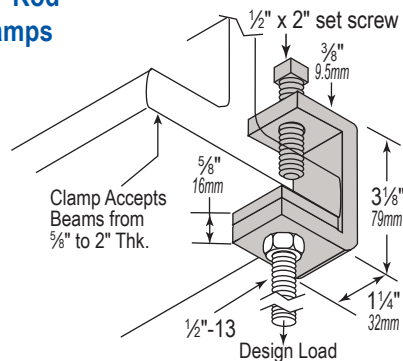

SPECIFYING Brand & Part No.	Design Load	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W5707	800 Lbs. (3.56 kN)	VX704450	--

Heavy Duty Rod Suspension Clamps Wide Jaw fits up to 1-3/8" Thick


Supplied with stainless 18-8 cup point square head set screw.

(Stainless 316 available by special order)

All U.N.C course threads

SPECIFYING Brand & Part No.	Threaded Base Rod Size	Set Screw Size	Clamp Thickness	* Max. Design Load for Threaded Base Lbs. (kN)	DISCONTINUED Brands & Part No.	
					VERSABAR	FLORIDA STRUT
W5746	1/4"-20	3/8"-16 x 2"	1/4" (6mm)	250 (1.11 kN)	VX7070A	--
W5747	3/8"-16	1/2"-13 x 2"	3/8" (10mm)	750 (3.34 kN)	VX7070B	--
W5748	1/2"-13	1/2"-13 x 2"		1,130 (5.03 kN)	VX7070C	--
W5749	5/8"-11	5/8"-11 x 2"		1,130 (5.03 kN)	VX7070D	--

* Do not exceed design loading per rod diameter.
Load for Clamp base threaded rod suspended downward

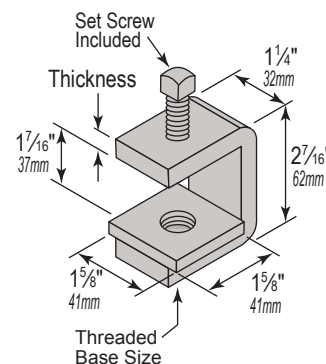


Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam.
It is recommended that the beam be drilled at set screw contact location.



Standard Finish: Electro Galvanized (EG)

“Handi-Clamp” Rod Suspension Clamps Wide jaw fits up to 2" thick beam flange

This beam clamp is used with conduit hangers, bridle rings, and threaded rod. W5780 beam clamp is used to hang light, medium or heavy loads from structural beams. Their hardened, cup-point screw and carbon steel body will not distort or slip off the beam edge when tightened. Having a total of FIVE individual base threads always means you've got "the right clamp" in your hands. Wide jaw allows fitment to thick beams. Hot dipped finish is suitable for indoor or out door use.

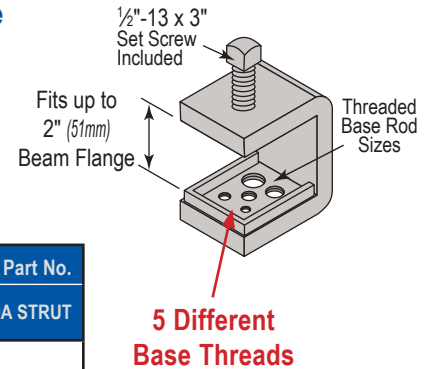


SPECIFYING Brand & Part No.		Threaded Base Rod Size	Set Screw Size	* Max. Design Load for Threaded Base Lbs. (<i>kN</i>)	DISCONTINUED Brands & Part No.	
 WESANCO					VERSABAR	FLORIDA STRUT
W5780	1/4"-20	1/2"-13 x 3"	250 (1.11 <i>kN</i>)	VXH1	--	
	5/16"-18		650 (2.89 <i>kN</i>)			
	3/8"-16		750 (3.34 <i>kN</i>)			
	1/2"-13		900 (4.00 <i>kN</i>)			
	5/8"-11		1,000 (4.45 <i>kN</i>)			

* Do not exceed design loading per rod diameter.

* Do not exceed design loading per rod diameter.

Malleable Iron Universal Beam Clamps


- Material: Malleable Iron
- Finish: Plain (PL),or Electro Galvanized (EG)
- Maximum flange thickness of 5/8" (16mm)

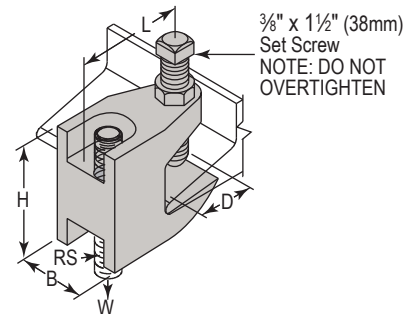

SPECIFYING Brand & Part No.		Rod Size (RS)	Max Load W lbs	Max Pipe Size	B	L	H	D	DISCONTINUED Brands & Part No.	
 WESANCO									VERSABAR	FLORIDA STRUT
BC8037	3/8" - 16	350 (1.56kN)	4" (102mm)	7/8" (22mm)	1 5/16" (33mm)	1 1/2" (38mm)	1/2" (13mm)	--	BC800037	
BC8050	1/2" - 13	470 (2.09kN)						--	BC800050	
BC8062	5/8" - 11	550 (2.45kN)	5" (127mm)	1 1/8" (29mm)	1 3/4" (45mm)	1 3/4" (45mm)	5/8" (16mm)	--	BC800062	
BC8075	3/4" - 10	700 (3.11kN)	6" (152mm)	1 3/8" (35mm)	1 7/8" (48mm)	1 7/8" (48mm)		--	BC800075	

Wide Mouth Malleable Iron Universal Beam Clamps

- Material: Malleable Iron
- Finish: Plain (PL),or Electro Galvanized (EG)
- Maximum flange thickness of 1-1/16" (27mm)



SPECIFYING Brand & Part No.		Rod Size (RS)	Max Load W lbs	Max Pipe Size	B	L	H	D	DISCONTINUED Brands & Part No.	
 WESANCO									VERSABAR	FLORIDA STRUT
BC81037		3/8" – 16	400 (1.78kN)	4" (102mm)	7/8" (22mm)	1 3/8" (35mm)	2" (51mm)	1/2" (13mm)	VX111137T	BC810037
BC81050		1/2" – 13	500 (2.22kN)		1 1/4" (32mm)	1 7/8" (48mm)	2 3/8" (60mm)	5/8" (16mm)	VX111150T	BC810050
BC81062		5/8" – 11							VX111162T	BC810062
BC81075		3/4" - 10							800 (3.56kN)	2 3/8" (60mm)

Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam. It is recommended that the beam be dimpled at set screw contact location.




Beam Clamps




Standard Finish: Electro Galvanized (EG)

Strut to Beam Clamp C-Type

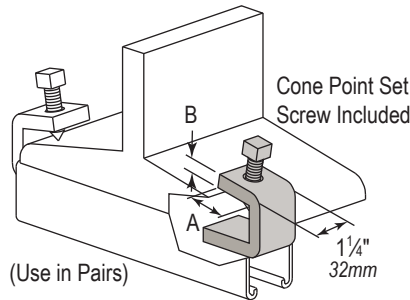

SPECIFYING Brand & Part No.	Set Screw	Max Flange Thickness	A	B	H	Design Load Lbs. (kN) (Used in Pairs)	DISCONTINUED Brands & Part No.	
							VERSABAR	FLORIDA STRUT
W5715	3/8"-16	1" (25mm)	1-3/4" (44mm)	1/4" (6mm)	7/8" (22mm)	550 (2.45 kN)	VX7001	BC20
W5716	1/2"-13	1" (25mm)	1-1/2" (38mm)	3/8" (10mm)	7/8" (22mm)	1,000 (4.45 kN)	VX7042	BC21
W5717	1/2"-13	2" (51mm)	1-1/4" (32mm)	3/8" (10mm)	2-1/8" (54mm)	900 (4.00 kN)	VX7043	--

Silver Claw Beam Clamp

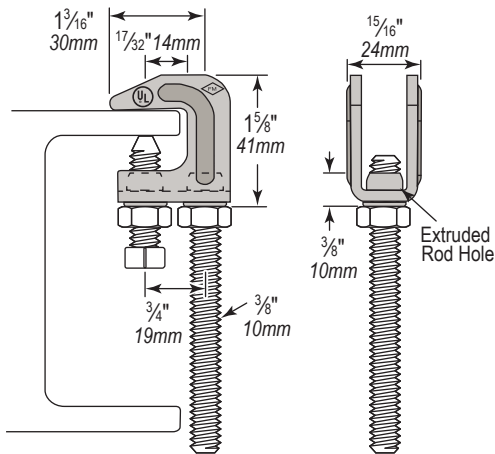


- Carbon Steel - Avoids Hydrogen Embrittlement
- Extruded Rod Hole - More Threads Captured
- Made in USA - Meets Requirements for Buy America
- Handles 3/8" Threaded Rod
- Attaches to 3/4" (19mm) Beam or Bar Joist
- Open Back for Easy Inspection and Adjustment
- 3/4" (19mm) Flange Beam
- Zinc Electroplate
- Installs in Upright Position
- UL Listed for Top of Beam
- FM Approved for NFPA 13, Maximum Rated Pipe Size
- Complies with Manufacturers Standardization Society SP-69 (Type 19 & 23) and Federal Specification WW-H-171E


Part No.	Rod Size	Max. Load
SCL037EG	3/8"	400 Lbs.

BCL

Beam Clamp

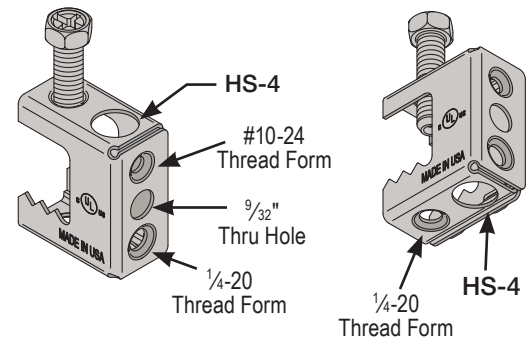

- UL Listed for box support.
- For installation on 1/2" maximum beam flanges.
- Included combo head set screw allows Robertson, Phillips/Slotted and Hex drivers.
- Accepts "S" hooks, threaded rod and bridal rings.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

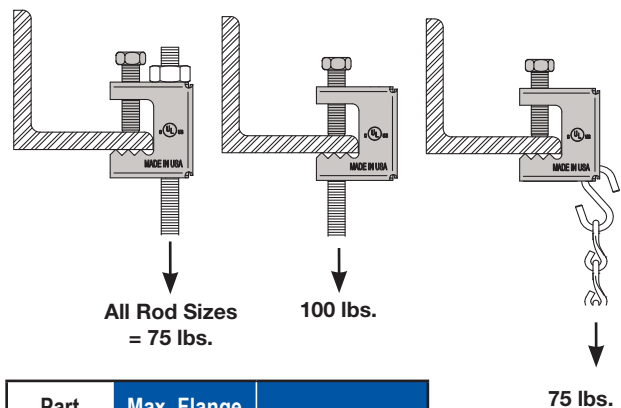


Part No.	Max. Flange Thickness	HS-4
BCL	1/2"	13/32" Thru Hole for 1/4" or 3/8" Rod

Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam. It is recommended that the beam be drilled at set screw contact location.




Strut to Beam Clamp Window Type

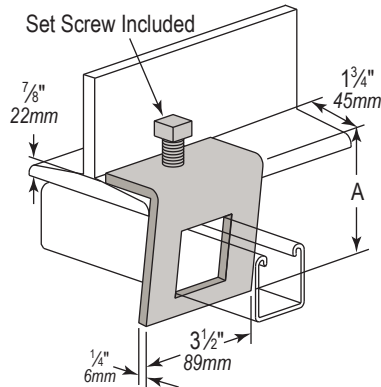

SPECIFYING Brand & Part No.	A	For Channel	Design Uniform Load Lbs. (kN)	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
W5705	2-11/16" (68mm)	1-5/8" x 1 3/16"	480 (2.14 kN)	VX7037A4	--
W5702	3-1/2" (89mm)	1-5/8" x 1-5/8"		VX7037A	BC40

Strut to Beam Clamp Notched Type

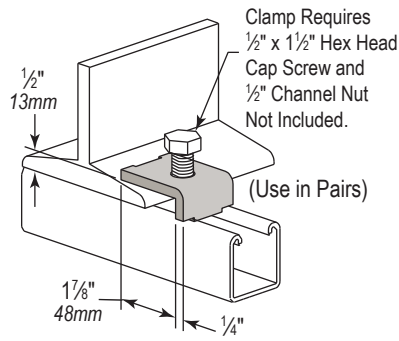


SPECIFYING Brand & Part No.	Includes	Design Uniform Load Lbs. (kN)		DISCONTINUED Brands & Part No.	
		1-5/8" 12 Gauge Channel	1-5/8" 14 Gauge Channel	VERSABAR	FLORIDA STRUT
WESANCO					
W5713	Without Hardware	600 (2.67 kN)	500 (2.22 kN)	VF2102	BC70

Load capacity when used in pairs

Malleable Iron Universal Beam Clamps

- Material: Malleable Iron
- Finish: Electrogalvanized (EG)
- Maximum flange thickness of 5/8" (16mm)

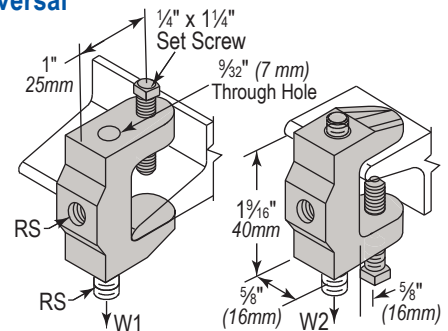


SPECIFYING Brand & Part No.	Rod Size (RS)	W1 Max Load	W2 Max Load	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
BC91025	1/4" - 20	100 (0.44kN)	250 (1.11kN)	--	BC910025

The threaded hole on the back side of the clamp is not load rated.
Do not over tighten set screw

Strut to Beam Clamp Z-Type

3/8" 10mm material thickness

Use in Pairs

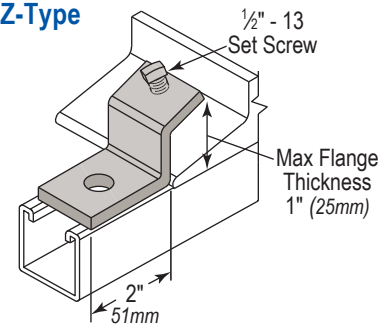


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO		
W5712	VX7106A	BC30

Strut to Beam Clamp Z-Type

3/8" 10mm material thickness

Use in Pairs



SPECIFYING Brand & Part No.	Includes	Design Uniform Load Lbs. (kN)		DISCONTINUED Brands & Part No.	
		1-5/8" 12 Gauge Channel	1-5/8" 14 Gauge Channel	VERSABAR	FLORIDA STRUT
WESANCO					
W5779	Clamp and Set Screw	600 (2.67 kN)	500 (2.22 kN)	VX7101S	--
W5779A	All Hardware			VX7101A	--

Load capacity when used in pairs

Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam.
It is recommended that the beam be dimpled at set screw contact location.



Beam Clamps





Standard Finish: Electro Galvanized (EG)

Strut to Beam Spreader Caps

Cut 1-5/8" channel length 1-3/4" (45mm)

shorter than I.D. between beam flanges to allow for plate thickness.

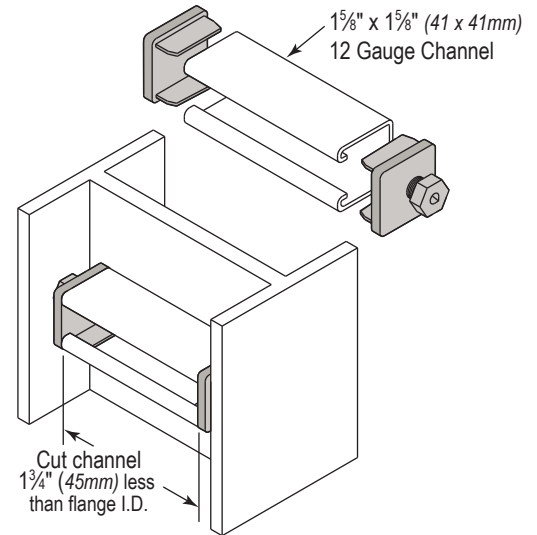


SPECIFYING Brand & Part No.	For Channel	Slip Load of plates Lbs. (kN)	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
W5760	1-5/8" (41mm)	800 (3.56 kN)	VX7715A	--

Channel Load rating is independent of clamp slip load rating

Strut to Beam Spreader Caps

Undercut channel length min of 1/2" (13mm)
to allow for plate thickness.

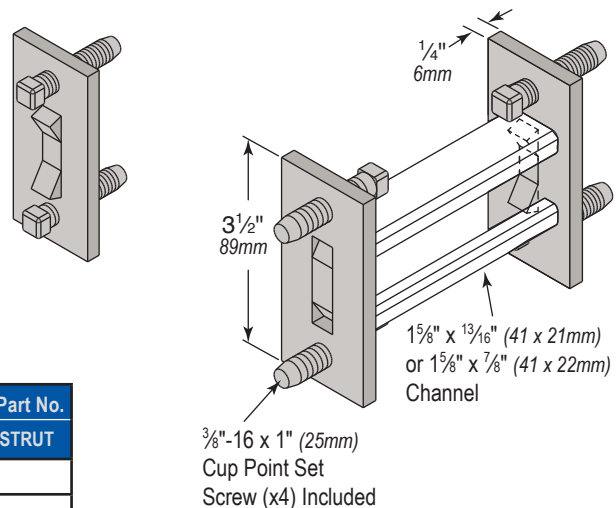


SPECIFYING Brand & Part No.	For Channel	Slip Load of plates Lbs. (kN)	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
W5790	7/8", & 13/16"	800 (3.56 kN)	VX7715B4	--

Channel Load rating is independent of clamp slip load rating

Strut to Beam Spreader Caps

Undercut channel length min of 1/2" (13mm)
to allow for plate thickness.

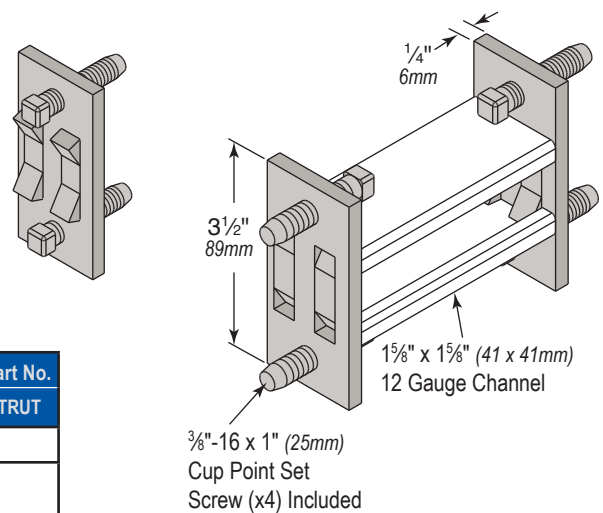

SPECIFYING Brand & Part No.	For Channel	Slip Load of plates Lbs. (kN)	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
W5791	1-5/8" (41mm)	800 (3.56 kN)	VX7715B	--


Channel Load rating is independent of clamp slip load rating
Available in Stainless Steel

Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam.
It is recommended that the beam be dimpled at set screw contact location.



Light Duty U-Bolt



2 - Hex Nuts Included

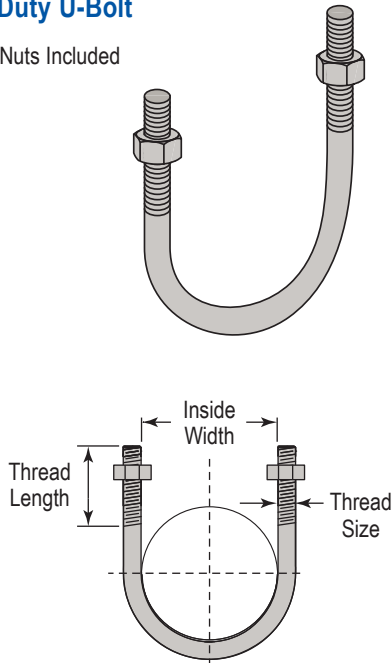

SPECIFYING Brand & Part No.	Nominal Pipe Size	C	Thread Length	Thread Size	DISCONTINUED Brands & Part No.	
					VERSABAR	FLORIDA STRUT
W6704	1/2" (13mm)	15/16" (24mm)	1-3/4" (45mm)	15/16"-18	--	--
W6706	3/4" (19mm)	1-1/8" (29mm)			--	--
W6708	1" (25mm)	1-3/8" (35mm)			--	--
W6710	1-1/4" (32mm)	1-21/32" (44mm)			--	--
W6712	1-1/2" (38mm)	2" (51mm)	2-1/16" (52mm)	3/8"-16	--	--
W6714	2" (51mm)	2-7/16" (62mm)			--	--
W6716	2-1/2" (64mm)	2-15/16" (75mm)			--	--
W6718	3" (76mm)	3-9/16" (91mm)			--	--
W6720	3-1/2" (89mm)	4-3/32" (104mm)	2-1/4" (57mm)	1/2"-13	--	--
W6722	4" (102mm)	4-19/32" (117mm)			--	--
W6724	5" (127mm)	5-21/32" (144mm)			--	--
W6726	6" (152mm)	6-3/4" (171mm)	2-5/8" (67mm)	5/8"-11	--	--
W6728	8" (203mm)	8-3/4" (222mm)			--	--

Standard Duty U-Bolt

SPECIFYING Brand & Part No.	Nominal Pipe Size	C	Thread Length	Thread Size	DISCONTINUED Brands & Part No.	
					VERSABAR	FLORIDA STRUT
W6304	1/2" (13mm)	15/16" (24mm)	2-1/8" (54mm)	1/4"-20	--	--
W6306	3/4" (19mm)	1-1/8" (29mm)			--	--
W6308	1" (25mm)	1-3/8" (35mm)			--	--
W6310	1-1/4" (32mm)	1-11/16" (43mm)			--	--
W6312	1-1/2" (38mm)	2" (51mm)	2-1/2" (64mm)	3/8"-16	--	--
W6314	2" (51mm)	2-7/16" (62mm)			--	--
W6316	2-1/2" (64mm)	2-15/16" (75mm)			--	--
W6318	3" (76mm)	3-9/16" (91mm)			--	--
W6320	3-1/2" (89mm)	4-1/16" (103mm)	3" (76mm)	1/2"-13	--	--
W6322	4" (102mm)	4-9/16" (116mm)			--	--
W6324	5" (127mm)	5-21/32" (144mm)			--	--
W6326	6" (152mm)	6-3/4" (171mm)			--	--
W6328	8" (203mm)	8-3/4" (222mm)	3-3/4" (95mm)	5/8"-11	--	--
W6330	10" (254mm)	10-7/8" (276mm)			--	--
W6332	12" (305mm)	12-7/8" (327mm)			--	--
W6334	14" (356mm)	14-1/8" (359mm)			--	--
W6336	16" (406mm)	16-1/8" (410mm)	4-1/4" (108mm)	7/8"-9	--	--
W6338	18" (457mm)	18-1/8" (460mm)			--	--
W6340	20" (508mm)	20-1/8" (511mm)			--	--
W6342	24" (610mm)	24-1/8" (613mm)			--	--
W6344	30" (762mm)	30-1/8" (765mm)	4-3/4" (121mm)	1"-8	--	--

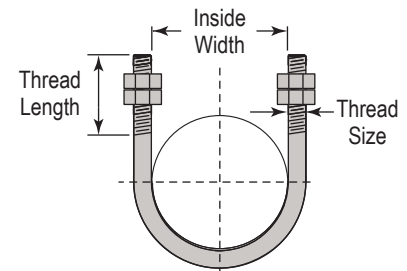

4 - Hex Nuts Included


Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam.
It is recommended that the beam be dimpled at set screw contact location.



Standard Finish: Electro Galvanized (EG)


Strut to Beam Clamps with Square U-Bolt

2 - 3/8"-16 Thread Hex Nuts Included

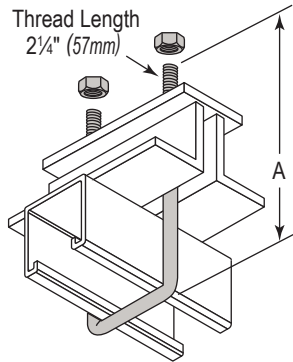

SPECIFYING Brand & Part No.	A	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W7050A	3-1/2" (89 mm)	VX7050A	--
W7050B	5" (127 mm)	VX7050B	--

Z-Purlin C-Clamp

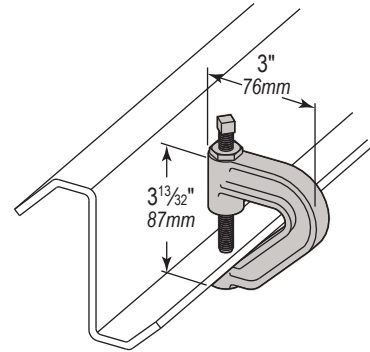


SPECIFYING Brand & Part No.	Bottom Hanger Rod Thread Size	Design Load Lbs. (kN) (ea.)	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
BCZ037EG	3/8"-16	500 (2.22 kN)	--	--

* Set Screw and Locknut included.
Safety Factor of 5

One Piece Purlin Beam Clamp

For 1 3/16" & 1-5/8" channel

One piece purlin clamp set:
Includes U-bolt and hex nut

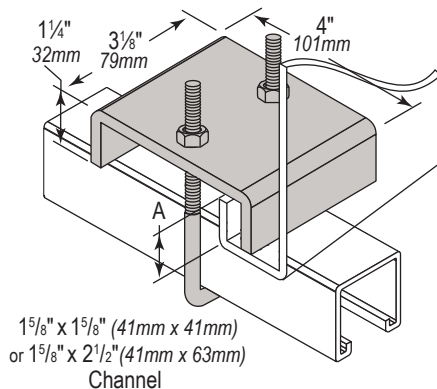


SPECIFYING Brand & Part No.	Maximum Purlin Lip Height "A"	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5710	1" (25mm)	VX9007	--

Two Piece Purlin Beam Clamp

For 1 3/16" & 1-5/8" channel

Two piece purlin clamp set:
Includes U-bolt and hex nut

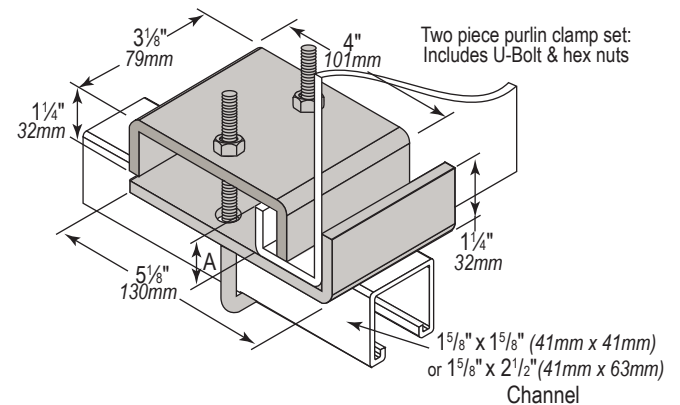

SPECIFYING Brand & Part No.	Maximum Purlin Lip Height "A"	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5711	1" (25mm)	VX9008	--


Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam.
It is recommended that the beam be drilled at set screw contact location.



Standard Finish: Electro Galvanized (EG)

Right Angle Clamps

Standard finish: Hot Dip Galv.




SPECIFYING Brand & Part No.	Pipe Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
RTA037	3/8" (DN10)	VX2037	--
RTA050	1/2" (DN15)	VX2050 *	RA0050
RTA075	3/4" (DN20)	VX2075 *	RA0075
RTA100	1" (DN25)	VX2100 *	RA0100
RTA125	1-1/4" (DN32)	VX2125 *	RA0125
RTA150	1-1/2" (DN40)	VX2150 *	RA0150
RTA200	2" (DN50)	VX2200 *	RA0200
RTA250	2-1/2" (DN65)	VX2250 *	RA0250
RTA300	3" (DN80)	VX2300 *	RA0300
RTA350	3-1/2" (DN90)	VX2350 *	RA0350
RTA400	4" (DN100)	VX2400 *	RA0400

* Available in stainless steel type 316. Add suffix "-SS316" to part no.

Strut to Beam Clamps with Square U-Bolt

For 13/16" & 1-5/8" Channel

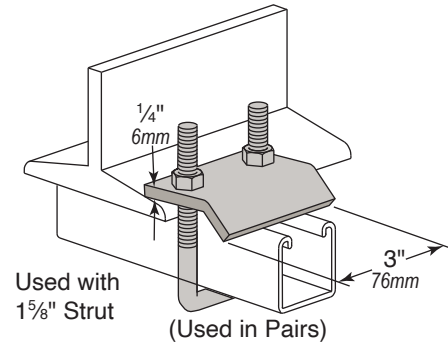


SPECIFYING Brand & Part No.	Allowable Load Lbs. (kN)	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5709	1,200 (5.34 kN)	VX7038A	BC60

Load capacity when used in pairs

Strut to Beam Clamps with Square U-Bolt


For 2-7/16" & 3-1/4" Channel

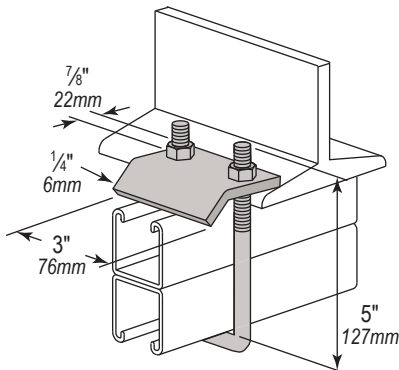

SPECIFYING Brand & Part No.	Allowable Load Lbs. (kN)	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5708	1,200 (5.34 kN)	VX7038B	BC61

Load capacity when used in pairs

"U" Bolt Beam Clamps (Long) for 6-1/2" maximum

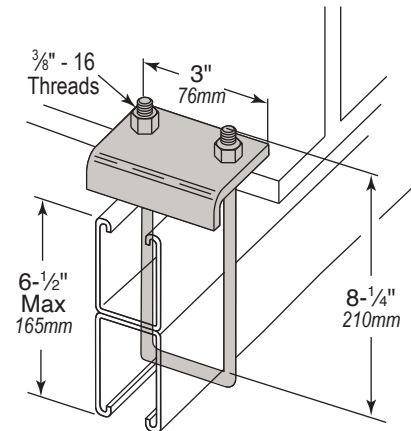

SPECIFYING Brand & Part No.	Allowable Load Lbs. (kN)	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5770	1,200 (5.34 kN)	--	--

Load capacity when used in pairs

Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam. It is recommended that the beam be dimpled at set screw contact location.



Beam Clamps




Standard Finish: Electro Galvanized (EG)

Strut to Beam Clamps with Square U-Bolt and J-Hook

For $\frac{13}{16}$ " & $1\frac{5}{8}$ " channel

SPECIFYING Brand & Part No.	For Flange Width "W"	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W5771-6	4" thru- 6" (102 thru 152mm)	VX7041A4	BC620600
W5771-9	6" thru 9" (152 thru 229mm)	VX7041A6	BC620900
W5771-12	9" thru 12" (229 thru 305mm)	VX7041A9	BC621200
W5771-15	12" thru 15" (305 thru 378mm)	VX7041A12	--
W5771-18	15" thru 18" (378 thru 457mm)	--	--

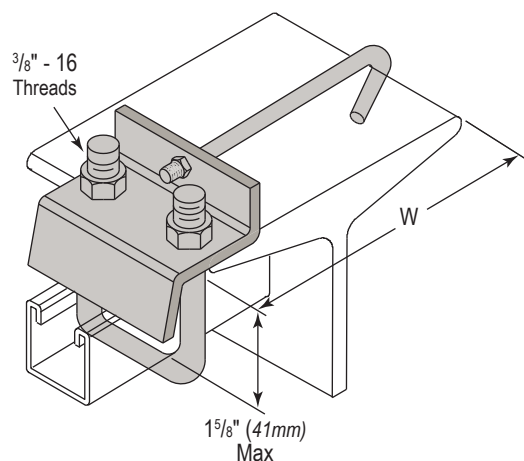


Strut to Beam Clamps with Square U-Bolt and J-Hook

For $2\frac{7}{16}$ " & $3\frac{1}{4}$ " channel

• 1" Max. Flange Thickness

SPECIFYING Brand & Part No.	For Flange Width "W"	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W5761	4" thru- 6" (102 thru 152mm)	VX7041B4	BC630600
W5761-9	6" thru 9" (152 thru 229mm)	VX7041B6	BC630900
W5761-12	9" thru 12" (229 thru 305mm)	VX7041B9	BC631200
W5761-15	12" thru 15" (305 thru 378mm)	VX7041B12	--
W5761-18	15" thru 18" (378 thru 457mm)	--	--

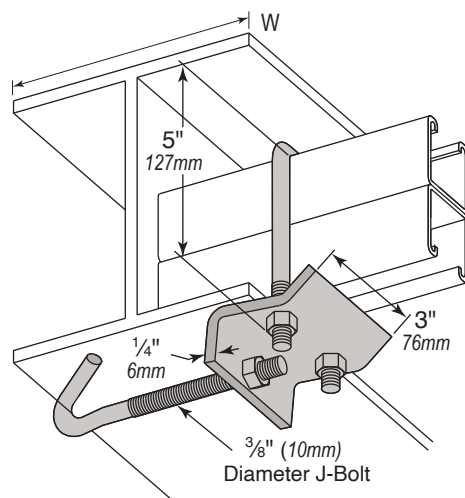


Strut to Beam Clamps with Square U-Bolt and J-Hook

For Back to Back $2\frac{1}{2}$ ", $2\frac{7}{16}$ " & $3\frac{1}{4}$ " channel

• 1" Max. Flange Thickness

SPECIFYING Brand & Part No.	For Flange Width "W"	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
W5772-6	4" thru- 6" (102 thru 152mm)	--	BC690600
W5772-9	6" thru 9" (152 thru 229mm)	--	BC690900
W5772-12	9" thru 12" (229 thru 305mm)	--	BC691200
W5772-15	12" thru 15" (305 thru 378mm)	VX7041C12	--
W5772-18	15" thru 18" (378 thru 457mm)	--	--

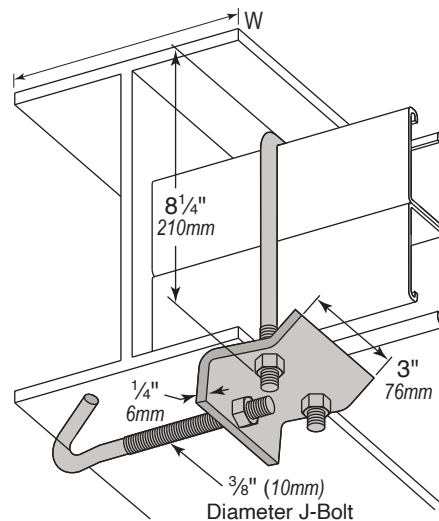

Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam.
It is recommended that the beam be drilled at set screw contact location.




Strut to Beam Clamps with Two Square U-Bolts

For channel up to 1-5/8" Deep

Square U-bolts, rod and hex nuts included

SPECIFYING Brand & Part No.	Rod Length	For Flange Width "W"	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
W5773-6	4" (102mm)	4" thru 6" (102 thru 152mm)	VX7045A4	--
W5773-9	6" (152mm)	6" thru 9" (152 thru 229mm)	VX7045A6	--
W5773-12	9" (229mm)	9" thru 12" (229 thru 305mm)	VX7045A9	--
W5773-15	12" (305mm)	12" thru 15" (305 thru 378mm)	VX7045A12	--

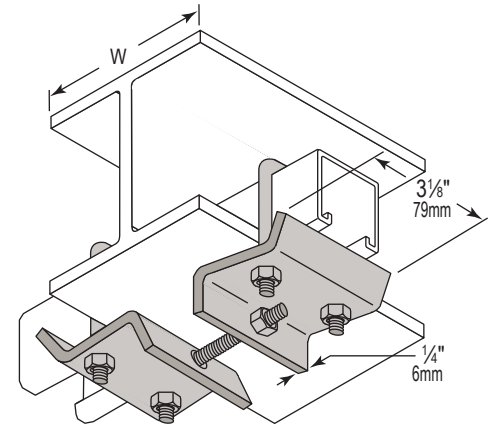


Strut to Beam Clamps with Two Square U-Bolts

For channel over 1-5/8" Deep

Square U-bolts, rod and hex nuts included

SPECIFYING Brand & Part No.	Rod Length	For Flange Width "W"	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
W5774-6	4" (102mm)	4" thru 6" (102 thru 152mm)	VX7045B4	--
W5774-9	6" (152mm)	6" thru 9" (152 thru 229mm)	VX7045B6	--
W5774-12	9" (229mm)	9" thru 12" (229 thru 305mm)	VX7045B9	--
W5774-15	12" (305mm)	12" thru 15" (305 thru 378mm)	VX7045B12	--

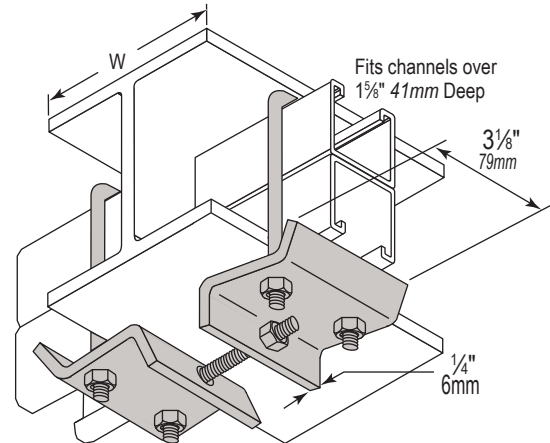


Strut to Beam Clamps with Two Square U-Bolts

For channel over 6-1/4" Deep

Square U-bolts, rod and hex nuts included

SPECIFYING Brand & Part No.	Rod Length	For Flange Width "W"	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
W5777-4	4" (102mm)	4" thru 6" (102 thru 152mm)	VX7045C4	--
W5777-6	6" (152mm)	6" thru 9" (152 thru 229mm)	VX7045C6	--
W5777-9	9" (229mm)	9" thru 12" (229 thru 305mm)	VX7045C9	--
W5777-12	12" (305mm)	12" thru 15" (305 thru 378mm)	VX7045C12	--
W5777-15	12" (305mm)	15" thru 18" (378 thru 457mm)	VX7045C15	--

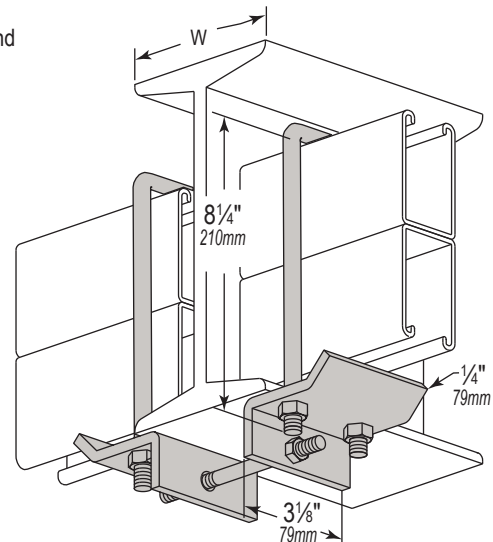

Opposing style clamps uniform loads are based on being used in pairs, installed against the flanges of the beam.
It is recommended that the beam be dimpled at set screw contact location.




Pipe, Tube, & Conduit Supports **WESANCO**

Pipe Clamps, Cushioned & Insulated Clamps & Support Saddles


Strut Clamps

Pages 140 - 143



Tubing Clamps & Hangers

Pages 144 - 145




Cush-A-Rings

Pages 146 - 147




Riser Clamps & Pipe Hangers

Pages 148 - 150



Pipe Rollers

Pages 151 - 152




Cushioned Clamps

Pages 153 - 180




Pipe Insulation Saddles

Pages 181 - 194

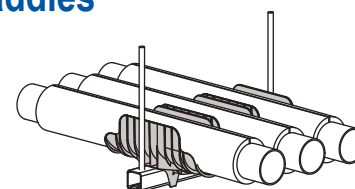

Beta Clamps

Pages 195 - 196



Pipe Clamp Specifications		
Material	ASTM	ASTM Description
Hot Rolled Plate	A 575	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting (Steel)	A 366	Steel carbon, cold rolled sheet, commercial quality structural steel.
	A 366	
	A 36	
Strip Steel: Pipe Clamps	A 569	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Stainless Steel:	A 240 TYPE 304	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	
Aluminum:	B 221	Aluminum alloy extruded bar, rod, wire, shape and tube.


Pipe Clamp Finish Specifications	
Finish	Description
Paint-Green Powder Coating	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Electroplated	Fittings and hardware supplied as "Electro-Galvanized" in accordance with ASTM B 633.
Mill-Galvanized (Pre-Galvanized)	Galvanized steel used in the manufacture of channel sections conforms to ASTM A 653 GR33 G90. Uncoated edges resulted from slitting, punching and channel cut off are present.
Hot Dip Galvanized After Fabrication	Channel and fittings which are hot dip galvanized after fabrication conform to one of the following specifications. ASTM A 123, ASTM A153, or ASTM A386.
Special Coatings	Other commercially available finishes can be supplied per specification when required to protect applications. Plain, or Gold (Yellow Zinc Dichromate)

See page 23 for Material or Finish ordering codes for part numbers.

Strut Serpent®

The Simplicity of the Strut Serpent!

Worm Gear Strut Clamp

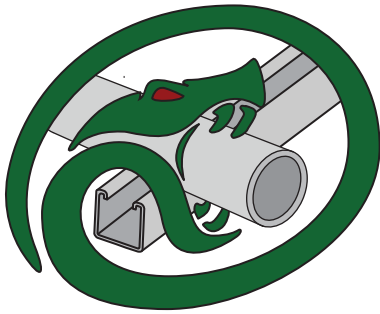


U.S. Patent No.
11,473,700



- Perfect for Trapeze Applications
- A significant reduction of 60% in labor costs to install.
- Worm Gear fastening method that ensures the proper torque-tension
- Directly Installs to Any Industry Standard Strut Profile.
- Electrical and Mechanical Applications
- Very Clean Appearance After the Assembly is Complete.
- Easy Relocation of Conduit, Pipe, or Tube Prior to Final Alignment.
- Secure the Conduit, Pipe, or Tube Above and/or Below the Strut

Part Number	Size	Outside Diameter	Conduit	Stainless Steel
SSEMT050	½" (13mm)	0.706 (18mm)	Electrical Metallic Tubing (EMT)	Type 301
SSEMT075	¾" (19mm)	0.922 (23mm)		
SSEMT100	1" (25mm)	1.163 (30mm)		
SSEMT125	1-¼" (32mm)	1.510 (38mm)		
SSEMT150	1-½" (38mm)	1.740 (44mm)		
SSEMT200	2" (51mm)	2.197 (56mm)		
SSGRC050	½" (13mm)	0.840 (21mm)	Galvanized Rigid Steel Conduit (GRC)	Type 301
SSGRC075	¾" (19mm)	1.050 (27mm)		
SSGRC100	1" (25mm)	1.315 (33mm)		
SSGRC125	1-¼" (32mm)	1.660 (42mm)		
SSGRC150	1-½" (38mm)	1.900 (48mm)		
SSGRC200	2" (51mm)	2.375 (60mm)		

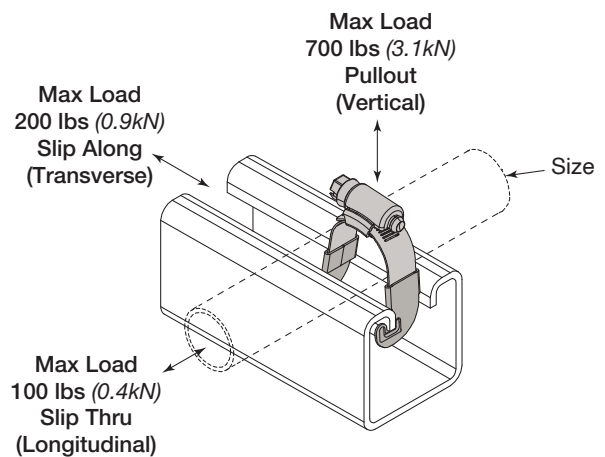


Strut Serpent® – New Installations

Step 1: Place Strut Serpent over pipe and into channel



Step 2: Hook Teeth onto channel In-turned edges and Tighten with a wrench

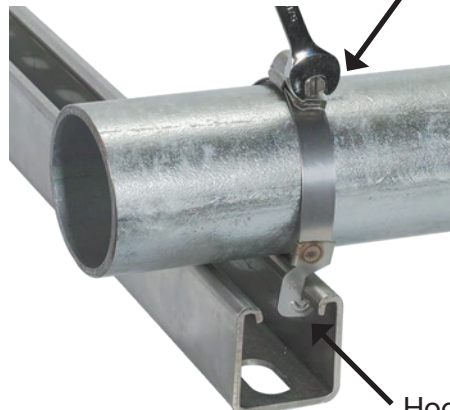

Step 3: Completed. Simple!




Strut Clamps



Standard Finish: Electro Galvanized (EG)

EMT Strut Clamp

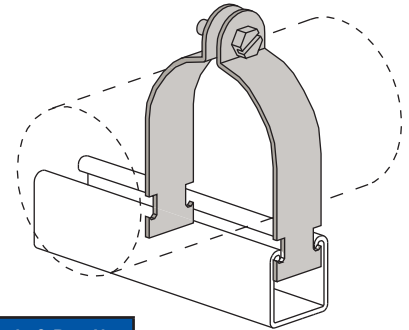


SPECIFYING Brand & Part No.	EMT Size	O.D. Size	Gauge	Allowable Load Lbs. (kN) (ea.)	Slotted Indented Hex Cap Screw	DISCONTINUED Brands & Part No.	
						VERSABAR	FLORIDA STRUT
WESANCO							
W6025A	3/8" (10mm)	0.577"	16	400 (1.78 kN)	1/4" x 3/4"	VPT1037	SCE0037
W6026A	1/2" (13mm)	0.706"			1/4" x 3/4"	VPT1050	SCE0050
W6028A	3/4" (19mm)	0.922"			1/4" x 3/4"	VPT1075	SCE0075
W6030A	1" (25mm)	1.163"	14	600 (2.67 kN)	1/4" x 3/4"	VPT1100	SCE0100
W6032A	1-1/4" (32mm)	1.510"			1/4" x 3/4"	VPT1125	SCE0125
W6034A	1-1/2" (38mm)	1.740"	12	800 (3.56 kN)	5/16" x 1"	VPT1150	SCE0150
W6038A	2" (51mm)	2.197"			5/16" x 1"	VPT1200	SCE0200

Each clamp consists of two halves, one kept nut and one slotted hex head cap screw.

Aluminum clamps (AL) are supplied with stainless steel hardware

Rigid Strut Clamp

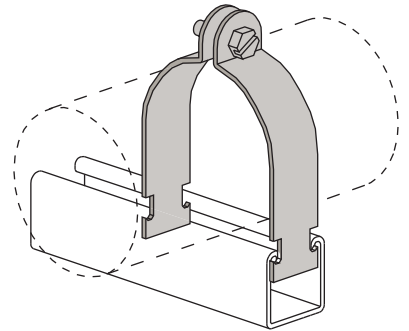


SPECIFYING							
Brand & Part No.	Pipe Size	O.D. Size	Gauge	Allowable Load Lbs. (kN) (ea.)	DISCONTINUED Brands & Part No.		
 WESCO					VERSABAR	FLORIDA STRUT	
W6125A	3⁄8" (10mm)	0.675"	16	400 (1.78 kN)	VP1037	SCR0037	
W6126A	1⁄2" (13mm)	0.840"			VP1050	SCR0050	
W6128A	3⁄4" (19mm)	1.050"			VP1075	SCR0075	
W6130A	1" (25mm)	1.315"	14	600 (2.67 kN)	VP1100	SCR0100	
W6132A	1-1⁄4" (32mm)	1.660"			VP1125	SCR0125	
W6134A	1-1⁄2" (38mm)	1.900"	12	800 (3.56 kN)	VP1150	SCR0150	
W6138A	2" (51mm)	2.375"			VP1200	SCR0200	
W6142A	2-1⁄2" (64mm)	2.875"			VP9250	SCR0250	
W6146A	3" (76mm)	3.500"			VP9300	SCR0300	
W6150A	3-1⁄2" (89mm)	4.000"	11	1,000 (4.45 kN)	VP9350	SCR0350	
W6154A	4" (102mm)	4.500"			VP9400	SCR0400	
W620500A	4-1⁄2" (114mm)	5.000"			VP1450	--	
W6162A	5" (127mm)	5.563"	10		VP1500	SCR0500	
W6170A	6" (152mm)	6.625"			VP1600	SCR0600	
W6174A	8" (203mm)	8.625"			VP1800	SCR0800	
W6176A	10" (254mm)	10.750"			VP10000	SCR1000	
W6178A	12" (305mm)	12.750"			VP12000	SCR1200	
Each clamp consists of two halves one kept nut and one slotted hex head cap screw.							

Aluminum clamps (AL) are supplied with stainless steel hardware



O.D. Strut Clamp

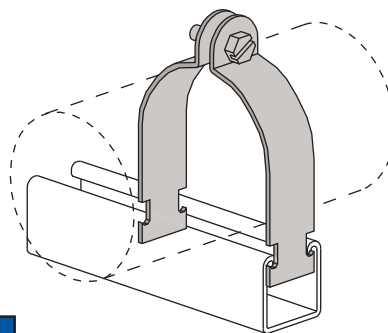

O.D. Size Range	Allowable Load (ea.)	Slotted Indented Hex Screw
¼" (6mm) - ⅞" (22mm)	400 (1.78 kN)	¼" x ¾"
1" (25mm) - 1-⅝" (41mm)	600 (2.67 kN)	¼" x ¾"
1-¾" (44mm) - 3-⅝" (92mm)	800 (3.56 kN)	⅝" x 1"
3-¾" (95mm) - 12-¾" (324mm)	1,000 (4.45 kN)	⅝" x 1-¼"

SPECIFYING Brand & Part No.	O.D. Size	Gauge	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
 WESANCO				
W620025A	¼" (6mm)	16	VT1025	SCO0025
W620037A	⅜" (10mm)		VT1037	SCO0037
W620050A	½" (13mm)		VT1050	SCO0050
W620062A	⅝" (16mm)		VT1062	SCO0062
W620075A	¾" (19mm)		VT1075	SCO0075
W620087A	⅞" (22mm)		VT1087	SCO0087
W620100A	1" (25mm)	14	VT1100	SCO0100
W620112A	1-⅛" (29mm)		VT1112	SCO0112
W620125A	1-¼" (32mm)		VT1125	SCO0125
W620137A	1-⅜" (35mm)		VT1137	SCO0137
W620150A	1-½" (38mm)		VT1150	SCO0150
W620162A	1-⅝" (41mm)		VT1162	SCO0162
W6034A	1-¾" (44mm)	12	VT1175	SCO0175
W620187A	1-⅞" (48mm)		VT1187	SCO0187
W620200A	2" (51mm)		VT1200	SCO0200
W620212A	2-⅛" (54mm)		VT1212	SCO0212
W620225A	2-¼" (57mm)		VT1225	SCO0225
W6138A	2-⅜" (60mm)		VT1237	SCO0237
W620250A	2-½" (64mm)		VT1250	SCO0250
W620262A	2-⅝" (67mm)		VT1262	SCO0262
W620275A	2-¾" (70mm)		VT1275	SCO0275
W6142A	2-⅞" (73mm)		VT1287	SCO0287
W620300A	3" (76mm)		VT1300	SCO0300
W620312A	3-⅛" (79mm)		VT1312	SCO0312
W620325A	3-¼" (83mm)	11	VT1325	SCO0325
W620337A	3-⅜" (86mm)		VT1337	SCO0337
W6146A	3-½" (89mm)		VT1350	SCO0350
W620362A	3-⅝" (92mm)		VT1362	SCO0362
W620375A	3-¾" (95mm)		VT1375	SCO0375
W620387A	3-⅞" (98mm)		VT1387	SCO0387
W6150A	4" (102mm)		VT1400	SCO0400
W620412A	4-⅛" (105mm)		VT1412	SCO0412
W620425A	4-¼" (108mm)		VT1425	SCO0425
W620437A	4-⅜" (111mm)		VT1437	SCO0437
W6154A	4-½" (114mm)		VT1450	SCO0450
W620462A	4-⅝" (118mm)		VT1462	SCO0462
W620475A	4-¾" (121mm)		VT1475	SCO0475
W620487A	4-⅞" (124mm)		VT1487	SCO0487

SPECIFYING Brand & Part No.	O.D. Size	Gauge	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
 WESANCO				
W620500A	5" (127mm)	11	VT1500	SCO0500
W620512A	5-⅛" (130mm)		VT1512	SCO0512
W620525A	5-¼" (133mm)		VT1525	SCO0525
W620537A	5-⅜" (137mm)		VT1537	SCO0537
W620550A	5-½" (140mm)		VT1550	SCO0550
W620562A	5-⅝" (143mm)		VT1562	SCO0562
W620575A	5-¾" (146mm)	10	VT1575	SCO0575
W620587A	5-⅞" (149mm)		VT1587	SCO0587
W620600A	6" (152mm)		VT1600	SCO0600
W620612A	6-⅛" (156mm)		VT1612	SCO0612
W620625A	6-¼" (159mm)		VT1625	SCO0625
W620637A	6-⅜" (162mm)		VT1637	SCO0637
W620650A	6-½" (165mm)		VT1650	SCO0650
W620662A	6-⅝" (168mm)		VT1662	SCO0662
W620675A	6-¾" (172mm)		VT1675	SCO0675
W620687A	6-⅞" (175mm)		VT1687	SCO0687
W620700A	7" (178mm)		VT1700	SCO0700
W620712A	7-⅛" (181mm)		VT1712	SCO0712
W620725A	7-¼" (184mm)		VT1725	SCO0725
W620737A	7-⅜" (187mm)		VT1737	SCO0737
W620750A	7-½" (191mm)		VT1750	SCO0750
W620762A	7-⅝" (194mm)		VT1762	SCO0762
W620775A	7-¾" (197mm)		VT1775	SCO0775
W620787A	7-⅞" (200mm)		VT1787	SCO0787
W620800A	8" (203mm)		VT1800	SCO0800
W620812A	8-⅛" (206mm)		VT1812	SCO0812
W620825A	8-¼" (210mm)		VT1825	SCO0825
W620837A	8-⅜" (213mm)		VT1837	SCO0837
W620850A	8-½" (216mm)		VT1850	SCO0850
W620862A	8-⅝" (219mm)		VT1862	SCO0862
W620887A	8-¾" (222mm)		VT1887	SCO0875
W621000A	10" (254mm)		VT10000	SCO1000
W621075A	10-¾" (273mm)		VT10075	SCO1075
W621137A	11-⅜" (289mm)		VT11037	SCO1137
W621200A	12" (305mm)		VT12000	SCO1200
W621275A	12-¾" (324mm)		VT12075	SCO1275

Aluminum clamps (AL) are supplied with stainless steel hardware




Strut Clamps



Standard Finish: Electro Galvanized (EG)

Universal Strut Clamp

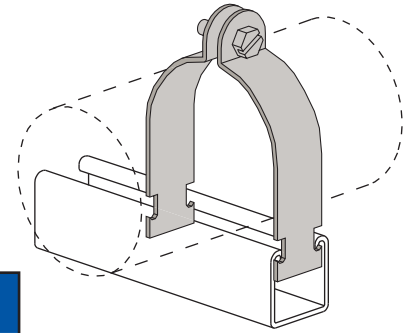


SPECIFYING Brand & Part No.	Nominal Size	O.D. Size	Gauge	Allowable Load Lbs. (kN) (ea.)	DISCONTINUED Brands & Part No.	
					VERSABAR	FLORIDA STRUT
WESANCO						
W6056A	½" (13mm)	0.701 - 0.875 (18-22mm)	16	400 (1.78 kN)	VP9050	SCU0050
W6058A	¾" (19mm)	0.917 - 1.081 (23-27mm)	16	600 (2.67 kN)	VP9075	SCU0075
W6060A	1" (25mm)	1.125 - 1.375 (28-35mm)	14		VP9100	SCU0100
W6062A	1-¼" (32mm)	1.500 - 1.691 (38-43mm)	14		VP9125	SCU0125
W6064A	1-½" (38mm)	1.735 - 1.931 (44-49mm)	14	800 (3.56 kN)	VP9150	SCU0150
W6068A	2" (51mm)	2.192 - 2.400 (56-61mm)	14		VP9200	SCU0200
W6142A	2-½" (64mm)	2.875" (73mm)	12		VP9250	--
W6146A	3" (76mm)	3.500" (89mm)	12	1,000 (4.45 kN)	VP9300	--
W6150A	3-½" (89mm)	4.000" (102mm)	11		VP9350	--
W6154A	4" (102mm)	4.500" (114mm)	11		VP9400	--

* These clamps are designed to fit both pipe (rigid conduit) and thin walled tubing (EMT) in the corresponding sizes.

Copper Tube Strut Clamp

Copper Colored Epoxy or Powder Coated Clamps

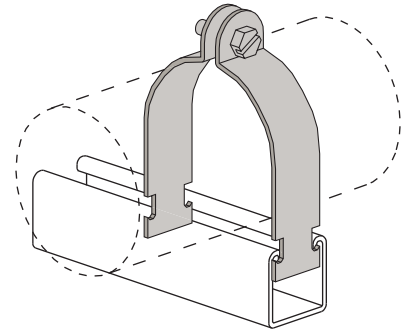

SPECIFYING Brand & Part No.	Nominal Size	O.D. Size	Gauge	Allowable Load Lbs. (kN) (ea.)	DISCONTINUED Brands & Part No.	
					VERSABAR	FLORIDA STRUT
 WESANCO						
W620037ACP	¼" (6mm)	0.375	16	400 (1.78 kN)	VT1037CP	--
W620050ACP	⅜" (10mm)	0.500			VT1050CP	--
W620062ACP	½" (13mm)	0.625			VT1062CP	--
W620075ACP	⅝" (16mm)	0.750			VT1075CP	--
W620087ACP	¾" (19mm)	0.875			VT1087CP	--
W620112ACP	1" (25mm)	1.125	14	600 (2.67 kN)	VT1112CP	--
W620137ACP	1-¼" (32mm)	1.375			VT1137CP	--
W620162ACP	1-½" (38mm)	1.625			VT1162CP	--
W620212ACP	2" (51mm)	2.125	12	800 (3.56 kN)	VT1212CP	--
W620262ACP	2-½" (64mm)	2.625			VT1262CP	--
W620312ACP	3" (76mm)	3.125			VT1312CP	--
W620362ACP	3-½" (89mm)	3.625	12	1,000 (4.45 kN)	VT1362CP	--
W620412ACP	4" (102mm)	4.125	11		VT1412CP	--
W620512ACP	5" (127mm)	5.125			VT1512CP	--
W620612ACP	6" (152mm)	6.125			VT1612CP	--
W620812ACP	8" (203mm)	8.125			VT1812CP	--


* These clamps are designed to fit copper tube

* These clamps are designed to fit copper tube




Standard Finish: Electro Galvanized (EG)

Rigid Conduit One Piece Pipe Clamp

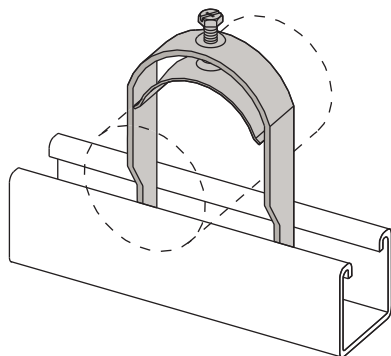


SPECIFYING Brand & Part No.	EMT Size	Rigid Con- duit Size	Design Load Lbs. (kN)	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
BMU050	1/2" (13mm)	--	200 (0.89 kN)	BMU050	SCH0050
BMU075	3/4" (19mm)	1/2" (13mm)		BMU075	SCH0075
BMU100	1" (25mm)	3/4" (19mm)	300 (1.33 kN)	BMU100	SCH0100
BMU125	1 1/4" (32mm)	1" (25mm)		BMU125	SCH0125
BMU150	1 1/2" (38mm)	1 1/4" (32mm)	400 (1.78 kN)	BMU150	SCH0150
BMU200	2" (51mm)	1 1/2" (38mm)		BMU200	SCH0200
BMU250	2 1/2" (64mm)	2 1/2" (64mm)		BMU250	SCH0250
BMU300	3" (76mm)	3" (76mm)		BMU300	SCH0300
BMU350	3 1/2" (89mm)	3 1/2" (89mm)		BMU350	SCH0350
BMU400	4" (102mm)	4" (102mm)		BMU400	SCH0400

Pipe Strap

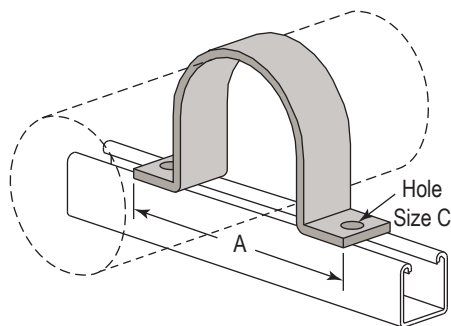

SPECIFYING Brand & Part No.	Pipe Size	"A" Length	"C" Hole Size	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
W7826	1/2"	3" (76mm)	5/16" (7.9mm)	VP4050	PS20050
W7828	3/4"	3-1/4" (83mm)		VP4075	PS20075
W7830	1"	3-9/16" (90mm)		VP4100	PS20100
W7832	1-1/4"	3-13/16" (97mm)		VP4125	PS20125
W7834	1-1/2"	4-1/16" (103mm)	7/16" (11.1mm)	VP4150	PS20150
W7838	2"	5-13/16" (148mm)		VP4200	PS20200
W7842	2-1/2"	6-1/4" (159mm)		VP4250	PS20250
W7846	3"	7" (178mm)		VP4300	PS20300
W7850	3-1/2"	7-7/8" (200mm)		VP4350	PS20350
W7854	4"	8" (203mm)		VP4400	PS20400
W7862	5"	9-1/8" (232mm)		VP4500	PS20500
W7870	6"	10-5/16" (262mm)		VP4600	PS20600

1-Hole O.D. Tubing Clamp




SPECIFYING Brand & Part No.	O.D. Tube Size	CL	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W7724	1/4"	9/16" (14mm)	VT2025	TC10025
W7724A	5/16"	9/16" (14mm)	VT2031	TC10031
W7725	3/8"	5/8" (16mm)	VT2037	TC10037
W7726	1/2"	11/16" (17mm)	VT2050	TC10050
W7727	5/8"	3/4" (19mm)	VT2062	TC10062
W7728	3/4"	13/16" (21mm)	VT2075	TC10075
W7729	7/8"	7/8" (22mm)	VT2087	TC10087
W7730	1"	15/16" (24mm)	VT2100	TC10100




Standard Finish: Electro Galvanized (EG)

Pipe Coupling Fitting

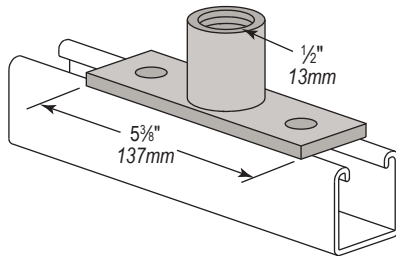


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W247050	--	--

Conduit Hangers



SPECIFYING Brand & Part No.	Pipe Size	Stock Gauge	Dim "A"	Dim "W"	DISCONTINUED Brands & Part No.	
WESANCO					VERSABAR	FLORIDA STRUT
SHH050	1/2" (13mm)	18 ga. (1.3mm)	9/32" (7.1mm)	3/4" (19mm)	VP13050	--
SHH075	3/4" (19mm)				VP13075	--
SHH100	1" (25mm)				VP13100	--
SHH125	1-1/4" (32mm)				VP13125	--
SHH150	1-1/2" (38mm)	16 ga. (1.3mm)	1 1/32" (8.7mm)	7/16" (11.1mm)	VP13150	--
SHH200	2" (51mm)				VP13200	--
SHH250	2-1/2" (64mm)				VP13250	--
SHH300	3" (76mm)				VP13300	--
SHH350	3-1/2" (89mm)				VP13350	--
SHH400	4" (102mm)				VP13400	--

Loop Hangers

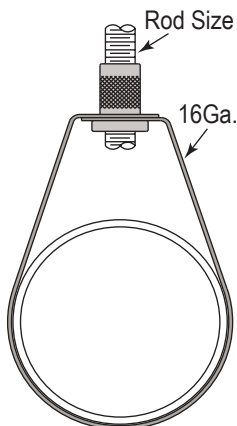

SPECIFYING Brand & Part No.	Pipe Size	Rod Size	Max Rec Load (Lbs.)	DISCONTINUED Brands & Part No.	
WESANCO				VERSABAR	FLORIDA STRUT
BHK050	1/2" (13mm)	3/8"	400 (1.78 kN)	VP7050	LH0050EG
BHK075	3/4" (19mm)			VP7075	LH0075EG
BHK100	1" (25mm)			VP7100	LH0100EG
BHK125	1-1/4" (32mm)			VP7125	LH0125EG
BHK150	1-1/2" (38mm)			VP7150	LH0150EG
BHK200	2" (51mm)			VP7200	LH0200EG
BHK250	2-1/2" (64mm)	1/2"	600 (2.67 kN)	VP7250	LH0250EG
BHK300	3" (76mm)			VP7300	LH0300EG
BHK400	4" (102mm)			VP7400	LH0400EG
BHK500	5" (127mm)			VP7500	LH0500EG
BHK600	6" (152mm)		1,250 (5.56 kN)	VP7600	LH0600EG
BHK800	8" (203mm)			VP7800	LH0800EG



SPH Cush-A-Ring Clamps


SPH Cush-A-Ring Clamp for Copper Tube or Steel Tube or Pipe




The **Cush-A-Ring** is a unique rubber lined hanger for copper and steel tube or pipe. The SPH-1 thru SPH-10 is a two-part clamp that has a hinged side with a single screw locking system. The quick locking system is easy to close with one hand, which makes it

easier and faster for installation.


The noise insulating rubber lining is made of UV-resistant EPDM rubber. The Cush-A-Ring is zinc plated for corrosion resistance.

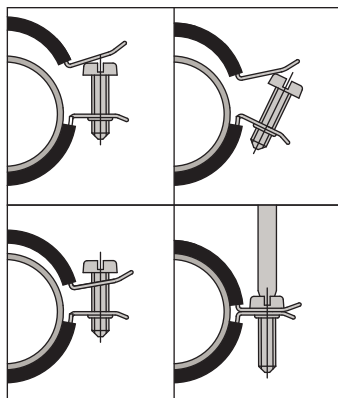

SPH-1 thru SPH-10

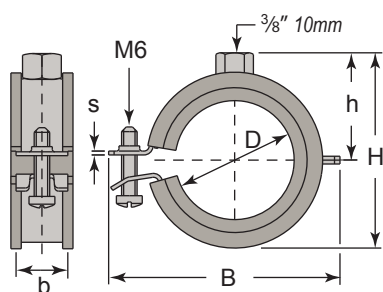

SPH-11 thru SPH-14

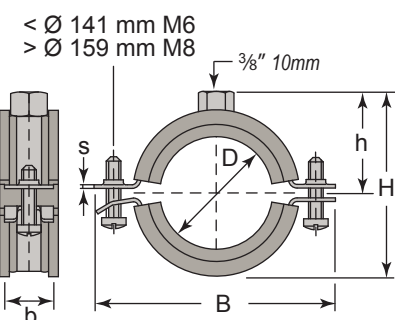

- Rubber lined, noise insulated, Lining resistant to aging
- With quick locking system
- Clamp easy to close with one hand
- UV-resistant black EPDM rubber lining
- Zinc plated
- Plenum rated - tested to ASTM E-84
- Meets - Buy America Act
- Temperature range -58°F to +200°F (-50°C to 93°C)

Part No.	Dimensions (in)						
	D (mm)	IP	CT	B	H	h	b x s (mm)
SPH-1	11 – 14	1/4" (6mm)	3/8" (10mm)	1.9" (48mm)	1.4" (36mm)	0.87" (22mm)	20 x 1.25
SPH-2	15 – 18	3/8" (10mm)	1/2" (13mm)	1.9" (48mm)	1.4" (36mm)	0.87" (22mm)	
SPH-3	20 – 23	1/2" (13mm)	3/4" (19mm)	2.2" (56mm)	1.6" (41mm)	0.94" (24mm)	
SPH-4	25 – 28	3/4" (19mm)	1" (25mm)	2.4" (61mm)	1.8" (46mm)	1.10" (28mm)	
SPH-5	31 – 35	1" (25mm)	1-1/4" (32mm)	2.6" (66mm)	2.0" (51mm)	1.20" (30mm)	
SPH-6	40 – 43	1-1/4" (32mm)	1-1/2" (38mm)	3.0" (76mm)	2.4" (61mm)	1.30" (33mm)	
SPH-7	48 – 53	1-1/2" (38mm)	-	3.3" (84mm)	2.6" (66mm)	1.50" (38mm)	
SPH-8	54 – 56	-	2" (51mm)	3.5" (89mm)	2.8" (71mm)	1.60" (41mm)	
SPH-9	57 – 63	2" (51mm)	-	3.7" (94mm)	3.1" (79mm)	1.70" (43mm)	
SPH-10	64-70	-	2-1/2" (64mm)	4.5" (114mm)	3.9" (99mm)	2.20" (56mm)	23 x 2.00
Below parts have 2 bolt configurations							
SPH-11	73-80	2-1/2" (64 mm)	3" (76 mm)	5.0" (127 mm)	4.3" (109 mm)	2.40" (61 mm)	23 x 2.00
SPH-12	83-91	3" (76 mm)	-	5.4" (137 mm)	4.8" (122 mm)	2.60" (66 mm)	25 x 2.50
SPH-13	100- 105	-	4" (102 mm)	6.0" (152 mm)	5.3" (135 mm)	2.90" (74 mm)	
SPH-14	108-114	4" (102 mm)	-	6.3" (160 mm)	5.7" (145 mm)	3.10" (79 mm)	



Standard Finish: Electro Galvanized (EG)


SPP Cush-A-Ring Clamps

SPP Cush-A-Ring Clamp for PEX, CPVC, or PVC Pipe




The **Cush-A-Ring** is a unique rubber lined hanger for PEX, CPVC, and PVC pipe. The SPP-1 thru SPP-10 has a two-part clamp with a hinged side and a single screw locking system. The quick locking system is easy to close with one hand, which makes it easier and faster for installation. The noise insulating rubber lining is made of UV-resistant EPDM rubber. The Cush-A-Ring is zinc plated for corrosion resistance.


- With quick locking system
- Clamp easy to close with one hand
- Specially formulated, green, UV, and age resistant EPDM rubber lining
- Perfect for PEX, Fusion, CPVC, and PVC pipe
- ASTM E-84
- Complies with MSS SP-58 and SP-69
- Material steel, zinc plated

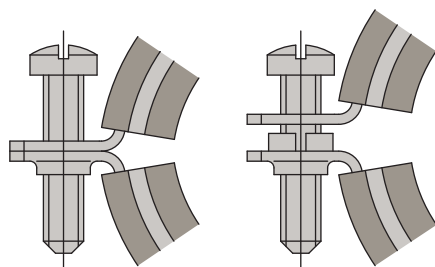

SPP-2 thru SPP-10

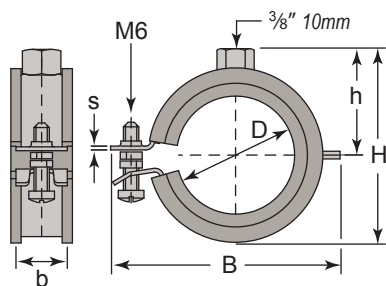

SPP-11 thru SPP-14

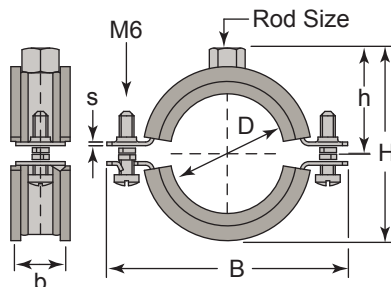


Part No.	Dimensions (in)						Rod Size
	D	IP	CT	B	H	h	
SPP-2	15 – 18	$\frac{3}{8}$ " (10mm)	$\frac{1}{2}$ " (13mm)	1.9" (48mm)	1.4" (36mm)	0.87" (22mm)	$\frac{3}{8}$ " (10mm)
SPP-3	20 – 23	$\frac{1}{2}$ " (13mm)	$\frac{3}{4}$ " (19mm)	2.2" (56mm)	1.7" (43mm)	0.94" (24mm)	
SPP-4	25 – 28	$\frac{3}{4}$ " (19mm)	1" (25mm)	2.4" (61mm)	1.9" (48mm)	1.0" (25mm)	
SPP-5	31 – 35	1" (25mm)	1- $\frac{1}{4}$ " (32mm)	2.6" (66mm)	2.2" (56mm)	1.2" (30mm)	
SPP-6	40 – 43	1- $\frac{1}{4}$ " (32mm)	1- $\frac{1}{2}$ " (38mm)	3.0" (76mm)	2.6" (66mm)	1.3" (33mm)	
SPP-7	48 – 53	1- $\frac{1}{2}$ " (38mm)	-	3.3" (84mm)	3.0" (76mm)	1.5" (38mm)	
SPP-8	54 – 56	-	2" (51mm)	3.5" (89mm)	3.0" (76mm)	1.6" (41mm)	
SPP-9	60 – 65	2" (51mm)	-	4.3" (109mm)	3.4" (86mm)	1.7" (43mm)	
SPP-10	70 – 76	2- $\frac{1}{2}$ " (64mm)	-	4.9" (124mm)	4.1" (104mm)	2.2" (56mm)	
Below parts have 2 bolt configurations							
SPP-11	86 – 91	3" (76mm)	-	5.4" (137mm)	4.6" (117mm)	2.4" (61mm)	$\frac{3}{8}$ " (10mm)
SPP-12	110 – 114	4" (102mm)	-	6.3" (160mm)	5.8" (147mm)	2.9" (74mm)	
SPP-13	124 – 132	-	-	6.8" (173mm)	5.9" (150mm)	3.1" (79mm)	$\frac{1}{2}$ " (13mm)
SPP-14	155 – 160	-	-	8.0" (203mm)	7.4" (188mm)	3.9" (99mm)	




Standard Finish: Electro Galvanized (EG)

Pipe Riser Clamps

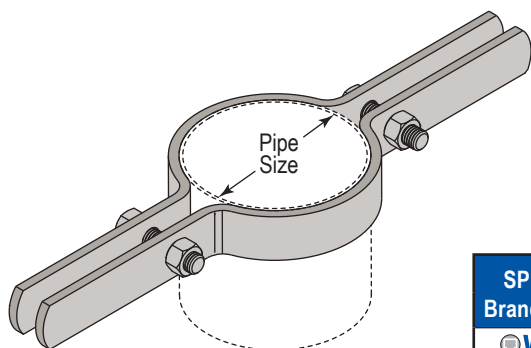

SPECIFYING Brand & Part No.	Pipe Size	Max Rec Load (Lbs.)	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
RCL050	½" (13mm)	220 (0.98 kN)	VP8050	--
RCL075	¾" (19mm)		VP8075	--
RCL100	1" (25mm)	255 (1.13 kN)	VP8100	RC0100
RCL125	1-¼" (32mm)		VP8125	RC0125
RCL150	1-½" (38mm)		VP8150	RC0150
RCL200	2" (51mm)		VP8200	RC0200
RCL250	2-½" (64mm)	390 (1.74 kN)	VP8250	RC0250
RCL300	3" (76mm)	530 (2.36 kN)	VP8300	RC0300
RCL350	3-½" (89mm)	600 (2.67 kN)	VP8350	--
RCL400	4" (102mm)	810 (3.60 kN)	VP8400	RC0400
RCL500	5" (127mm)	1,500 (6.67 kN)	VP8500	--
RCL600	6" (152mm)	1,570 (6.98 kN)	VP8600	RC0600
RCL800	8" (203mm)	2,500 (11.12 kN)	VP8800	RC0800

Parallel Pipe Clamps

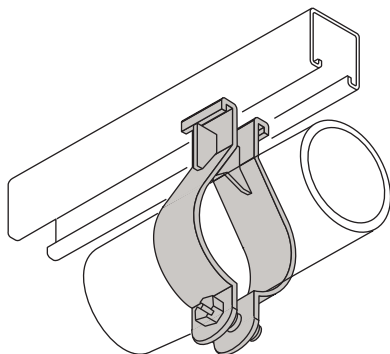


SPECIFYING Brand & Part No.	Pipe Size	Actual O.D.	Design Load (Lbs.)	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
WESANCO					
W6005	⅝" (10mm)	0.675" (17.1mm)	300 (1.35 kN)	VP6037	--
W6006	½" (13mm)	0.840" (21.3mm)		VP6050	--
W6007	¾" (19mm)	1.050" (26.7mm)		VP6075	--
W6008	1" (25mm)	1.315" (33.4mm)	400 (1.80 kN)	VP6100	--
W6009	1-¼" (32mm)	1.660" (42.2mm)		VP6125	--
W6010	1-½" (38mm)	1.900" (48.3mm)	500 (2.25 kN)	VP6150	--
W6011	2" (51mm)	2.375" (60.3mm)		VP6200	--
W6012	2-½" (64mm)	2.875" (73.0mm)		VP6250	--
W6013	3" (76mm)	3.500" (88.9mm)		VP6300	--
W6014	3-½" (89mm)	4.000" (101.6mm)		VP6350	--
W6015	4" (102mm)	4.500" (114.3mm)		VP6400	--



Standard Finish: Electro Galvanized (EG)

Standard Adjustable Clevis Hangers

For: Non-Insulated, stationary pipe lines. General piping, heating and sprinkler installations. * Also available: Stainless, Hot-Dipped, and Black H.R.P.O., (Larger sizes for up to 30" rigid pipe can be supplied)

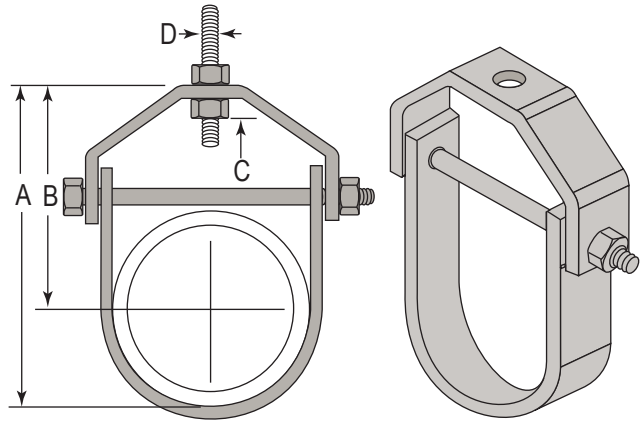


SPECIFYING Brand & Part No.	Pipe Size	A	B	C	Rod Size D	Design Load (Lbs.)	DISCONTINUED Brands & Part No.	
							VERSABAR	FLORIDA STRUT
WESANCO								
SCH050	1/2" (13mm)	2-1/8" (54mm)	1-11/16" (43mm)	7/16" (11mm)	3/8" (10mm)	610 (2.71 kN)	VP2050	CH0050
SCH075	3/4" (19mm)	2-7/16" (62mm)	1-7/8" (48mm)	1/2" (13mm)			VP2075	CH0075
SCH100	1" (25mm)	2-13/16" (71mm)	2-1/8" (54mm)	5/8" (16mm)			VP2100	CH0100
SCH125	1-1/4" (32mm)	3-7/16" (87mm)	2-9/16" (65mm)	7/8" (22mm)			VP2125	CH0125
SCH150	1-1/2" (38mm)	4" (102mm)	3" (76mm)	1-1/16" (27mm)			VP2150	CH0150
SCH200	2" (51mm)	4-7/8" (124mm)	3-11/16" (94mm)	1-5/8" (41mm)	1/2" (13mm)	1,130 (5.03 kN)	VP2200	CH0200
SCH250	2-1/2" (64mm)	6-1/8" (156mm)	4-1/16" (119mm)	2" (51mm)			VP2250	CH0250
SCH300	3" (76mm)	6-9/16" (166mm)	4-3/4" (121mm)	1-3/4" (44mm)			VP2300	CH0300
SCH350	3-1/2" (89mm)	6-15/16" (176mm)	4-15/16" (125mm)	1-3/4" (44mm)	5/8" (16mm)	--	VP2350	--
SCH400	4" (102mm)	7-13/16" (199mm)	5-9/16" (142mm)	1-15/16" (49mm)			VP2400	CH0400
SCH500	5" (127mm)	9" (229mm)	6-3/16" (158mm)	1-3/4" (44mm)			VP2500	--
SCH600	6" (152mm)	10-1/8" (257mm)	6-13/16" (173mm)	1-7/8" (48mm)	3/4" (19mm)	--	VP2600	--
SCH800	8" (203mm)	12-5/8" (321mm)	8-5/16" (212mm)	2-1/8" (54mm)	7/8" (22mm)	--	VP2800	--

*A & B Dimensions may vary


Side Opening Hangers

Swing Hinge Design

Can be supported by rod or bolted directly to wall.
Hanger is rigid enough to hold pipe prior to closure



SPECIFYING Brand & Part No.	Pipe Size	A	D	F	DISCONTINUED Brands & Part No.	
					VERSABAR	FLORIDA STRUT
WESANCO						
W4050H	1/2" (13mm)	2-7/16" (62mm)	3/8" (10mm)	3/4" (19mm)	VP3050	--
W4075H	3/4" (19mm)	2-1/2" (64mm)			VP3075	--
W4100H	1" (25mm)	2-9/16" (65mm)			VP3100	--
W4125H	1-1/4" (32mm)	2-11/16" (68mm)			VP3125	--
W4150H	1-1/2" (38mm)	2-7/8" (73mm)			VP3150	--
W4200H	2" (51mm)	3-5/16" (84mm)	1/2" (13mm)	1-1/4" (32mm)	VP3200	--
W4250H	2-1/2" (64mm)	3-7/8" (98mm)			VP3250	--
W4300H	3" (76mm)	4-1/8" (105mm)			VP3300	--
W4350H	3-1/2" (89mm)	4-5/8" (117mm)			VP3350	--
W4400H	4" (102mm)	5" (127mm)			VP3400	--



Standard Finish: Electro Galvanized (EG)

Adjustable J-Hanger

Finish: Electro Galvanized (standard) or Stainless Steel

Size Range: ½" thru 4" (13mm to 102mm) Pipe


Material: Carbon Steel

Function: Can be suspended by hanger rod or attached to a wall. "T" slot in hanger permits side bolt to be installed after installation and setting of pipe.

Approvals: Conforms to Manufacturers Standardization Society SP-69, Type 5.

Maximum Temperature: 650° F (343°C)

Finish: Carbon Steel

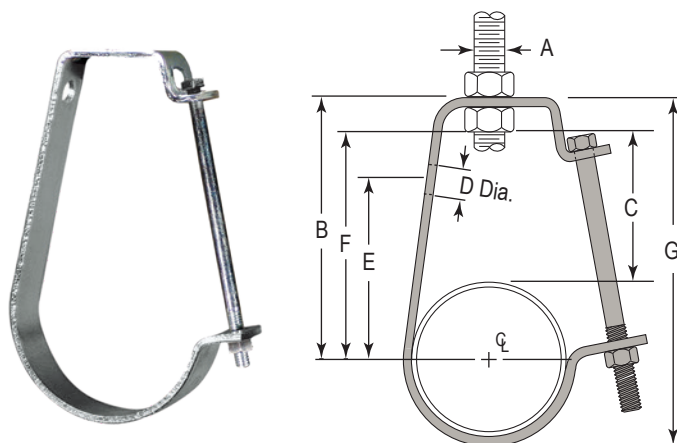

SPECIFYING Brand & Part No.		Pipe Size	A Rod Size	B	C	D	E	F	Bolt Size	G	Stock Size	Max. Rec. Load Lbs. (<i>kN</i>)	DISCONTINUED Brands & Part No.	
 WESANCO													VERSABAR	FLORIDA STRUT
W4050	½"	¾"	2- ⁵ / ₁₆ " (67 mm)	1- ³ / ₄ " (44 mm)	7/16" (11 mm)	1- ¹ / ₂ " (38 mm)	1- ¹⁵ / ₁₆ " (49 mm)	¼"	3- ⁵ / ₃₂ " (80 mm)	12 ga. x ¾"	400 (1.78 kN)	VP3050	--	
W4075	¾"		2- ⁷ / ₈ " (73 mm)	1- ⁷ / ₈ " (48 mm)		1- ¹¹ / ₁₆ " (43 mm)	2- ¹ / ₈ " (54 mm)		3- ¹ / ₂ " (89 mm)			VP3075	--	
W4100	1"		2- ¹⁵ / ₁₆ " (75 mm)	1- ¹⁵ / ₁₆ " (49 mm)		1- ¹³ / ₁₆ " (46 mm)	2- ⁵ / ₁₆ " (59 mm)		3- ¹¹ / ₁₆ " (94 mm)			VP3100	--	
W4125	1-¼"		3-¼" (83 mm)	2" (51 mm)		2- ¹ / ₁₆ " (52 mm)	2- ⁵ / ₈ " (67 mm)		4- ¹ / ₈ " (105 mm)			VP3125	--	
W4150	1-½"		3- ⁹ / ₁₆ " (90 mm)	2- ³ / ₁₆ " (56 mm)		2- ⁷ / ₁₆ " (62 mm)	2- ⁷ / ₈ " (73 mm)		4- ⁵ / ₈ " (117 mm)			VP3150	--	
W4200	2"		3- ¹¹ / ₁₆ " (94 mm)	2- ¹ / ₈ " (54 mm)		2- ⁹ / ₁₆ " (65 mm)	3- ¹ / ₁₆ " (78 mm)		5" (127 mm)			VP3200	--	
W4250	2-½"	½"	4- ⁷ / ₁₆ " (113 mm)	2- ⁷ / ₁₆ " (62 mm)	9/16" (14 mm)	3- ³ / ₁₆ " (81 mm)	3- ⁵ / ₈ " (92 mm)	¾"	6" (152 mm)	12 ga. x 1-¼"	500 (2.22 kN)	VP3250	--	
W4300	3"		4- ¹³ / ₁₆ " (122 mm)	2- ⁹ / ₁₆ " (65 mm)		3-½" (89 mm)	4- ¹ / ₁₆ " (103 mm)		6- ²¹ / ₃₂ " (169 mm)			VP3300	--	
W4350	3-½"		5- ¹ / ₈ " (130 mm)	2- ⁵ / ₈ " (67 mm)		3-¾" (95 mm)	4- ³ / ₈ " (111 mm)		7- ⁵ / ₁₆ " (186 mm)	¾" x 1-¼"		VP3350	--	
W4400	4"	5/8"	6- ¹ / ₈ " (156 mm)	3- ³ / ₁₆ " (81 mm)		4- ⁵ / ₈ " (117 mm)	5- ³ / ₁₆ " (132 mm)		8- ⁹ / ₁₆ " (217 mm)			550 (2.45 kN)	VP3400	--




Standard Finish: Electro Galvanized (EG)

Pipe Roller - No Axle

For 1" to 4" Pipe

Cast Aluminum rollers
Steel portion has Electro-galvanized Finish

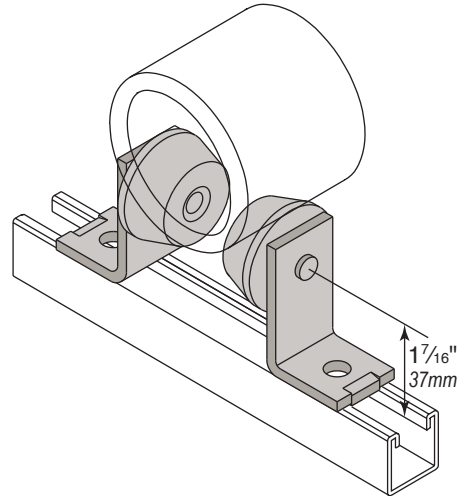


SPECIFYING Brand & Part No.	Design Load 12 Ga. Channel	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
SPR14	500 Lbs. (2.22 kN)	VPR	R20

Pipe Roller - With Axle

For 1/2" to 10" Pipe

Cast Aluminum rollers
Steel portion has Electro-galvanized Finish

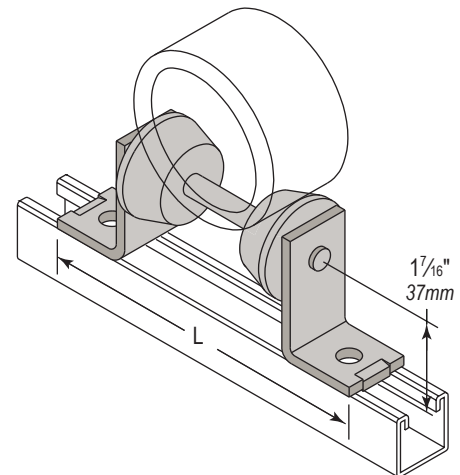


SPECIFYING Brand & Part No.	Pipe Size	L	Design Load 12 Ga. Channel	DISCONTINUED Brands & Part No.	
				VERSABAR	FLORIDA STRUT
 WESANCO					
SPRA3	½" - 3" (13mm - 76mm)	6-½" (165mm)	750 Lbs. (3.3 kN)	VPR1	--
SPRA4	3-½" - 4" (89mm - 102mm)	7" (178mm)		VPR2	R213740
SPRA5	5" (127mm)	7-½" (191mm)		VPR3	R214350
SPRA6	6" (152mm)	7-¾" (197mm)		VPR4	R214360
SPRA8	8" (203mm)	9" (229mm)		VPR5	R216380
SPRA10	9" - 10" (229mm - 254mm)	--		--	R219010
Pipe without insulation					



Standard Finish: Electro Galvanized (EG)

Pipe Roller - Heavy Duty

For 6" to 18" Pipe

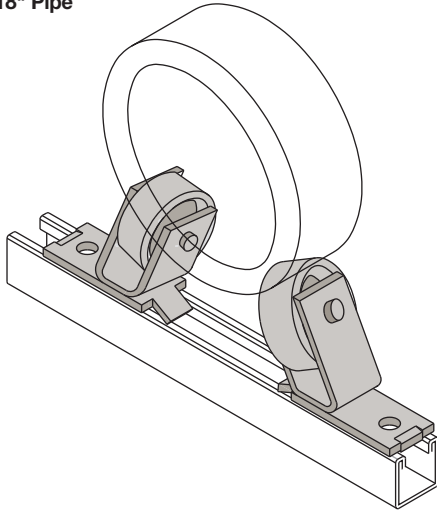


Cast Aluminum rollers
Steel portion has Electro-galvanized Finish

SPECIFYING Brand & Part No.	Design Load 12 Ga. Channel	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
 WESANCO			
SPRHD18	1,500 Lbs. (6.67 kN)	VPR2000	R22

Pipe Roller - Heavy Duty

For 16" to 24" Pipe

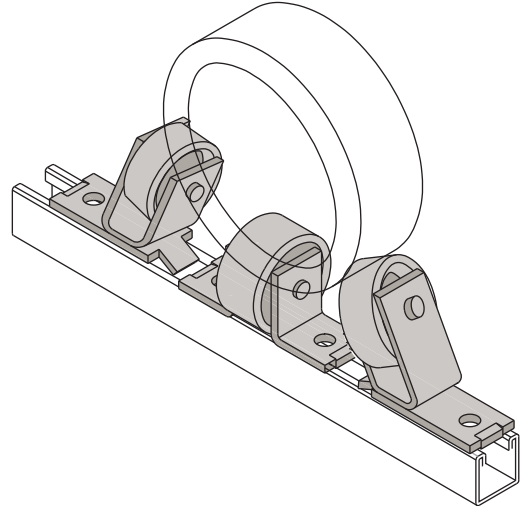


Cast Aluminum rollers
Steel portion has Electro-galvanized Finish

SPECIFYING Brand & Part No.	Design Load 12 Ga. Channel	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
 WESANCO			
SPRHD24	2,000 Lbs. (8.90 kN)	VPR3000	R23



Cush-A-Nator®

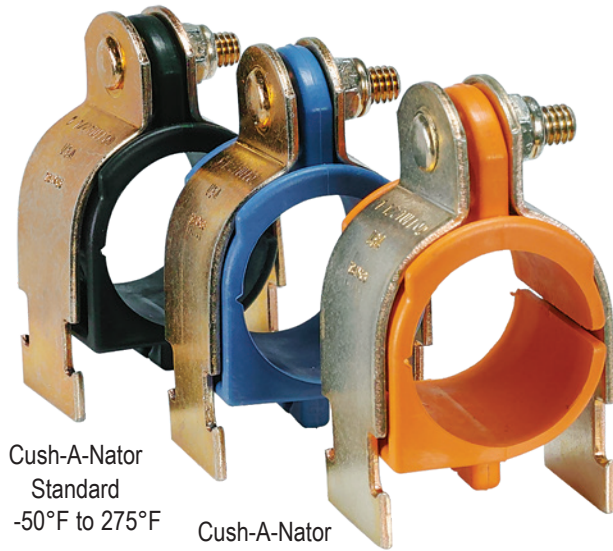

Cush-A-Nator
Standard
-50°F to 275°F

Cush-A-Nator
High Temp
-65°F to 340°F

Cush-A-Nator
High Intensity Temp
-65°F to 400°F


The Cush-A-Nator® cushion is manufactured in the United States and made from a new incredibly durable thermoplastic rubber that resists high heat and provides longer life against vibration fatigue. The Cush-A-Nator is made from a proprietary thermoplastic vulcanized material cross-linked with high performance rubber and thermoplastic elastomers, which produces the highest operating temperature range in the industry.



New Cush-A-Nator High Intensity Temp
has a service temperature of
-65°F to 400°F

The Cush-A-Nator® is designed to provide the user with a choice of the highest heat range resistance of any cushion on the market or simply the advanced features of a superior design.

The Cush-A-Nator is designed and manufactured in Michigan.

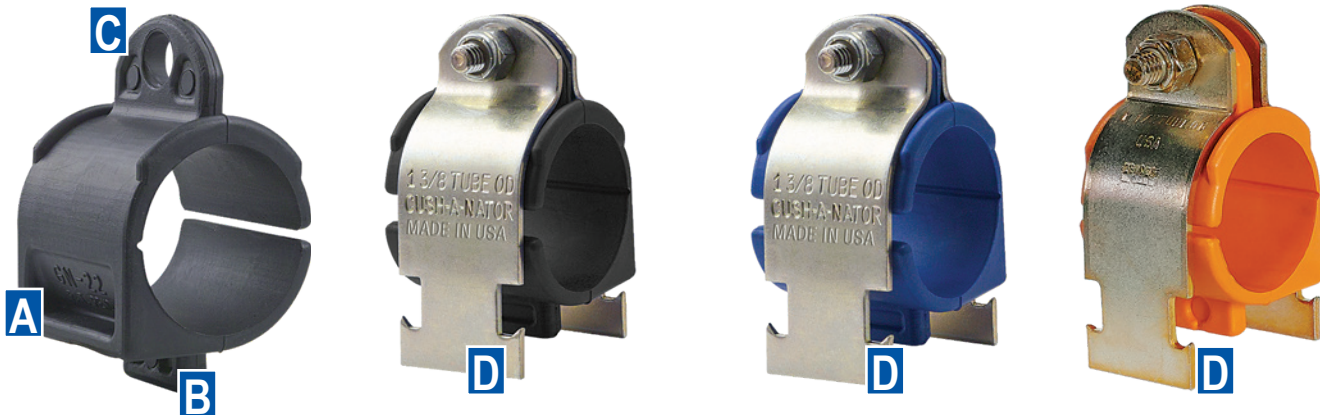

Features

A Thumb Drive

The Cush-A-Nator has the exclusive "Thumb Drive" that provides the installer a gripping point to easily open the cushion with the help of leverage tabs and a living hinge. Easy and effortlessly to install.

B Self-Alignment

Cushion can be opened and placed over the pipe or tube and rotated into place while on the channel and automatically aligned with the channel opening ready for clamping.

C Pressure Control

The Cush-A-Nator cushion has a built in squeeze control as part of the cushion design. The side opening and the squeeze control tab provides evenly distributed pressure around the tube or pipe.

D Complete Clamping Unit


The Cush-A-Nator is the only strut mounted cushion that is mechanically connected to the supporting steel clamp because the bolt passes through the squeeze control tab forming the single unit connection. This design helps prevent the cushion from excess vibration by being attached directly to the clamp.

Cush-A-Nator® is manufactured under U.S. patents #9074715, #D702113, #D710190, and European Community patents #0013843410001, #0013843410002, and a United Kingdom patent pending.

Installation examples shown on next page



Cush-A-Nator® – New Installations

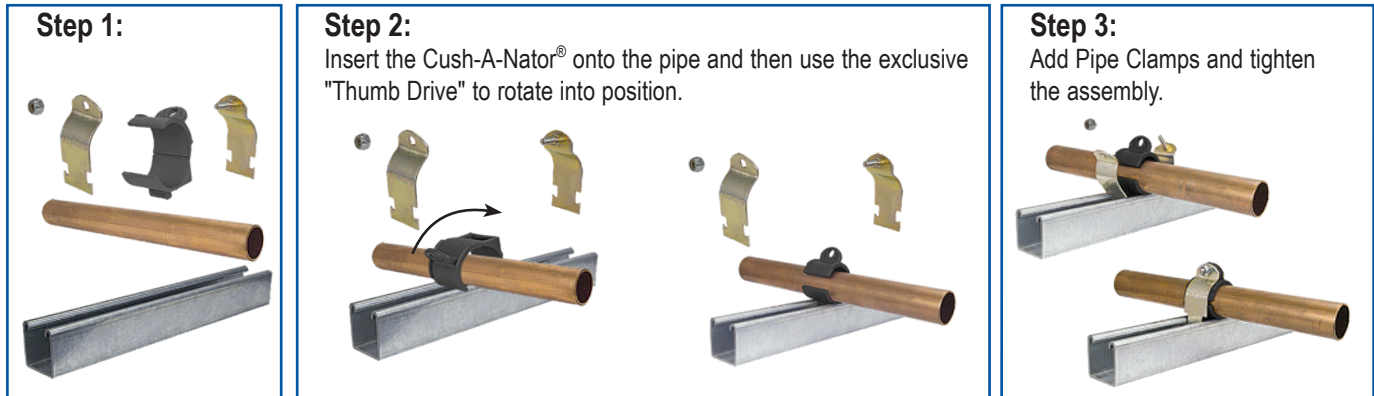

Cush-A-Nator® – Retrofit / Replacement Applications

A key feature of the Cush-A-Nator is this ability to place the cushion and rotate into position. ***Perfect for retrofit applications!***

Retrofit - The Common Problem


Replacing a cush-a-clamp within a long pipe run poses a problem. Clamps before and after the one to be replaced prohibit the pipe from being raised so that the new cushion can be installed correctly. All to often a work-around is used which compromises the connection.

Retrofit - The Perfect Solution


Step 1: Remove Bad Cushion.




Step 2: The Cush-A-Nator can be installed without raising the pipe. The unique "Thumb Drive" allows you to rotate the Cush-A-Nator into position.

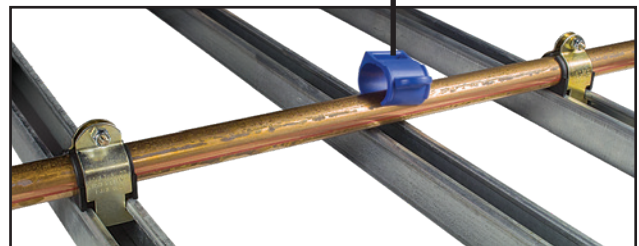


Step 3: Rotated into place while on the channel and the Self-Alignment tab automatically aligns with the channel opening ready for clamping.

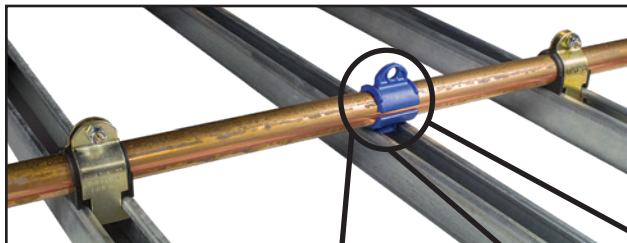


Step 3: Add Pipe Clamps and tighten the assembly.



Rotate into Position




Thumb Drive



"Self-Alignment"



Cush-A-Nator® Standard (CN) has an operating range of -50°F to 275°F (-45°C to 135°C).

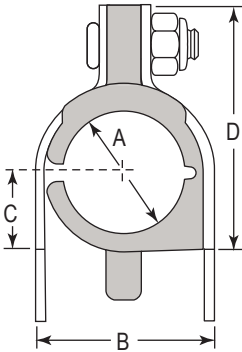

Cush-A-Nator® Standard (CN) Tube Part No.			O.D. Tube Size	Dimensions (inches)			
Steel	SS304	SS316		A	B	C	D
CN04	CN04SS	CN04S6	1/4"	0.25" (6mm)	0.62" (16mm)	0.27" (7mm)	0.98" (25mm)
CN06	CN06SS	CN06S6	3/8"	0.37" (9mm)	0.82" (21mm)	0.33" (8mm)	1.13" (29mm)
CN08	CN08SS	CN08S6	1/2"	0.50" (13mm)	0.94" (24mm)	0.40" (10mm)	1.34" (34mm)
CN10	CN10SS	CN10S6	5/8"	0.62" (16mm)	1.06" (27mm)	0.46" (12mm)	1.54" (39mm)
CN12	CN12SS	CN12S6	3/4"	0.75" (19mm)	1.20" (30mm)	0.52" (13mm)	1.68" (43mm)
CN14	CN14SS	CN14S6	7/8"	0.87" (22mm)	1.31" (33mm)	0.58" (15mm)	1.82" (46mm)
CN16	CN16SS	CN16S6	1"	1.00" (25mm)	1.44" (37mm)	0.65" (17mm)	1.95" (50mm)
CN18	CN18SS	CN18S6	1 1/8"	1.12" (28mm)	1.57" (40mm)	0.70" (18mm)	2.08" (53mm)
CN20	CN20SS	CN20S6	1 1/4"	1.25" (32mm)	1.70" (43mm)	0.77" (20mm)	2.21" (56mm)
CN32M	CN32MSS	CN32MS6	32mm	32mm	1.51" (38mm)	0.76" (19mm)	2.55" (65mm)
CN22	CN22SS	CN22S6	1 3/8"	1.37" (35mm)	1.82" (46mm)	0.83" (21mm)	2.34" (59mm)
CN24	CN24SS	CN24S6	1 1/2"	1.50" (38mm)	1.95" (50mm)	0.90" (23mm)	2.47" (63mm)
CN26	CN26SS	CN26S6	1 5/8"	1.62" (41mm)	2.07" (53mm)	0.96" (24mm)	2.60" (66mm)
CN28	CN28SS	CN28S6	1 3/4"	1.75" (45mm)	2.20" (56mm)	1.02" (26mm)	2.73" (69mm)
CN30	CN30SS	CN30S6	1 7/8"	1.87" (48mm)	2.32" (59mm)	1.09" (28mm)	2.86" (73mm)
CN32	CN32SS	CN32S6	2"	2.00" (51mm)	2.45" (62mm)	1.15" (29mm)	3.04" (77mm)
CN34	CN34SS	CN34S6	2 1/8"	2.12" (54mm)	2.57" (65mm)	1.27" (32mm)	3.23" (82mm)
CN36	CN36SS	CN36S6	2 1/4"	2.25" (57mm)	2.82" (72mm)	1.41" (36mm)	3.67" (93mm)
CN38	CN38SS	CN38S6	2 3/8"	2.37" (60mm)	2.82" (72mm)	1.41" (36mm)	3.67" (93mm)
CN40	CN40SS	CN40S6	2 1/2"	2.50" (64mm)	2.94" (75mm)	1.46" (37mm)	3.79" (96mm)
CN42	CN42SS	CN42S6	2 5/8"	2.62" (66mm)	3.07" (78mm)	1.53" (39mm)	3.92" (100mm)
CN46	CN46SS	CN46S6	2 7/8"	2.87" (73mm)	3.32" (84mm)	1.66" (42mm)	4.17" (106mm)
CN75M	CN75MSS	CN75MS6	75mm	75mm	3.37" (86mm)	1.69" (43mm)	4.68" (119mm)
CN48	CN48SS	CN48S6	3"	3.00" (76mm)	3.57" (91mm)	1.78" (45mm)	4.42" (112mm)
CN50	CN50SS	CN50S6	3 1/8"	3.12" (79mm)	3.57" (91mm)	1.78" (45mm)	4.42" (112mm)
CN56	CN56SS	CN56S6	3 1/2"	3.50" (89mm)	3.95" (100mm)	1.97" (50mm)	4.79" (122mm)
CN90M	CN90MSS	CN90MS6	90mm	90mm	3.86" (98mm)	1.94" (49mm)	5.23" (133mm)
CN64	CN64SS	CN64S6	4"	4.00" (102mm)	4.45" (113mm)	2.28" (58mm)	5.11" (130mm)
CN66	CN66SS	CN66S6	4 1/8"	4.12" (105mm)	4.57" (116mm)	2.34" (59mm)	5.54" (141mm)
CN110M	CN110MSS	CN110MS6	110mm	110mm	4.99" (127mm)	2.81" (71mm)	6.38" (162mm)
CN72	CN72SS	CN72S6	4 1/2"	4.50" (114mm)	4.95" (126mm)	2.53" (64mm)	5.92" (150mm)
CN125M	CN125MSS	CN125MS6	125mm	125mm	5.61" (142mm)	2.81" (71mm)	7.00" (178mm)
CN96	CN96SS	CN96S6	6"	6.00" (152mm)	6.62" (168mm)	3.31" (84mm)	7.63" (194mm)
CN160M	CN160MSS	CN160MS6	160mm	160mm	6.62" (168mm)	3.31" (84mm)	7.63" (194mm)


Cush-A-Nator® Standard (CN) Pipe Part No.			Pipe Size	Dimensions (inches)			
Steel	SS304	SS316		A	B	C	D
CN14P	CN14PSS	CN14PS6	1/2"	0.840" (21mm)	1.29" (33mm)	0.58" (15mm)	1.82" (46mm)
CN17P	CN17PSS	CN17PS6	3/4"	1.050" (27mm)	1.57" (40mm)	0.70" (18mm)	2.08" (53mm)
CN21P	CN21PSS	CN21PS6	1"	1.315" (33mm)	1.76" (45mm)	0.81" (21mm)	2.34" (59mm)
CN30P	CN30PSS	CN30PS6	1 1/2"	1.900" (48mm)	2.32" (59mm)	1.09" (28mm)	2.86" (73mm)
CN38P	CN38PSS	CN38PS6	2"	2.375" (60mm)	2.82" (72mm)	1.41" (36mm)	3.67" (93mm)
CN46P	CN46PSS	CN46PS6	2 1/2"	2.875" (73mm)	3.32" (84mm)	1.66" (42mm)	4.17" (106mm)
CN56P	CN56PSS	CN56PS6	3"	3.500" (89mm)	3.95" (100mm)	1.97" (50mm)	4.79" (122mm)
CN64P	CN64PSS	CN64PS6	3 1/2"	4.000" (102mm)	4.45" (113mm)	2.28" (58mm)	5.11" (130mm)
CN72P	CN72PSS	CN72PS6	4"	4.500" (114mm)	4.95" (126mm)	2.53" (64mm)	5.92" (150mm)

Contact Factory for Additional Sizes





Cush-A-Nator® High Temp (HT) has service temperatures of -65°F to 340°F (-53°C to 170°C).


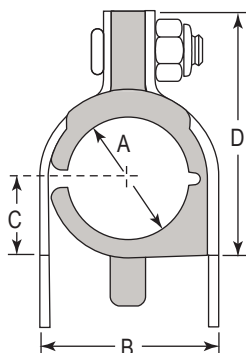


Cush-A-Nator® High Temp (HT) Tube Part No.			O.D. Tube Size	Dimensions (inches)			
Steel	SS304	SS316		A	B	C	D
HT04	HT04SS	HT04S6	1/4"	0.25" (6mm)	0.62" (16mm)	0.27" (7mm)	0.98" (25mm)
HT06	HT06SS	HT06S6	3/8"	0.37" (9mm)	0.82" (21mm)	0.33" (8mm)	1.13" (29mm)
HT08	HT08SS	HT08S6	1/2"	0.50" (13mm)	0.94" (24mm)	0.40" (10mm)	1.34" (34mm)
HT10	HT10SS	HT10S6	5/8"	0.62" (16mm)	1.06" (27mm)	0.46" (12mm)	1.54" (39mm)
HT12	HT12SS	HT12S6	3/4"	0.75" (19mm)	1.20" (30mm)	0.52" (13mm)	1.68" (43mm)
HT14	HT14SS	HT14S6	7/8"	0.87" (22mm)	1.31" (33mm)	0.58" (15mm)	1.82" (46mm)
HT16	HT16SS	HT16S6	1"	1.00" (25mm)	1.44" (37mm)	0.65" (17mm)	1.95" (50mm)
HT18	HT18SS	HT18S6	1 1/8"	1.12" (28mm)	1.57" (40mm)	0.70" (18mm)	2.08" (53mm)
HT20	HT20SS	HT20S6	1 1/4"	1.25" (32mm)	1.70" (43mm)	0.77" (20mm)	2.21" (56mm)
HT32M	HT32MSS	HT32MS6	32mm	32mm	1.51" (38mm)	0.76" (19mm)	2.55" (65mm)
HT22	HT22SS	HT22S6	1 3/8"	1.37" (35mm)	1.82" (46mm)	0.83" (21mm)	2.34" (59mm)
HT24	HT24SS	HT24S6	1 1/2"	1.50" (38mm)	1.95" (50mm)	0.90" (23mm)	2.47" (63mm)
HT26	HT26SS	HT26S6	1 5/8"	1.62" (41mm)	2.07" (53mm)	0.96" (24mm)	2.60" (66mm)
HT28	HT28SS	HT28S6	1 3/4"	1.75" (45mm)	2.20" (56mm)	1.02" (26mm)	2.73" (69mm)
HT30	HT30SS	HT30S6	1 7/8"	1.87" (48mm)	2.32" (59mm)	1.09" (28mm)	2.86" (73mm)
HT32	HT32SS	HT32S6	2"	2.00" (51mm)	2.45" (62mm)	1.15" (29mm)	3.04" (77mm)
HT34	HT34SS	HT34S6	2 1/8"	2.12" (54mm)	2.57" (65mm)	1.27" (32mm)	3.23" (82mm)
HT36	HT36SS	HT36S6	2 1/4"	2.25" (57mm)	2.82" (72mm)	1.41" (36mm)	3.67" (93mm)
HT38	HT38SS	HT38S6	2 3/8"	2.37" (60mm)	2.82" (72mm)	1.41" (36mm)	3.67" (93mm)
HT40	HT40SS	HT40S6	2 1/2"	2.50" (64mm)	2.94" (75mm)	1.46" (37mm)	3.79" (96mm)
HT42	HT42SS	HT42S6	2 5/8"	2.62" (66mm)	3.07" (78mm)	1.53" (39mm)	3.92" (100mm)
HT46	HT46SS	HT46S6	2 7/8"	2.87" (73mm)	3.32" (84mm)	1.66" (42mm)	4.17" (106mm)
HT75M	HT75MSS	HT75MS6	75mm	75mm	3.37" (86mm)	1.69" (43mm)	4.68" (119mm)
HT48	HT48SS	HT48S6	3"	3.00" (76mm)	3.57" (91mm)	1.78" (45mm)	4.42" (112mm)
HT50	HT50SS	HT50S6	3 1/8"	3.12" (79mm)	3.57" (91mm)	1.78" (45mm)	4.42" (112mm)
HT56	HT56SS	HT56S6	3 1/2"	3.50" (89mm)	3.95" (100mm)	1.97" (50mm)	4.79" (122mm)
HT90M	HT90MSS	HT90MS6	90mm	90mm	3.86" (98mm)	1.94" (49mm)	5.23" (133mm)
HT64	HT64SS	HT64S6	4"	4.00" (102mm)	4.45" (113mm)	2.28" (58mm)	5.11" (130mm)
HT66	HT66SS	HT66S6	4 1/8"	4.12" (105mm)	4.57" (116mm)	2.34" (59mm)	5.54" (141mm)
HT110M	HT110MSS	HT110MS6	110mm	110mm	4.99" (127mm)	2.81" (71mm)	6.38" (162mm)
HT72	HT72SS	HT72S6	4 1/2"	4.50" (114mm)	4.95" (126mm)	2.53" (64mm)	5.92" (150mm)
HT125M	HT125MSS	HT125MS6	125mm	125mm	5.61" (142mm)	2.81" (71mm)	7.00" (178mm)
HT96	HT96SS	HT96S6	6"	6.00" (152mm)	6.62" (168mm)	3.31" (84mm)	7.63" (194mm)
HT160M	HT160MSS	HT160MS6	160mm	160mm	6.62" (168mm)	3.31" (84mm)	7.63" (194mm)

Cush-A-Nator® High Temp (HT) Pipe Part No.			Pipe Size	Dimensions (inches)			
Steel	SS304	SS316		A	B	C	D
HT14P	HT14PSS	HT14PS6	1/2"	0.840" (21mm)	1.29" (33mm)	0.58" (15mm)	1.82" (46mm)
HT17P	HT17PSS	HT17PS6	3/4"	1.050" (27mm)	1.57" (40mm)	0.70" (18mm)	2.08" (53mm)
HT21P	HT21PSS	HT21PS6	1"	1.315" (33mm)	1.76" (45mm)	0.81" (21mm)	2.34" (59mm)
HT30P	HT30PSS	HT30PS6	1 1/2"	1.900" (48mm)	2.32" (59mm)	1.09" (28mm)	2.86" (73mm)
HT38P	HT38PSS	HT38PS6	2"	2.375" (60mm)	2.82" (72mm)	1.41" (36mm)	3.67" (93mm)
HT46P	HT46PSS	HT46PS6	2 1/2"	2.875" (73mm)	3.32" (84mm)	1.66" (42mm)	4.17" (106mm)
HT56P	HT56PSS	HT56PS6	3"	3.500" (89mm)	3.95" (100mm)	1.97" (50mm)	4.79" (122mm)
HT64P	HT64PSS	HT64PS6	3 1/2"	4.000" (102mm)	4.45" (113mm)	2.28" (58mm)	5.11" (130mm)
HT72P	HT72PSS	HT72PS6	4"	4.500" (114mm)	4.95" (126mm)	2.53" (64mm)	5.92" (150mm)

Contact Factory for Additional Sizes



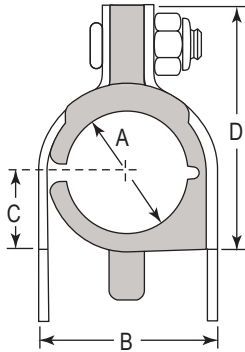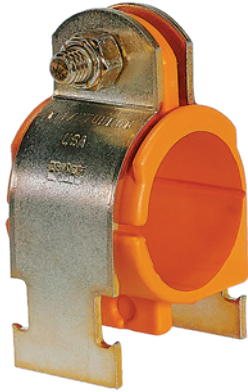

Cush-A-Nator® High Intensity Temp (HIT) has service temperatures of
-65°F to 400°F (-53°C to 204°C).

Cush-A-Nator® High Intensity Temp (HIT) Tube Part No.			O.D. Tube Size	Dimensions (inches)			
Steel	SS304	SS316		A	B	C	D
HIT04	HIT04SS	HIT04S6	1/4"	0.25" (6mm)	0.62" (16mm)	0.27" (7mm)	0.98" (25mm)
HIT06	HIT06SS	HIT06S6	3/8"	0.37" (9mm)	0.82" (21mm)	0.33" (8mm)	1.13" (29mm)
HIT08	HIT08SS	HIT08S6	1/2"	0.50" (13mm)	0.94" (24mm)	0.40" (10mm)	1.34" (34mm)
HIT10	HIT10SS	HIT10S6	5/8"	0.62" (16mm)	1.06" (27mm)	0.46" (12mm)	1.54" (39mm)
HIT12	HIT12SS	HIT12S6	3/4"	0.75" (19mm)	1.20" (30mm)	0.52" (13mm)	1.68" (43mm)
HIT14	HIT14SS	HIT14S6	7/8"	0.87" (22mm)	1.31" (33mm)	0.58" (15mm)	1.82" (46mm)
HIT16	HIT16SS	HIT16S6	1"	1.00" (25mm)	1.44" (37mm)	0.65" (17mm)	1.95" (50mm)
HIT18	HIT18SS	HIT18S6	1 1/8"	1.12" (28mm)	1.57" (40mm)	0.70" (18mm)	2.08" (53mm)
HIT20	HIT20SS	HIT20S6	1 1/4"	1.25" (32mm)	1.70" (43mm)	0.77" (20mm)	2.21" (56mm)
HIT32M	HIT32MSS	HIT32MS6	32mm	32mm	1.51" (38mm)	0.76" (19mm)	2.55" (65mm)
HIT22	HIT22SS	HIT22S6	1 3/8"	1.37" (35mm)	1.82" (46mm)	0.83" (21mm)	2.34" (59mm)
HIT24	HIT24SS	HIT24S6	1 1/2"	1.50" (38mm)	1.95" (50mm)	0.90" (23mm)	2.47" (63mm)
HIT26	HIT26SS	HIT26S6	1 5/8"	1.62" (41mm)	2.07" (53mm)	0.96" (24mm)	2.60" (66mm)
HIT28	HIT28SS	HIT28S6	1 3/4"	1.75" (45mm)	2.20" (56mm)	1.02" (26mm)	2.73" (69mm)
HIT30	HIT30SS	HIT30S6	1 7/8"	1.87" (48mm)	2.32" (59mm)	1.09" (28mm)	2.86" (73mm)
HIT32	HIT32SS	HIT32S6	2"	2.00" (51mm)	2.45" (62mm)	1.15" (29mm)	3.04" (77mm)
HIT34	HIT34SS	HIT34S6	2 1/8"	2.12" (54mm)	2.57" (65mm)	1.27" (32mm)	3.23" (82mm)
HIT36	HIT36SS	HIT36S6	2 1/4"	2.25" (57mm)	2.82" (72mm)	1.41" (36mm)	3.67" (93mm)
HIT38	HIT38SS	HIT38S6	2 3/8"	2.37" (60mm)	2.82" (72mm)	1.41" (36mm)	3.67" (93mm)
HIT40	HIT40SS	HIT40S6	2 1/2"	2.50" (64mm)	2.94" (75mm)	1.46" (37mm)	3.79" (96mm)
HIT42	HIT42SS	HIT42S6	2 5/8"	2.62" (66mm)	3.07" (78mm)	1.53" (39mm)	3.92" (100mm)
HIT46	HIT46SS	HIT46S6	2 7/8"	2.87" (73mm)	3.32" (84mm)	1.66" (42mm)	4.17" (106mm)
HIT75M	HIT75MSS	HIT75MS6	75mm	75mm	3.37" (86mm)	1.69" (43mm)	4.68" (119mm)
HIT48	HIT48SS	HIT48S6	3"	3.00" (76mm)	3.57" (91mm)	1.78" (45mm)	4.42" (112mm)
HIT50	HIT50SS	HIT50S6	3 1/8"	3.12" (79mm)	3.57" (91mm)	1.78" (45mm)	4.42" (112mm)
HIT56	HIT56SS	HIT56S6	3 1/2"	3.50" (89mm)	3.95" (100mm)	1.97" (50mm)	4.79" (122mm)
HIT90M	HIT90MSS	HIT90MS6	90mm	90mm	3.86" (98mm)	1.94" (49mm)	5.23" (133mm)
HIT64	HIT64SS	HIT64S6	4"	4.00" (102mm)	4.45" (113mm)	2.28" (58mm)	5.11" (130mm)
HIT66	HIT66SS	HIT66S6	4 1/8"	4.12" (105mm)	4.57" (116mm)	2.34" (59mm)	5.54" (141mm)
HIT110M	HIT110MSS	HIT110MS6	110mm	110mm	4.99" (127mm)	2.81" (71mm)	6.38" (162mm)
HIT72	HIT72SS	HIT72S6	4 1/2"	4.50" (114mm)	4.95" (126mm)	2.53" (64mm)	5.92" (150mm)
HIT125M	HIT125MSS	HIT125MS6	125mm	125mm	5.61" (142mm)	2.81" (71mm)	7.00" (178mm)
HIT96	HIT96SS	HIT96S6	6"	6.00" (152mm)	6.62" (168mm)	3.31" (84mm)	7.63" (194mm)
HIT160M	HIT160MSS	HIT160MS6	160mm	160mm	6.62" (168mm)	3.31" (84mm)	7.63" (194mm)

Cush-A-Nator® High Intensity Temp (HIT) Pipe Part No.			Pipe Size	Dimensions (inches)			
Steel	SS304	SS316		A	B	C	D
HIT14P	HIT14PSS	HIT14PS6	1/2"	0.840" (21mm)	1.29" (33mm)	0.58" (15mm)	1.82" (46mm)
HIT17P	HIT17PSS	HIT17PS6	3/4"	1.050" (27mm)	1.57" (40mm)	0.70" (18mm)	2.08" (53mm)
HIT21P	HIT21PSS	HIT21PS6	1"	1.315" (33mm)	1.76" (45mm)	0.81" (21mm)	2.34" (59mm)
HIT30P	HIT30PSS	HIT30PS6	1 1/2"	1.900" (48mm)	2.32" (59mm)	1.09" (28mm)	2.86" (73mm)
HIT38P	HIT38PSS	HIT38PS6	2"	2.375" (60mm)	2.82" (72mm)	1.41" (36mm)	3.67" (93mm)
HIT46P	HIT46PSS	HIT46PS6	2 1/2"	2.875" (73mm)	3.32" (84mm)	1.66" (42mm)	4.17" (106mm)
HIT56P	HIT56PSS	HIT56PS6	3"	3.500" (89mm)	3.95" (100mm)	1.97" (50mm)	4.79" (122mm)
HIT64P	HIT64PSS	HIT64PS6	3 1/2"	4.000" (102mm)	4.45" (113mm)	2.28" (58mm)	5.11" (130mm)
HIT72P	HIT72PSS	HIT72PS6	4"	4.500" (114mm)	4.95" (126mm)	2.53" (64mm)	5.92" (150mm)

Contact Factory for Additional Sizes



Cush-A-Clamp®



Gold Electro-Galvanized Steel

Stainless Steel



The "Living Hinge" allows the cushion to be spread apart for quick, easy installation.

CUSH-A-CLAMP — Channel mounted clamping systems are ideal for multiple line runs, while absorbing shock and vibration, reducing unwanted noise, and preventing galvanic corrosion. Cush-A-Clamp fits any standard 1-5/8" (41mm) wide channel.


Assembly consisting of steel clamp with locknut and thermoplastic elastomer cushion. All parts are marked for easy identification and packaged for small lot or bulk use. When specified, Cush-A-Clamp assemblies up to 2" (51mm), are available individually packaged.

THE CLAMP — Features a unique shoulder stud which is securely fastened to one clamp half. Steel clamps for tube sizes up to 1-3/8" (35mm) have the "Controlled Squeeze™" design which eliminates over-tightening and rotation while a nylon-insert nut assures a positive lock. Clamps are available in steel (with electro-dichromate finish), and stainless steel type 304 or type 316.

THE CUSHION — Made from a thermoplastic elastomer, it's built tough to withstand the effects of most oils, chemicals and industrial cleaning compounds, in temperatures from -50°F to 275°F (-45°C to 135°C). Interlock edges and channel locator legs ensure that the cushion remains in place.

INSTALLATION — One man, one tool time savings. Retrofits can be added without disassembly. The "Living Hinge" allows the cushion to be spread apart for quick, easy installation on sizes from 1/4" through 1-3/4" (6mm - 45mm).

Controlled Squeeze™ Shoulder Bolt Eliminates Over-Tightening

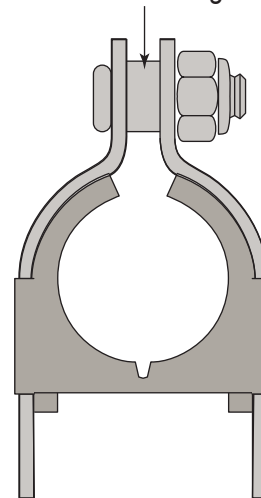

The controlled squeeze insures that the nut on the clamp is not over tightened which avoids damaging the pipe that is being installed.

Loading Values Mounted in Standard 12 Gauge Channel					
Nut	Torque (in-lbs)	Products	Pullout (lbs)	Slip (lbs)	
				Along	Through
1/4"	40 (4.5 N•m)	004T008 - 022T026	1,000 (4.5 kN)	100 (0.4 kN)	100 (0.4 kN)
5/16"	60 (6.8 N•m)	024T028 - 050N056	2,200 (9.8 kN)	200 (0.9 kN)	200 (0.9 kN)
3/8"	150 (16.9 N•m)	053N050 - 138NS146	3,600 (16.0 kN)	600 (2.7 kN)	350 (1.6 kN)
Loads are the same for Stainless Steel Clamps (Example 024NS028)					






Gold Electro-Galvanized Steel



Stainless Steel



Controlled Squeeze™
Eliminates Over-Tightening


Controlled Squeeze as shown in the drawing is included on smaller sizes of Cush-A-Clamp with "T" in the part number (e.g. 010T014).

Part No.			Dimension "A"			
Steel	Stainless Steel 304	Stainless Steel 316	*Copper and Steel Tubing	Copper Water Pipe (Nom.)	Nom. Pipe Size	A
004T008 - with Controlled Squeeze	004NS008	004NST008	1/4"	-	-	0.25" (6mm)
006T010 - with Controlled Squeeze	006NS010	006NST010	3/8"	1/4"	-	0.37" (9mm)
008T012 - with Controlled Squeeze	008NS012	008NST012	1/2"	3/8"	-	0.50" (13mm)
009N012	009NS012	009NST012	-	-	1/4"	0.54" (14mm)
010T014 - with Controlled Squeeze	010NS014	010NST014	5/8"	1/2"	-	0.62" (16mm)
011N014	011NS014	011NST014	-	-	3/8"	0.67" (17mm)
012T016 - with Controlled Squeeze	012NS016	012NST016	3/4"	5/8"	-	0.75" (19mm)
014N018	014NS018	014NST018	-	-	1/2"	0.84" (21mm)
014T018 - with Controlled Squeeze	014NS018	014NST018	7/8"	3/4"	-	0.87" (22mm)
016T020 - with Controlled Squeeze	016NS020	016NST020	1"	-	-	1.00" (25mm)
017N022	017NS022	017NST022	-	-	3/4"	1.05" (27mm)
018T022 - with Controlled Squeeze	018NS022	018NST022	1-1/8"	1"	-	1.12" (28mm)
020T024 - with Controlled Squeeze	020NS024	020NST024	1-1/4"	-	-	1.25" (32mm)
021N026	021NS026	021NST026	-	-	1"	1.31" (33mm)
022T026 - with Controlled Squeeze	022NS026	022NST026	1-3/8"	1-1/4"	-	1.37" (35mm)
024N028	024NS028	024NST028	1-1/2"	-	-	1.50" (38mm)
026N030	026NS030	026NST030	1-5/8"	1-1/2"	-	1.62" (41mm)
027N032	027NS032	027NST032	-	-	1-1/4"	1.66" (42mm)
028N032	028NS032	028NST032	1-3/4"	-	-	1.75" (44mm)
030N034	030NS034	030NST034	1-7/8"	-	1-1/2"	1.90" (48mm)
032N036	032NS036	032NST036	2"	-	-	2.00" (51mm)
034N040	034NS040	034NST040	2-1/8"	2"	-	2.12" (54mm)
038N042	038NS042	038NST042	2-1/4"	-	-	2.37" (60mm)
038N044	038NS044	038NST044	2-3/8"	-	2"	2.37" (60mm)
040N046	040NS046	040NST046	2-1/2"	-	-	2.50" (64mm)
042N048	042NS048	042NST048	2-5/8"	2-1/2"	-	2.62" (67mm)
046N052	046NS052	046NST052	2-7/8"	-	2-1/2"	2.87" (73mm)
050N054	050NS054	050NST054	3"	-	-	3.00" (76mm)
050N056	050NS056	050NST056	3-1/8"	3"	-	3.12" (79mm)
053N060	053NS060	053NST060	3-5/16"	-	-	3.31" (84mm)
056N062	056NS062	056NST062	3-1/2"	-	3"	3.50" (89mm)
058N064	058NS064	058NST064	3-5/8"	3-1/2"	-	3.62" (92mm)
064N072	064NS072	064NST072	4"	-	3-1/2"	4.00" (102mm)
066N074	066NS074	066NST074	4-1/8"	4"	-	4.12" (105mm)
069N076	069NS076	069NST076	4-5/16"	-	-	4.34" (110mm)
072N080	072NS080	072NST080	4-1/2"	-	4"	4.50" (114mm)
082N090	082NS090	082NST090	5-1/8"	5"	-	5.12" (130mm)
089N096	089NS096	089NST096	-	-	5"	5.56" (141mm)
096N106	096NS106	096NST106	6"	-	-	6.00" (152mm)
098N106	098NS106	098NST106	6-1/8"	6"	-	6.12" (155mm)
106N114	106NS114	106NST114	-	-	6"	6.62" (168mm)
138N146	138NS146	138NST146	-	-	8"	8.62" (219mm)

*Tube O.D. is Cushion I.D. Design load deflection data available on request.



- Made in USA, Meets - Buy America Act
- UL Classified 2043 (25/50) for use in plenums and air handling systems
- Specified MSS-SP 58 Type 60 and Type 61
- Clamps are 1008-1010 carbon steel
- Eliminate shock and vibration
- Studs are projection welded
- Nylon insert locknut
- Resist most fuels, oils, gases, greases, solvents, mineral acids and other harsh materials
- UV resistant
- Allow fluid conductors to be added or removed from installations without disturbing adjacent lines
- Assembled or disassembled with a single hand or power wrench for fast and simple installation
- Permit various size lines to be mixed to suit installation
- All metal components have a yellow Tri-Valent (non-hex) plating
- Also available in EG Clear, 304 SS, 316 SS and Aluminum
- Cushion material is a thermoplastic elastomer
- Temperature rating: -65°F to +275°F (-53.9°C to +135°C)

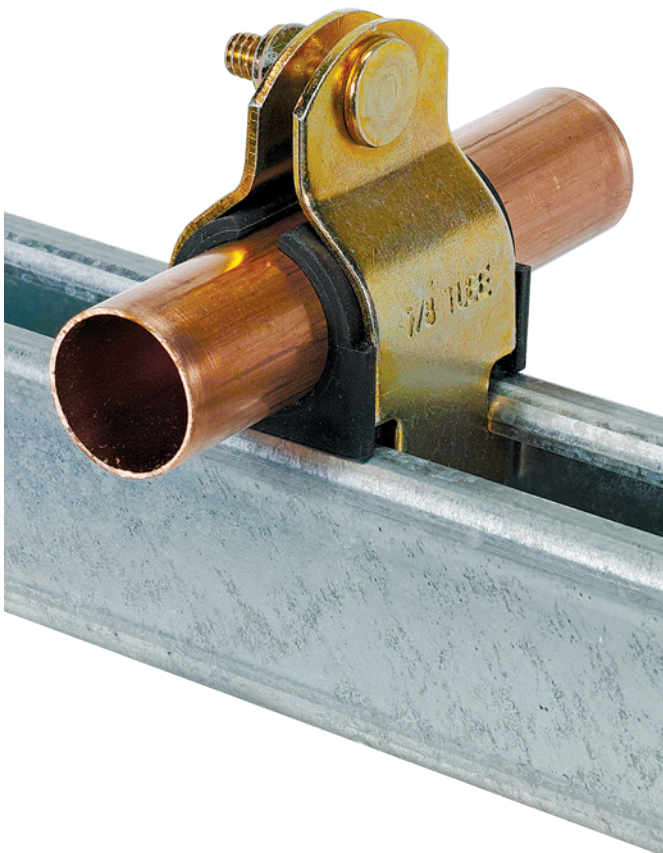

Nominal Pipe Sizes					
Part No.	Nom. Pipe	Hole Size	Width	Center to Top of Strut	Height
200025	1/4"	0.540"	0.91"	0.63"	1.41"
200037	3/8"	0.675"	1.07"	0.45"	1.59"
200050	1/2"	0.840"	1.45"	0.59"	1.91"
200075	3/4"	1.050"	1.79"	0.72"	2.16"
200100	1"	1.315"	2.22"	0.91"	2.75"
200125	1-1/4"	1.660"	2.47"	1.03"	3.03"
200150	1-1/2"	1.900"	2.47"	1.16"	3.28"
200200	2"	2.375"	3.22"	1.41"	3.78"
200250	2-1/2"	2.875"	3.72"	1.66"	4.27"
200300	3"	3.500"	4.36"	1.97"	4.91"
200350	3-1/2"	4.000"	4.97"	2.28"	5.53"
200400	4"	4.500"	5.47"	2.53"	6.03"
200500	5"	5.563"	6.47"	3.03"	7.03"
200600	6"	6.625"	7.62"	3.53"	8.03"
200800	8"	8.625"	9.36"	5.00"	10.61"

Additional sizes available on request.

Metric Pipe Sizes				
Part No.	Metric Pipe Sizes	Width	Center to Top of Strut	Height
20MMHZ	20mm	1.33"	0.53"	1.78"
25MMHZ	25mm	1.66"	0.66"	2.03"
32MMHZ	32mm	1.92"	0.78"	2.30"
40MMHZ	40mm	2.22"	0.91"	2.75"
50MMHZ	50mm	2.72"	1.16"	3.28"
63MMHZ	63mm	3.47"	1.53"	4.03"
75MMHZ	75mm	3.97"	1.78"	4.52"
90MMHZ	90mm	4.36"	1.97"	4.91"
110MMHZ	110mm	5.30"	2.44"	5.76"
125MMHZ	125mm	6.15"	2.71"	6.55"
160MMHZ	160mm	7.70"	3.41"	7.95"

Additional sizes available on request.





Premier Cushioned Clamp

Tubing Sizes



Tubing O.D. Sizes						
Part No.	Tubing O.D.	Copper (Nom.)	Hole Size	Width	Center to Top of Strut	Height
100025	1/4"	-	0.250"	0.62"	0.22"	1.11"
100031	5/16"	-	0.313"	0.75"	0.28"	1.24"
100037	3/8"	1/4"	0.375"	0.75"	0.28"	1.24"
100047	0.47"	-	0.470"	0.87"	0.34"	1.36"
100050	1/2"	3/8"	0.500"	0.87"	0.34"	1.36"
100062	5/8"	1/2"	0.625"	1.00"	0.41"	1.50"
100075	3/4"	5/8"	0.750"	1.33"	0.53"	1.78"
100087	7/8"	3/4"	0.870"	1.45"	0.58"	1.91"
100100	1"	-	1.000"	1.66"	0.66"	2.03"
100112	1-1/8"	1"	1.125"	1.79"	0.72"	2.16"
100119	1.19"	-	1.190"	1.92"	0.72"	2.30"
100125	1-1/4"	-	1.250"	1.92"	0.78"	2.30"
100137	1-3/8"	1-1/4"	1.375"	2.22"	0.91"	2.75"
100150	1-1/2"	-	1.500"	2.22"	0.91"	2.75"
100162	1-5/8"	1-1/2"	1.625"	2.47"	1.03"	3.03"
100175	1-3/4"	-	1.750"	2.47"	1.03"	3.03"
100187	1-7/8"	-	1.900"	2.47"	1.16"	3.28"
100200	2"	-	2.000"	2.72"	1.16"	3.28"
100212	2-1/8"	2"	2.125"	2.97"	1.28"	3.53"
100225	2-1/4"	-	2.370"	3.22"	1.41"	3.78"
100237	2-3/8"	-	2.370"	3.22"	1.41"	3.78"
100251	2-1/2"	-	2.500"	3.47"	1.53"	4.03"
100262	2-5/8"	2-1/2"	2.625"	3.47"	1.53"	4.03"
100287	2-7/8"	-	2.870"	3.73"	1.65"	4.28"
100300	3"	-	3.000"	3.97"	1.78"	4.52"
100312	3-1/8"	3"	3.125"	3.97"	1.78"	4.52"
100337	3-3/8"	-	3.375"	4.09"	1.89"	4.84"
100362	3-5/8"	3-1/2"	3.625"	4.47"	2.03"	5.03"
100400	4"	-	4.000"	4.80"	2.28"	5.50"
100412	4-1/8"	4"	4.125"	5.09"	2.34"	5.66"
100425	4-1/4"	-	4.250"	5.21"	2.40"	5.76"
100431	4-5/16"	-	4.340"	5.27"	2.44"	5.85"
100437	4-3/8"	-	4.375"	5.33"	2.47"	5.92"
100462	4-5/8"	-	4.625"	5.59"	2.60"	6.17"
100492	4.92"	-	4.920"	5.88"	2.74"	6.46"
100500	5"	-	5.000"	6.25"	2.81"	6.75"
100512	5-1/8"	5"	5.125"	6.25"	2.81"	6.75"
100600	6"	-	6.000"	7.50"	3.31"	7.75"
100612	6-1/8"	6"	6.125"	7.50"	3.31"	7.75"
100631	6-5/16"	-	6.313"	7.71"	3.44"	8.06"
100637	6-3/8"	-	6.375"	7.77"	3.47"	8.12"
100650	6-1/2"	-	6.500"	7.90"	3.53"	8.25"

Additional sizes available on request.

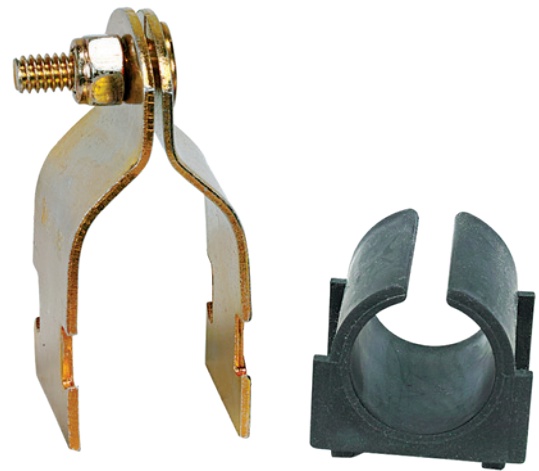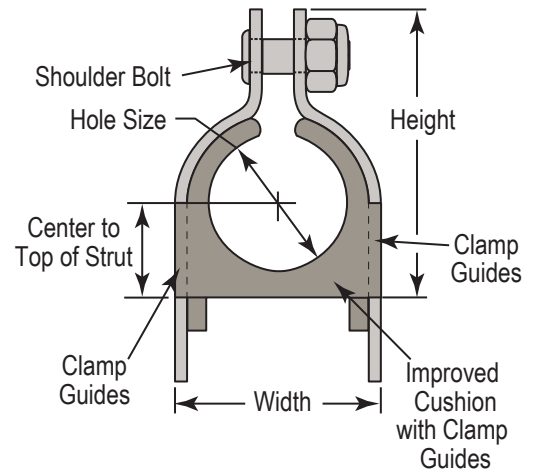

TITAN® Insulation Riser Clamp Series

The patented Titan riser is made to fit insulated pipe and create a clean vapor barrier on vertical pipe runs. Klo-Shure Titan riser will dramatically improve the fit and finish of insulated tube and pipe runs.




- Made in USA, Meets - Buy America Act
- Superior vapor barrier
- Three times faster installation of insulation
- Crush resistant design
- Dramatically improved finished appearance of insulated tube & pipe runs
- Eliminates insulation compression
- Available for $\frac{7}{8}$ " to $4\frac{1}{8}$ " (22mm to 105mm) OD tube
- Insulation wall thickness from 1" to $1\frac{1}{2}$ " (25mm to 38mm)
- Molded with high strength TPO plastic

Upper floor insulation from above.

Riser clamp assembly secures and supports the weight of pipe or tubing.



Pipe or tubing and insulation through floor.

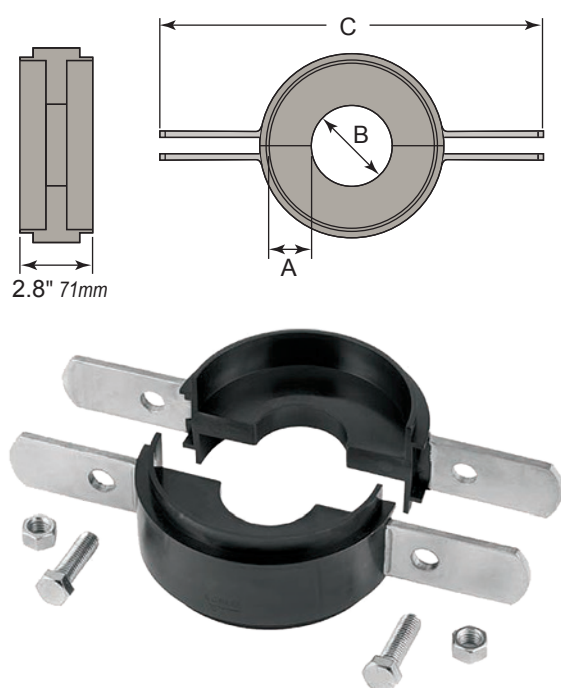

Part No.	Dimensions (in)			
	A Wall Thickness	B OD Size	C	Load Data Lbs
R087100	1" (25mm)	$\frac{7}{8}$ " (22mm)	$10\frac{1}{4}$ " (260mm)	75 (0.33 kN)
R112100		$1\frac{1}{8}$ " (29mm)	$10\frac{7}{8}$ " (276mm)	120 (0.53 kN)
R137100		$1\frac{3}{8}$ " (35mm)	$11\frac{1}{2}$ " (292mm)	150 (0.67 kN)
R162100		$1\frac{5}{8}$ " (41mm)	$11\frac{1}{2}$ " (292mm)	150 (0.67 kN)
R212100		$2\frac{1}{8}$ " (54mm)	$11\frac{1}{2}$ " (292mm)	190 (0.85 kN)
R262100		$2\frac{5}{8}$ " (67mm)	$12\frac{1}{2}$ " (318mm)	300 (1.34 kN)
R312100		$3\frac{1}{8}$ " (79mm)	$12\frac{1}{2}$ " (318mm)	300 (1.34 kN)
R412100		$4\frac{1}{8}$ " (105mm)	13.8" (351mm)	320 (1.42 kN)
R087150	$1\frac{1}{2}$ " (38mm)	$\frac{7}{8}$ " (22mm)	$10\frac{7}{8}$ " (276mm)	75 (0.33 kN)
R112150		$1\frac{1}{8}$ " (29mm)	$10\frac{7}{8}$ " (276mm)	120 (0.67 kN)
R137150		$1\frac{3}{8}$ " (35mm)	$11\frac{1}{2}$ " (292mm)	150 (0.67 kN)
R162150		$1\frac{5}{8}$ " (41mm)	$11\frac{1}{2}$ " (292mm)	150 (0.67 kN)
R212150		$2\frac{1}{8}$ " (54mm)	12" (305mm)	150 (0.67 kN)
R262150		$2\frac{5}{8}$ " (67mm)	12" (305mm)	300 (1.34 kN)
R312150		$3\frac{1}{8}$ " (79mm)	13" (330mm)	300 (1.34 kN)
R412150		$4\frac{1}{8}$ " (105mm)	$15\frac{5}{8}$ " (397mm)	300 (1.34 kN)



Airtight Crush-Resistant Insulation Clamp

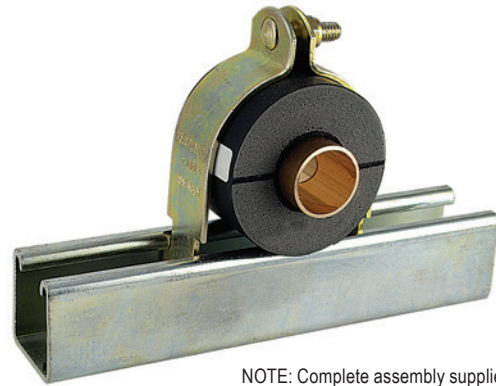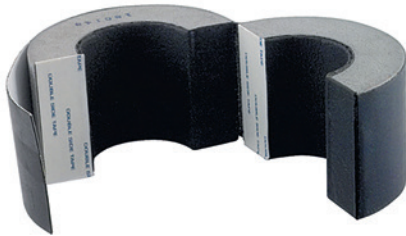

NOTE: Complete assembly supplied with gold electro-galvanized channel clamp and hardware


Cush-A-Therm Clamp is a perfect crush-resistant airtight seal for chilled refrigeration or mechanical pipe lines that require continuous insulation.

The rigid foam construction has an insulating tape inner lining which supports tube and absorbs vibration of operating pipe lines.

The outer cover consists of a special rubber coating which seals the cushion after installation in order to prevent condensation.

It's strong closed-cell structure is ideal for liquid cooling lines to prevent condensation, save energy, and maintain the vapor barrier.

- Service Temperature, Continuous: -328°F to +257°F (-200°C to +125°C)
- Flammability is Self-Extinguishing as tested under ASTM D 635
- Maintains thermal barrier protection
- Tested in Conformance with ASTM E84 (UL 723, NFPA 255) having results of 0 FSI (Flame Spread Index) and 50 SDI (Smoke Developed Index)
- Prevents condensation
- Properly supports pipe and tube
- Absorbs vibration
- Polyurethane foam laminated with a rubber lining

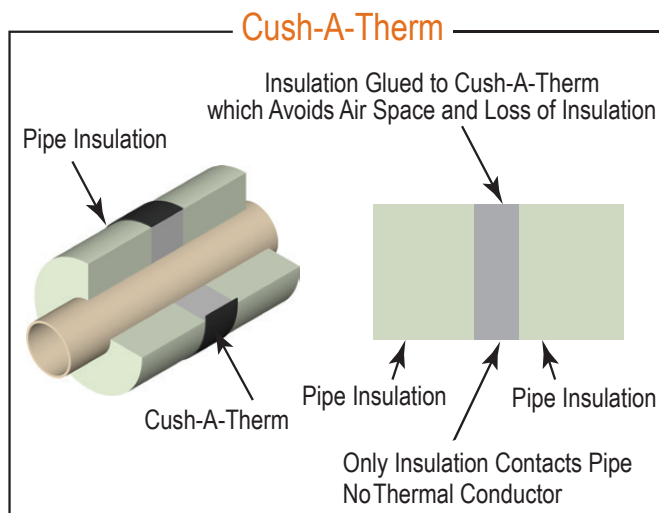

ASHRAE Insulation Recommendations

Cush-A-Therm is designed to meet the ASHRAE recommendations for insulation for mechanical systems which indicate that insulated pipe hangers should provide the following:


1. Complete sealing of pipe against water vapor ingress
2. No energy transfer of cold to supporting clamp to prevent condensation of water and possible growth of mold. If the support encasing the insulation is in contact with the pipe or tube and supported by a metallic clamp, which is not protected by insulation, below ambient temperatures will be transferred to the clamp causing energy transfer and condensation.
3. No interruption of the insulation envelope
4. Limit or avoid compression at support location

ASHRAE Section 23.13-23.14 further states "when the goal is avoiding compression of low-compressive-strength insulation products, it is recommended to use high-strength insulation inserts made of a product that offers the desired compressive strength and other necessary performance properties. Other higher-strength materials that are not thermal insulation material and interrupt the insulation envelope, or do not allow complete sealing of an insulation system against water vapor ingress are not recommended for supporting insulated piping on pipe hangers. Note that wood blocks have poor thermal conductivity and are not recommended, especially for cold pipe systems."

Insulated cold piping should receive special attention when exposed to ambient or unconditioned air. The Cush-A-Therm is a product that seals out air, and insulates the pipe/tube from the supporting clamp, and is therefore in compliance with the 2013 ASHRAE insulation recommendations.



INSTALLATION IS AS EASY AS 1-2-3!




1. Insulation slides over pipes.
Self adhesive surfaces
provide seal.



2 Put in place and glue
to insulation.




3. Wrap and seal with
ProTape.

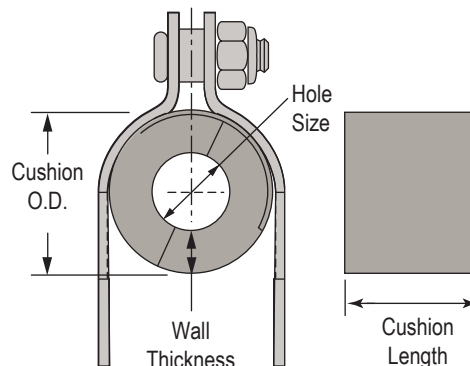


Dimensions (Inches)					Nominal 1/2" (13mm) Wall Thickness				Nominal 3/4" (19mm) Wall Thickness			
Hole Size	Copper I.D.	Pipe O.D.	IPS	Cushion Length	Part No.			Cushion O.D.	Part No.			Cushion O.D.
					Steel	SS 304	SS 316		Steel	SS 304	SS 316	
1/4" (6mm)	-	1/4"	-	2.953" (75mm)	UX1412	UX1412SS	UX1412S6	1 1/4" (1.250") (32mm)	UX1434	UX1434SS	UX1434S6	1 3/4" (1.750") (45mm)
3/8" (10mm)	1/4"	3/8"	-		UX3812	UX3812SS	UX3812S6	1 3/8" (1.375") (35mm)	UX3834	UX3834SS	UX3834S6	1 7/8" (1.875") (48mm)
1/2" (13mm)	3/8"	1/2"	1/4"		UX1212	UX1212SS	UX1212S6	1 1/2" (1.500") (38mm)	UX1234	UX1234SS	UX1234S6	2" (2.000") (51mm)
5/8" (16mm)	1/2"	5/8"	3/8"	2.953" (75mm)	UX5812	UX5812SS	UX5812S6	1 5/8" (1.625") (41mm)	UX5834	UX5834SS	UX5834S6	2 1/8" (2.125") (54mm)
3/4" (19mm)	5/8"	3/4"	-		UX3412	UX3412SS	UX3412S6	1 3/4" (1.750") (45mm)	UX3434	UX3434SS	UX3434S6	2 1/4" (2.250") (57mm)
7/8" (22mm)	3/4"	7/8"	1/2"		UX7812	UX7812SS	UX7812S6	1 7/8" (1.875") (48mm)	UX7834	UX7834SS	UX7834S6	2 3/8" (2.375") (60mm)
1-1/8" (29mm)	1"	1 1/8"	3/4"	2.953" (75mm)	UX11812	UX11812SS	UX11812S6	2 1/8" (2.125") (54mm)	UX11834	UX11834SS	UX11834S6	2 5/8" (2.625") (67mm)
1-3/8" (35mm)	1 1/4"	1 3/8"	1"		UX13812	UX13812SS	UX13812S6	2 3/8" (2.375") (60mm)	UX13834	UX13834SS	UX13834S6	2 7/8" (2.875") (73mm)
1-5/8" (41mm)	1 1/2"	1 5/8"	1 1/4"		UX15812	UX15812SS	UX15812S6	2 5/8" (2.625") (67mm)	UX15834	UX15834SS	UX15834S6	3 1/8" (3.125") (79mm)
1-7/8" (48mm)	-	1 7/8"	-	2.953" (75mm)	UX17812	UX17812SS	UX17812S6	2 7/8" (2.875") (73mm)	UX17834	UX17834SS	UX17834S6	3 3/8" (3.375") (86mm)
2-1/8" (54mm)	2"	2 1/8"	-		UX21812	UX21812SS	UX21812S6	3 1/8" (3.125") (79mm)	UX21834	UX21834SS	UX21834S6	3 5/8" (3.625") (92mm)
2-3/8" (60mm)	2 1/4"	2 3/8"	2"		UX23812	UX23812SS	UX23812S6	3 3/8" (3.375") (86mm)	UX23834	UX23834SS	UX23834S6	3 7/8" (3.875") (98mm)
2-5/8" (67mm)	2 1/2"	2 5/8"	-	3.937" (100mm)	UX25812	UX25812SS	UX25812S6	3 5/8" (3.625") (92mm)	UX25834	UX25834SS	UX25834S6	4 1/8" (4.125") (105mm)
2-7/8" (73mm)	-	2 7/8"	2 1/2"		UX27812	UX27812SS	UX27812S6	3 7/8" (3.875") (98mm)	UX27834	UX27834SS	UX27834S6	4 3/8" (4.375") (111mm)
3-1/8" (79mm)	3"	3 1/8"	-		UX31812	UX31812SS	UX31812S6	4 1/8" (4.125") (105mm)	UX31834	UX31834SS	UX31834S6	4 5/8" (4.625") (118mm)
3-1/2" (89mm)	-	3 1/2"	3"	3.937" (100mm)	UX31212	UX31212SS	UX31212S6	4 1/2" (4.500") (114mm)	UX31234	UX31234SS	UX31234S6	5" (5.000") (127mm)
3-5/8" (92mm)	3 1/2"	3 5/8"	-		UX35812	UX35812SS	UX35812S6	4 5/8" (4.625") (118mm)	UX35834	UX35834SS	UX35834S6	5 1/8" (5.125") (130mm)
4-1/8" (105mm)	4"	4 1/8"	3 1/2"		UX41812	UX41812SS	UX41812S6	5 1/8" (5.125") (130mm)	UX41834	UX41834SS	UX41834S6	5 5/8" (5.625") (143mm)
4-1/2" (114mm)	-	4 1/2"	4"		UX41212	UX41212SS	UX41212S6	5 1/2" (5.500") (140 mm)	UX41234	UX41234SS	UX41234S6	6" (6.00") (152mm)



NOTE: Complete assembly supplied with Stainless Steel channel clamp and hardware

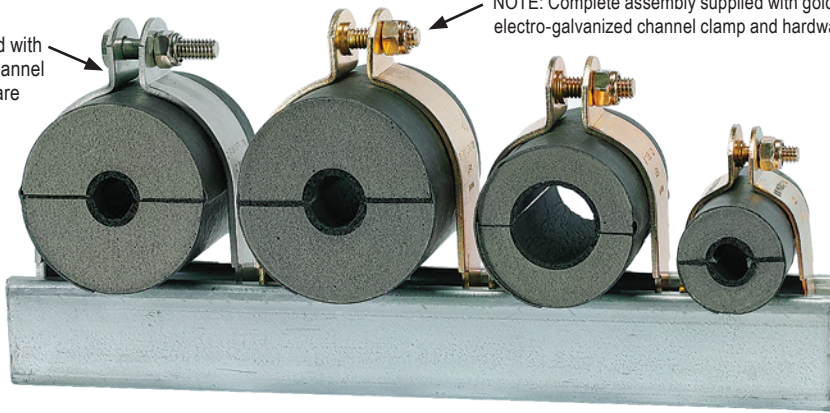

NOTE: Complete assembly supplied with gold electro-galvanized channel clamp and hardware

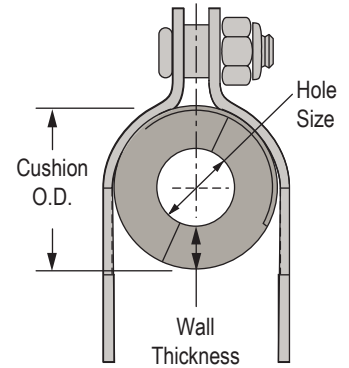


Hole Size	Nominal 1" (25mm) Wall Thickness				Nominal 1-1/2" (38mm) Wall Thickness				Nominal 2" (51mm) Wall Thickness			
	Part No.			Cushion O.D.	Part No.			Cushion O.D.	Part No.			Cushion O.D.
	Steel	SS 304	SS 316		Steel	SS 304	SS 316		Steel	SS 304	SS 316	
1/4" (6mm)	UX1410	UX1410SS	UX1410S6	2 1/4" (2.250") (57mm)	UX1415	UX1415SS	UX1415S6	3 1/4" (3.250") (83mm)	-	-	-	-
3/8" (10mm)	UX3810	UX3810SS	UX3810S6	2 3/8" (2.375") (60mm)	UX3815	UX3815SS	UX3815S6	3 3/8" (3.375") (86mm)	-	-	-	-
1/2" (13mm)	UX1210	UX1210SS	UX1210S6	2 1/2" (2.500") (64mm)	UX1215	UX1215SS	UX1215S6	3 1/2" (3.500") (89mm)	-	-	-	-
5/8" (16mm)	UX5810	UX5810SS	UX5810S6	2 5/8" (2.625") (67mm)	UX5815	UX5815SS	UX5815S6	3 5/8" (3.625") (92mm)	UX5820	UX5820SS	UX5820S6	4 5/8" (4.625") (118mm)
3/4" (19mm)	UX3410	UX3410SS	UX3410S6	2 3/4" (2.750") (70mm)	UX3415	UX3415SS	UX3415S6	3 3/4" (3.750") (95mm)	UX3420	UX3420SS	UX3420S6	4 3/4" (4.750") (121mm)
7/8" (22mm)	UX7810	UX7810SS	UX7810S6	2 7/8" (2.875") (73mm)	UX7815	UX7815SS	UX7815S6	3 7/8" (3.875") (98mm)	UX7820	UX7820SS	UX7820S6	4 7/8" (4.875") (124mm)
1-1/8" (29mm)	UX11810	UX11810SS	UX11810S6	3 1/8" (3.125") (79mm)	UX11815	UX11815SS	UX11815S6	4 1/8" (4.125") (105mm)	UX11820	UX11820SS	UX11820S6	5 1/8" (5.125") (130mm)
1-3/8" (35mm)	UX13810	UX13810SS	UX13810S6	3 3/8" (3.375") (86mm)	UX13815	UX13815SS	UX13815S6	4 3/8" (4.375") (111mm)	UX13820	UX13820SS	UX13820S6	5 3/8" (5.375") (137mm)
1-5/8" (41mm)	UX15810	UX15810SS	UX15810S6	3 5/8" (3.625") (92mm)	UX15815	UX15815SS	UX15815S6	4 5/8" (4.625") (118mm)	UX15820	UX15820SS	UX15820S6	5 5/8" (5.625") (143mm)
1-7/8" (48mm)	UX17810	UX17810SS	UX17810S6	3 7/8" (3.875") (98mm)	UX17815	UX17815SS	UX17815S6	4 7/8" (4.875") (124mm)	UX17820	UX17820SS	UX17820S6	5 7/8" (5.875") (149mm)
2-1/8" (54mm)	UX21810	UX21810SS	UX21810S6	4 1/8" (4.125") (105mm)	UX21815	UX21815SS	UX21815S6	5 1/8" (5.125") (130mm)	UX21820	UX21820SS	UX21820S6	6 1/8" (6.125") (156mm)
2-3/8" (60mm)	UX23810	UX23810SS	UX23810S6	4 3/8" (4.375") (111mm)	UX23815	UX23815SS	UX23815S6	5 3/8" (5.375") (137mm)	UX23820	UX23820SS	UX23820S6	6 3/8" (6.375") (162mm)
2-5/8" (67mm)	UX25810	UX25810SS	UX25810S6	4 5/8" (4.625") (118mm)	UX25815	UX25815SS	UX25815S6	5 5/8" (5.625") (143mm)	UX25820	UX25820SS	UX25820S6	6 5/8" (6.625") (168mm)
2-7/8" (73mm)	UX27810	UX27810SS	UX27810S6	4 7/8" (4.875") (124mm)	UX27815	UX27815SS	UX27815S6	5 7/8" (5.875") (149mm)	UX27820	UX27820SS	UX27820S6	6 7/8" (6.875") (175mm)
3-1/8" (79mm)	UX31810	UX31810SS	UX31810S6	5 1/8" (5.125") (130mm)	UX31815	UX31815SS	UX31815S6	6 1/8" (6.125") (156mm)	UX31820	UX31820SS	UX31820S6	7 1/8" (7.125") (181mm)
3-1/2" (89mm)	UX31210	UX31210SS	UX31210S6	5 1/2" (5.500") (140mm)	UX31215	UX31215SS	UX31215S6	6 1/2" (6.500") (165mm)	UX31220	UX31220SS	UX31220S6	7 1/2" (7.500") (191mm)
3-5/8" (92mm)	UX35810	UX35810SS	UX35810S6	5 5/8" (5.625") (143mm)	UX35815	UX35815SS	UX35815S6	6 5/8" (6.625") (168mm)	UX35820	UX35820SS	UX35820S6	7 5/8" (7.625") (194mm)
4-1/8" (105mm)	UX41810	UX41810SS	UX41810S6	6 1/8" (6.125") (156mm)	UX41815	UX41815SS	UX41815S6	7 1/8" (7.125") (181mm)	UX41820	UX41820SS	UX41820S6	8 1/8" (8.125") (206mm)
4-1/2" (114mm)	UX41210	UX41210SS	UX41210S6	6 1/2" (6.500") (165mm)	UX41215	UX41215SS	UX41215S6	7 1/2" (7.500") (191mm)	UX41220	UX41220SS	UX41220S6	8 1/2" (8.500") (216mm)






Patented Klo-Shure® Insulation Couplings allow sections of closed-cell, elastomeric or fiberglass insulation to be secured, eliminating most secondary operations at suspension points. It can also be used to simply join and secure two lengths of insulation.


7-Series Strut Mount



8-Series Strut Mount



9-Series Strut Mount



For elastomeric insulation.

Supports and secures tubing in strut mounted applications.

For fiberglass insulation, available in copper tube, iron pipe and mm sizing.







Features:

- All insulated copper tube and iron pipe lines are to be secured using can be insulated and secured
- Insulation is inserted inside coupling until it contacts internal wall
- Secondary operations (glue + tape) can be performed at installer's discretion
- Entire assembly can be assembled or disassembled with a single hand or power wrench
- Keep conductor runs as straight as possible.
- Overwrap of Klo-Shure coupling with insulation is not required
- Acceptable for horizontal and vertical installations



Specification Data & Guidelines:

- Made in USA
- UL Classified 2043 (25/50) for use in plenums and air handling systems
- Specified MSS-SP 58 Type 60 and Type 61
- Manufactured from high strength TPO plastic
- Superior vapor barrier
- Three times faster installation of closed-cell elastomeric and fiberglass insulation
- Dramatically improved finished appearance of insulated tubing
- UV resistant
- Eliminates insulation compression at suspension points
- Available with strut mounted clamps and clevis hangers
 - OD tube from 1/4" to 4-1/8"
 - Nominal pipe 1/2" to 3"
 - Metric sizes 25mm –110mm
- All metal components have a yellow Trivalent (non-hex) plating





Klo-Shure® Insulation Couplings

7-Series for Elastomeric Insulation



7-Series Strut Mount

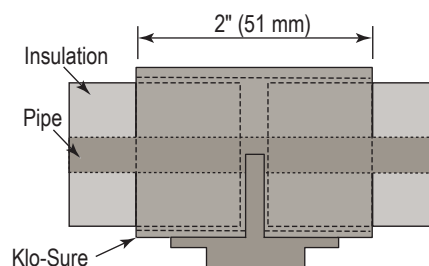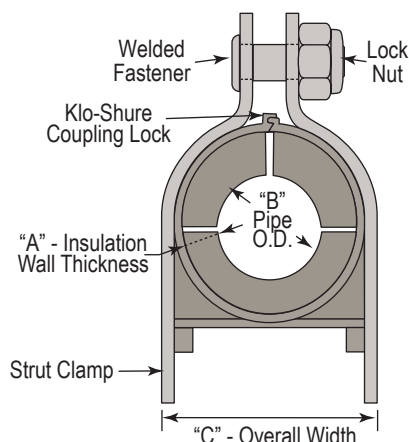




Part No.	Insulation Wall Thickness	Copper Tube O.D.	C Overall Width
723025	3/8"	1/4" OD	1.12" (28mm)
723037		3/8" OD	1.25" (32mm)
723050		1/2" OD	1.37" (35mm)
723062		5/8" OD	1.50" (38mm)
723075		3/4" OD	1.62" (41mm)
723087		7/8" OD	1.75" (44mm)
723100		1" OD	1.87" (47mm)
723112		1-1/8" OD	2.00" (51mm)
723137		1-3/8" OD	2.25" (57mm)
723162		1-5/8" OD	2.50" (64mm)
723212		2-1/8" OD	3.00" (76mm)
724025	1/2"	1/4" OD	1.12" (28mm)
724037		3/8" OD	1.50" (38mm)
724050		1/2" OD	1.62" (41mm)
724062		5/8" OD	1.75" (44mm)
724075		3/4" OD	1.87" (47mm)
724087		7/8" OD	2.00" (51mm)
724100		1" OD	2.12" (54mm)
724112		1-1/8" OD	2.25" (57mm)
724137		1-3/8" OD	2.50" (64mm)
724162		1-5/8" OD	2.75" (70mm)
724212	3/4"	2-1/8" OD	3.25" (83mm)
724262		2-5/8" OD	3.75" (95mm)
724312		3-1/8" OD	4.25" (108mm)
724362		3-5/8" OD	4.75" (121mm)
724412		4-1/8" OD	5.25" (133mm)
726025		1/4" OD	1.87" (47mm)
726037		3/8" OD	2.00" (51mm)
726050		1/2" OD	2.12" (54mm)
726062		5/8" OD	2.25" (57mm)
726075		3/4" OD	2.37" (60mm)
726087	1"	7/8" OD	2.50" (64mm)
726112		1-1/8" OD	2.75" (70mm)
726137		1-3/8" OD	3.00" (76mm)
726162		1-5/8" OD	3.25" (83mm)
726212		2-1/8" OD	3.75" (95mm)
726262		2-5/8" OD	4.25" (108mm)
726312		3-1/8" OD	4.75" (121mm)
726362		3-5/8" OD	5.25" (133mm)
726412		4-1/8" OD	5.75" (146mm)

Part No.	Insulation Wall Thickness	Copper Tube O.D.	C Overall Width
728025	1"	1/4" OD	2.37" (60mm)
728031		5/16" OD	2.43" (62mm)
728037		3/8" OD	2.50" (64mm)
728050		1/2" OD	2.62" (67mm)
728062		5/8" OD	2.75" (70mm)
728075		3/4" OD	2.87" (73mm)
728087		7/8" OD	3.00" (76mm)
728112		1-1/8" OD	3.25" (83mm)
728137		1-3/8" OD	3.50" (89mm)
728162		1-5/8" OD	3.75" (95mm)
728212	1-1/2"	2-1/8" OD	4.25" (108mm)
728262		2-5/8" OD	4.75" (121mm)
728312		3-1/8" OD	5.25" (133mm)
728362		3-5/8" OD	5.75" (146mm)
728412		4-1/8" OD	6.25" (159mm)
729031		5/16" OD	3.43" (87mm)
729037		3/8" OD	3.50" (89mm)
729050		1/2" OD	3.62" (92mm)
729062		5/8" OD	3.75" (95mm)
729087		7/8" OD	4.00" (102mm)
729112	1-3/4"	1-1/8" OD	4.25" (108mm)
729137		1-3/8" OD	4.50" (114mm)
729162		1-5/8" OD	4.75" (121mm)
729212		2-1/8" OD	5.25" (133mm)
729262		2-5/8" OD	5.75" (146mm)
729312		3-1/8" OD	6.25" (159mm)
729412		3-5/8" OD	7.25" (184mm)



8-Series and 9-Series

8-Series Strut Mount For use with Elastomeric Insulation.

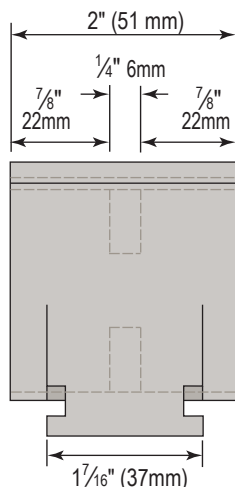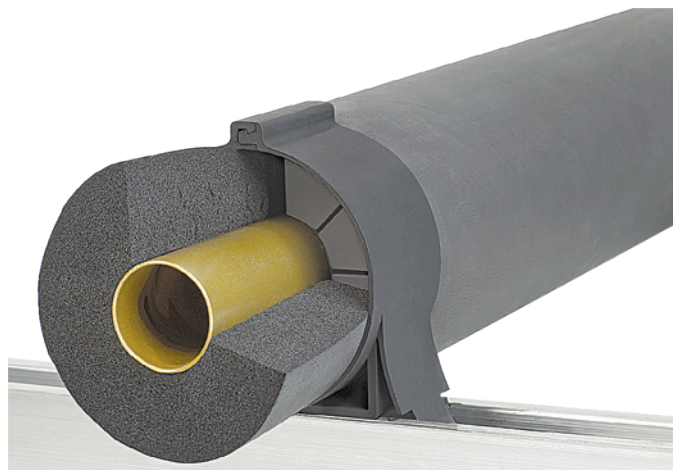

Part No.	Insulation Wall Thickness - A	B Tube O.D.	C Overall Width
824050	1/2"	1/2" OD	1.62" (41mm)
824062		5/8" OD	1.75" (44mm)
824087		7/8" OD	2.00" (51mm)
824112		1-1/8" OD	2.25" (57mm)
824137		1-3/8" OD	2.50" (64mm)
824162		1-5/8" OD	2.75" (70mm)
824212		2-1/8" OD	3.25" (83mm)
826062	3/4"	5/8" OD	2.25" (57mm)
826087		7/8" OD	2.50" (64mm)
826112		1-1/8" OD	2.75" (70mm)
826137		1-3/8" OD	3.00" (76mm)
828087	1"	7/8" OD	3.00" (76mm)
828112		1-1/8" OD	3.25" (83mm)
828137		1-3/8" OD	3.50" (89mm)
828162		1-5/8" OD	3.75" (95mm)
828212		2-1/8" OD	4.25" (108mm)
828262		2-5/8" OD	4.75" (121mm)

9-Series Strut Mount For use with Fiberglass Insulation.





9-Series for Iron Pipe

Part No.	Insulation Wall Thickness	Iron Pipe O.D.	C Overall Width
924084	1/2"	1/2" OD	0.840
924105		3/4" OD	1.050
924131		1" OD	1.315
924166		1-1/4" OD	1.660
924190		1-1/2" OD	1.900
928084		1/2" OD	0.840
928105	1"	3/4" OD	1.050
928131		1" OD	1.315
928166		1-1/4" OD	1.660
928190		1-1/2" OD	1.900
928237		2" OD	2.375
928287		2-1/2" OD	2.875
928350		3" OD	3.500
928362		3-5/8" OD	3.625
928412		4-1/8" OD	4.125
928512		5-1/8" OD	5.125
929084	1-1/2"	1/2" OD	0.840
929105		3/4" OD	1.050
929131		1" OD	1.315
929166		1-1/4" OD	1.660
929190		1-1/2" OD	1.900
929262		2-5/8" OD	3.625
929312		3-1/8" OD	4.125
929350		3" OD	3.500
929362		3-5/8" OD	3.625
929412		4-1/8" OD	4.125
922212	2"	2-1/8" OD	2.125
922262		2-5/8" OD	2.625
922312		3-1/8" OD	3.125
922362		3-5/8" OD	3.625
922362		3-5/8" OD	3.625




Klo-Shure® Insulation Couplings

9-Series for Fiberglass Insulation

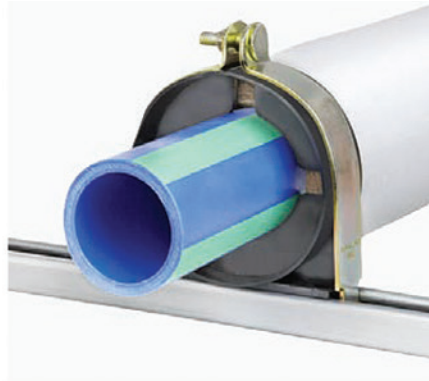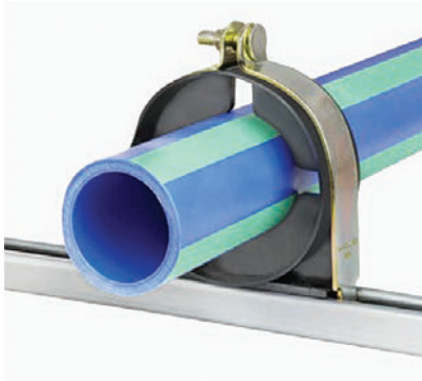

9-Series for Copper Tube

Part No.	Insulation Wall Thickness	Copper Tube O.D.	C Overall Width
924062	1/2"	5/8" OD	1.79" (45mm)
924087		7/8" OD	2.03" (51mm)
924112		1-1/8" OD	2.29" (58mm)
924137		1-3/8" OD	2.50" (64mm)
924162		1-5/8" OD	2.85" (72mm)
924212		2-1/8" OD	3.29" (83mm)
928062	1"	5/8" OD	3.01" (76mm)
928087		7/8" OD	3.01" (76mm)
928112		1-1/8" OD	3.01" (76mm)
928137		1-3/8" OD	3.64" (92mm)
928162		1-5/8" OD	3.64" (92mm)
928212		2-1/8" OD	4.14" (105mm)
928262		2-5/8" OD	4.65" (118mm)
928312		3-1/8" OD	5.14" (131mm)
928362		3-5/8" OD	5.69" (145mm)
928412		4-1/8" OD	6.87" (174mm)
928512		5-1/8" OD	7.87" (200mm)
929087	1-1/2"	7/8" OD	4.14" (105mm)
929112		1-1/8" OD	4.14" (105mm)
929137		1-3/8" OD	4.65" (118mm)
929162		1-5/8" OD	5.14" (131mm)
929212		2-1/8" OD	5.14" (131mm)
929262		2-5/8" OD	5.69" (145mm)
929312	2"	3-1/8" OD	6.87" (174mm)
929362		3-5/8" OD	6.87" (174mm)
929412		4-1/8" OD	7.87" (200mm)
922062	2"	5/8" OD	4.65" (118mm)
922087		7/8" OD	5.14" (131mm)
922112		1-1/8" OD	5.14" (131mm)
922137		1-3/8" OD	5.7" (145mm)
922162		1-5/8" OD	5.7" (145mm)
922212		2-1/8" OD	6.87" (174mm)
922262		2-5/8" OD	6.87" (174mm)
922312		3-1/8" OD	7.87" (200mm)
922362		3-5/8" OD	7.87" (200mm)
922412		4-1/8" OD	8.87" (225mm)

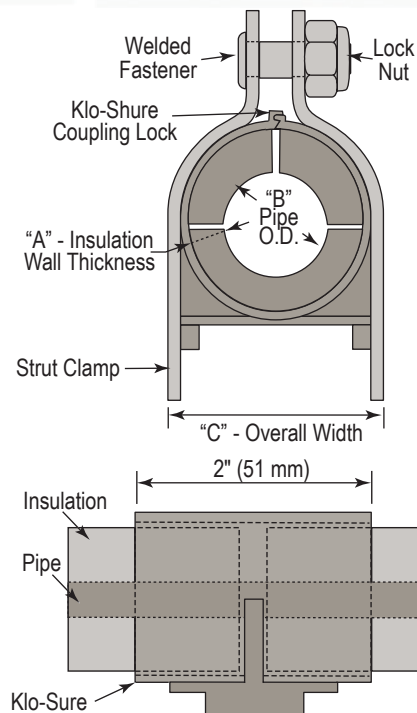

9-Series for Metric Pipe



Part No.	Insulation Wall Thickness	Metric Pipe	C Overall Width
928M25	1"	25mm	0.98" (25mm)
928M32		32mm	1.26" (32mm)
928M40		40mm	1.57" (40mm)
928M50		50mm	1.97" (50mm)
928M63		63mm	2.48" (63mm)
928M75		75mm	2.95" (75mm)
928M90		90mm	3.54" (90mm)
928M110		110mm	4.33" (110mm)
929M25	1-1/2"	25mm	0.98" (25mm)
929M32		32mm	1.26" (32mm)
929M40		40mm	1.57" (40mm)
929M50		50mm	1.97" (50mm)
929M63		63mm	2.48" (63mm)
929M75		75mm	2.95" (75mm)
929M90		90mm	3.54" (90mm)



Klo-Shure Clevis Hanger System includes clevis hanger, plastic coupling and fastening clip.

Part No.	Insulation Wall Thickness	Pipe O.D.	Dimensions (inches)		
			C	E	F
703025*	3/8"	1/4" OD	1.12 (28mm)	-	-
703037*		3/8" OD	1.25 (32mm)	-	-
703050*		1/2" OD	1.37 (35mm)	-	-
703062*		5/8" OD	1.50 (38mm)	-	-
703075*		3/4" OD	1.62 (41mm)	-	-
703087		7/8" OD	1.75 (44mm)	3-3/8" (86mm)	4-3/8" (111mm)
703100		1" OD	1.87 (47mm)	3-7/16" (87mm)	4-1/2" (114mm)
703112		1-1/8" OD	2.00 (51mm)	3-1/2" (89mm)	4-5/8" (118mm)
703137		1-3/8" OD	2.25 (57mm)	3-13/16" (97mm)	5" (127mm)
703162		1-5/8" OD	2.50 (64mm)	4" (102mm)	5-1/2" (140mm)
703212	1/2"	2-1/8" OD	3.00 (76mm)	4-3/4" (121mm)	6-1/2" (165mm)
704037*		3/8" OD	1.50 (38mm)	--	--
704050*		1/2" OD	1.62 (41mm)	--	--
704062		5/8" OD	1.75 (44mm)	3-3/8" (86mm)	4-3/8" (111mm)
704075		3/4" OD	1.87 (47mm)	3-7/16" (87mm)	4-1/2" (114mm)
704087		7/8" OD	2.00 (51mm)	3-1/2" (89mm)	4-5/8" (118mm)
704100		1" OD	2.12 (54mm)	3-5/8" (92mm)	4-7/8" (124mm)
704112		1-1/8" OD	2.25 (57mm)	3-13/16" (97mm)	5" (127mm)
704137		1-3/8" OD	2.50 (64mm)	4" (102mm)	5-1/2" (140mm)
704162		1-5/8" OD	2.75 (70mm)	4-3/8" (111mm)	5-7/8" (149mm)
704212	3/4"	2-1/8" OD	3.25 (83mm)	5-1/8" (130mm)	6-7/8" (175mm)
704262		2-5/8" OD	3.75 (95mm)	5-5/8" (143mm)	7-5/8" (194mm)
704312		3-1/8" OD	4.25 (108mm)	6-7/16" (164mm)	8-3/4" (222mm)
704362		3-5/8" OD	4.75 (121mm)	6-7/8" (175mm)	9-3/8" (238mm)
704412		4-1/8" OD	5.25 (133mm)	7-1/2" (191mm)	10-1/8" (257mm)
706025		1/4" OD	1.87 (47mm)	3-7/16" (87mm)	4-1/2" (114mm)
706037		3/8" OD	2.00 (51mm)	3-1/2" (89mm)	4-5/8" (118mm)
706050		1/2" OD	2.12 (54mm)	3-5/8" (92mm)	4-7/8" (124mm)
706062		5/8" OD	2.25 (57mm)	3-13/16" (97mm)	5" (127mm)
706075		3/4" OD	2.37 (60mm)	3-15/16" (100mm)	5-1/4" (133mm)
706087	1"	7/8" OD	2.50 (64mm)	4" (102mm)	5-1/2" (140mm)
706112		1-1/8" OD	2.75 (70mm)	4-3/8" (111mm)	5-7/8" (149mm)
706137		1-3/8" OD	3.00 (76mm)	4-3/4" (121mm)	6-1/2" (165mm)
706162		1-5/8" OD	3.25 (83mm)	5-1/8" (130mm)	6-7/8" (175mm)
706212		2-1/8" OD	3.75 (95mm)	5-5/8" (143mm)	7-5/8" (194mm)
706262		2-5/8" OD	4.25 (108mm)	6-7/16" (164mm)	8-3/4" (222mm)
706312		3-1/8" OD	4.75 (121mm)	6-7/8" (175mm)	9-3/8" (238mm)
706362		3-5/8" OD	5.25 (133mm)	7-1/2" (191mm)	10-1/8" (257mm)
706412		4-1/8" OD	5.75 (146mm)	7-7/8" (181mm)	10-3/4" (273mm)
708062		5/8" OD	2.75 (70mm)	4-3/8" (111mm)	5-7/8" (149mm)
708087	1"	7/8" OD	3.00 (76mm)	4-3/4" (121mm)	6-1/2" (165mm)
708112		1-1/8" OD	3.25 (83mm)	5-1/8" (130mm)	6-7/8" (175mm)
708137		1-3/8" OD	3.50 (89mm)	5-3/8" (137mm)	7-1/4" (184mm)
708162		1-5/8" OD	3.75 (95mm)	5-5/8" (143mm)	7-5/8" (194mm)
708212		2-1/8" OD	4.25 (108mm)	6-7/16" (164mm)	8-3/4" (222mm)
708262		2-5/8" OD	4.75 (121mm)	6-7/8" (175mm)	9-3/8" (238mm)
708312		3-1/8" OD	5.25 (133mm)	7-1/2" (191mm)	10-1/8" (257mm)
708362		3-5/8" OD	5.75 (146mm)	7-7/8" (181mm)	10-3/4" (273mm)

Note: *Part number includes plastic coupling only. All metal parts have Tri-Valent plating.

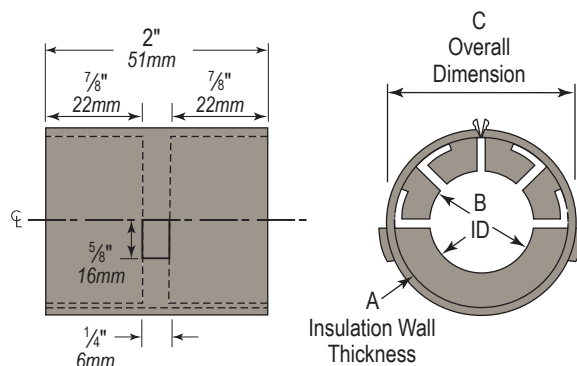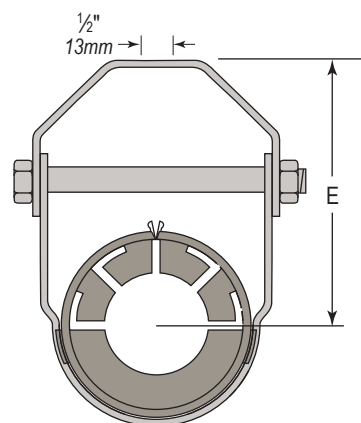


Coupling "C" Dimension	Material size	Cross Bolt Size	Max Recommended Loads Lbs
2.12" to 3.25"	14 gauge x 1.25	5/16"	250 (1.11 kN)
3.50" to 5.75"	12 gauge x 1.25	5/16"	350 (1.156 kN)



Cush-A-Claw®



Strut Mounted

Insert	Twist & Lock	Position Pipe	Snap In
			



Surface Mounted

Position	Mount w/Screw	Position Pipe	Snap In
			
Side grooves provide Centering guide	Counter-sunk hole allows tightening of any type of #10 fastener		


The **Cush-A-Claw** Grabs on to your Tube, Pipe, or Hose and holds it in place. The unique one piece patented design allows for quick, simple, and easy installation. It will not rust because it's molded from the same choice TPE Material of some of our other products that you've come to know and trust.

- Easy Snap-in Installation of Tube, Pipe, or Hose
- Sure Grip Strut Base easily rotates into strut
- Will not rust
- Non Conducting
- Saves Time and Money
- Temp Range: -50° to 275° F (-45°C to 135°C)
- Works Great Indoors or Outdoors
- Seven Sizes of Tube and Three Sizes of EMT
- Designed for Light Duty Loads and Applications
- Prevents Galvanic Corrosion of Dissimilar Metals
- An Excellent Alternative to Steel, Stainless Steel, or Galvanized Clamps.

O.D. Tube Size			EMTS Conduit Sizes		
Strut Mount Part #	Surface Mount Part #.	Size O.D.	Strut Mount Part #	Surface Mount Part #.	Size O.D.
CL-04	CLS-04	1/4" (6mm)	EMT-1/2	EMTS-1/2	1/2" (18mm)
CL-06	CLS-06	3/8" (10mm)	EMT-3/4	EMTS-3/4	3/4" (23mm)
CL-08	CLS-08	1/2" (13mm)	EMT-1	EMTS-1	1" (30mm)
CL-10	CLS-10	5/8" (16mm)			
CL-12	CLS-12	3/4" (19mm)			
CL-14	CLS-14	7/8" (22mm)			
CL-18	CLS-18	1 1/8" (29mm)			



75 Lbs. Load
(Safety Factor: 3)



Cush-A-Claw® is manufactured under U.S. patent #D631739, #D679177, and European Community patent #0011520030001, #0011520030002, #0011520030003, #0011520030004, #0011520030005, #0011520030006, #0011520030007





Omega Series™

The Omega Series™ clamp assembly retains, guides, protects, and uniformly spaces line runs. Attached with two standard fasteners to any flat surface, the Omega Series™ clamp eliminates the use of special channels, providing a savings in both space and cost. They go up fast, lines are rigid, and look neat.

THE CLAMP — Steel with gold electro-dichromate finish, or stainless steel type 304.

THE CUSHION — Manufactured from a thermoplastic elastomer, it's built tough to withstand the effects of most oils, chemicals and industrial cleaning compounds. Interlock edge ensures that the cushion remains in place.



Stainless Steel



Assembly consists of clamp and thermoplastic elastomer cushion. Fasteners not included.



Stainless Steel



Gold Electro-Galvanized Steel

Standard

Extreme Temp (HT)


High Intensity Temp (HIT)



-50°F to 275°F
(-45°C to 135°C)



-65°F to 340°F
(-53°C to 170°C)

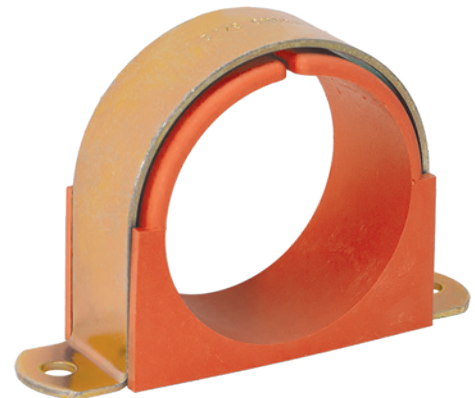



-65°F to 400°F
(-53°C to 204°C)



Standard
-50°F to 275°F
(-45°C to 135°C)

Extreme Temp (HT)
-65°F to 340°F
(-53°C to 170°C)

High Intensity Temp (HIT)
-65°F to 400°F
(-53°C to 204°C)

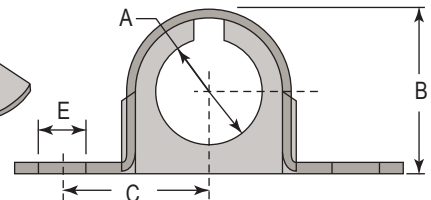

Steel - Part No.			Copper & Steel Tubing O.D.	Copper Water Pipe (Nom.)	Pipe Size (Nom.)	Dimensions (inches)			E	F	Hanging Design Load
Standard Black	Extreme Blue	High Intensity Temp				A	B	C			
004M007	HT004M007	HIT004M007	1/4"	-	-	0.25" (6mm)	0.48" (12mm)	0.60" (15mm)	0.26" (7mm)	0.78"	50 (0.22 kN)
006M008	HT006M008	HIT006M008	3/8"	1/4"	-	0.37" (9mm)	0.62" (16mm)	0.66" (17mm)		0.81"	
008M011	HT008M011	HIT008M011	1/2"	3/8"	1/4"	0.50" (13mm)	0.81" (21mm)	0.83" (21mm)		0.98" (25mm)	
010M013	HT010M013	HIT010M013	5/8"	1/2"	3/8"	0.62" (16mm)	0.93" (24mm)	0.85" (22mm)			
012M015	HT012M015	HIT012M015	3/4"	5/8"	-	0.75" (19mm)	1.02" (26mm)	0.90" (23mm)			
014M017	HT014M017	HIT014M017	7/8"	3/4"	1/2"	0.87" (22mm)	1.12" (28mm)	1.03" (26mm)			
016M019	HT016M019	HIT016M019	1"	-	-	1.00" (25mm)	1.24" (31mm)	1.04" (26mm)			
018M020	HT018M020	HIT018M020	-	-	3/4"	1.05" (27mm)	1.40" (36mm)	1.11" (28mm)			
018M021	HT018M021	HIT018M021	1-1/8"	1"	-	1.12" (28mm)	1.40" (36mm)	1.17" (30mm)			
020M024	HT020M024	HIT020M024	1-1/4"	-	-	1.25" (32mm)	1.60" (41mm)	1.20" (30mm)			
021M026	HT021M026	HIT021M026	-	-	1"	1.31" (33mm)	1.71" (43mm)	1.28" (33mm)	200 (0.89 kN)		
022M026	HT022M026	HIT022M026	1-3/8"	1-1/4"	-	1.37" (35mm)	1.71" (43mm)	1.28" (33mm)			
024M028	HT024M028	HIT024M028	1-1/2"	-	-	1.50" (38mm)	1.85" (47mm)	1.36" (35mm)			
026M030	HT026M030	HIT026M030	1-5/8"	1-1/2"	-	1.62" (41mm)	1.98" (50mm)	1.43" (36mm)			
027M032	HT027M032	HIT027M032	-	-	1-1/4"	1.66" (42mm)	2.12" (54mm)	1.55" (39mm)	0.34" (9mm)	1.56" (40mm)	400 (1.78 kN)
028M032	HT028M032	HIT028M032	1-3/4"	-	-	1.75" (44mm)	2.12" (54mm)	1.55" (39mm)			
030M034	HT030M034	HIT030M034	1-7/8"	-	1-1/2"	1.87" (47mm)	2.25" (57mm)	1.64" (42mm)			
032M036	HT032M036	HIT032M036	2"	-	-	2.00" (51mm)	2.38" (60mm)	1.69" (43mm)			
034M040	HT034M040	HIT034M040	2-1/8"	-	-	2.12" (54mm)	2.62" (67mm)	1.86" (47mm)			
038M044	HT038M044	HIT038M044	2-3/8"	-	2"	2.37" (60mm)	2.88" (73mm)	1.94" (49mm)			
040M046	HT040M046	HIT040M046	2-1/2"	-	-	2.50" (64mm)	3.00" (76mm)	2.00" (51mm)			
042M048	HT042M048	HIT042M048	2-5/8"	2-1/2"	-	2.62" (67mm)	3.13" (80mm)	2.07" (53mm)			
046M052	HT046M052	HIT046M052	2-7/8"	-	2-1/2"	2.87" (73mm)	3.38" (86mm)	2.19" (56mm)			
050M056	HT050M056	HIT050M056	3-1/8"	3"	-	3.12" (79mm)	3.68" (93mm)	2.32" (59mm)			
056M062	HT056M062	HIT056M062	3-1/2"	-	3"	3.50" (89mm)	4.06" (103mm)	2.50" (64mm)	0.43" (11mm)	700 (3.11 kN)	
058M064	HT058M064	HIT058M064	3-5/8"	3-1/2"	-	3.62" (92mm)	4.19" (106mm)	2.57" (65mm)			
064M072	HT064M072	HIT064M072	4"	-	3-1/2"	4.00" (102mm)	4.68" (119mm)	2.82" (72mm)			
066M074	HT066M074	HIT066M074	4-1/8"	4"	-	4.12" (105mm)	4.84" (123mm)	3.05" (77mm)			
072M080	HT072M080	HIT072M080	4-1/2"	-	4"	4.50" (114mm)	5.22" (133mm)	3.24" (82mm)	0.56" (14mm)	800 (3.56 kN)	
082M090	HT082M090	HIT082M090	5-1/8"	5"	-	5.12" (130mm)	5.82" (148mm)	3.55" (90mm)			
089M096	HT089M096	HIT089M096	-	-	5"	5.56" (141mm)	6.31" (160mm)	4.00" (102mm)			
098M106	HT098M106	HIT098M106	6-1/8"	6"	-	6.12" (155mm)	6.90" (175mm)	4.31" (109mm)			
106M114	HT106M114	HIT106M114	-	-	6"	6.62" (168mm)	7.39" (188mm)	4.56" (116mm)			1,200 (5.34 kN)
PART NO. SUFFIX			Cushions			Example					
CHANGE "M" IN PART NUMBER TO 'MS'			Thermoplastic elastomer			004M007 (STEEL) - 004MS007 (STAINLESS STEEL)					
N	-		Flame Retardant			004M007N (STEEL) - 004MS007N (STAINLESS STEEL)					
NH	-		Flame Retardant Halogen Free			004M007NH (STEEL) - 004MS007NH (STAINLESS STEEL)					
Note: Fasteners not included.											




Alpha Series™



Designed for the tough jobs, the **Alpha Series™** U-Bolt Assembly secures pipe runs to any flat surface. The cushion design provides total load distribution, allowing the U-Bolt to become a full contact hanger, eliminating knife-edge loading. The U-Bolt traps and secures the cushion in place to prevent lateral movement, while nylon insert lock nuts provide a positive lock.


Alpha Series™ U-Bolt Assembly conforms to MIL-S-901D for shock testing.

Standard




-50°F to 275°F
(-45°C to 135°C)

Extreme Temp (HT)




-65°F to 340°F
(-53°C to 170°C)


High Intensity Temp (HIT)



-65°F to 400°F
(-53°C to 204°C)

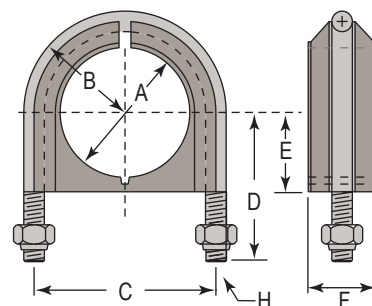

½" thru 6" assembly

Assembly Part No.			Tube Size (O.D.)	Dimensions (Inches)							Torque	Design Load Lbs. (kN)	Slip Thru
Standard Black	Extreme Blue	High Intensity Temp		A Dia.	B Radius	C	D	E	F	H Bolt Size			
UB7/8TA	HTUB7/8TA	HITUB7/8TA	7⁄8"	0.875" (22mm)	0.80" (20mm)	1.60" (41mm)	1.50" (38mm)	0.67" (17mm)	0.68" (17mm)	¼"-20 UNC-2B	100	485 (2.16 kN)	500
UB1TA	HTUB1TA	HITUB1TA	1"	1.00" (25mm)	0.90" (23mm)	1.80" (46mm)	1.60" (41mm)	0.78" (20mm)	0.68" (17mm)	¼"-20 UNC-2B			500
UB11/4TA	HTUB1-1/4TA	HITUB1-1/4TA	1-¼"	1.25" (32mm)	1.02" (26mm)	2.05" (52mm)	1.70" (43mm)	0.91" (23mm)	0.68" (17mm)	¼"-20 UNC-2B			500
UB13/8TA	HTUB1-3/8TA	HITUB1-3/8TA	1-⅜"	1.375" (35mm)	1.02" (26mm)	2.05" (52mm)	1.70" (43mm)	0.91" (23mm)	0.68" (17mm)	¼"-20 UNC-2B			500
UB2TA	HTUB2TA	HITUB2TA	2"	2.00" (51mm)	1.40" (36mm)	2.80" (71mm)	2.20" (56mm)	1.19" (30mm)	1.24" (31mm)	⅜"-16 UNC-2B	150	1,220 (5.43 kN)	500
UB3TA	HTUB3TA	HITUB3TA	3"	3.00" (76mm)	1.95" (50mm)	3.90" (99mm)	3.00" (76mm)	1.69" (43mm)	1.24" (31mm)	½"-13 UNC-2B	200	2,260 (10.05 kN)	500
UB4TA	HTUB4TA	HITUB4TA	4"	4.00" (102mm)	2.52" (64mm)	5.05" (128mm)	3.70" (94mm)	2.25" (57mm)	1.24" (31mm)	½"-13 UNC-2B			500
UB5TA	HTUB5TA	HITUB5TA	5"	5.00" (127mm)	3.25" (83mm)	6.56" (167mm)	4.50" (114mm)	3.03" (77mm)	1.24" (31mm)	½"-13 UNC-2B			500
UB6TA	HTUB6TA	HITUB6TA	6"	6.00" (152mm)	3.87" (98mm)	7.75" (197mm)	5.40" (137mm)	3.56" (90mm)	1.44" (37mm)	⅝"-11 UNC-2B	250	3,620 (16.10 kN)	500
▼ SUFFIX			Clamp		Cushion					Example			
NONE			Electro-galvanized		Thermoplastic elastomer					UB½PA			
6			Stainless Steel, Type 316		Thermoplastic elastomer					UB½PA6			
N6	—	—	Stainless Steel, Type 316							UB½PAN6			
N	—	—	Electro-galvanized							UB½PAN			
NH	—	—	Electro-galvanized							UB½PANH			
NH6	—	—	Stainless Steel, Type 316							UB½PANH6			






Standard
-50°F to 275°F
(-45°C to 135°C)




Extreme Temp (HT)
-65°F to 340°F
(-53°C to 170°C)



High Intensity Temp (HIT)
-65°F to 400°F
(-53°C to 204°C)

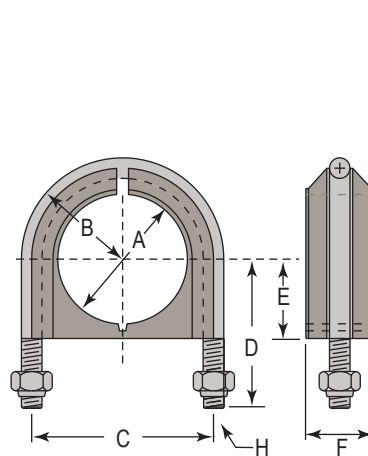

1/2" thru 6" assembly

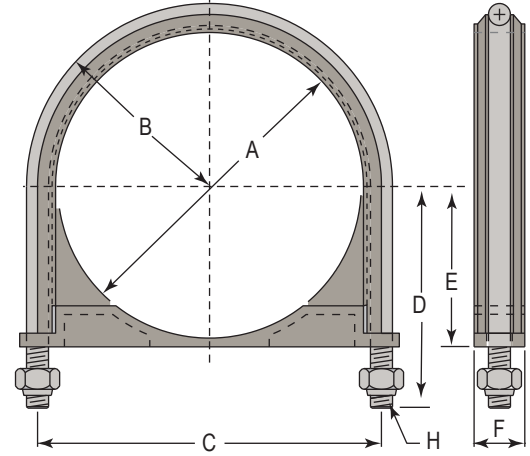

8" thru 12" assembly – Two piece cushion design



Assembly Part No.			Pipe Size (Nom.)	Dimensions (Inches)							Torque	Design Load Lbs. (kN)	Slip Thru
Standard Black	Extreme Blue	High Intensity Temp		A Dia.	B Radius	C	D	E	F	H			
UB1/2PA	HTUB1/2PA	HITUB1/2PA	½"	0.840" (21mm)	0.80" (20mm)	1.60" (41mm)	1.50" (38mm)	0.67" (17mm)	0.68" (17mm)	¼"-20 UNC-2B	100	485 (2.16 kN)	500
UB3/4PA	HTUB3/4PA	HITUB3/4PA	¾"	1.05" (27mm)	0.90" (23mm)	1.80" (46mm)	1.60" (41mm)	0.78" (20mm)	0.68" (17mm)	¼"-20 UNC-2B			500
UB1PA	HTUB1PA	HITUB1PA	1"	1.31" (33mm)	1.02" (26mm)	2.05" (52mm)	1.70" (43mm)	0.91" (23mm)	0.68" (17mm)	¼"-20 UNC-2B			500
UB1-1/4PA	HTUB1-1/4PA	HITUB1-1/4PA	1-¼"	1.66" (42mm)	1.27" (32mm)	2.55" (65mm)	2.10" (53mm)	1.08" (27mm)	1.24" (31mm)	⅜"-16 UNC-2B	150	1,220 (5.43 kN)	500
UB1-1/2PA	HTUB1-1/2PA	HITUB1-1/2PA	1-½"	1.90" (48mm)	1.40" (36mm)	2.80" (71mm)	2.20" (56mm)	1.19" (30mm)	1.24" (31mm)	⅜"-16 UNC-2B			500
UB2PA	HTUB2PA	HITUB2PA	2"	2.37" (60mm)	1.67" (42mm)	3.35" (85mm)	2.50" (64mm)	1.45" (37mm)	1.24" (31mm)	⅜"-16 UNC-2B			500
UB2-1/2PA	HTUB2-1/2PA	HITUB2-1/2PA	2-½"	2.87" (73mm)	1.95" (50mm)	3.90" (99mm)	3.00" (76mm)	1.69" (43mm)	1.24" (31mm)	½"-13 UNC-2B	200	2,260 (10.05 kN)	500
UB3PA	HTUB3PA	HITUB3PA	3"	3.50" (89mm)	2.27" (58mm)	4.55" (116mm)	3.30" (84mm)	2.00" (51mm)	1.24" (31mm)	½"-13 UNC-2B			500
UB3-1/2PA	HTUB3-1/2PA	HITUB3-1/2PA	3-½"	4.00" (102mm)	2.52" (64mm)	5.05" (128mm)	3.70" (94mm)	2.25" (57mm)	1.24" (31mm)	½"-13 UNC-2B			500
UB4PA	HTUB4PA	HITUB4PA	4"	4.50" (114mm)	3.00" (76mm)	5.50" (140mm)	3.90" (99mm)	2.50" (64mm)	1.24" (31mm)	½"-13 UNC-2B	250	3,620 (16.10 kN)	500
UB5PA	HTUB5PA	HITUB5PA	5"	5.56" (141mm)	3.25" (83mm)	6.56" (167mm)	4.50" (114mm)	3.03" (77mm)	1.24" (31mm)	½"-13 UNC-2B			500
UB6PA	HTUB6PA	HITUB6PA	6"	6.62" (168mm)	3.87" (98mm)	7.75" (197mm)	5.40" (137mm)	3.56" (90mm)	1.44" (37mm)	⅝"-11 UNC-2B			500
UB8PA	HTUB8PA	HITUB8PA	8"	8.62" (219mm)	4.85" (123mm)	9.82" (249mm)	6.40" (163mm)	4.56" (116mm)	1.44" (37mm)	⅝"-11 UNC-2B	275	5,420 (25.11 kN)	500
UB10PA	HTUB10PA	HITUB10PA	10"	10.75" (273mm)	6.08" (154mm)	12.16" (309mm)	7.70" (196mm)	5.68" (144mm)	1.65" (42mm)	¾"-10 UNC-2B			500
UB12PA	HTUB12PA	HITUB12PA	12"	12.75" (324mm)	7.13" (181mm)	14.25" (362mm)	8.7" (221mm)	6.68" (170mm)	1.65" (42mm)	¾"-10 UNC-2B			500
▼ SUFFIX			Clamp			Cushion				Example			
NONE			Electro-galvanized			Thermoplastic elastomer				UB½PA			
6			Stainless Steel, Type 316			Thermoplastic elastomer				UB½PA6			
N6	—	—	Stainless Steel, Type 316			 Flame Retardant				UB½PAN6			
N	—	—	Electro-galvanized							UB½PAN			
NH	—	—	Electro-galvanized			 Flame Retardant Halogen Free				UB½PANH			
NH6	—	—	Stainless Steel,Type 316							UB½PANH6			



Cush-a-Glide™

Cush-A-Glide is designed for fast installation of copper tube or pipe, and can be easily installed in seconds with fasteners of your choice. Just spread the clamp apart placing it over the top of a tube or pipe and fasten one side. Push in the opposite side to the desired tightness, allowing for expansion and contraction, then fasten the other side.

- Allows for expansion and contraction of copper tube and pipe
- Excellent alternative to stainless or galvanized clamps
- Fits tightly and securely against mounting surfaces
- Made from trusted high quality TPE material
- One piece molded split ring design
- Suitable for indoor or outdoor applications
- Temperature range of -50°F to 275°F (-45°C to 135°C)
- Will not rust and prevents and eliminates galvanic corrosion
- Made in the USA

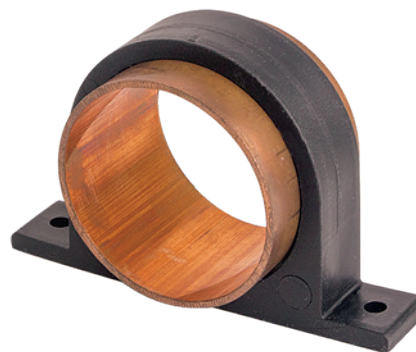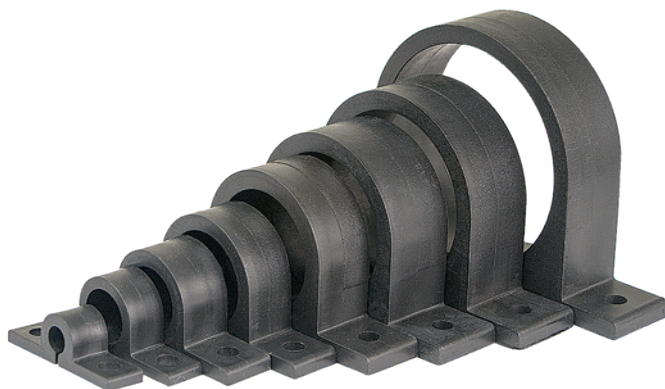


Step 1: Spread open Cush-a-Glide, and place it over tube, pipe, or hose





Step 2: Secure one side of Cush-a-Glide with a fastener of your choice



Step 3: Simply glide tube or pipe through the Cush-a-Glide to desired position



Step 4: Fasten second side of the Cush-a-Glide

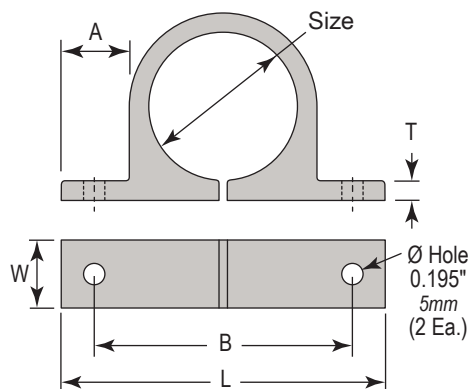

Part No.	Pipe, Hose or Tube Size	Size	Dimensions – inches				
			A	B	L	T Thickness	W
CAGB04	1/4"	0.245" (6mm)	0.500" (13mm)	1.000" (25mm)	1.465" (37mm)	0.110" (3mm)	0.375" (10mm)
CAGB06	3/8"	0.370" (9mm)		1.125" (29mm)	1.590" (40mm)		
CAGB08	1/2"	0.495" (13mm)		1.250" (32mm)	1.715" (44mm)		
CAGB10	5/8"	0.620" (16mm)	0.563" (14mm)	1.500" (38mm)	2.045" (52mm)	0.150" (4mm)	0.500" (13mm)
CAGB14	7/8"	0.870" (22mm)		1.750" (44mm)	2.295" (58mm)		
CAGB18	1 1/8"	1.120" (28mm)	0.625" (16mm)	2.125" (54mm)	2.730" (69mm)	0.180" (5mm)	0.625" (16mm)
CAGB20	1 1/4"	1.250" (32mm)		2.250" (57mm)	2.855" (73mm)		
CAGB22	1 3/8"	1.370" (35mm)		2.375" (60mm)	2.980" (76mm)		
CAGB26	1 5/8"	1.620" (41mm)		2.625" (67mm)	3.230" (82mm)		
CAGB34	2 1/8"	2.120" (54mm)		3.125" (79mm)	3.730" (95mm)		0.750" (19mm)



Quick-Clip

Quick-Clip's unique one-piece composite polyamide alloy design combines strength with light weight. It will overcome the problems of using cable ties for piping, electrical, optical and network cabling.

- Quick-Clip locates easily on $\frac{3}{8}$ " rod
- No breaks in insulation material
- Fast and easy installation, saves time and money
- Single handed installation
- Manufactured from a composite polyamide, tested from -40°F to +275°F, (-40°C to 135°C) makes it ideal for network cables
- Studding panel inserts.



Slide onto threaded rod, twist to engage.
Insert pipe and clip to lock.



Part No.	Standard Copper	Metric Copper	Copper Tube		Condensate Drain
	(no insulation)		with $\frac{3}{8}$ " (10mm) Insulation	with $\frac{1}{2}$ " (13mm) Insulation	
QC12	$\frac{3}{4}$ "	-	-	-	-
QC14	$\frac{7}{8}$ "	22mm	-	-	yes
QC16	1"	-	$\frac{1}{4}$ " tube	-	-
QC18	$1\frac{1}{8}$ "	28mm	$\frac{3}{8}$ " tube	-	-
QC20	$1\frac{1}{4}$ "	-	$\frac{1}{2}$ " tube	$\frac{1}{4}$ " tube	-
QC22	$1\frac{3}{8}$ "	-	$\frac{5}{8}$ " tube	$\frac{3}{8}$ " tube	yes
QC24	$1\frac{1}{2}$ "	-	$\frac{7}{8}$ " tube	$\frac{5}{8}$ " tube	-
QC26	$1\frac{5}{8}$ "	42mm	$1\frac{1}{8}$ " tube	$\frac{3}{4}$ " tube	yes
QC32	2"	-	-	$\frac{7}{8}$ " tube	-
QC34	$2\frac{1}{8}$ "	54mm	$1\frac{3}{8}$ " tube	$1\frac{1}{8}$ " tube	yes

Inside diameter: Certain clips have two or more positions to accommodate both metric and standard sizes

Cush-A-Grip

FEATURES:


- Ten sizes of tube, five sizes of pipe
- Diameters from .25" to 1.31"

ADVANTAGES:

- Reduces inventory SKU's
- Simplifies take-offs and requirements on projects using both tube and pipe sizes
- Easy installation, non-conducting
- Permissible outdoors
- Temp. range: -40°F to +380°F (-40°C to 193°C)
- No galvanic reaction, Will not rust

BENEFITS:

- Lowers overall inventory costs
- Works with screw or nut driver
- Resists vibration
- Use in place of steel clamps with steel tube
- Multi-environmental
- Covers a wide range of applications and maintains thermal barrier
- For use on copper tube
- Use in place of stainless, aluminum, PVC or hot dipped galvanized clamps

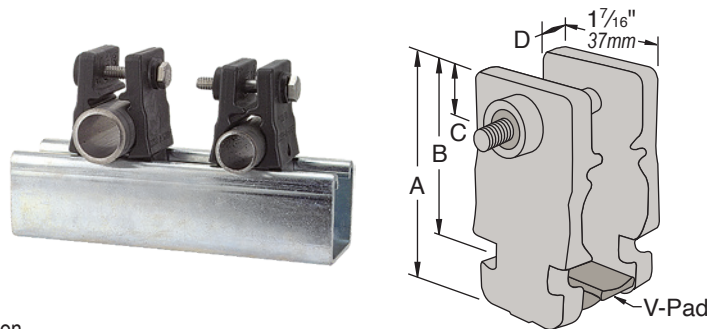

Part No.	O.D. Tube Sizes		Pipe Sizes	Metric Sizes	Diameters (in)
CG-10	$\frac{1}{4}$ "	$\frac{3}{8}$ "	$\frac{1}{2}$ "	6mm – 14mm	0.25 – 0.54
CG-20	$\frac{5}{8}$ "	$\frac{3}{4}$ "	$\frac{7}{8}$ "	15mm – 22mm	0.62 – 0.87
CG-30	$\frac{7}{8}$ "	1"	$1\frac{1}{8}$ "	22mm – 28mm	0.87 – 1.12
CG-40	1"	$1\frac{1}{8}$ "	$1\frac{1}{4}$ "	26mm – 32mm	1.00 – 1.31

Part No.	Nominal Pipe Size	Dimensions				Hex Head Cap Screw & Lock Nut
		"A"	"B"	"C"	"D"	
CG-10	$\frac{1}{4}$ "	$1\frac{15}{16}$ " (49mm)	$1\frac{3}{8}$ " (35mm)	$\frac{3}{8}$ " (10mm)	$\frac{3}{16}$ " (5mm)	$\frac{1}{4}$ "-20 x $1\frac{1}{2}$ "
CG-20	$\frac{3}{8}$ "	$2\frac{3}{8}$ " (60mm)	$1\frac{5}{8}$ " (41mm)	$\frac{7}{16}$ " (11mm)	$\frac{1}{4}$ " (6mm)	$\frac{1}{4}$ "-20 x 2"
CG-30	$\frac{1}{2}$ "	$2\frac{9}{16}$ " (65mm)	$1\frac{13}{16}$ " (46mm)	$\frac{7}{16}$ " (11mm)	$\frac{5}{16}$ " (8mm)	$\frac{1}{4}$ "-20 x 2"
CG-40	$\frac{3}{4}$ "	$2\frac{11}{16}$ " (68mm)	$1\frac{15}{16}$ " (49mm)	$\frac{7}{16}$ " (11mm)	$\frac{5}{16}$ " (8mm)	$\frac{1}{4}$ "-20 x 2"




Cush-A-Clip®



A Simple, Economical, Lightweight Hanger For Supporting Tubing

- Manufactured from polyamide alloy
- U.L. Rated
- Sizes from $\frac{3}{8}$ " to $1\frac{1}{8}$ "
- One piece design makes installation a snap.
- No nuts to tighten, no parts to lose.
- Temperatures from -40°F to 275°F (-40°C to 135°C)
- Secure but non-tightening design allows for expansion, greatly reducing joint fractures




Part No.	Tube O.D.
RPC-3/8	$\frac{3}{8}$ " (10mm)
RPC-1/2	$\frac{1}{2}$ " (13mm)
RPC-5/8	$\frac{5}{8}$ " (16mm)
RPC-3/4	$\frac{3}{4}$ " (19mm)
RPC-7/8	$\frac{7}{8}$ " (22mm)
RPC-1-1/8	$1\frac{1}{8}$ " (29mm)

Cush-A-Click

The great advantage with the **Cush-A-Click** is it retains an unbroken vapor barrier seal, eliminating the problem of sweating on metal fittings. The Cush-A-Click is ideal for the installation of refrigeration systems allowing the barrier seal to run the length of the pipe work without cutting the insulation material. The Cush-A-Click quickly secures both the pipe and the insulation.



- Time and labor savings
- Simple, secure installation of refrigeration and plumbing pipe work
- No break insulation material
- Corrosion resistance
- Light weight



Part No.	Standard Copper	Metric Copper	Copper Tube		Condensate Drain
	(no insulation)		with $\frac{3}{8}$ " (10mm) Insulation	with $\frac{1}{2}$ " (13mm) Insulation	
CAC12	$\frac{3}{4}$ "	-	-	-	-
CAC14	$\frac{7}{8}$ "	22mm	-	-	yes
CAC16	1"	-	$\frac{1}{4}$ " tube	-	-
CAC18	$1\frac{1}{8}$ "	28mm	$\frac{3}{8}$ " tube	-	-
CAC20	$1\frac{1}{4}$ "	-	$\frac{1}{2}$ " tube	$\frac{1}{4}$ " tube	-
CAC22	$1\frac{3}{8}$ "	-	$\frac{5}{8}$ " tube	$\frac{3}{8}$ " tube	yes
CAC24	$1\frac{1}{2}$ "	-	$\frac{7}{8}$ " tube	$\frac{5}{8}$ " tube	-
CAC26	$1\frac{5}{8}$ "	42mm	$1\frac{1}{8}$ " tube	$\frac{3}{4}$ " tube	yes
CAC32	2"	-	-	$\frac{7}{8}$ " tube	-
CAC34	$2\frac{1}{8}$ "	54mm	$1\frac{3}{8}$ " tube	$1\frac{1}{8}$ " tube	yes


Inside diameter: Certain clips have two or more positions to accommodate both metric and standard sizes



AIRSTRIP®




The AIRSTRIP is designed to dampen the noise and vibration that can occur between piping or duct work and the supporting channel. Made from 64 Durometer Santoprene, the AIRSTRIP 1 is light weight, dependable, and long-lasting.

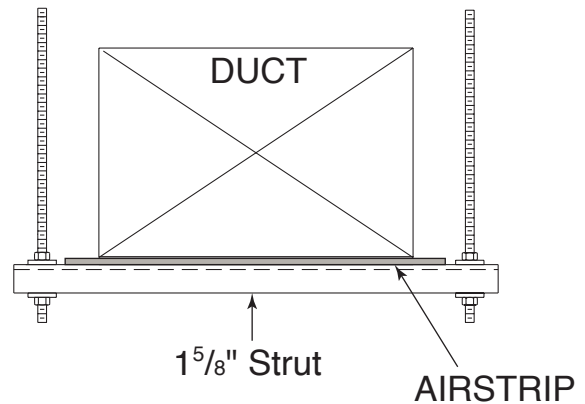

Part No.	Max. Load Lbs. per Lineal In.		Length	
	Lbs.	(kg/25.4mm)	Ft.	(m)
AS1	40	18.1	10	3.05

- Temp Range: -40°F to 250°F (-40°C to 121°C)
- Available in 10' (3m) lengths
- Santoprene UL94HB rated
- Made in USA

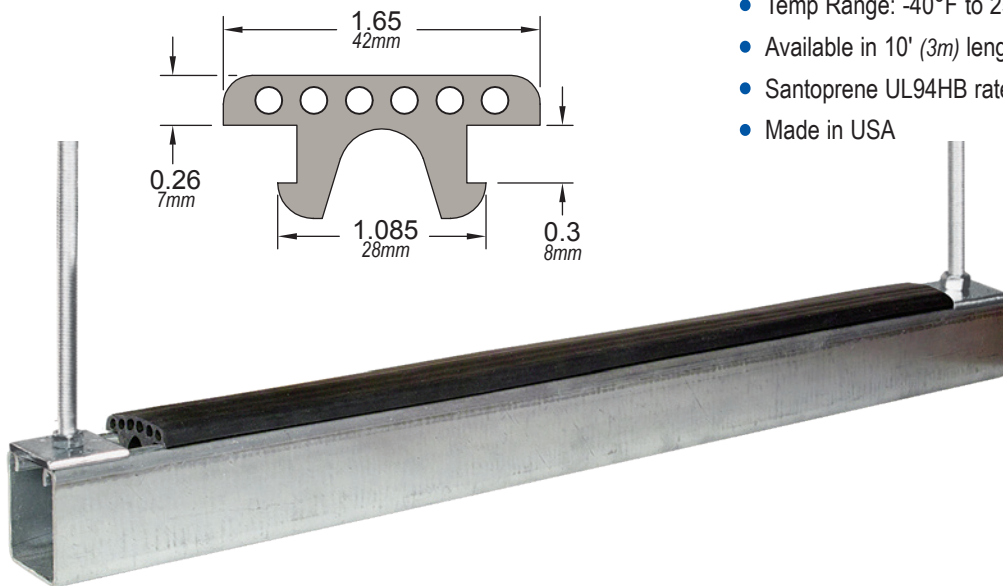

Installs simply by pushing into place



To remove, squeeze the tabs at the end and push up



Cush-A-Strip™

- Manufactured from a thermoplastic elastomer, Cush-A-Strip is designed for use from -50°F to 275°F (-45°C to 135°C).
- Easy Stocking – Packaged in 20 foot rolls in an E-Z dispenser box for convenience in handling and storage. **Cush-A-Strip roll part number is S-716**
- Easy Measuring – Marked in 1/4" increments for fast measuring and cutting, while eliminating waste.
- Lock-lip edges ensure that Cush-A-Strip will remain in place with a balanced grip.
- Clamps ordered separately. They are available with a standard bolt and nylon lock nut in steel (electro-dichromate), and stainless steel, in sizes ranging from 1/4" tube to 6" pipe.




(1) Cut appropriate length strip using the cutting schedule shown on right.




(2) Place the pipe on the Cush-A-Strip



(3) Insert the clamps in the strut



(4) Tighten the clamps.

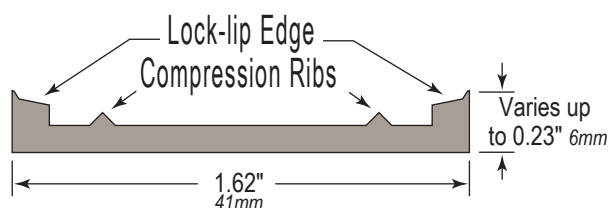

Cush-A-Strip™ Cutting Guide

Clamp Part No.		Dimensions (Inches)			
Gold Plated Steel	Stainless Steel Type 304	Clamp Size O.D.	Tube Size O.D.	Pipe Size (Nom.)	Cutting Schedule
TG008C	NS008	1/2"	1/4"	–	7/8" (22mm)
TG010C	NS010	5/8"	3/8"	–	1-1/8" (29mm)
TG012C	NS012	3/4"	1/2"	1/4"	1-1/2" (38mm)
TG014C	NS014	7/8"	5/8"	3/8"	2" (51mm)
TG016C	NS016	1"	3/4"	–	2-1/4" (57mm)
TG018C	NS018	1-1/8"	7/8"	1/2"	3" (76mm)
TG020C	NS020	1-1/4"	1"	3/4"	3-1/4" (83mm)
TG022C	NS022	1-3/8"	1-1/8"	–	3-5/8" (92mm)
TG024C	NS024	1-1/2"	1-3/16"	–	3-7/8" (98mm)
TG024C	NS024	1-1/2"	1-1/4"	1"	4" (102mm)
TG026C	NS026	1-5/8"	1-3/8"	–	4-1/2" (114mm)
NG028C	CS028	1-3/4"	1-1/2"	–	4-7/8" (124mm)
NG030C	CS030	1-7/8"	1-5/8"	1-1/4"	5-1/4" (133mm)
NG032C	CS032	2"	1-3/4"	–	5-1/2" (140mm)
NG034C	CS034	2-1/8"	1-7/8"	1-1/2"	6" (152mm)
NG036C	CS036	2-1/4"	2"	–	6-3/8" (162mm)
NG038C	CS038	2-3/8"	2-1/8"	–	6-3/4" (172mm)
NG040C	CS040	2-1/2"	2-1/4"	–	7-1/4" (184mm)
NG042C	CS042	2-5/8"	2-3/8"	2"	7-1/2" (191mm)
NG044C	CS044	2-3/4"	2-1/2"	–	8" (203mm)
NG048C	CS048	3"	2-3/4"	–	8-3/4" (222mm)
NG050C	CS050	3-1/8"	2-7/8"	2-1/2"	9-1/4" (235mm)
NG054C	CS054	3-1/4"	3"	–	9-1/2" (241mm)
NG060C	CS060	3-3/4"	3-1/2"	3"	11" (279mm)
NG068C	CS068	4-1/4"	4"	3-1/2"	12-1/4" (311mm)
NG076C	CS076	4-3/4"	4-1/2"	4"	14" (356mm)
NG092C	CS092	5-3/4"	–	5"	15-1/2" (394mm)
NG110C	CS110	6-7/8"	–	6"	18-1/2" (470mm)

* Gold Plated Steel Clamps Supplied with Fixed Stud and Nylon Lock Nut



* Stainless Steel Clamps Supplied with fixed Stud and Nylon Lock Nut from 1/2" through 1-3/4" Sizes and 1-7/8" through 6-7/8" Sizes are supplied with a Loose Bolt and Hex Nut





- Universal mounting feature allows secure fit on either side of channel.
- Molded with self-tapping screw location hole
- UL Classified 2043 (25/50) for use in plenums and air handling systems
- Manufactured from high-strength Polypropylene Copolymer
- Extra strength ribbed side walls
- No assembly or tools required
- Enhanced safety lip prevents insulation crushing and tearing from pipe movement
- UV resistant
- Available in black and white to match insulation
- Excellent finished appearance
- Made in the U.S.A.

Part No.		A
Black	White	
225B2S	225W2S	2.25" (57mm)
325B2S	325W2S	3.25" (82mm)
425B2S	425W2S	4.25" (108mm)
525B2S	525W2S	5.25" (133mm)
625B2S	625W2S	6.25" (159mm)
825B2S	825W2S	8.25" (204mm)

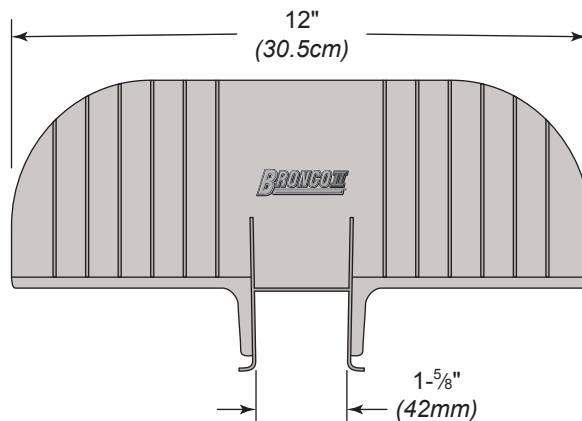



Copper Tube Size	Insulation Thickness				
	½" (13mm)	¾" (19mm)	1" (25mm)	1½" (38mm)	2" (50mm)
⅜" (9.5 mm)	225B2S	225B2S	325B2S	425B2S	525B2S
½" (13 mm)					
⅝" (16 mm)					
¾" (19 mm)					
⅞" (22 mm)					
1-⅛" (29 mm)	325B2S	325B2S	425B2S	525B2S	625B2S
1-⅜" (35 mm)					
1-⅝" (41 mm)					
2-⅛" (54 mm)	425B2S	425B2S	525B2S	625B2S	825B2S
2-⅝" (67 mm)					
3-⅛" (79 mm)	425B2S	525B2S	525B2S	625B2S	825B2S
3-⅝" (92 mm)	525B2S	525B2S	625B2S	825B2S	
4-⅛" (105 mm)		625B2S			

Available in Black (B) or White (W) to match insulation

Schedule 40/80 Pipe Size	Insulation Thickness				
	½" (13mm)	¾" (19mm)	1" (25mm)	1½" (38mm)	2" (50mm)
¼" (6.4 mm)	225B2S	225B2S	325B2S	425B2S	525B2S
⅜" (9.5 mm)					
½" (13 mm)					
¾" (19 mm)					
1" (25 mm)	325B2S	325B2S	425B2S	525B2S	625B2S
1-¼" (31 mm)					
1-½" (38 mm)					
2" (50 mm)					
2-½" (63 mm)	425B2S	425B2S	525B2S	625B2S	825B2S
3" (75 mm)					
3-½" (88 mm)					
4" (100 mm)					

Available in Black (B) or White (W) to match insulation



Its revolutionary design allows for pipe movement within the support, eliminating common problems related to traditional pipe saddles: rotation, displacement and thermal insulation damages.

Breakthrough Innovation

Snap-a-Saddle Pro™ is designed to accommodate movement of the pipes generated by thermal expansion and vibration. With its unique sliding design at each end, Snap-a-Saddle Pro easily and effectively cradles and protects pipes allowing them to expand and vibrate without damaging their insulation.

Snap-a-Saddle Pro permanently eliminates insulation tears, refrigerant leaks, condensing, and freezing. It holds up to the highest quality standards of the industry.



Maintains Pipe Insulation Properties

Eliminates displacement and/or failing of pipe support, leading to refrigerant leaks

Maintains Liquid Line In Place

Eliminates refrigerant leaks

Fastest Installation In The Industry

60% faster than metal or plastic shields

80% faster than clamps and collars

Keeps Thermal Bridge Intact

Eliminates insulation compression


Copper Tube Size	Insulation Thickness				
	1/2" (13mm)	3/4" (19mm)	1" (25mm)	1 1/2" (38mm)	2" (50mm)
1/4" (6.4 mm)	SAS225	SAS225	SAS325	SAS425	SAS525
3/8" (9.5 mm)					
1/2" (13 mm)					
5/8" (16 mm)					
3/4" (19 mm)					
7/8" (22 mm)	SAS325	SAS325	SAS425	SAS525	SAS625
1 1/8" (29 mm)					
1 3/8" (35 mm)					
1 5/8" (41 mm)					
2 1/8" (54 mm)					
2 5/8" (67 mm)	SAS425	SAS425	SAS525	SAS625	SAS825
4 1/8" (105 mm)					
5 1/8" (130 mm)					
	SAS525	SAS825	SAS825	SAS825	-

Schedule 40/80 Pipe Size	Insulation Thickness				
	1/2" (13mm)	3/4" (19mm)	1" (25mm)	1 1/2" (38mm)	2" (50mm)
1/4" (6.4 mm)	SAS225	SAS225	SAS325	SAS425	SAS525
3/8" (9.5 mm)					
1/2" (13 mm)					
3/4" (19 mm)					
1" (25 mm)					
1 1/4" (31 mm)	SAS325	SAS325	SAS425	SAS525	SAS625
1 1/2" (38 mm)					
2" (50 mm)					
2 1/2" (63 mm)	SAS425	SAS425	SAS525	SAS625	SAS825
3" (75 mm)					
3 1/2" (88 mm)					
4" (100 mm)	SAS525	SAS525	SAS625	SAS825	SAS825
5" (127 mm)					
6" (152 mm)					



Snap-A-Saddle Pro™

Insulated Pipe Saddle

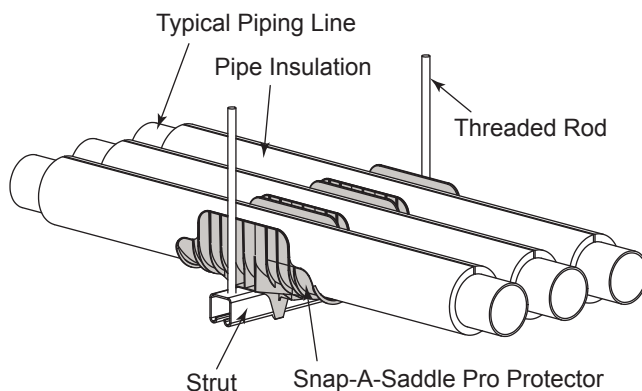

Applications:

Refrigeration, Air Conditioning and Plumbing

Installation:

Tool-Free, "Clips" directly on standard 1-5/8" x 1-5/8" (41mm x 41mm) strut channel.

Suited for horizontal pipe installation.


Certification:

UL classified for USA (UL-723 (ASTM E 84) and ULC listed for Canada (ULC-S102.2).

Material:

Polypropylene copolymer

- UV resistant
- Operating temperature -40° to 178°F (-40° to 81°C)
- Paintable (preserves mechanical properties even after painting)
- Non-adhesive surface for linear expansion of thermal insulation. SAS825B & SAS825W have 20% glass filled material for additional strength.

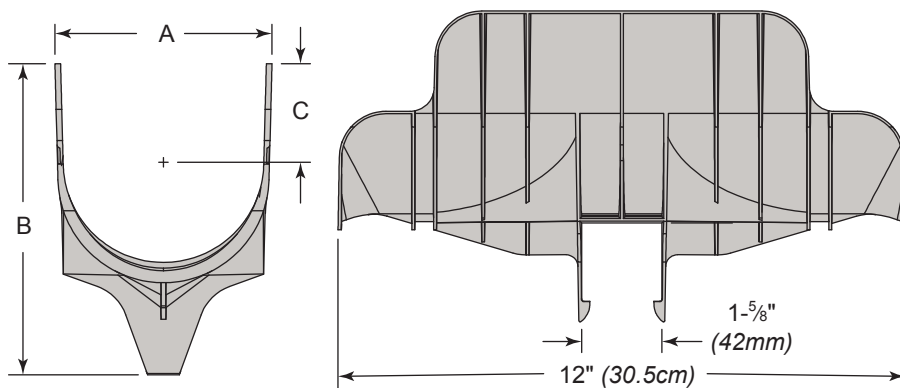

Part No.		A	B	C
Black	White			
SAS225B	SAS225W	2.25" (57mm)	4.56" (116mm)	1.09" (28mm)
SAS325B	SAS325W	3.25" (82mm)	5.57" (140mm)	1.59" (40mm)
SAS425B	SAS425W	4.25" (108mm)	6.59" (167mm)	2.09" (53mm)
SAS525B	SAS525W	5.25" (133mm)	7.57" (192mm)	2.58" (66mm)
SAS625B	SAS625W	6.25" (159mm)	8.57" (218mm)	3.09" (78mm)
SAS825B	SAS825W	8.25" (204mm)	11.04" (280mm)	4.27" (108mm)



Snap-A-Saddle Pro Multi™ Adapts To Your Needs!

Allows use on various sizes of strut, H-Beam, floor-mount, Clevis and steel angle mountings
Adapts to different suspension systems, simply by swapping clipping adapters.



Breakthrough Innovation

Piping installations require different types of suspension systems, which vary in size. This new design adapts to various sizes of strut, H-Beam, floor-mount, clevis hangers, and steel angles. Thanks to the interchangeable bottom adapters, Snap-a-Saddle Pro Multi eliminates the hassle and headaches of compatibility problems you've been dealing with for so long!

Standardize Your Installation

Snap-a-Saddle Pro Multi™ makes the installer's job easier while standardizing piping installations and improving appearance. Whether you are looking at new or existing installations, the Snap-a-Saddle Pro Multi clip-on adapters will adapt to both the suspension system and the selected size of saddle core.

One Part Suits Multiple Uses

Simply change adapters

Fastest Installation In The Industry

40% Faster than metal or plastic shields

80% Faster than clamps and collars

Keeps Thermal Bridge Intact

Prevents insulation damage and compression

Tool-Free Installation

One simple click is all it takes

Maintains Pipe Insulation Properties

Permanent solution to displacement and/or falling of pipe support


Maintains Liquid Line In Place

Eliminates refrigerant leaks



Snap-A-Saddle Pro Multi™

Adaptable Insulated Pipe Saddle

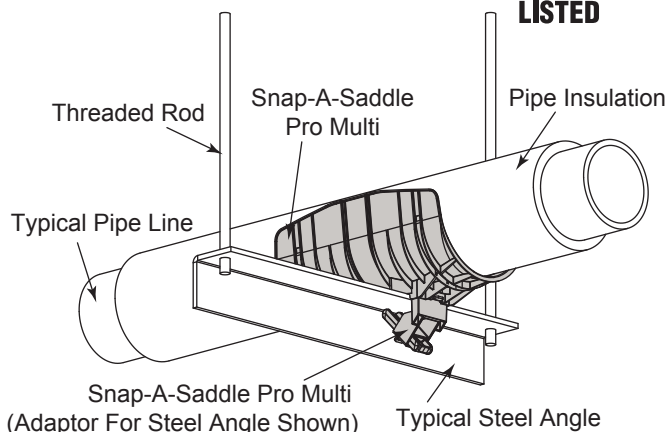

Applications:

Plumbing, Mechanical, Refrigeration, and Air Conditioning

Installation:


Tool-Free, suited for horizontal pipe installation.

Certification:

UL classified for USA (UL-723 (ASTM E 84)) and ULC listed for Canada (ULC-S102.2).

Material:

- Polypropylene 20% glass filled
- UV resistant
- Operating temperature -40° to 178°F (-40° to 81°C)
- Paintable (preserves mechanical properties even after painting)
- Non-adhesive surface for linear expansion of thermal insulation.

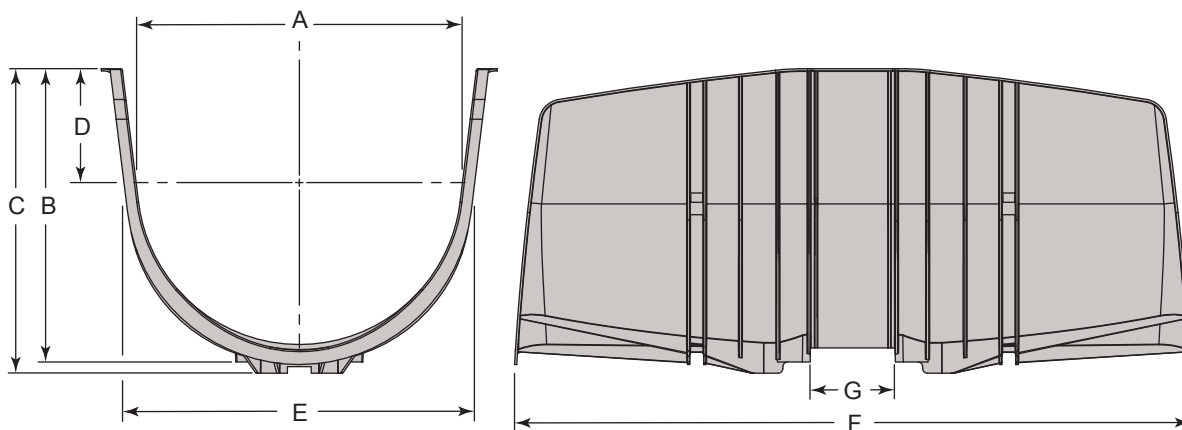

Part No. Grey	A	B	C	D	E	F Length	G
SASM250G	2.34" (60mm)	1.92" (49mm)	2.33" (59mm)	0.40" (10mm)	2.45" (62mm)	12" (305mm)	1.20" (30mm)
SASM350G	3.45" (88mm)	3.17" (81mm)	3.58" (91mm)	1.09" (28mm)	3.56" (90mm)		1.48" (38mm)
SASM450G	4.50" (114mm)	3.89" (99mm)	4.19" (106mm)	1.17" (30mm)	4.61" (117mm)		1.75" (44mm)
SASM550G	5.56" (140mm)	4.90" (124mm)	5.20" (132mm)	1.66" (42mm)	5.75" (146mm)		1.78" (45mm)
SASM650G	6.46" (165mm)	5.96" (151mm)	6.26" (159mm)	2.18" (55mm)	6.75" (171mm)		2.08" (53mm)
SASM850G	8.65" (219mm)	7.83" (199mm)	8.13" (207mm)	3.04" (77mm)	8.75" (222mm)	18" (457mm)	2.26" (57mm)
SASM1050G	10.65" (271mm)	7.80" (198mm)	8.10" (206mm)	1.76" (45mm)	10.59" (269mm)	23" (584mm)	
SASM1250G	12.65" (321mm)	9.18" (233mm)	9.48" (241mm)	2.14" (54mm)	12.52" (318mm)		

The use of the Stabilizer Adapter with 10" SASM1050G and 12" SASM1250G Saddles is suggested for additional support.





Snap-A-Saddle Pro Multi™ Adapters




Adaptable Insulated Pipe Saddle

Strut Mount Adapter

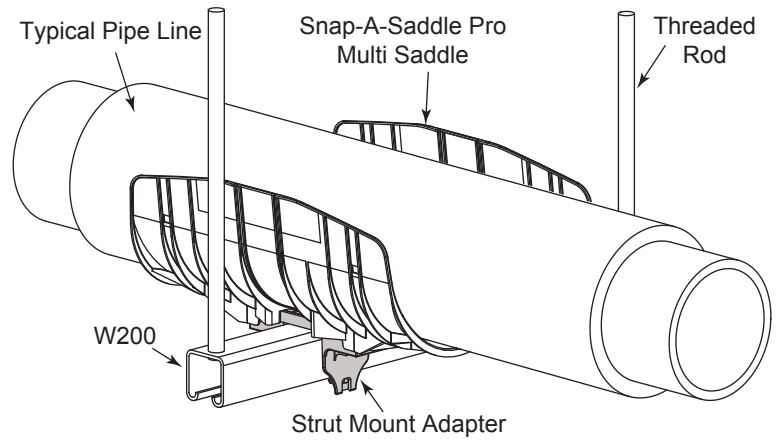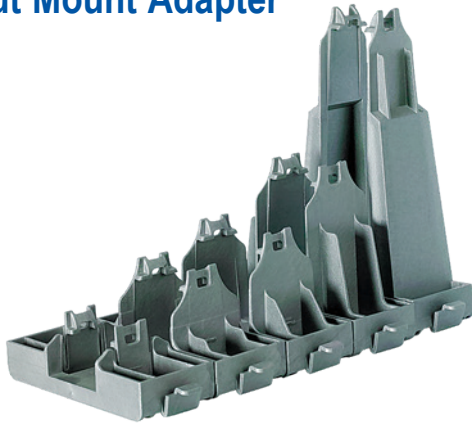




Part No.	A	B	Use with Channel Sizes
SASM30X30G	1-3/16" (30mm)	1-3/16" (30mm)	-
SASM31X43G	1-5/64" (31mm)	1-11/16" (43mm)	-
SASM40X38G	1-9/16" (40mm)	1-1/2" (38mm)	-
SASM42X20G	1-5/8" (41mm)	13/16" (21mm)	1-5/8" x 13/16"
SASM42X42G		1-5/8" (41mm)	1-5/8" x 1-5/8", 1-5/8" x 13/16" Back-to-Back
SASM42X84G		3-1/4" (165mm)	1-5/8" x 1-5/8" Back-to-Back, 1-5/8" x 3-1/4"
SASM42X166G		6-1/2" (165mm)	1-5/8" x 3-1/4" Back-to-Back
SASM4D21G	2-1/8" (54mm)	1-1/16" (27mm)	-
SASM4D22G		2-1/8" (54mm)	-

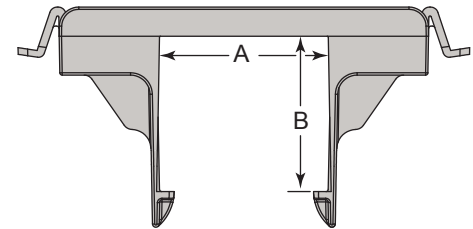

The use of the Stabilizer Adapter with 10" SASM1050G and 12" SASM1250G Saddles is suggested for additional support.

SASMCLEVISG

Clevis Mount Adapter

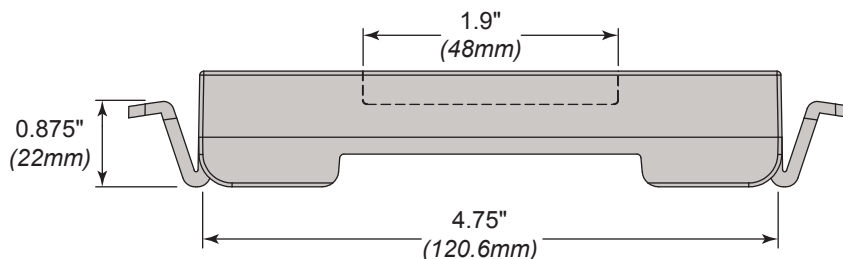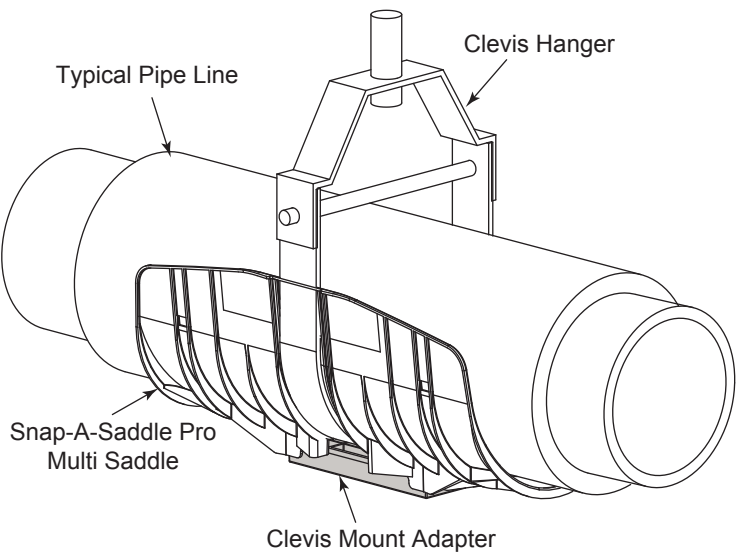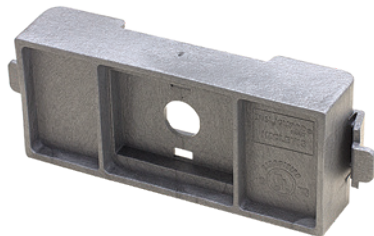

SnapShock™ can be attached to Clevis Mount Adapter.

Stabilizer can be attached with Clevis Mount Adapter



Clevis Mount Adapter is utilized with Floor Adapter assembly.





SASM2-5/8G




Steel Angle Mount Adapter

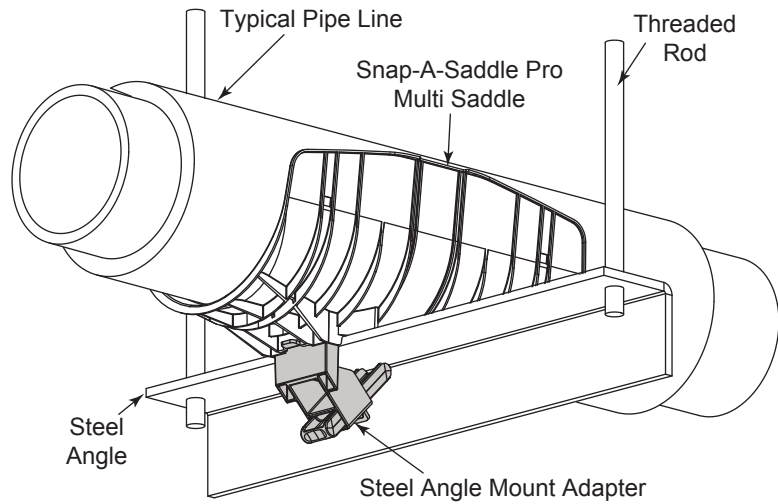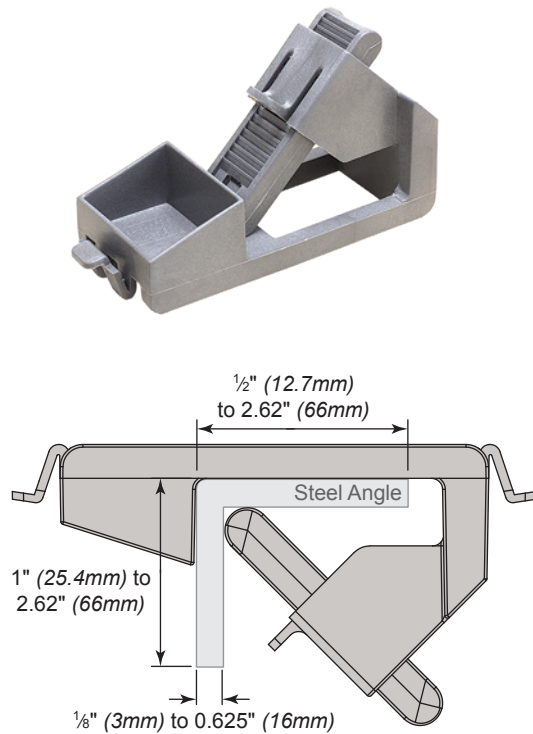

The use of the Stabilizer Adapter with 10" SASM1050G and 12" SASM1250G Saddles is suggested for additional support.

SASMHBEAMG

H-Beam / I-Beam Adapter

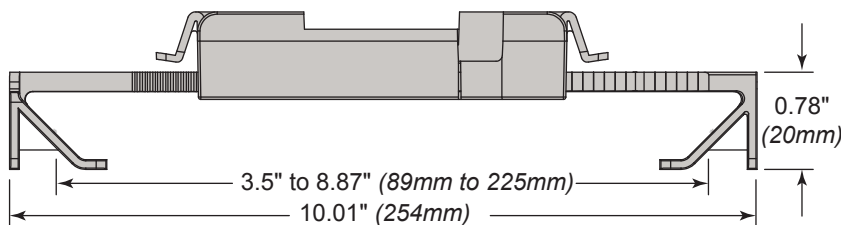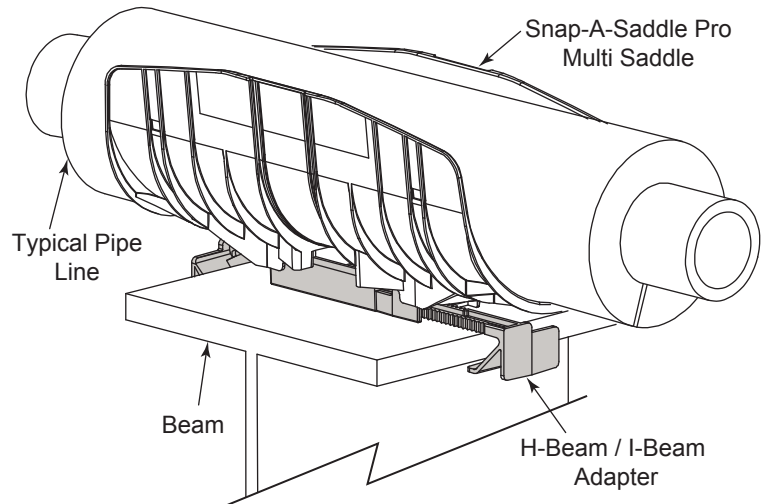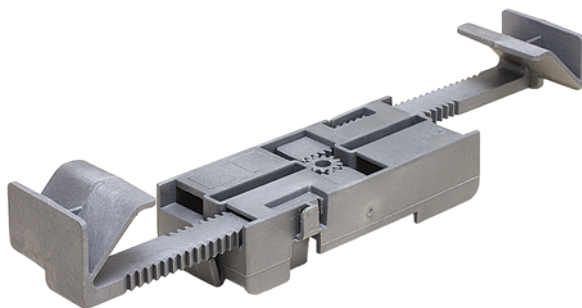

The use of the Stabilizer Adapter with 10" SASM1050G and 12" SASM1250G Saddles is suggested for additional support.




Snap-A-Saddle Pro Multi™ Adapters


Adaptable Insulated Pipe Saddle



Stabilizer

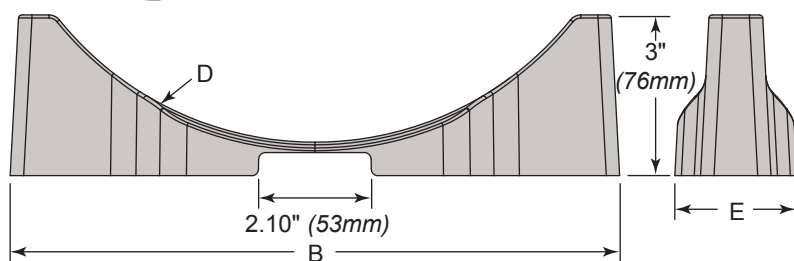


Part Number	B	D	E	Compatible Only with Saddle
SASMSTAB1050G	10.34" (263mm)	R5.13	2.24" (57mm)	SASM1050G
SASMSTAB1250G	11.38" (289mm)	R6.13	2.28" (58mm)	SASM1250G

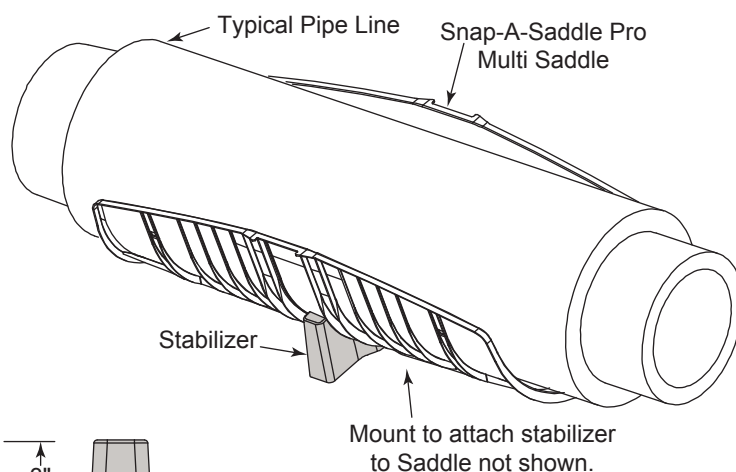

Stabilizer is attached to Saddle with Strut Mount, Steel Angle, H & I-Beam and Clevis Mount adapters.



The use of this Stabilizer Adapter with 10" SASM1050G and 12" SASM1250G Saddles is suggested for additional support.

Floor Adapter

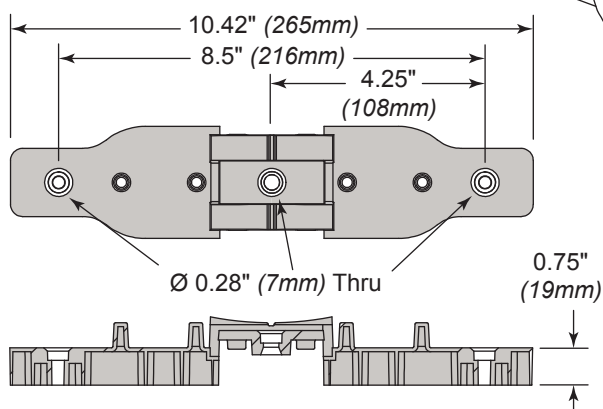





Floor Mount works with 10" SASM1050G and 12" SASM1250G Saddles. Requires the Stabilizer and Clevis Mount Adapters as shown in photo to the right.

Part Number	Compatible Only with Saddle	Requires a Stabilizer	Requires a Clevis Mount
SASMFLOOR10-12G	SASM1050G & SASM1250G	SASMSTAB1050G & SASMSTAB1250G	SASMCLEVISG

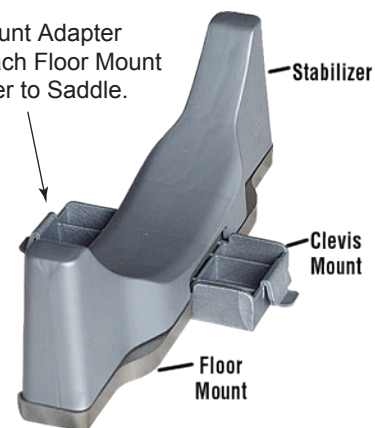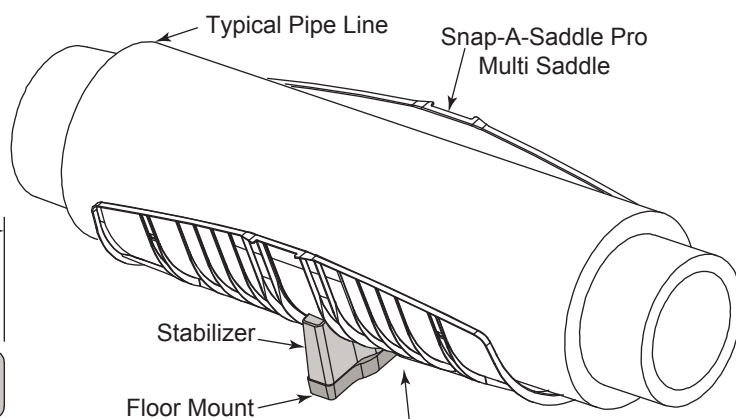

Snap-A-Cover™

Insulated Pipe Saddle Cover

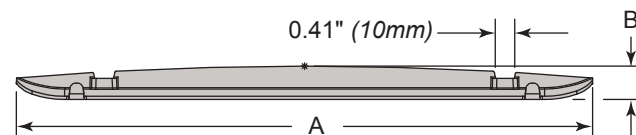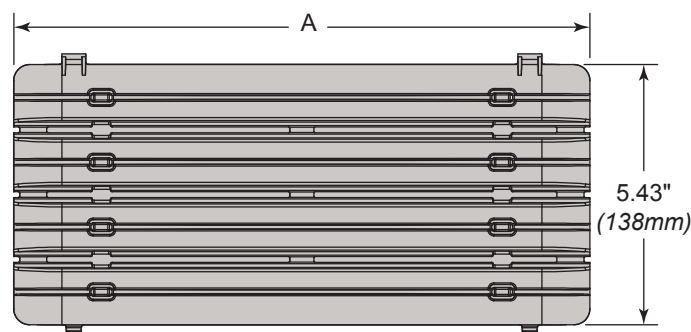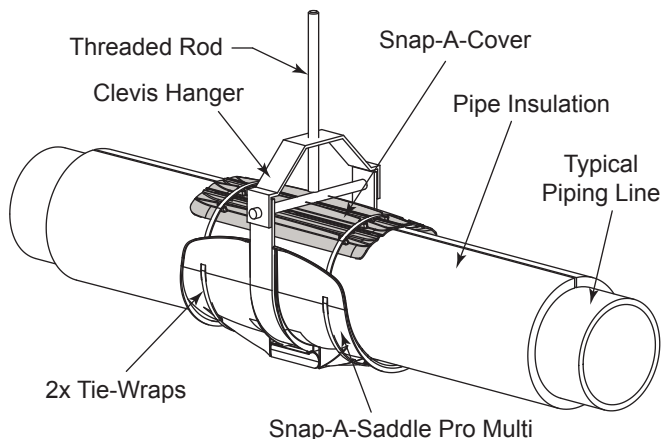

Applications:

Refrigeration, Air Conditioning and Plumbing

Installation:

Tool-Free, Suited for vertical or horizontal pipe installation.

Certification:

UL classified for USA (UL-723 (ASTM E 84)) and ULC listed for Canada (ULC-S102.2).

Material:

- Polypropylene
- UV resistant
- Operating temperature -40° to 178°F (-40° to 81°C)
- Paintable (preserves mechanical properties even after painting)
- Non-adhesive surface for linear expansion of thermal insulation.

Part Number	Color	Use With Snap-A-Saddle Pro Part Numbers	A	B
SACX25B	Black	SAS225B, SAS325B, SAS425B, SAS525B, SAS625B	12" (305mm)	0.83" (21mm)
SACX25W	White	SAS225W, SAS325W, SAS425W, SAS525W, SAS625W		
SAC825B	Black	SAS825B		
SAC825W	White	SAS825W		

Part Number	Color	Use With Snap-A-Saddle Pro Multi Part Numbers	A	B
SACX50G	Grey	SASM250G, SASM350G, SASM450G, SASM550G, SASM650G	12" (305mm)	0.83" (21mm)
SACL50G	Grey	SASM850G, SASM1050G, SASM1250G	18" (457mm)	0.77" (19.5mm)



SnapShock™

Applications:

Refrigeration, Air Conditioning and Plumbing

Installation:

Tool-Free, clips directly into the Clevis adapter of the Snap-A-Saddle Pro Multi™

Certification:

UL classified for USA (UL-723 (ASTM E 84) and ULC listed for Canada (ULC-S102.2).

Material:




- Polypropylene 20% glass filled
- UV resistant
- Operating temperature -40° to 178°F (-40° to 81°C)



Each color coded flag will trigger at a different shock intensity. Flags are easily interchangeable for different shock tolerance. Flag thickness varies by shock intensity.

- 1.8G
(Downward Allowable Stress Design)
- 1.6G
(Downward Allowable Stress Design)
- 1.4G
(Downward Allowable Stress Design)

SnapShock is sold by the set. Each set is supplied complete with all three flags.

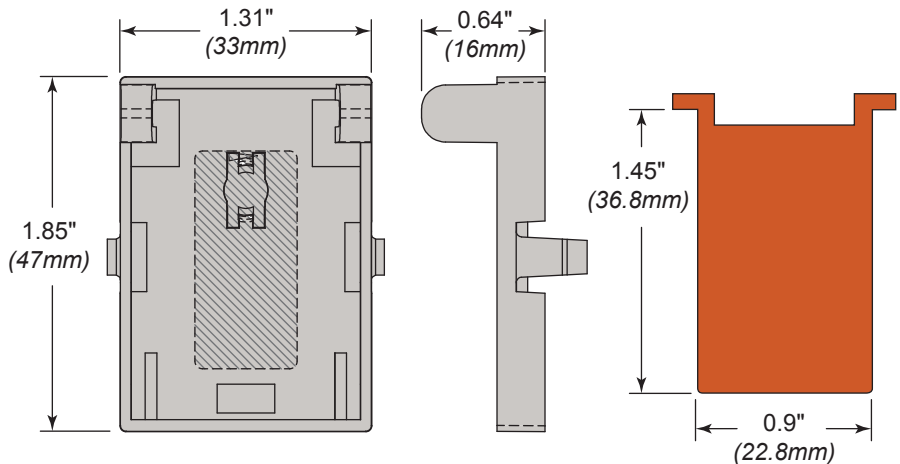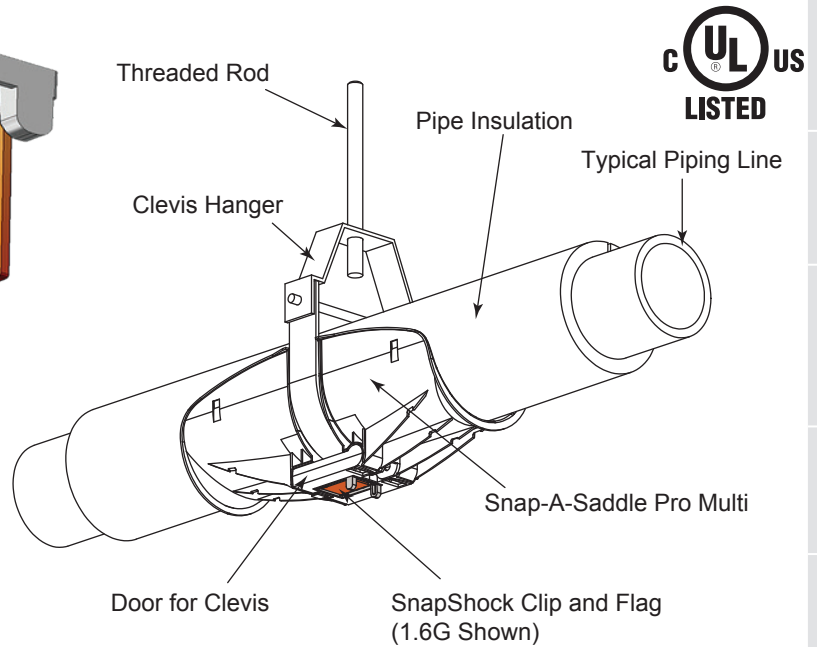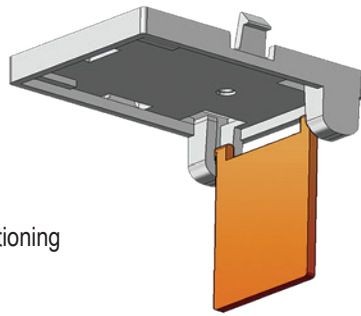

Install Flag



Set Flag to Arm



Activated Flag Indicates Shock Issue

Snap-A-Clip™



Applications:

Refrigeration, Air Conditioning, Plumbing,
Electrical and Communication

Installation:




Tool-Free, Tie-wrap style

Certification:

UL classified for USA (UL-723 (ASTM E 84)) and
ULC listed for Canada (ULC-S102.2).

Material:

- Polypropylene
- UV resistant
- Operating temperature -40° to 178°F (-40° to 81°C)
- Paintable (preserves mechanical properties even after painting)

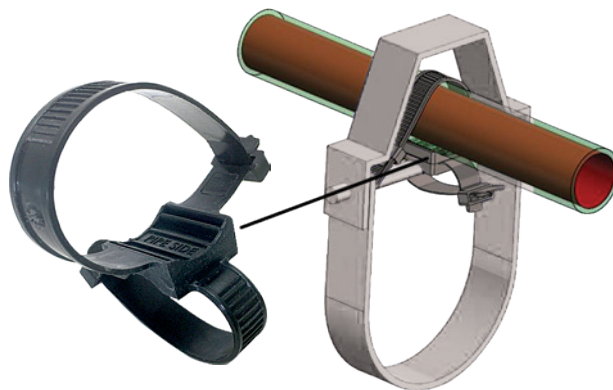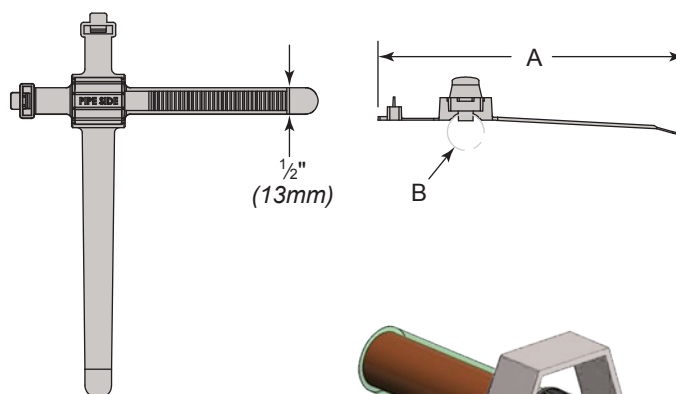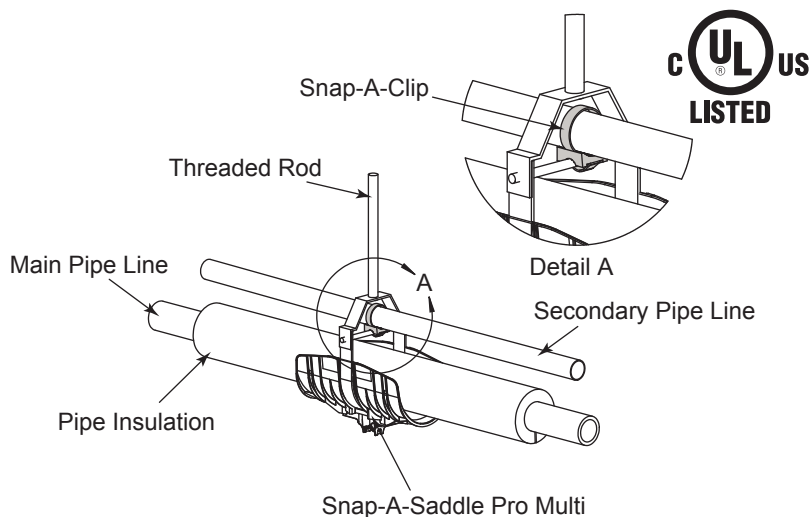

Part Number	For Pipe OD	A	B
SASP050B	1/4" - 1/2"	5.62" (143mm)	0.68" (17mm)
SASP125B	5/8" - 1-1/4"	5.77" (147mm)	1.25" (32mm)
SASP175B	1-5/16" - 1-3/4"	6.20" (158mm)	1.75" (45mm)
SASP225B	1-3/4" - 2-1/4"	6.20" (158mm)	1.71" (44mm)

Bolt Diameter	Pipe Diameter									
	1/4" (6mm)	1/2" (13mm)	5/8" (16mm)	3/4" (19mm)	1" (25mm)	1-1/4" (39mm)	1-1/2" (38mm)	1-3/4" (45mm)	2" (51mm)	2-1/4" (57mm)
1/4" (6.3mm)	SASP050B	SASP050B	-	-	-	-	-	-	-	-
5/16" (7.9mm)			SASP125B	SASP125B	SASP125B	SASP125B	-	-	-	-
3/8" (9.5mm)							-	-	-	-
1/2" (12.7mm)							SASP175B	-	-	-
11/16" (17.5mm)								SASP225B	SASP225B	SASP225B





Saddle-Up

Insulation Saddle

The Saddle-Up Pipe Insulation Saddle is a formed metal shield designed to allow insulated refrigeration pipe or tubing to pass through the support without need to compromise the vapor barrier and protects from crushing or damage at hanger and support locations. Made from 20 gauge electro-galvanized steel the ribbed design along its 12" (305mm) length offers the superior support needed to spread out loading on insulation which reduces the potential for internal cavity creation between the pipe and insulation. The strut mounting option provides a time tested secure and safe attachment method so there is no need for other tie downs to the support.

FEATURES:

- Shipped with all necessary hardware to attach to strut or any other industry standard 1 5/8" (41mm) wide strut channel.
- Features flared edges to protect pipe insulation jacketing.
- Each Saddle individually marked with part number
- Counter Sunk attachment Hole and Flat Head Machine Screw prevent possible damage to insulation.
- Electro-Galvanized Steel provides excellent rust protection and has no exposed fabricated edges.

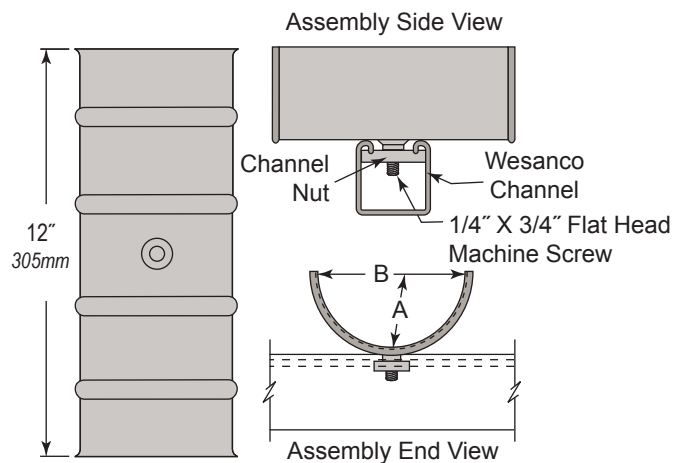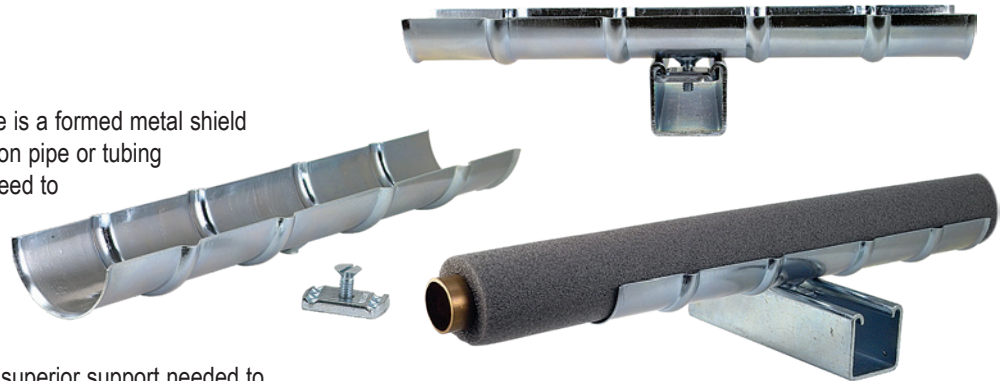


Dimensions (Inches)			1/2" (13mm) Insulation		3/4" (19mm) Insulation		1" (25mm) Insulation		1 1/2" (38mm) Insulation	
Part No.	B Width	A Radius	OD Tube Size	OD With Insulation	OD Tube Size	OD With Insulation	OD Tube Size	OD With Insulation	OD Tube Size	OD With Insulation
SD150	1 1/2" (38mm)	3/4" (19mm)	3/8"	1 3/8" (35mm)	—	—	—	—	—	—
			1/2"	1 1/2" (38mm)	—	—	—	—	—	—
SD200	2" (51mm)	1" (25mm)	5/8"	1 5/8" (41mm)	3/8"	1 7/8" (48mm)	—	—	—	—
			3/4"	1 3/4" (45mm)	1/2"	2" (51mm)	—	—	—	—
			7/8"	1 7/8" (48mm)	—	—	—	—	—	—
SD250	2 1/2" (64mm)	1 1/4" (32mm)	1 1/8"	2 1/8" (54mm)	5/8"	2 1/8" (54mm)	3/8"	2 3/8" (60mm)	—	—
			1 3/8"	2 3/8" (60mm)	3/4"	2 1/4" (57mm)	1/2"	2 1/2" (64mm)	—	—
			—	—	7/8"	2 3/8" (60mm)	—	—	—	—
SD300	3" (76mm)	1 1/2" (38mm)	1 5/8"	2 5/8" (67mm)	1 1/8"	2 5/8" (67mm)	5/8"	2 5/8" (67mm)	—	—
			—	—	1 3/8"	2 7/8" (73mm)	3/4"	2 3/4" (70mm)	—	—
			—	—	—	—	7/8"	2 7/8" (73mm)	—	—
SD350	3 1/2" (89mm)	1 3/4" (45mm)	2 1/8"	3 1/8" (79mm)	1 5/8"	3 1/8" (79mm)	1 1/8"	3 1/8" (79mm)	3/8"	3 3/8" (86mm)
			2 3/8"	3 3/8" (86mm)	—	—	1 3/8"	3 3/8" (86mm)	1/2"	3 1/2" (89mm)
			2 5/8"	3 5/8" (86mm)	2 1/8"	3 5/8" (92mm)	1 5/8"	3 5/8" (92mm)	5/8"	3 5/8" (92mm)
SD450	4 1/2" (114mm)	2 1/4" (57mm)	—	—	2 3/8"	3 7/8" (98mm)	—	—	3/4"	3 3/4" (95mm)
			—	—	—	—	—	—	7/8"	3 7/8" (98mm)
			3 1/8"	4 1/8" (105mm)	2 5/8"	4 1/8" (105mm)	2 1/8"	4 1/8" (105mm)	1 1/8"	4 1/8" (105mm)
			—	—	—	—	2 3/8"	4 3/8" (111mm)	1 3/8"	4 3/8" (111mm)
SD550	5 1/2" (140mm)	2 3/4" (70mm)	3 5/8"	4 5/8" (118mm)	3 3/8"	4 5/8" (118mm)	2 5/8"	4 5/8" (118mm)	1 5/8"	4 5/8" (118mm)
			4 1/8"	5 1/8" (130mm)	3 5/8"	5 1/8" (130mm)	3 3/8"	5 1/8" (130mm)	2 1/8"	5 1/8" (130mm)
			—	—	—	—	—	—	2 3/8"	5 3/8" (143mm)
SD650	6 1/2" (165mm)	3 1/4" (83mm)	—	—	4 1/8"	5 5/8" (143mm)	3 5/8"	5 5/8" (143mm)	2 5/8"	5 5/8" (143mm)
			—	—	—	—	4 1/8"	6 1/8" (156mm)	3 1/8"	6 1/8" (156mm)





Snap-A-Saddle®

Strut Mount Plastic Insulation Saddle

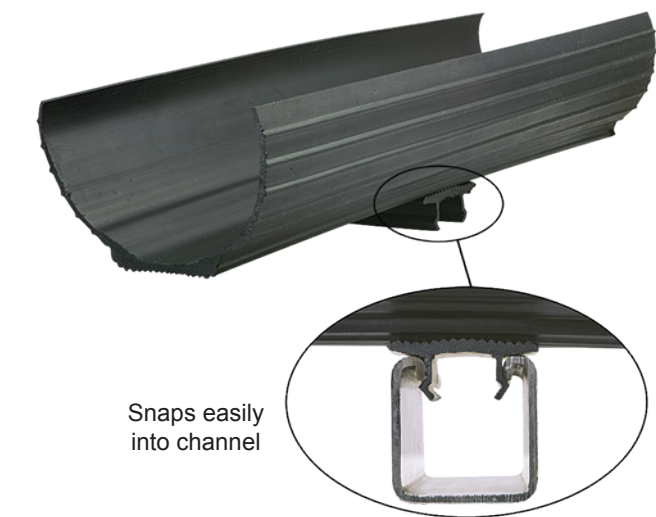

Snaps easily
into channel

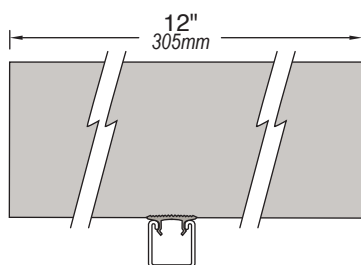

Part No.		Nominal Inside Opening
Black	White	
SB225	SW225	2 1/4" (57mm)
SB325	SW325	3 1/4" (83mm)
SB425	SW425	4 1/4" (108mm)
SB525	SW525	5 1/4" (133mm)
SB625	SW625	6 1/4" (159mm)
SB825	SW825	8 5/8" (219mm)



- Temp Range: -50° to 275°F (-46° to 135° C)
- Available in both black and white
- UL94-HB1 Rated TPV Material
- Made in USA
- Easy Installation
- Standard 12" (305mm) lengths. Special lengths available upon request



Snap-A-Saddle Size Guide - Copper Tubing					
Tubing Size	Insulation Thickness				
	1/2" (13mm)	3/4" (19mm)	1" (25mm)	1 1/2" (38mm)	2" (51mm)
1/4"	S*225	S*225	S*325	S*425	S*525
3/8"					
1/2"					
5/8"					
3/4"					
1"	S*325	S*325	S*425	S*525	S*625
1 1/4"					
1 1/2"					
2"					
2 1/2"					
3"	S*425	S*425	S*525	S*625	S*825
3 1/2"					
4"					

* Add "B" for Black or "W" for White




Snap-A-Saddle Size Guide - Schedule 40/80 Pipe					
Pipe Size	Insulation Thickness				
	1/2" (13mm)	3/4" (19mm)	1" (25mm)	1 1/2" (38mm)	2" (51mm)
1/4"	S*225	S*225	S*325	S*425	S*525
3/8"					
1/2"					
3/4"					
1"					
1 1/4"	S*325	S*325	S*425	S*525	S*625
1 1/2"					
2"					
2 1/2"					
3"					
3 1/2"	S*425	S*425	S*525	S*625	S*825
4"					

* Add "B" for Black or "W" for White

Snap-A-Saddle® is manufactured under U.S. patents #D753468 and Canadian patents #163550



Standard Series Beta Clamps

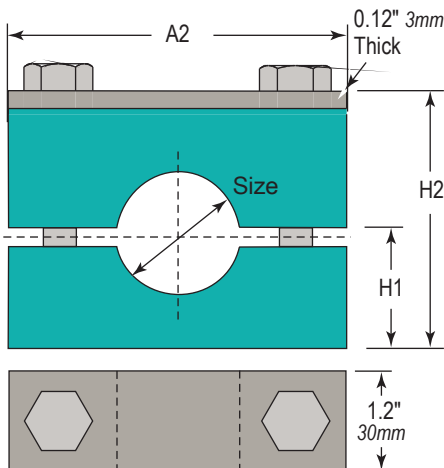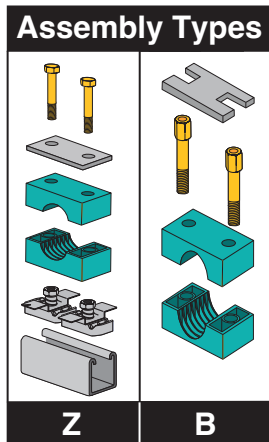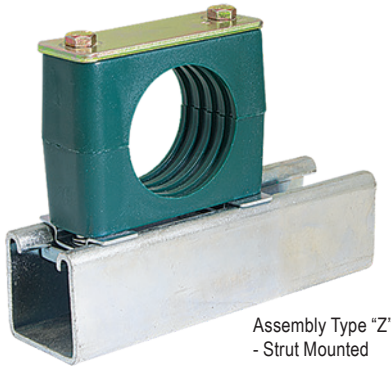

Complete Beta Product Line - Refer to Foster Quick Disconnects Product Catalog for more information on all available Beta Clamps


- Cushions are Polypropylene (Green Color)
- Recommended for systems with less than 1,500 psi (103 bar) without dynamic loads.
- Use for standard hydraulics, general pipe construction, electrical cables, and general duty piping applications subject to moderate levels of shock and vibration.
- Aluminum cushions are used in higher heat applications up to 500°F (260°C)

INSTALLATION - Refer to technical data section for complete installation guide.


Group	Part No. *	Tube Size	Pipe Size	Metric Size	Dimensions			Bolt																
					A2	H1	H2																	
S1	S1004	¼" (0.250)	—	—	1.34" (34)	0.50" (13)	1.13" (29)	¼"-20 x 1¼"																
	S1006	⅜"(0.375)	—	—																				
	SM1006	—	—	6mm																				
	S1007	—	⅛" (0.405)	—																				
	SM1008	—	—	8mm																				
	SM1012	—	—	12mm																				
S2	S2008	½" (0.500)	—	—	1.57" (40)	0.64" (16)	1.42" (36)	¼"-20 x 1⅜"																
	S2009	—	¼" (0.540)	—																				
	S2010	⅝" (0.625)	—	—																				
	S2011	—	⅜" (0.675)	—																				
	SM2014	—	—	14mm																				
	SM2015	—	—	15mm																				
	SM2018	—	—	18mm																				
S3	S3012	¾" (0.750)	—	—	1.96" (50)	0.68" (17)	1.49" (38)	¼"-20 x 1½"																
	S3014	—	½" (0.840)	—																				
	S3015	⅞" (0.875)	—	—																				
	S3016	1" (1.000)	—	—																				
	SM3020	—	—	20mm																				
	SM3025	—	—	25mm																				
S4	S4017	—	¾" (1.050)	—	2.28" (58)	0.82" (21)	1.76" (45)	¼"-20 x 1¾"																
	S4018	1⅛" (1.125)	—	—																				
	SM4030	—	—	30mm																				
S5	S5020	1¼" (1.250)	—	—	2.75" (70)	1.13" (29)	2.40" (61)	¼"-20 x 2½"																
	S5021	—	1" (1.315)	—																				
	S5024	1½" (1.500)	—	—																				
	S5027	—	1¼" (1.660)	—																				
	SM5035	—	—	35mm																				
S6	S6028	1¾" (1.750)	—	—	3.38" (86)	1.29" (33)	2.71" (69)	¼"-20 x 2¾"																
	S6030	—	1½" (1.900)	—																				
	S6032	2" (2.000)	—	—																				
S7	S7038	—	2" (2.375)	—	4.75" (121)	1.88" (48)	3.93" (100)	¼"-20 x 4"																
	S7036	2¼" (2.250)	—	—																				
	S7040	2½" (2.500)	—	—																				
	S7044	2¾" (2.750)	—	—																				
	S7048	3" (3.000)	—	—																				
	 SUFFIX	*For additional sizes contact factory. Note: Add assembly type to part number. Example: S1004S-SS provides the complete assembly as shown with stainless steel components. NOTE: SM (metric) only available in Steel with Polypropylene (green) cushion. <table><tr><td></td><td>Components</td><td>Cushion</td><td>Example</td></tr><tr><td>none</td><td>Steel</td><td>Polypropylene (green)</td><td>S1004S</td></tr><tr><td>-AL</td><td>Steel</td><td>Aluminum</td><td>S1004S-AL</td></tr><tr><td>-SS</td><td>Stainless Steel</td><td>Polypropylene (green)</td><td>S1004S-SS</td></tr></table>								Components	Cushion	Example	none	Steel	Polypropylene (green)	S1004S	-AL	Steel	Aluminum	S1004S-AL	-SS	Stainless Steel	Polypropylene (green)	S1004S-SS
	Components	Cushion	Example																					
none	Steel	Polypropylene (green)	S1004S																					
-AL	Steel	Aluminum	S1004S-AL																					
-SS	Stainless Steel	Polypropylene (green)	S1004S-SS																					





Standard Series Beta Clamps

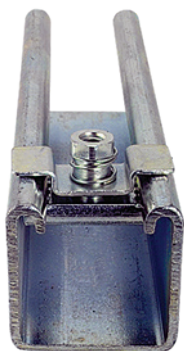


Channel with ZSA1-8
Nut installed

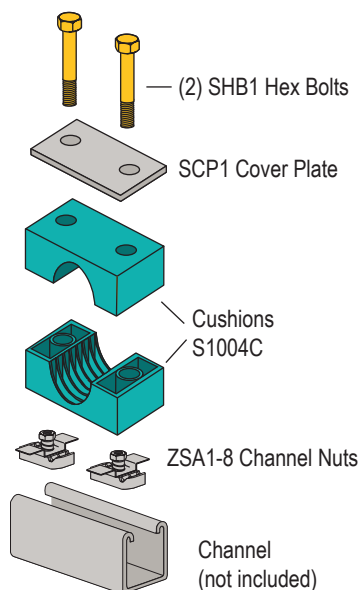

Strut Mounted Ordering Example - S1004Z		
"Z" Assembly Includes		
Quantity	Part No.	Description
2 Each	SHB1	Hex Bolts
1 Each	SCP1	Cover Plate
1 Set	S1004C	Cushions
2 Each	ZSA1-8	Channel Nuts

STANDARD SERIES COVER PLATE			STANDARD SERIES SAFETY PLATE		
	SCP1	Use with Group S1		SP1	Use with Group S1
	SCP2	Use with Group S2		SP2	Use with Group S2
	SCP3	Use with Group S3		SP3	Use with Group S3
	SCP4	Use with Group S4		SP4	Use with Group S4
	SCP5	Use with Group S5		SP5	Use with Group S5
	SCP6	Use with Group S6		SP6	Use with Group S6
	SCP7	Use with Group S7		SP7	Use with Group S7
HEX BOLT (Two required per assembly)			STACKING BOLTS - (Two required per assembly)		
	SHB1	Use with Group S1		SB1	Use with Group S1
	SHB2	Use with Group S2		SB2	Use with Group S2
	SHB3	Use with Group S3		SB3	Use with Group S3
	SHB4	Use with Group S4		SB4	Use with Group S4
	SHB5	Use with Group S5		SB5	Use with Group S5
	SHB6	Use with Group S6		SB6	Use with Group S6
	SHB7	Use with Group S7		SB7	Use with Group S7
STRUT NUT - For connection to Channel (Two required)			CHANNEL		
	ZSA1-8	Use with Groups S1-S7		Pages 38 - 41	1 5/8" x 1 5/8" (41mm x 41mm)
				Pages 50 - 52	1 5/8" x 1 3/16" (41mm x 11mm)
				Pages 44 - 46	1 5/8" x 1" (41mm x 25mm)
				Pages 47 - 49	1 5/8" x 7/8" (41mm x 22mm)

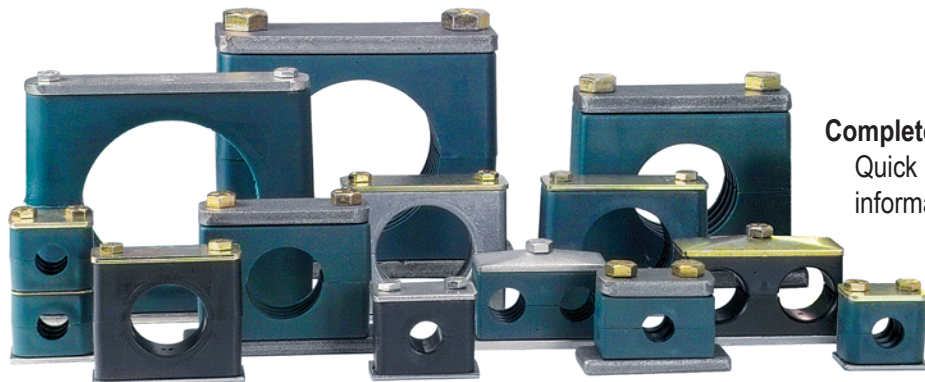


Complete Beta Product Line - Refer to Foster Quick Disconnects Product Catalog for more information on all available Beta Clamps



Electrical Fittings


Fixture Hangers

Pages 198 - 199




Conduit Connector

Pages 199 - 200



Raceway Splice Assemblies


Pages 200 - 203



Raceway Channel with Knock-Outs



- 1-5/8" x 2-7/16" 12 Gauge (page 53)
- 1-5/8" x 1-5/8" 12 Gauge (page 38)
- 1-5/8" x 1-5/8" 14 Gauge (page 38)
- 1-5/8" x 1-3/8" 12 Gauge (page 42)
- 1-5/8" x 13/16" 14 Gauge (page 50)



Maximum Number of Wires

Also suitable for the number of wires in table below when installed to support and supply electric discharge type lighting fixtures when raceway wiring is suitable for at least 70°C and clearance between fixture and raceway is at least 1/8". In all cases, a snap-in cover is required to complete the raceway enclosure.

Wire Types: R, RH, RU, RW, T, or TW


Wire Size AWG	1-5/8" x 1-5/8" Channel	1-5/8" x 1-3/8" Channel	1-5/8" x 13/16" Channel
14	10	10	6
12	10	10	6
10	8	6	-
8	6	4	-
6	3	2	-

Electrical Specifications		
Material	ASTM	ASTM Description
Hot Rolled Plate	A 575	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting (Steel)	A 366	Steel carbon, cold rolled sheet, commercial quality structural steel.
	A 366	
	A 36	

See page 23 for Material or Finish ordering codes for part numbers.


Junction Boxes

Page 203




Receptacle Boxes

Page 204




Accessories

Pages 205 - 207



Porc-A-Clamp


Page 208



Electrical Finish Specifications	
Finish	Description
Paint-Green Powder Coating	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Electroplated	Fittings and hardware supplied as "Electro-Galvanized" in accordance with ASTM B 633.
Mill-Galvanized (Pre-Galvanized)	Galvanized steel used in the manufacture of Channel sections conforms to ASTM A 653 GR33 G90. Uncoated edges resulted from slitting, punching and channel cut off are present.
Hot Dip Galvanized After Fabrication	Channel and fittings which are hot dip galvanized after fabrication conform to one of the following specifications.: ASTM A 123, ASTM A153, or ASTM A386.
Special Coatings	Other commercially available finishes can be supplied per specification when required to protect applications.

Hinged Fluorescent Fixture Hanger


For 1-5/8" Channel

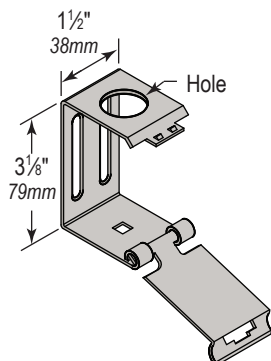

SPECIFYING Brand & Part No.	Hole Size	Design Load 12 Ga. Channel	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W6420	9/16" (14mm)	120 lbs (0.53 kN)	VF7106	EF10

Hinged Fluorescent Fixture Hanger



For 3-1/4" Channel

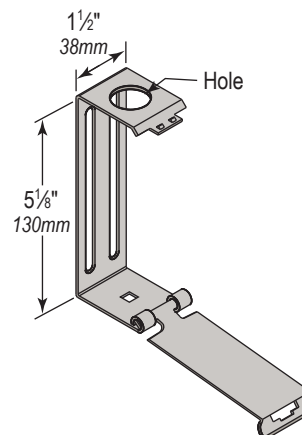

SPECIFYING Brand & Part No.	Hole Size	Design Load 12 Ga. Channel	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W6422	9/16" (14mm)	120 lbs (0.53 kN)	VF710611	EF11

Hinged Channel Hanger



For 1-5/8" Channel

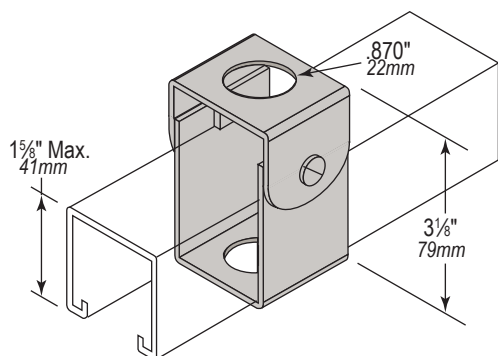

SPECIFYING Brand & Part No.	Design Load 12 Ga. Channel	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6419	120 Lbs. (0.53 kN)	VF7104	EF14

Hinged Channel Hanger

For 3-1/4" Channel
Accepts rod to 7/8" Dia. or 1/2" conduit

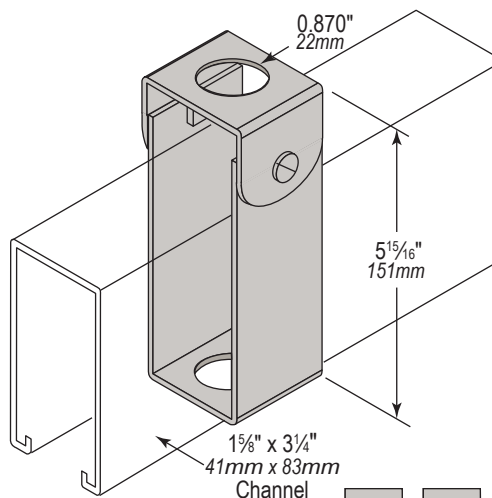


SPECIFYING Brand & Part No.	Design Load 12 Ga. Channel	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6426	120 Lbs. (0.53 kN)	VF710411	EF15

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)





Cushion Washer for Box Fixture Hangers

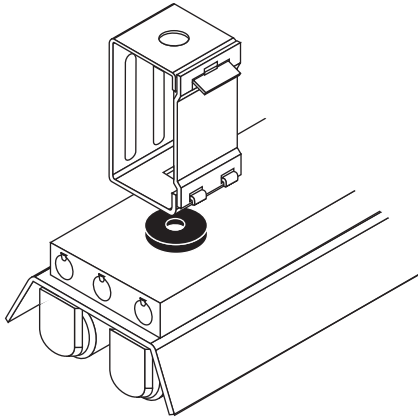

Provides a cushion between fluorescent fixture and hanger. For use with 1/4" thread diameter fasteners.

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
RW25	RW25	--


Fixture Stud

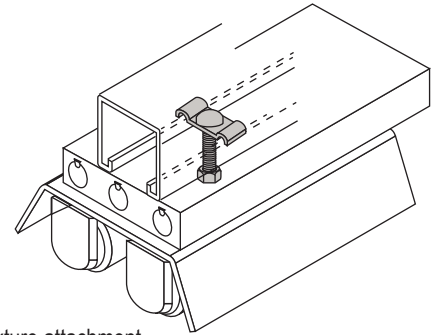

1/4"-20 x 1-1/4" stud nut for fixture attachment. Stud extends 1" below channel slot. Hex nut included.

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6460	FF100 *	EF19
* Includes nut		


1" Nipple End Cap

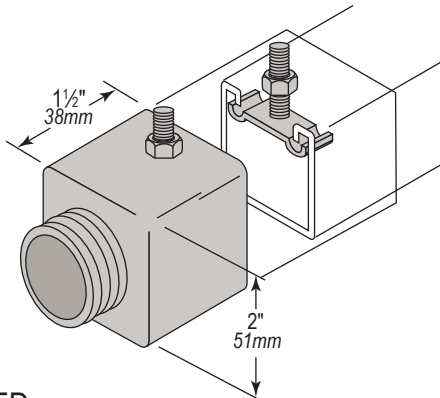

Conduit entry fitting with 1" NPT male thread on 9/16" long nipple. Fits 1-5/8" (41mm) square channel only. Comes complete with W6460 stud nut assembly.

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6401	LL21A	--

Fixture Spacer

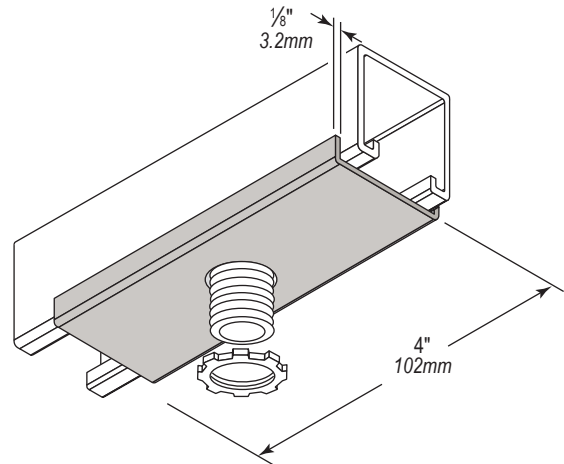


Spacer fits between channel and electric discharge lighting fixtures where 1/8" (3.2) clearance is required. Clearance hole for W6462 wiring nipple nut also shown on page 207. (Nipple and locknut not included.)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6402	LL60	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Conduit Connection Plate with Hardware

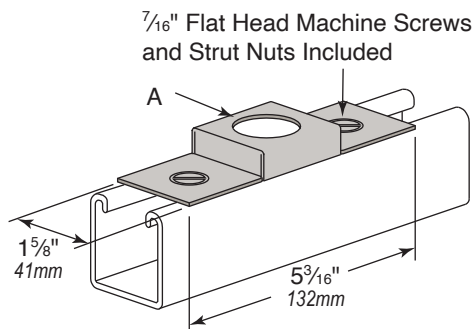

Non load bearing conduit connector. Fraction indicates conduit size. Furnished with mounting hardware for connection to channel.

SPECIFYING Brand & Part No.	Use with Conduit	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6442	1/2" (13mm)	EB20A50	EF220050
W6443	3/4" (19mm)	EB20A75	EF220075

Raceway Conduit Connector

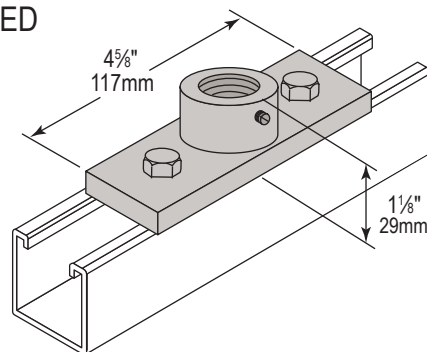


Raceway supporting conduit connector. Fraction indicates conduit size. Furnished with 1/4" x 1/2" set screw and mounting hardware for connection to channel.

Casting thread is for 3/4" conduit, reducer will be supplied for 1/2" conduit if ordered W6446


SPECIFYING Brand & Part No.	Use with Conduit	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6446	1/2" (13mm)	EB19A50	--
W6447	3/4" (19mm)	EB19A75	--

Standard Raceway Stud Plate



SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO		
W6439	--	EF31

4-Hole Tapped Splice Plate (opt.) with 4 Screws




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO		
W6440	--	EF30

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Outlet Box Connection Fitting

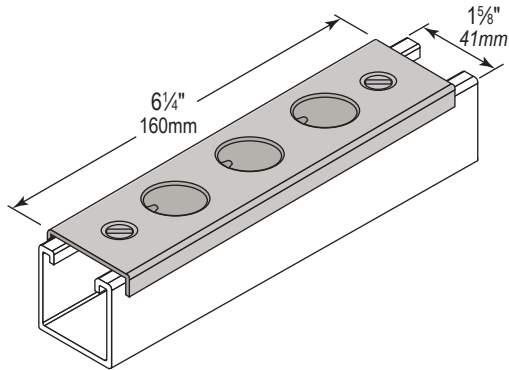

Outlet plate fitting. Three $\frac{7}{8}$ " (22) dia.K.O.'s on $1\text{-}\frac{3}{16}$ " (30) centers. Supplied ready to install with W2-4WS channel nuts and $\frac{1}{4}$ " x $\frac{5}{8}$ " FLMS25x062 flat head machine screws.


SPECIFYING Brand & Part No.	Use with Conduit	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6449	$\frac{7}{8}$ " (22mm)	EB25A75	--

Flush Type Raceway Splice Assemblies

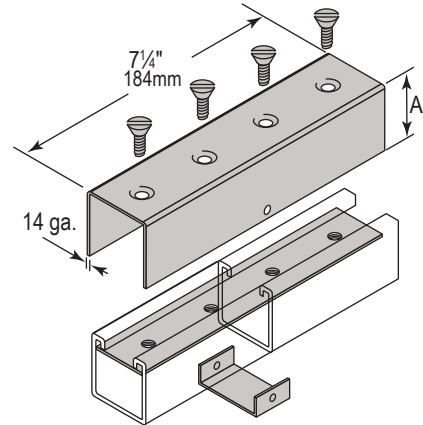

SPECIFYING Brand & Part No.	Channel Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6432	1- $\frac{5}{8}$ " (41mm)	VF5403A	--
W6435	1- $\frac{3}{16}$ " (21mm)	VF5403A4	--

Stud Type Raceway Splice Assemblies

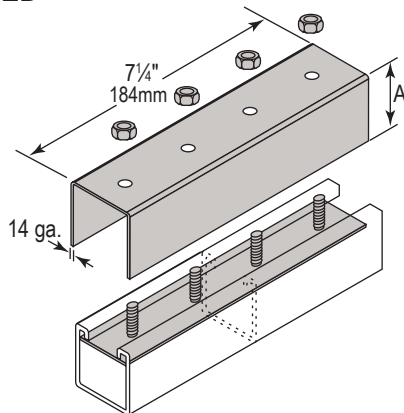


SPECIFYING Brand & Part No.	Channel Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W6404	1- $\frac{5}{8}$ " (41mm)	VF5404A	--

Raceway Grounding Kit

*Wire nut is not included



- A.. 2 - $\frac{1}{4}$ " HH25 Hex Nuts
- B. W5051 Square Washer
- C. $\frac{1}{4}$ " x 1" HHCS25X100 Hex Head Cap Screw
- D. W6461 Channel Nut
- E. $\frac{1}{4}$ " FW25 Flat Washer

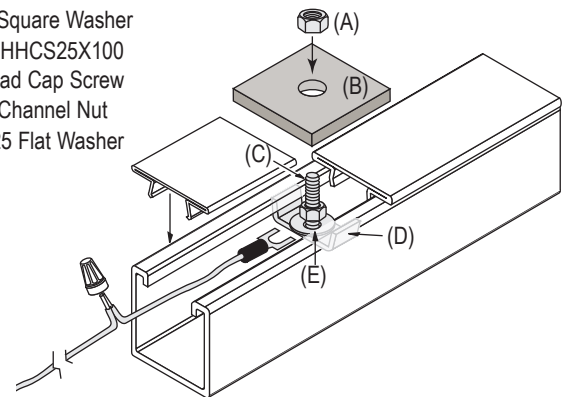


*Connect ground conductor to ground wire (not included)

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO		
W6403	LLG1	--

Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\text{-}\frac{7}{8}$ " (48mm); Width: 1- $\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)




Standard Straight Intersplice for $\frac{13}{16}$ " (21mm) or $1\frac{5}{8}$ " (41mm) Channel

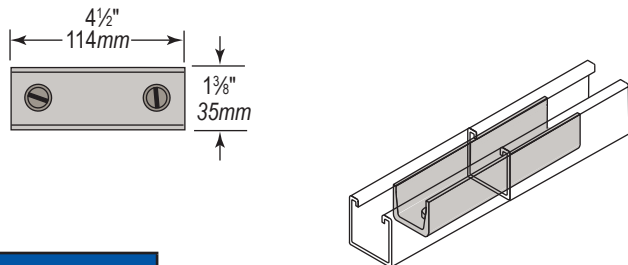


SPECIFYING Brand & Part No.	Channel Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO EJ330081	$\frac{13}{16}$ " (21mm)	--	--
EJ330162	$1\frac{5}{8}$ " (41mm)	VF5901A	--

Long Straight Intersplice for $1\frac{5}{8}$ " (41mm) Channel

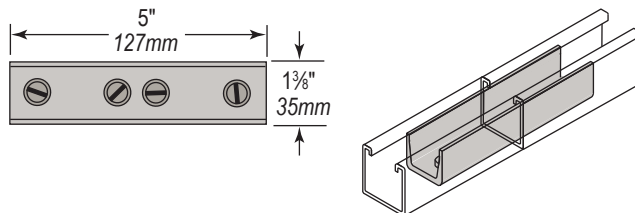


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO W6415	VF5905A	--

90° Intersplice for $1\frac{5}{8}$ " (41mm) Channel

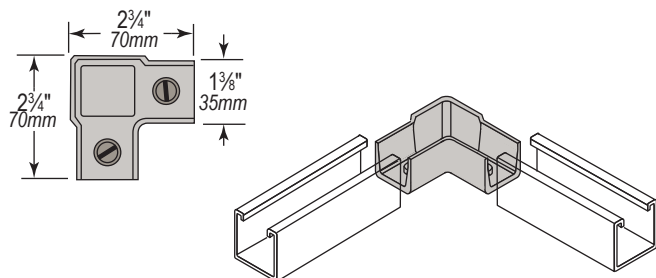


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO W6416	VF5903A	--

Tee Intersplice for $1\frac{5}{8}$ " (41mm) Channel

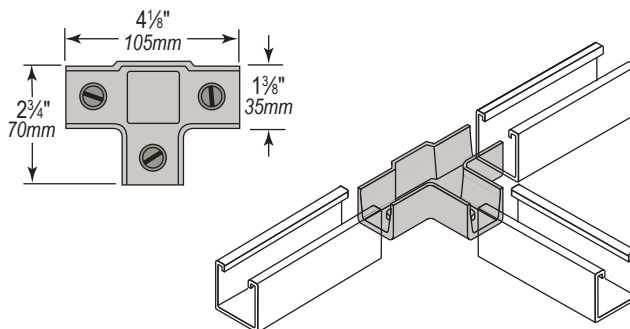


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO W6417	VF5902A	--

Cross Intersplice for $1\frac{5}{8}$ " (41mm) Channel




SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO W6418	VF5904A	--

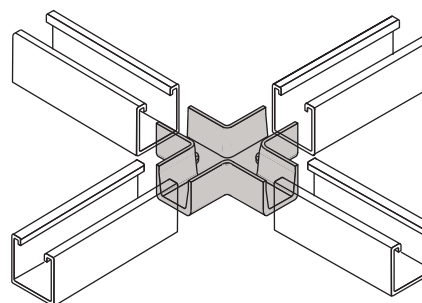

Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)




Raceway End Box Assembly

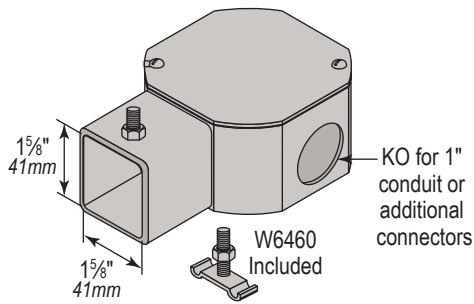


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6450	VJB1	--

Raceway Straight Box Assembly

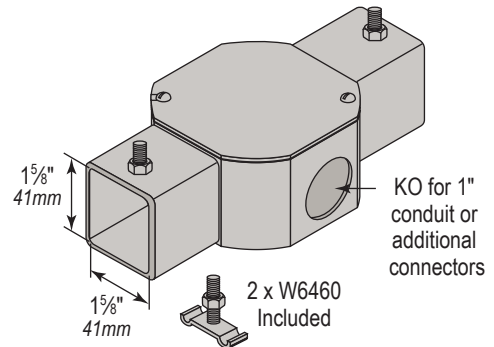


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6451	VJB2	--

Raceway Corner Box Assembly

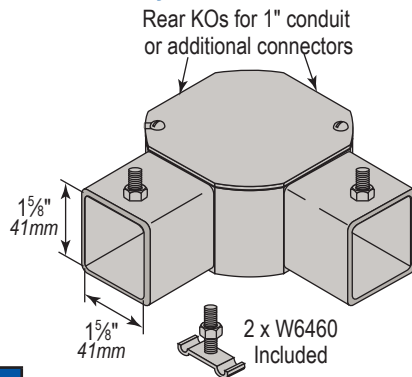


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6452	VJB3	--

Raceway 3-Way Box Assembly

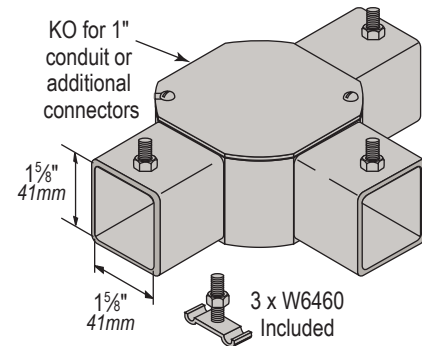


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6453	VJB4	--

Raceway 4-Way Box Assembly

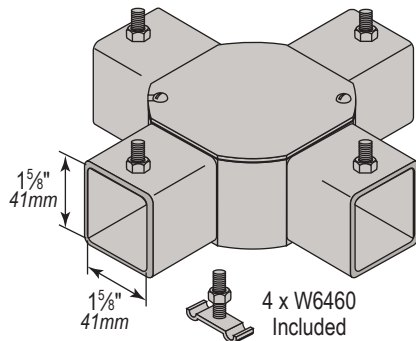

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
WESANCO	VERSABAR	FLORIDA STRUT
W6454	VJB5	--

Raceway Box Versatility

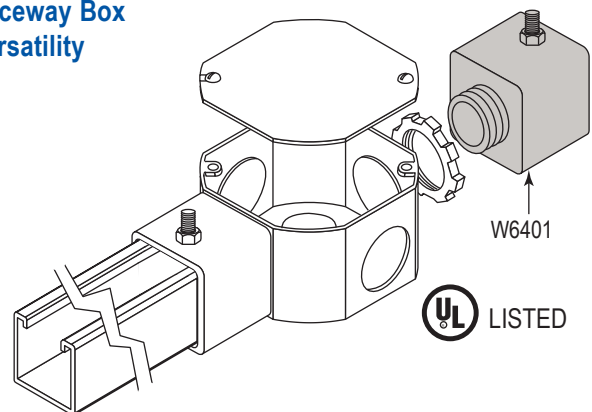

Make additional connections
Through any open K.O. with W6401


Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)



Snap-A-Box


Quickly Attaches to Strut

- Requires Ground Wire Installation for use with UL Listed Channel Raceway System
- Concentric Knock-Outs $\frac{3}{4}$ " and 1"
- No Bolts or Channel Nuts Required
- Snaps Quickly and Easily Into Channel
- Internal Slot, Rounded Edges to Avoid Wire Damage
- Includes Duplex Cover Plate
- Includes #10-32 Tapped Hole for Grounding Strap
- Knock-out Holes for Conduit Attachment

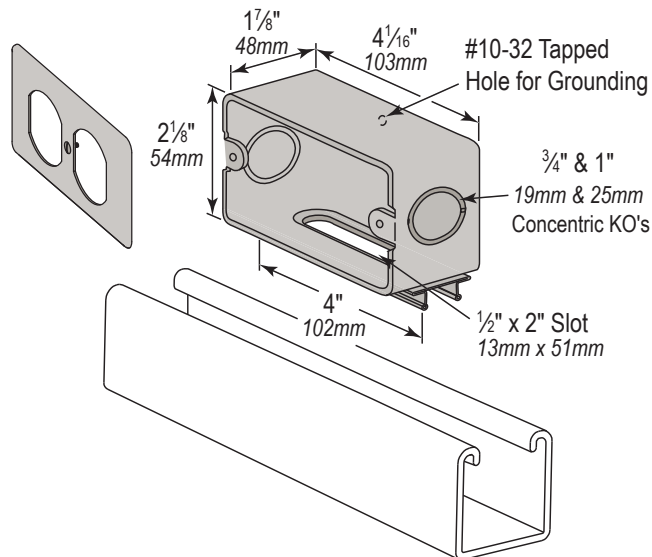


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W6445S	---	B6445S

Receptacle Box

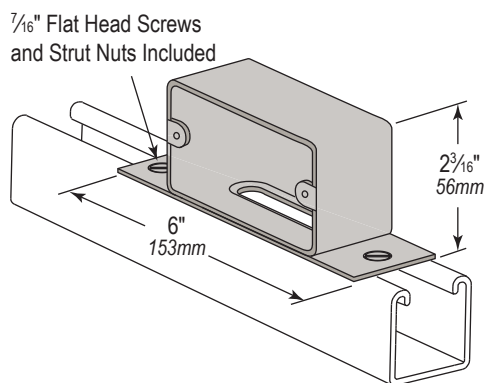

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
 WESANCO	VERSABAR	FLORIDA STRUT
W6445	LL41NC	EF40

Closure Strip (19 ga.)

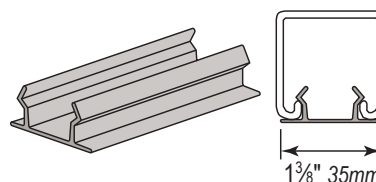


Use of Closure Strip with UL listed channel completes UL Listed surface metal raceway.
Standard finish: PG

SPECIFYING Brand & Part No.	Use with Conduit	DISCONTINUED Brands & Part No.	
 WESANCO		VERSABAR	FLORIDA STRUT
W6500	Galvanized	VA9	CA-10 GAL
W6500PLASTIC	Plastic	---	CA-10 PVC


Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)



Shoulder Bolt $\frac{3}{8}$ "-16 x 2"




$\frac{3}{8}$ "-16 x 2- $\frac{1}{4}$ " shoulder bolt with special head to fit through channel slots. Bolt extends $\frac{3}{4}$ " (19mm) below 1- $\frac{5}{8}$ " (41mm) channels. Hex nut included.

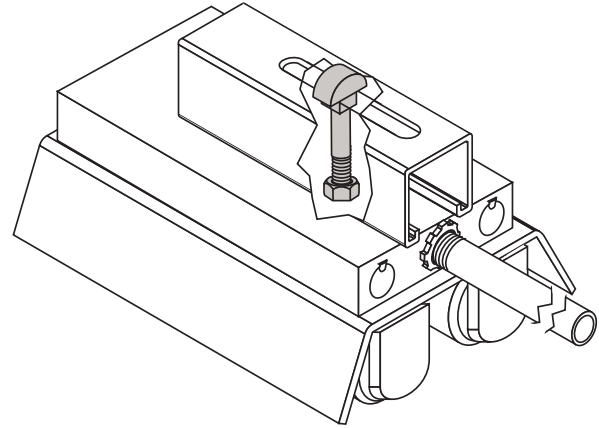

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO W6463	FF200	--

Aluminum Wiring Stud

$\frac{1}{2}$ "-14 Thread 1- $\frac{1}{8}$ " (29mm) Long

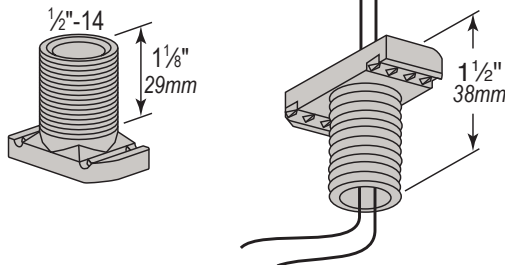


$\frac{1}{2}$ " threaded nipple nut for connecting fluorescent fixtures directly to raceway or H.I.D. fixtures. W6462 provides 1" (25mm) clearance when used through channel K.O. or $\frac{3}{4}$ " (19mm) when supported by channel from slot.

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
WESANCO W6462	EB22	EF21

$\frac{3}{4}$ " Nipple Assembly

For $\frac{1}{2}$ " Knock-Outs

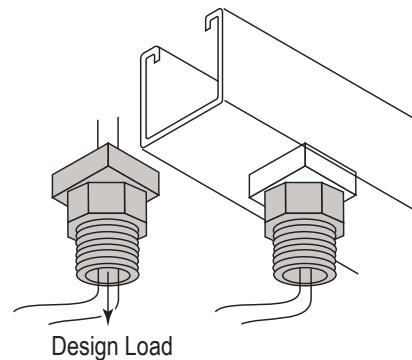

This adapter works with manufacturers standard $\frac{1}{2}$ " Knock-out raceway channel or fixture hanger. $\frac{3}{4}$ " male pipe thread nipple can be removed if $\frac{3}{4}$ " female thread is required.


SPECIFYING Brand & Part No.	Design Load 12 Ga. Channel	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO W6400	200 (0.90 kN)	EB23A	--

Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: 1- $\frac{7}{8}$ " (48mm); Width: 1- $\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)




Fiber Wire Retainer

Holds wire in place while W6500 closure strip is installed.
Fits all raceway channels.

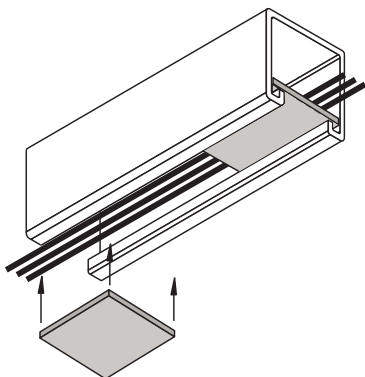


SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
 WESANCO		
W6469	LL42	--

Wireway End Cap



SPECIFYING Brand & Part No.	Channel Size	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
 WESANCO			
W5920	1-5/8" (41mm)	--	--

End Cap with Knock-outs




SPECIFYING Brand & Part No.	Knock-out Size	Channel Size	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
 WESANCO				
W5945	1/2" (13mm)	3-1/4" (86mm)	VF1003A1150	--
W5946	3/4" (19mm)		VF1003A1175	--
W5947	1/2" (13mm)	2-1/2" (64mm)	VF1003A350	--
W5944	3/4" (19mm)		VF1003A375	--
W5940	1/2" (13mm)	1-5/8" (41mm)	VF1003A150	EF200050
W5941	3/4" (19mm)		VF1003A175	EF200075
W5942	1/2" (13mm)	1-3/8" (35mm)	VF1003A650	--
W5943	3/4" (19mm)		VF1003A675	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




End Caps




SPECIFYING Brand & Part No.	Channel Usage	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5909	3-1/4" - 12 gauge	VF100111	--
W5908	2-1/2" - 12 gauge	VF10013	--
W5910	2-7/16" - 12 gauge	--	--
W5930	1-5/8" - 12 gauge	VF1001	EC10
W5931	1-5/8" - 14 Gauge	VF10012	EC11
W5933	1-3/8" - 12 gauge	VF10016	--
W5938	1" - 12 gauge	VF100110	--
W5935	7/8" - 12 gauge	--	EC12
W5936	13/16" - 14 Gauge	VF10014	EC12

Cover Plastic End Caps




SPECIFYING Brand & Part No.	Color	Channel Usage	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W5900PLASTIC	White	3-1/4" or	VF100111PL	--
W5900PLASTICRED	Red	1-5/8" Back to Back	--	--
W5930PLASTIC	White	1-5/8" or	VF10011PL	EC09000VC
W5930PLASTICRED	Red	13/16" Back-to-Back	--	EC09000RVC
W5935PLASTIC	White	13/16"	VF10014PL	EC08000VC
W5935PLASTICRED	Red		--	EC08000RVC

Polyurethane End Caps



SPECIFYING Brand & Part No.	Color	Channel Usage	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W5920PLASTICWHT	White	1-5/8"	--	--
W5920PLASTICRED	Red		--	--
W5920PLASTICGRY	Grey		--	--
W5925PLASTICWHT	White	13/16" & 7/8"	--	--
W5925PLASTICRED	Red		--	--
W5925PLASTICGRY	Grey		--	--

Form Fit Plastic End Caps

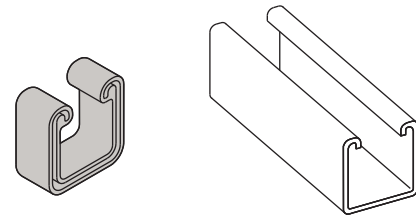


SPECIFYING Brand & Part No.	Channel Usage	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5900-M	1-5/8" Back to Back 12 gauge	--	--
W5930-M	1-5/8" - 12 gauge 1-5/8" - 14 Gauge	--	--
W5935-M	13/16" - 14 Gauge	--	--

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8"(41mm); Thickness: 1/4" (6mm)




Porce-A-Clamp® Cable Clamp

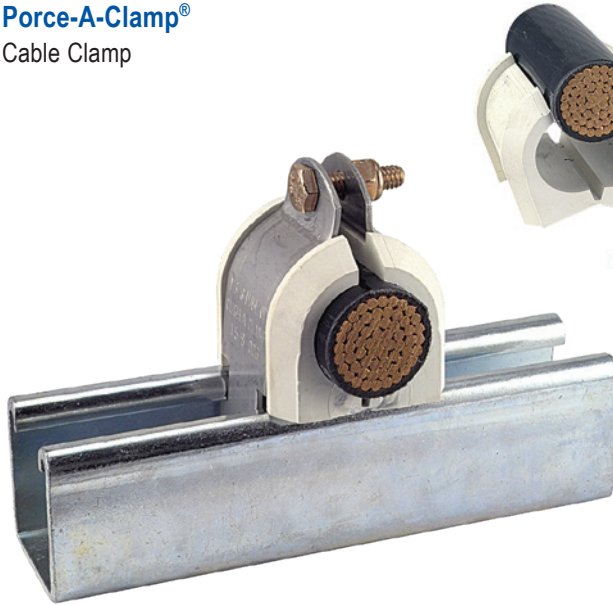

The hinged cushion allows easy installation of the wire, but the components will not get separated and lost or broken.

Replaces Porcelain and Maple Cable Clamp. Assembly consists of thermoplastic elastomer cushion with plated or stainless steel clamp. Plated steel and stainless are both supplied with Silicon Bronze bolt and nut.

- Non-breakable material
- Chemical and UV resistant
- **U.L. Listed** - Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar with no flaming drips.
- Plated Steel, or Stainless steel clamps
- Tapered flange to protect cable
- Dielectric strength 640 volts per mil
- One piece cushion design, available with Flame retardant / Halogen Free cushions
- Silicon Bronze Hardware used to Breakup the Magnetic field around the Cable at the Clamping Location.

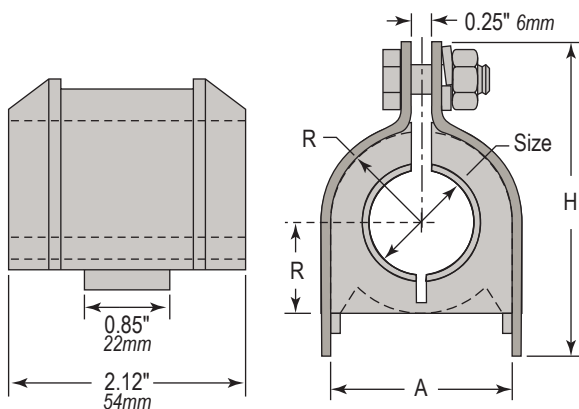

Part No.	Dimensions (In.)			Total Assy. Height - H
	Hole Dia.	A	R	
006CC018	3/8"	1.12" (28mm)	0.56" (14mm)	1.82" (46mm)
008CC018	1/2"			
010CC018	5/8"			
012CC026	3/4"	1.62" (41mm)	0.81" (21mm)	2.34" (59mm)
014CC026	7/8"			
016CC026	1"			
018CC026	1-1/8"			
020CC034	1-1/4"	2.12" (54mm)	1.06" (27mm)	2.86" (73mm)
022CC034	1-3/8"			
024CC034	1-1/2"			
026CC034	1-5/8"			
028CC042	1-3/4"	2.62" (67mm)	1.31" (33mm)	3.50" (89mm)
030CC042	1-7/8"			
032CC042	2"			
034CC042	2-1/8"			
036CC050	2-1/4"	3.12" (79mm)	1.56" (40mm)	4.05" (103mm)
038CC050	2-3/8"			
040CC050	2-1/2"			
042CC050	2-5/8"			
044CC058	2-3/4"	3.62" (92mm)	1.81" (46mm)	4.75" (121mm)
046CC058	2-7/8"			
048CC058	3"			
050CC058	3-1/8"			
052CC066	3-1/4"	4.12" (105mm)	2.06" (52mm)	5.125" (130mm)
054CC066	3-3/8"			
056CC066	3-1/2"			
058CC066	3-5/8"			
060CC074	3-3/4"	4.62" (117mm)	2.31" (59mm)	5.54" (141mm)
062CC074	3-7/8"			
064CC074	4"			
066CC074	4-1/8"			
068CC080	4-1/4"	5.00" (127mm)	2.50" (64mm)	5.92" (150mm)
070CC080	4-3/8"			
072CC080	4-1/2"			

Note: All clamps have Silicon Bronze Hardware

SUFFIX	Clamp	Cushion	Example
Z	Plated Steel	 Flame Retardant	006CC018Z
S	Stainless Steel		006CC018S
ZH	Plated Steel	 Flame Retardant Halogen Free	006CC018ZH
SH	Stainless Steel		006CC018SH

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Spring Steel

Electrical Positioning and Support Products


Conduit and Cable Supports

Pages 210 - 219

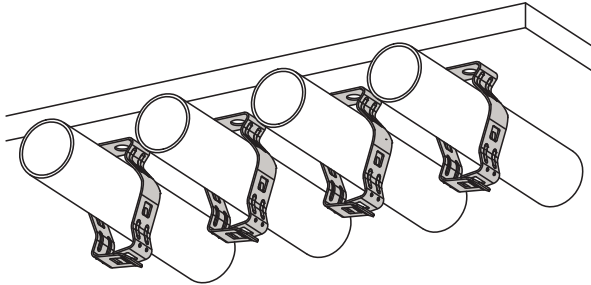


Stud Wall Applications

Pages 231 - 236




Structural Attachment

Pages 220 - 230

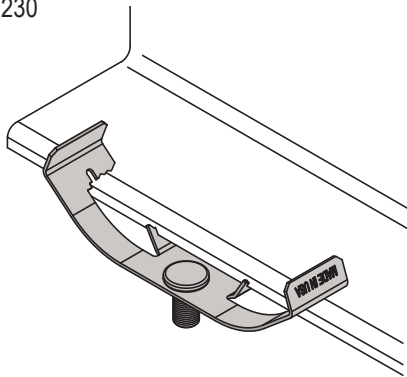

Ceiling and Acoustical Applications

Pages 237 - 240

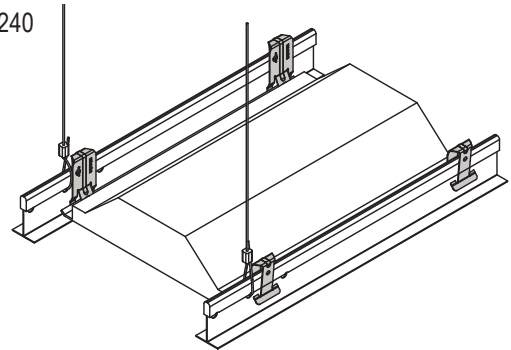


Spring Steel Specifications	
Material	ASTM Description
Spring Steel	Cold Roll, ASTM A684 Grade 1055 Spring Steel
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

Spring Steel Finish Specifications	
Finish	Description
Black Zinc Phosphate	The coating is a phosphate treatment meeting the requirements of ASTM F1137, providing a corrosion-resistant crystalline layer—typically zinc, iron, or manganese phosphate—suitable for use as a base for lubricants or paint. The coating is uniform, adherent, and tested in accordance with ASTM F1137 procedures.
Silva-Guard	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated Zinc or Electro-Galvanized	This coating is standard for most products. Electro-Galvanized products meet ASTM B633 SC1 or SC3, Type III. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-galvanized Zinc	ASTM A653 G-90 Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.



See page 23 for Material or Finish ordering codes for part numbers.

CC/CCT


Conduit Clips



- For vertical or horizontal conduit and pipe applications.
- Threaded version can be used with 1/4"-20 threaded rods.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

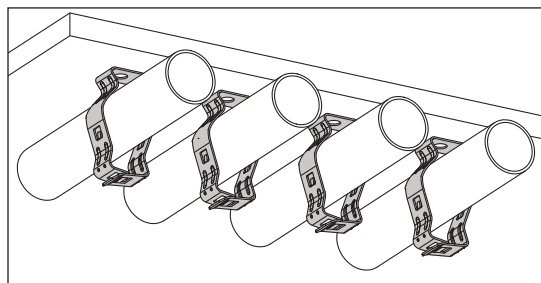

30 lbs





120 lbs

Part No.	Mounting Hole	Conduit Size
CC6 *	5/32" Thru Hole	3/8" Flexible Conduit
CC812	5/32" Thru Hole	1/2" or 3/4" EMT, Rigid
CCT812	1/4"-20 Thread Form	
CC16	5/32" Thru Hole	1" EMT, Rigid
CCT16	1/4"-20 Thread Form	
CC20	5/32" Thru Hole	1-1/4" EMT, Rigid
CCT20	1/4"-20 Thread Form	
CC24	5/32" Thru Hole	1-1/2" EMT, Rigid
CCT24	1/4"-20 Thread Form	
CC32	5/32" Thru Hole	2" EMT, Rigid
CCT32	1/4"-20 Thread Form	

* Not a UL Listed Product

CCP

Conduit "Push In" Clips

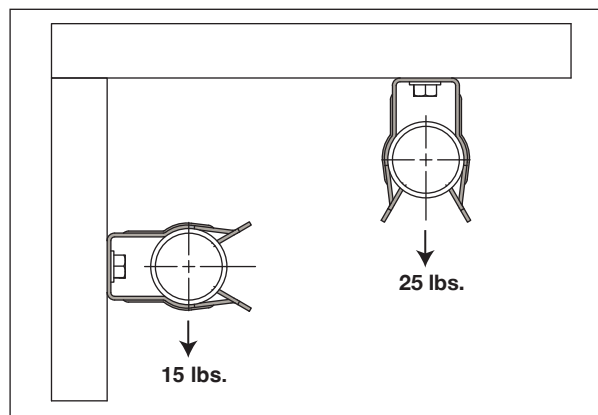

- Eliminates need for conduit offset bending.
- For vertical or horizontal conduit and pipe applications.
- Simple Push-in design
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Mounting Hole	Conduit Size
CCP8	5/32" Thru Hole	1/2" EMT
CCP12		3/4" EMT, 1/2", Rigid
CCP16		1" EMT, 3/4" Rigid





Conduit and Cable Support

Standard Finish: Black Zinc Phosphate or Pregalvanized (PG)



PCH

Pipe and Conduit Hanger

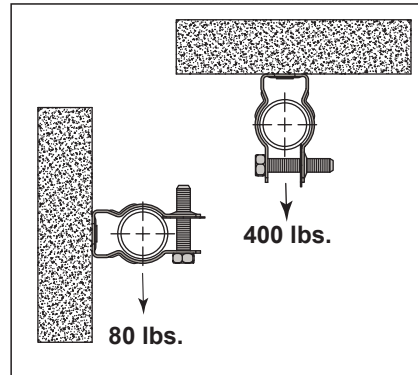


- PCH #0-5 come with retained combo head screw and thread form.
- Combo head screw allows Robertson, Phillips, Slotted and Hex drivers.
- Supports vertical and horizontal installations of 3/8" - 4" Pipe and Conduit.
- 1/4"-20 Thread Form Hole Size available. Add suffix TF to Catalog Number.
- Also available in 304 and 316 Stainless Steel.
- **Material:** Steel
- **Finish:** Pregalvanized

Part No.	Trade Size	Conduit Size		Hole Size
		EMT	Rigid	
PCH037050	0	1/2"	3/8", 1/2"	1/4"
PCH075	1	3/4"	3/4"	1/4"
PCH100	2	1"	1"	1/4"
PCHE125	2.5	1-1/4"	-	1/4"
PCH125	3	1-1/2"	1-1/4"	1/4"
PCH150	4	-	1-1/2"	5/16"
PCH200	5	2"	2"	5/16"
PCH250 *	6	2-1/2"	2-1/2"	5/16"
PCH300 *	7	3"	3"	5/16"
PCH350 *	8	3-1/2"	3-1/2"	5/16"
PCH400 *	9	4"	4"	5/16"

* EG finish and pan head, hex nut hardware.

WC/WCBW

Wing Clip Conduit Hanger




Conduit Size	#12 & #10 Wire	#9 & #8 Wire	3/16" & 1/4" Rod	1/8" Thru 1/4" Flange	5/16" Thru 3/8" Flange	7/16" Thru 1/2" Flange
1/2" EMT	WC8	WC8	WC8	WC8	WC12	WC12
1/2" RIGID		WC12	WC12	WC12		WC16
3/4" EMT	WC16		WC16	WC20	WC20	
3/4" RIGID			WC16		WC20	
1" EMT	—	WC16	WC20	WC20	WC20	
1" RIGID	—	—				
1-1/4" EMT	—	WC20		WC20	—	—

WC clip shown


MC/AC Cable Size	#12, #10, #9 & #8 Wire
14 - 2 (.433-.475 O.D.)	WCBW
14 - 3 (.453-.500 O.D.)	WCBW
12 - 2 (.467-.475 O.D.)	WCBW
12 - 3 (.489-.535 O.D.)	WCBW
WCBW For Position Only	

- Supports conduit and pipe to a rod, wire, or flange.
- No installation tools required.
- Box Qty 100 for all sizes.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Flange Installation



Wire or Rod Installation





MFC

Multi-Function Clip with Assemblies



Wire or Rod Installation



50 lbs



- Supports conduit and pipe to a rod, wire or flange.
- No tools required. Easy adjustment after installation.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Flange Size	Threaded Rod Size	Conduit Size or Threads
MFC6 *	1/8" - 3/8"	#12 - 1/4" wire or rod with or without Threads	3/8" Flexible Conduit
MFC812			1/2" EMT, Rigid 3/4" EMT, Rigid
MFC16			1" EMT, Rigid

* Not a UL Listed Product

MFCCCP

Multi-Function Clip with Conduit "Push In" Clip

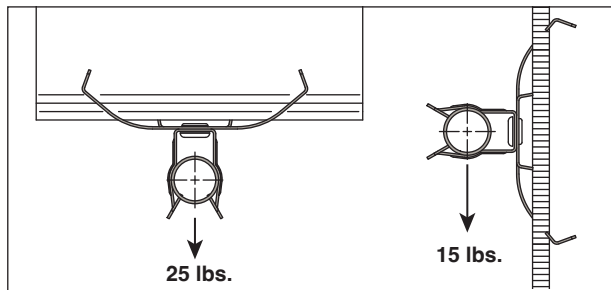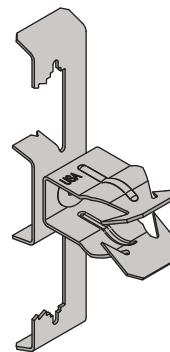

25 lbs.


15 lbs.

- No tools required for installation of conduit.
- Supports conduit to a rod, wire or flange.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate


Part No.	Flange Size	Wire or Rod Size	Conduit Size
MFCCCP8	1/8" - 3/8"	#12 - 1/4" wire or rod with or without Threads	1/2" EMT
MFCCCP12			3/4" EMT, 1/2" Rigid
MFCCCP16			1" EMT, 3/4" Rigid

BCC


Beam Clamp with Conduit Clip

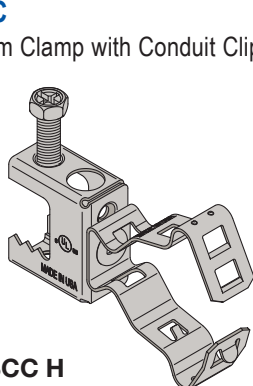

BCC H

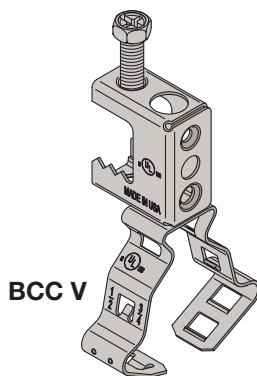

BCC V

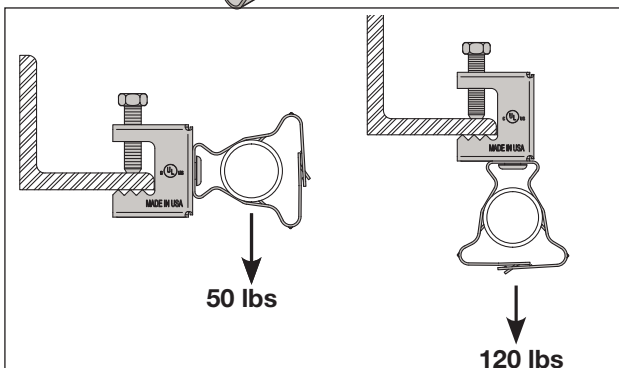

50 lbs

120 lbs

Part No.	Conduit Size
BCC6HM *	3/8" Flexible Conduit
BCC812HM	1/2" & 3/4" EMT, Rigid
BCC16HM	1" EMT, Rigid
BCC20HM	1-1/4" EMT, Rigid
BCC24HM	1-1/2" EMT, Rigid
BCC32HM	2" EMT, Rigid
BCC6VM	3/8" Flexible Conduit
BCC812VM	1/2" & 3/4" EMT, Rigid
BCC16VM	1" EMT, Rigid
BCC20CM	1-1/4" EMT, Rigid
BCC24VM	1-1/2" EMT, Rigid
BCC32VM	2" EMT, Rigid

* Not a UL Listed Product



- Eliminates offset bending of conduit.
- For installation on 1/2" maximum flanges.
- Included combo head screw allows Robertson, Phillips/Slotted and Hex drivers.
- Conduit clip rotates 360 degrees.
- For support of conduit per NEC 344.30(B).
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate




Conduit and Cable Support

Standard Finish: Black Zinc Phosphate




BCL CCP

Beam Clamp with Conduit "Push In" Clip




BCL CCP H

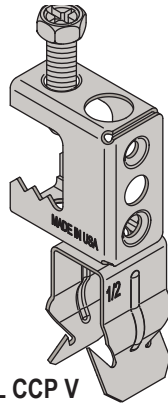

BCL CCP V


- Eliminates offset bending of conduit.
- For installation on 1/2" maximum flanges.
- Included combo head screw allows Robertson, Phillips/Slotted and Hex drivers.
- Conduit clip rotates 360 degrees.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

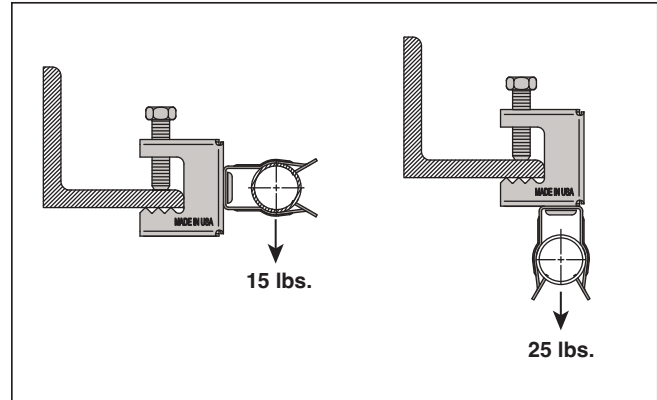


Part No.	Conduit Size
BCLCCP8HM	1/2" EMT
BCLCCP12HM	3/4" EMT, 1/2" Rigid
BCLCCP16HM	1" EMT, 3/4" Rigid
BCLCCP8VM	1/2" EMT
BCLCCP12VM	3/4" EMT, 1/2" Rigid
BCLCCP16VM	1" EMT, 3/4" Rigid

FH C

Flange Clip with Conduit Clip



- Supports pipe and conduit from beam flanges.
- Conduit clip rotates 360 degrees.
- Flange thickness range stamped on part.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

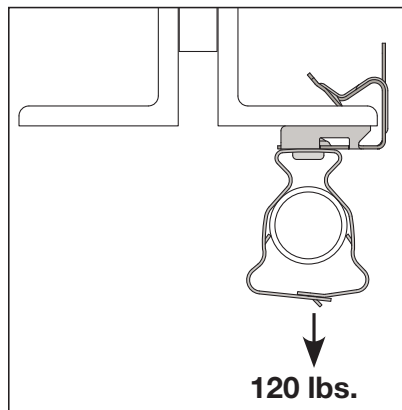


Part No.	Min. - Max. Flange Thickness	Conduit Size
FH24CC6 *	1/8" - 1/4" (3mm - 6mm)	3/8" Flexible Conduit
FH58CC6 *	5/16" - 1/2" (8mm - 13mm)	
FH912CC6 *	9/16" - 3/4" (14mm - 19mm)	
FH24CC812	1/8" - 1/4" (3mm - 6mm)	1/2" & 3/4" EMT, Rigid
FH58CC812	5/16" - 1/2" (8mm - 13mm)	
FH912CC812	9/16" - 3/4" (14mm - 19mm)	
FH24CC16	1/8" - 1/4" (3mm - 6mm)	1" EMT, Rigid
FH58CC16	5/16" - 1/2" (8mm - 13mm)	
FH912CC16	9/16" - 3/4" (14mm - 19mm)	
FH23CC20	1/8" - 1/4" (3mm - 6mm)	1-1/4" EMT, Rigid
FH58CC20	5/16" - 1/2" (8mm - 13mm)	
FH912CC20	9/16" - 3/4" (14mm - 19mm)	
FH24CC24	1/8" - 1/4" (3mm - 6mm)	1-1/2" EMT, Rigid
FH58CC24	5/16" - 1/2" (8mm - 13mm)	
FH912CC24	9/16" - 3/4" (14mm - 19mm)	
FH24CC32	1/8" - 1/4" (3mm - 6mm)	2" EMT, Rigid
FH58CC32	5/16" - 1/2" (8mm - 13mm)	
FH912CC32	9/16" - 3/4" (14mm - 19mm)	

* Not a UL Listed Product




FH CCP

Flange Clip with
Conduit "Push In" Clip




- Supports conduit from beam flanges.
- Conduit clip rotates 360 degrees.
- Flange thickness range stamped on part.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

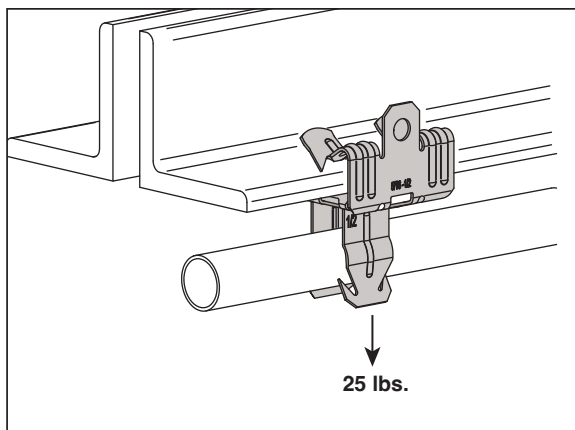


Part No.	Min. - Max. Flange Thickness	Conduit Size
FH24CCP8	1/8" - 1/4" (3mm - 6mm)	1/2" EMT
FH58CCP8	5/16" - 1/2" (8mm - 13mm)	
FH912CCP8	9/16" - 3/4" (14mm - 19mm)	
FH24CCP12	1/8" - 1/4" (3mm - 6mm)	3/4" EMT, 1/2" Rigid
FH58CCP12	5/16" - 1/2" (8mm - 13mm)	
FH912CCP12	9/16" - 3/4" (14mm - 19mm)	
FH24CCP16	1/8" - 1/4" (3mm - 6mm)	1" EMT, 3/4" Rigid
FH58CCP16	5/16" - 1/2" (8mm - 13mm)	
FH912CCP16	9/16" - 3/4" (14mm - 19mm)	

FHS C

Flange Clip Side Mount with Conduit Clip



- Supports pipe and conduit from beam flanges.
- Flange thickness range stamped on part.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

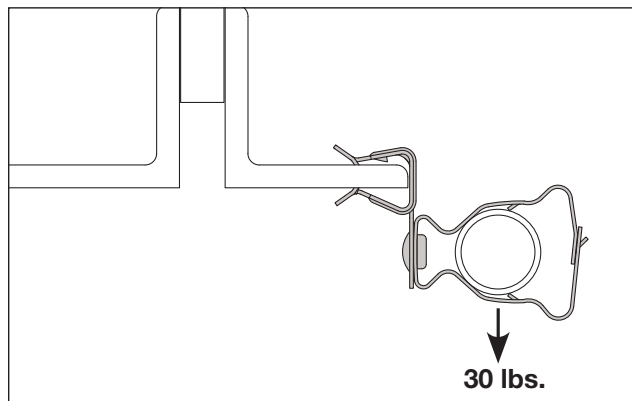

Part No.	Min. - Max. Flange Thickness	Conduit Size
FHS24CC6 *	1/8" - 1/4" (3mm - 6mm)	3/8" Flexible Conduit
FHS58CC6 *	5/16" - 1/2" (8mm - 13mm)	
FHS912CC6 *	9/16" - 3/4" (14mm - 19mm)	
FHS24CC812	1/8" - 1/4" (3mm - 6mm)	1/2" & 3/4" EMT, Rigid
FHS58CC812	5/16" - 1/2" (8mm - 13mm)	
FHS912CC812	9/16" - 3/4" (14mm - 19mm)	
FHS24CC16	1/8" - 1/4" (3mm - 6mm)	1" EMT, Rigid
FHS58CC16	5/16" - 1/2" (8mm - 13mm)	
FHS912CC16	9/16" - 3/4" (14mm - 19mm)	
FHS24CC20	1/8" - 1/4" (3mm - 6mm)	1-1/4" EMT, Rigid
FHS58CC20	5/16" - 1/2" (8mm - 13mm)	
FHS912CC20	9/16" - 3/4" (14mm - 19mm)	
FHS24CC24	1/8" - 1/4" (3mm - 6mm)	1-1/2" EMT, Rigid
FHS58CC24	5/16" - 1/2" (8mm - 13mm)	
FHS912CC24	9/16" - 3/4" (14mm - 19mm)	
FHS24CC32	1/8" - 1/4" (3mm - 6mm)	2" EMT, Rigid
FHS58CC32	5/16" - 1/2" (8mm - 13mm)	
FHS912CC32	9/16" - 3/4" (14mm - 19mm)	

* Not a UL Listed Product





Conduit and Cable Support



Standard Finish: Black Zinc Phosphate or Electro-Galvanized (EG)

FHS CCP

Flange Clip Side Mount
with Conduit "Push In" Clip

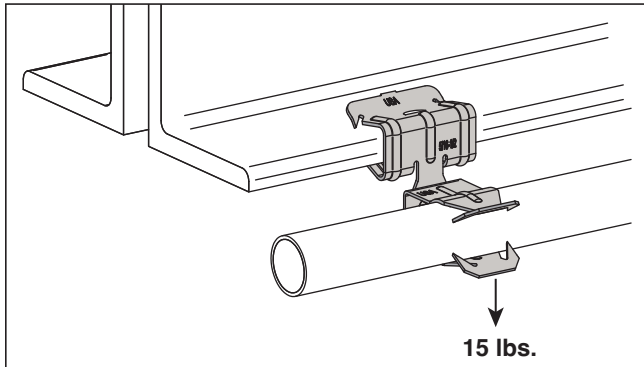


- Supports conduit from beam flanges.
- Flange thickness range stamped on part.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Min. - Max. Flange Thickness	Conduit Size
FHS24CCP8	1/8" - 1/4" (3mm - 6mm)	1/2" EMT
FHS58CCP8	5/16" - 1/2" (8mm - 13mm)	
FHS912CCP8	9/16" - 3/4" (14mm - 19mm)	
FHS24CCP12	1/8" - 1/4" (3mm - 6mm)	3/4" EMT, 1/2" Rigid
FHS58CCP12	5/16" - 1/2" (8mm - 13mm)	
FHS912CCP12	9/16" - 3/4" (14mm - 19mm)	
FHS24CCP16	1/8" - 1/4" (3mm - 6mm)	1" EMT, 3/4" Rigid
FHS58CCP16	5/16" - 1/2" (8mm - 13mm)	
FHS912CCP16	9/16" - 3/4" (14mm - 19mm)	

FHV CC


Flange Hanger with Conduit Clip

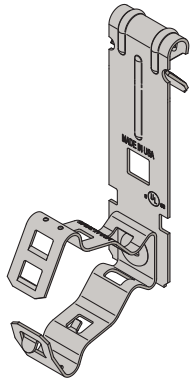

- Supports pipe and conduit from bar joist's and "C" purlin's.
- Compatible with many industry standard installation tools.
- 1/16" - 1/4" flange thickness range.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate


Part No.	Min. - Max. Flange Thickness	Conduit Size
FHV3CC6 *	1/16" - 1/4"	3/8" Flexible Conduit
FHV3CC812		1/2" & 3/4" EMT, Rigid
FHV3CC16		1" EMT, Rigid

* Not a UL Listed Product

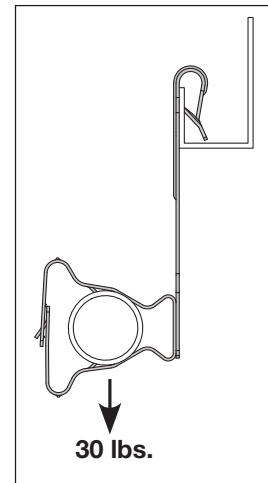


CFC

Conduit Clip to Flange



Part No.	Flange Thickness	Cable O.D.
CFC2D	1/16" - 3/16"	0.46 - 0.56
CFC4D	3/16" - 9/32"	0.46 - 0.56
CFC4E		0.50 - 0.72
CFC8D	5/16" - 1/2"	0.46 - 0.56
CFC8E		0.50 - 0.72


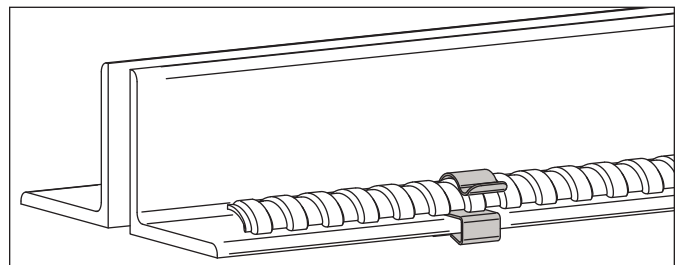


- Supports flexible conduit and cable from flanges.
- Simple Push-in clip design.
- **Material:** Steel
- **Finish:** Electro-Galvanized



CC CC

Conduit Clip
with Conduit Clip

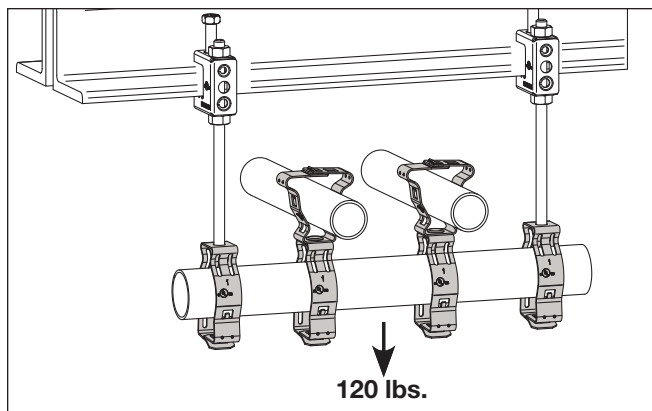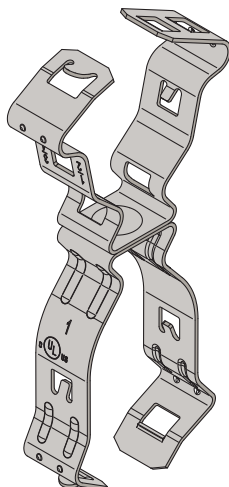



- No screws or bolts required.
- For lightweight trapeze systems.
- Conduit clip rotates 360 degrees.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Conduit Clip
CC16CC6 *	3/8" Flexible Conduit
CC16CC812	1/2" or 3/4" EMT, Rigid
CC16CC16	1" EMT, Rigid
CC16CC20	1-1/4" EMT, Rigid
CC16CC24	1-1/2" EMT, Rigid
CC16CC32	2" EMT, Rigid

* Not a UL Listed Product

CCP CCP

Conduit "Push In" Clip with Conduit
"Push In" Clip

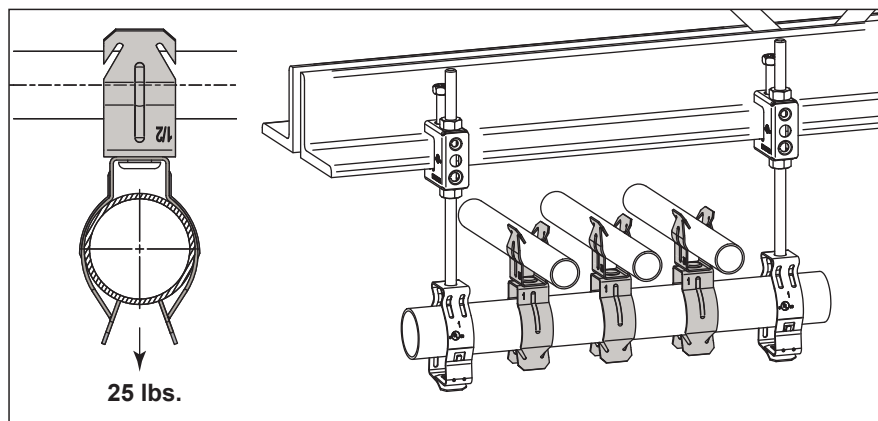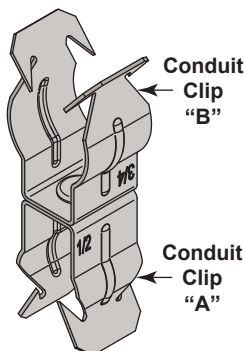

- No tools required for conduit installation.
- For lightweight trapeze systems.
- Conduit clips rotate 360 degrees.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Conduit Clip "A"	Conduit Clip "B"
CCP8CCP8	1/2" EMT	1/2" EMT
CCP8CCP12		3/4" EMT, 1/2" Rigid
CCP8CCP16		1" EMT, 3/4" Rigid
CCP12CCP12	3/4" EMT, 1/2" Rigid	3/4" EMT, 1/2" Rigid
CCP12CCP16		1" EMT, 3/4" Rigid
CCP16CCP16	1" EMT, 3/4" Rigid	1" EMT, 3/4" Rigid





Conduit and Cable Support



Standard Finish: Pregalvanized (PG) or Electro-Galvanized (EG)

PCH PCH

Pipe and Conduit Hanger with Pipe and Conduit Hanger

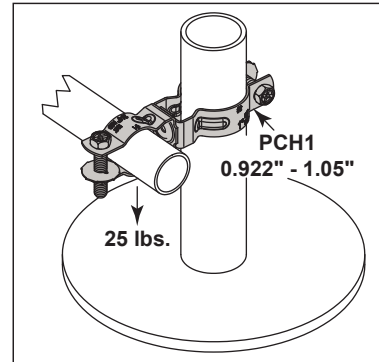
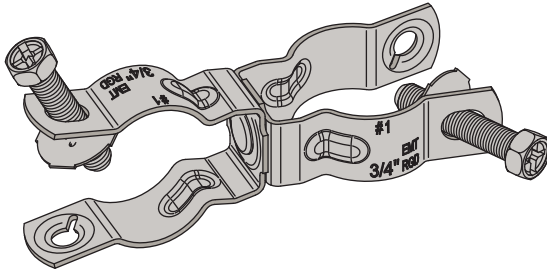


- Supports conduit and pipe from 1" O.D. computer floor pedestals.
- Retained combo head screw allows Robertson, Phillips/ Slotted and Hex drivers.
- Conduit clip rotates 360 degrees.
- Suitable for air handling spaces (plenums) (remove washer at assembly)
- Also available in 304 and 316 Stainless Steel.
- **Material:** Steel
- **Finish:** Pregalvanized

Part No.	Trade Size	Conduit Size	
		EMT	Rigid
PCH075PCH037050	0	1/2"	3/8", 1/2"
PCH075PCH075	1	3/4"	3/4"
PCH075PCH100	2	1"	1"
PCH075PCH125	2.5	1-1/4"	-
PCH075PCH125	3	1-1/2"	1-1/4"

BR

Bridle Ring

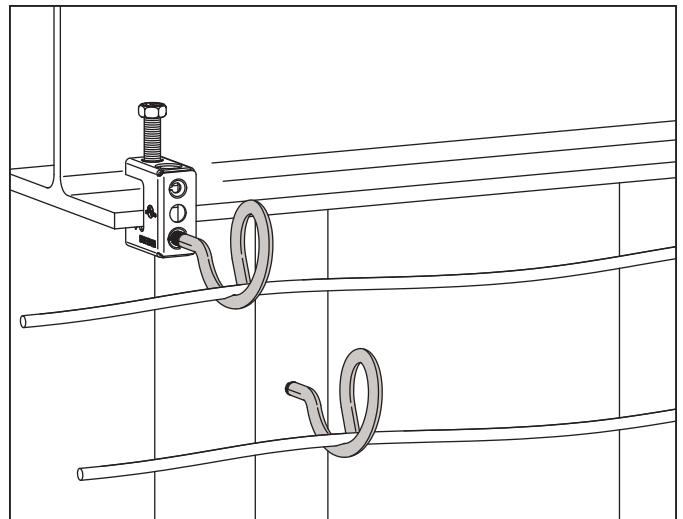



Part No.	Ring Size I.D.	Thread Size
BR1012	3/4"	#10-24
BR1020	1-1/4"	#10-24
BR2520		1/4"-20
BR2520WS		1/4" Wood Screw
BR1032	2"	#10-24
BR2532		1/4"-20
BR2532WS		1/4" Wood Screw

- Supports low voltage communication cable.
- Compatible with many other fasteners for support from purlin, T-grid, drop wire, and beam flanges.
- **Material:** Steel
- **Finish:** Electro-galvanized



B18 CC CCP

Box to Conduit Support, Snap Close or Push-In Conduit Clips

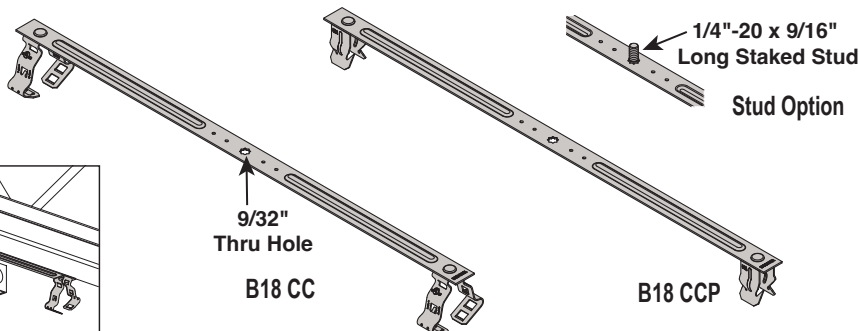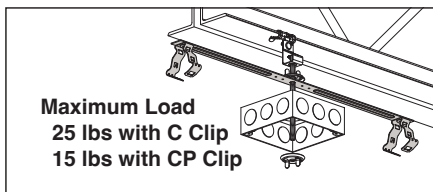



Part No.	Description	Conduit Size
B18 CC6 *	Box Support with through hole	3/8" Flexible Conduit
BS18 CC6S *	Box Support with 1/4" Threaded Stud	
B18 CC8-12	Box Support with through hole	1/2" & 3/4" EMT, Rigid
BS18 CC8-12S	Box Support with 1/4" Threaded Stud	
B18 CC16	Box Support with through hole	1" EMT, Rigid
BS18 CC16S	Box Support with 1/4" Threaded Stud	
B18 CCP8 *	Box Support with through hole	1/2" EMT
BS18 CCP8S *	Box Support with 1/4" Threaded Stud	
B18 CCP12 *	Box Support with through hole	3/4" EMT or 1/2" Rigid
BS18 CCP12S *	Box Support with 1/4" Threaded Stud	
B18 CCP16 *	Box Support with through hole	1" EMT or 3/4" Rigid
BS18 CCP16S *	Box Support with 1/4" Threaded Stud	

* Not a UL Listed Product

- For support of conduit per NEC344.30(B).
- SDTSLP8X1/2 low profile screws recommended for installation, see page 236.
- For wet or dry applications.
- Dedicated drop wire/rod secured (anchor) at both ends required per NEC 300.11.
- Two B18 though hole assemblies may be used by mounting 90° to each other.
- Not for fixture or ceiling fan support.
- **Material:** Steel/Spring Steel
- **Finish:** Black Zinc Phosphate

MFC B18 CC CCP

Multi-function clip to Box and Conduit Support

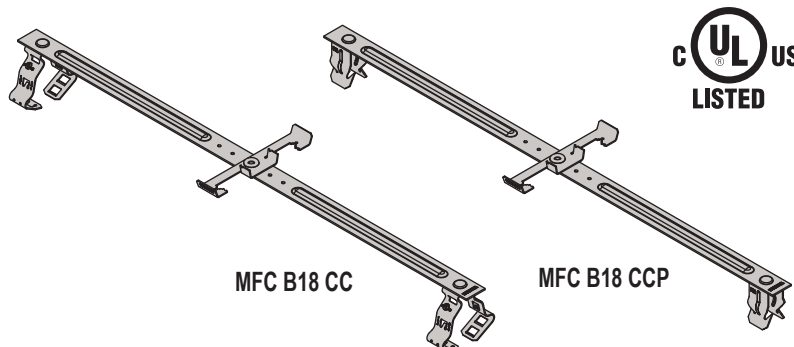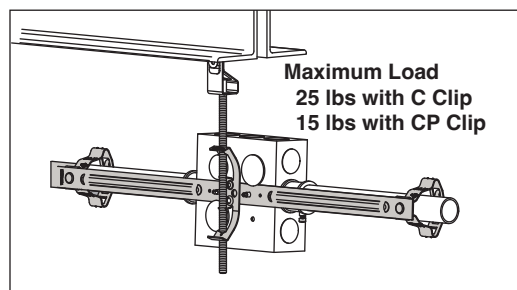

Part No.	Description for 1/4" Threaded Rod Size	Conduit Size
MFC B18 CC6 *	Box Support with multi-function clip and snap close conduit clips	3/8" Flexible Conduit
MFC B18 CC8-12		
MFC B18 CC16	Box Support with multi-function clip and push-in conduit clips	1/2" & 3/4" EMT, Rigid
MFC B18 CCP8 *		
MFC B18 CCP12 *		1" EMT, Rigid
MFC B18 CCP16 *		

* Not a UL Listed Product

- For support of conduit per NEC344.30(B).
- SDTSLP8X1/2 low profile screws recommended for installation, see page 236.
- For wet or dry applications.
- Multi-function clip requires dedicated drop wire/rod per NEC 300.11.
- Two screws are required when mounting box to B18 Support.
- Multi-function clips are for single use only.
- Not for fixture or ceiling fan support.
- **Material:** Steel/Spring Steel
- **Finish:** Black Zinc Phosphate





Conduit and Cable Support

Standard Finish: Black Zinc Phosphate



FH B18 CC CCP

Flange Clip Hammer-On to Box and Conduit Support

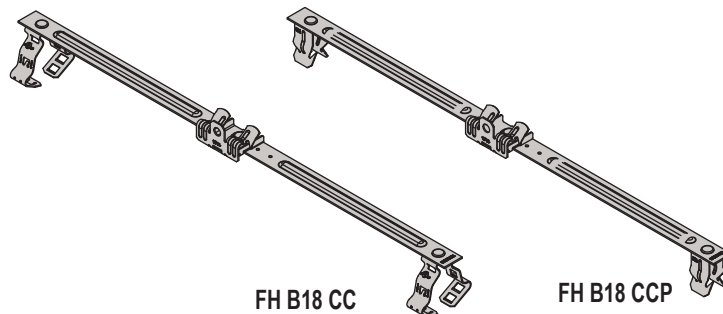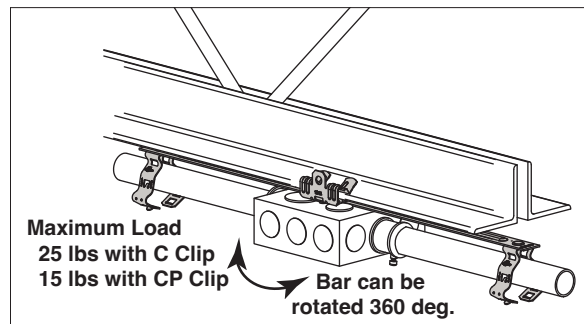

Part No.	Description	Flange Thickness	Conduit Size
FH24B18 CC6 *	Box Support with flange clip hammer on and snap close conduit clips	1/8" - 1/4"	3/8" Flexible Conduit
FH58B18 CC6 *		5/16" - 1/2"	
FH24B18 CC812		1/8" - 1/4"	1/2" & 3/4" EMT, Rigid
FH58B18 CC812		5/16" - 1/2"	
FH24B18 CC16		1/8" - 1/4"	1" EMT, Rigid
FH58B18 CC16		5/16" - 1/2"	
FH24B18 CCP8 *	Box Support with flange clip hammer on and push-in conduit clips	1/8" - 1/4"	1/2" EMT
FH58B18 CCP8 *		5/16" - 1/2"	
FH24B18 CCP12 *		1/8" - 1/4"	3/4" EMT or 1/2" Rigid
FH58B18 CCP12 *		5/16" - 1/2"	
FH24B18 CCP16 *		1/8" - 1/4"	1" EMT or 3/4" Rigid
FH58B18 CCP16 *		5/16" - 1/2"	

* Not a UL Listed Product

- For support of conduit per NEC344.30(B).
- SDTSLP8X1/2 low profile screws recommended for installation, see page 236.
- For wet or dry applications.
- Two screws are required when mounting box to B18 Support.
- Hammer-on flange hangers are for single use only.
- Not to be used on tapered flanges.
- Not for fixture or ceiling fan support.
- **Material:** Steel/Spring Steel
- **Finish:** Black Zinc Phosphate

TRH



Hanger System

Great for running Communication or Internet Cables



Supports cable runs or a pair of insulated flow and return refrigerant lines on 1/4" to 3/8" threaded rod. Simply fold the lock-tab over to secure the lines into the strap. The spring steel hanger grips the rod tightly, and the black zinc coating offers corrosion resistance while matching the insulation color. The clamp can be detached from the rod hanger and used to secure lines to flat surfaces.

- Black color to match pipe insulation
- Quick to Install
- Quick to Adjust
- Spring steel hanger grips rod tightly
- Rolled steel edges for safe cable runs

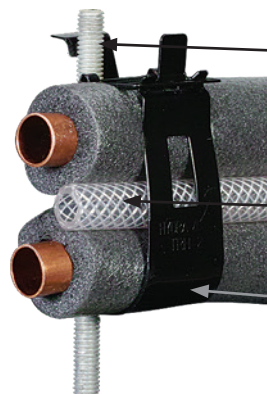

Works with 1/4" - 3/8" threaded rod

Supports a pair of insulated liquid and suction lines


Spring steel rod hanger can be fitted or adjusted in seconds

Part No. (Pack of 10)	Threaded Rod Sizes	Flow & Return Pipe Pairs	A	B	C
TRH-2	1/4" - 3/8"	3/8" Liquid & 5/8" Gas	1.28" (33mm)	3.12" (79mm)	3.82" (97mm)
TRH-3		1/2" Liquid & 7/8" Gas	1.40" (36mm)	3.28" (83mm)	3.70" (94mm)
TRH-4		5/8" Liquid & 1-1/8" Gas	2.40" (61mm)	4.17" (106mm)	5.00" (127mm)
TRH-5			3.38" (86mm)	6.26" (159mm)	7.03" (179mm)




FCH

Flange Clip



FCH




FCH S
w/Stud

$\frac{1}{4}$ "-20 x
 $\frac{3}{8}$ " Stud

- Multi use beam clamp used to support threaded rod, electrical boxes, and bridal rings from beam flanges.
- Beam clamp with stud is for supporting electrical boxes from beam flanges.
- Punched holes provided for zip tie applications.
- $\frac{1}{4}$ "-20 thread forms permit threaded rod applications.
- Only a hammer required for installation.

- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate



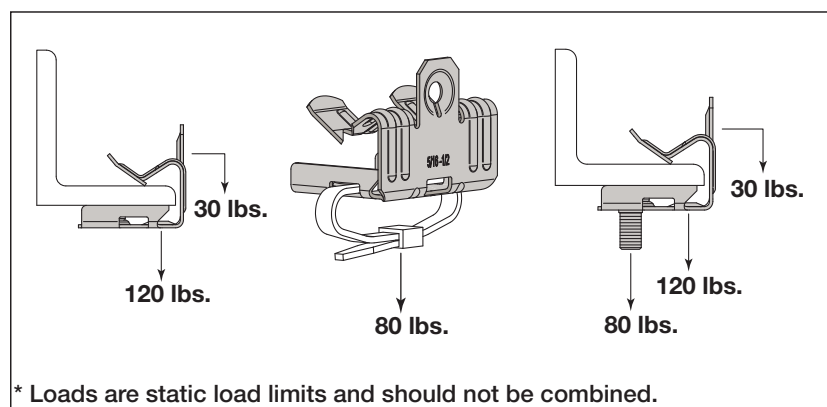


* Loads are static load limits and should not be combined.

Part No.	Flange Thickness
FCH24	$\frac{1}{8}$ " - $\frac{1}{4}$ " (3mm - 6mm)
FCH58	$\frac{5}{16}$ " - $\frac{1}{2}$ " (8mm - 13mm)
FCH912	$\frac{9}{16}$ " - $\frac{3}{4}$ " (14mm - 19mm)
FCH24S	$\frac{1}{8}$ " - $\frac{1}{4}$ " (3mm - 6mm)
FCH58S	$\frac{5}{16}$ " - $\frac{1}{2}$ " (8mm - 13mm)
FCH912S	$\frac{9}{16}$ " - $\frac{3}{4}$ " (14mm - 19mm)

FSM

Flange Clip Side Mount

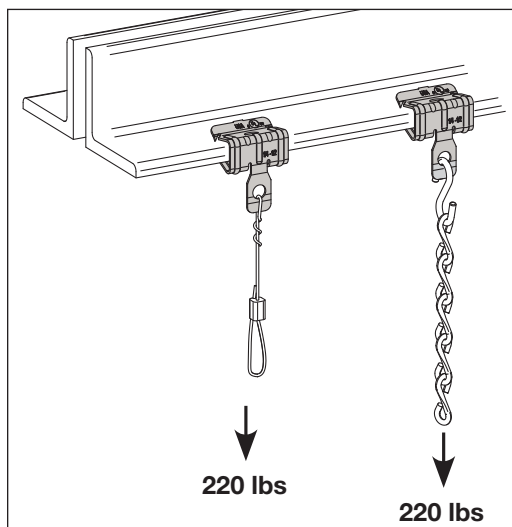



Part No.	Flange Thickness	Hole Size
FSM24	$\frac{1}{8}$ " - $\frac{1}{4}$ " (3mm - 6mm)	$\frac{9}{32}$ " (7.1mm)
FSM58	$\frac{5}{16}$ " - $\frac{1}{2}$ " (8mm - 13mm)	
FSM912	$\frac{9}{16}$ " - $\frac{3}{4}$ " (14mm - 19mm)	

- Beam clamp with hole for supporting tie wire and jack chain to beam flanges.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate



FVZ, FHZ

Flange Hanger for Purlins and Bar Joists

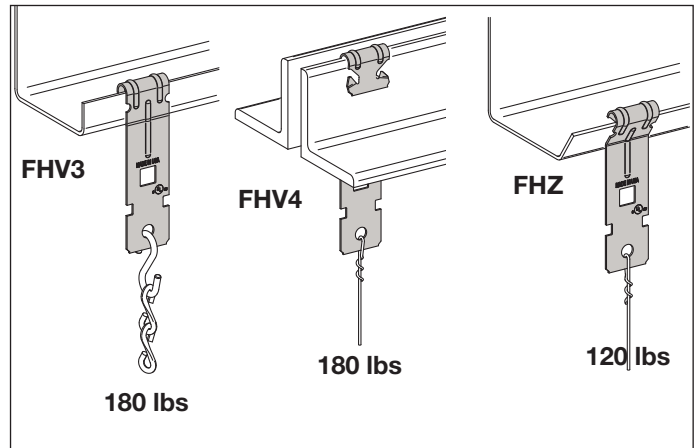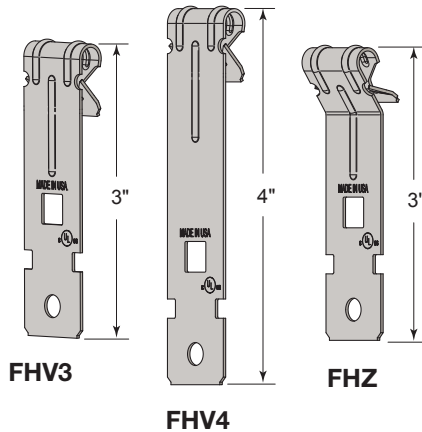


- **FHV3:** Flange clip with hole for supporting tie wire and jack chain to bar joist's and "C" purlin's.
- **FHV4:** Extra long flange clip with hole for supporting tie wire and jack chain to tall bar joist's and "C" purlin's.
- **FHZ:** Angled flange clip with hole for supporting tie wire and jack chain to "Z" purlin's.
- Compatible with many industry standard installation tools.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Min. - Max. Flange Thickness	Hole Size
FHV3	1/16" - 1/4" (2mm - 6mm)	9/32" (7.1mm)
FHV4		
FHZ		

MFC


Multi-Function Clip

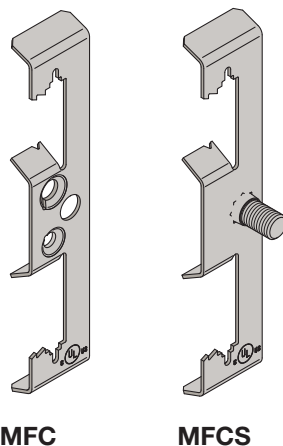

Part No.	Flange Size	Threaded Rod Size	Conduit Size or Threads
MFC	1/8" - 3/8"	1/4" Threaded Rod	9/32" - hole, 1/4" - 20 and 10-24 thread form
MFCS	1/8" - 3/8"	1/4" Threaded Rod	1/4" - 20 staked stud with nut (UL listed box support)


- **MFC:** Supports #10-24 and 1/4"-20 bridal rings to rod and wire.
- **MFCS:** Supports electrical boxes to rod and wire.
- No tools required. Easy adjustment after installation.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Flange Installation



RHP RHT


Rod Hanger Push Install or Rod Hanger Thread Install

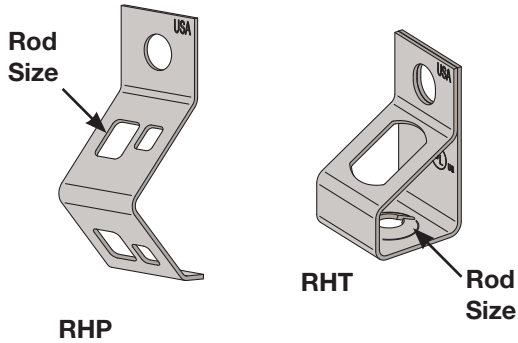

- **RHP:** Suspends plain and threaded rod from vertical surfaces, and provides easy adjustment of rod after installation.
- **RHT:** Suspends threaded rod from vertical surfaces.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate


Part No.	Rod Size
RHP4	#8 Wire or 1/4" Plain or Threaded Rod
RHP6	3/8" Plain or Threaded Rod
RHT4T	1/4" - 20 Thread Form
RHT6T	3/8" - 16 Thread Form
RHT6 *	13/32" Thru Hole for 1/4" or 3/8" Threaded Rod

* Nuts sold separately

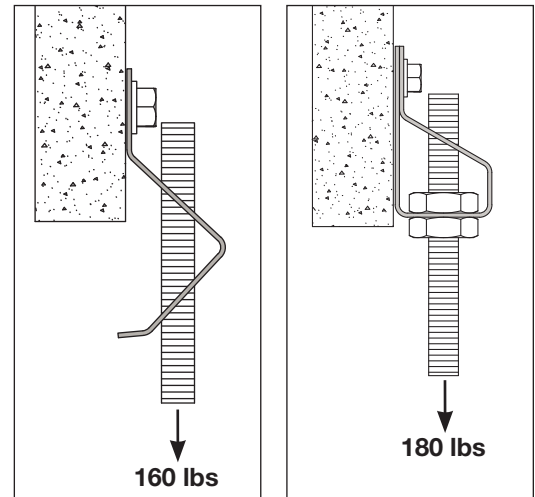

FH P

Flange Clip Side Mount with Rod Hanger Push Install

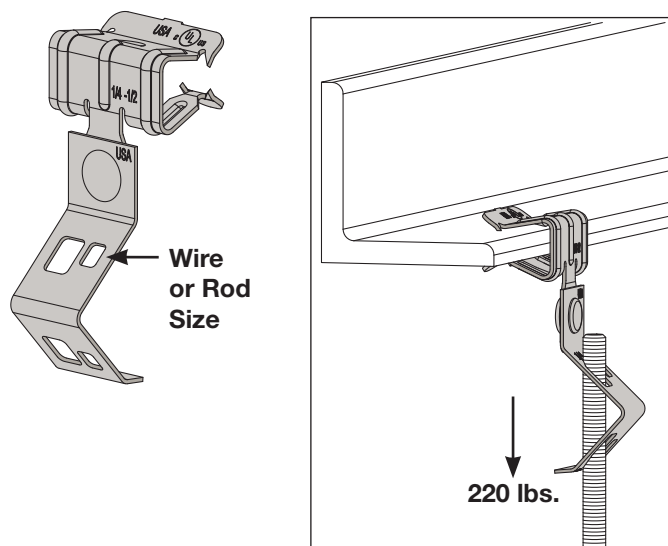

- Suspends plain and threaded rod from beam flanges.
- Easy adjustment of rod after installation.
- Flange thickness range stamped on part.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Minimum - Maximum Flange Thickness	Wire/ Rod Size
FH24RHP4	1/8" - 1/4" (3mm - 6mm)	#8 Wire or 1/4" Rod
FH58RHP4	5/16" - 1/2" (8mm - 13mm)	
FH912RHP4	9/16" - 3/4" (14mm - 19mm)	
FH24RHP6	1/8" - 1/4" (3mm - 6mm)	3/8" Rod
FH58RHP6	5/16" - 1/2" (8mm - 13mm)	
FH912RHP6	9/16" - 3/4" (14mm - 19mm)	



FH RHT

Flange Clip Side Mount with Rod Hanger Thread Install

- Suspends threaded rod from beam flanges.
- Flange thickness range stamped on part.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate



Introduction

Channel

Channel Nuts
& Hardware

General
Fittings

Brackets

Beam
Clamps

Pipe & Conduit
Supports

Electrical
Fittings



Spring
Steel

Concrete
Inserts

Rooftop
Supports

Fiberglass
System

Technical
Data

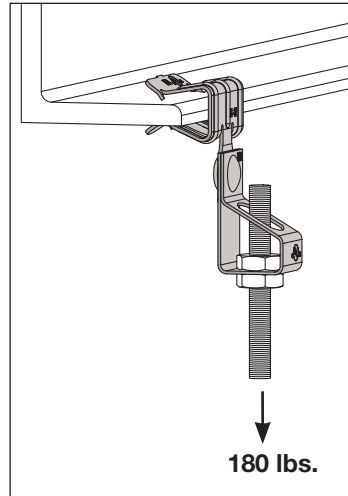
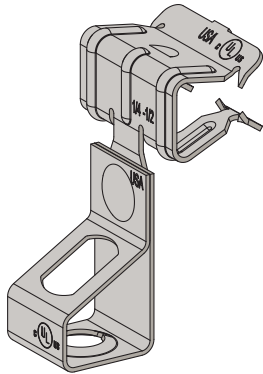


Part No.	Min. - Max. Flange Thickness	Hole Size
FH24RH4T	1/8" - 1/4" (3mm - 6mm)	1/4" - 20 Thread Form
FH58RH4T	5/16" - 1/2" (8mm - 13mm)	
FH912RH4T	9/16" - 3/4" (14mm - 19mm)	
FH24RH6T	1/8" - 1/4" (3mm - 6mm)	3/8" - 16 Thread Form
FH58RH6T	5/16" - 1/2" (8mm - 13mm)	
FH912RH6T	9/16" - 3/4" (14mm - 19mm)	
FH24RH6 *	1/8" - 1/4" (3mm - 6mm)	1 1/32" thru hole for 1/4" or 3/8" Threaded Rod
FH58RH6 *	5/16" - 1/2" (8mm - 13mm)	
FH912RH6 *	9/16" - 3/4" (14mm - 19mm)	

* 2 nuts required (sold separately)

FBZ RH

Flange hanger with Rod Hanger Push Install

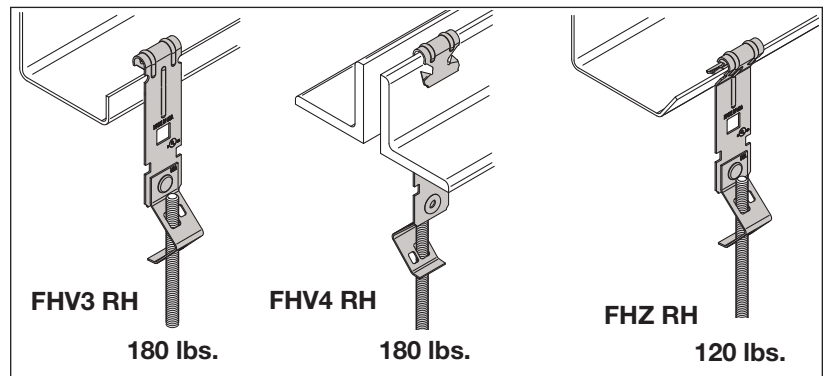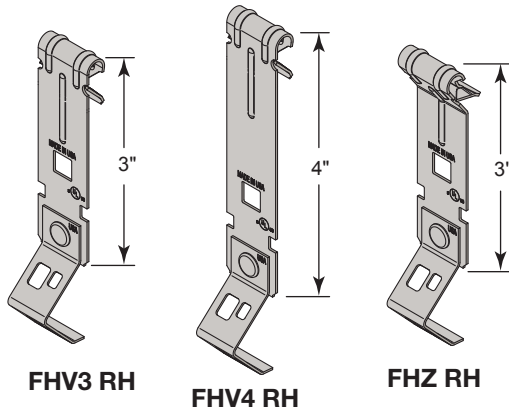



- **FHV3:** Suspends plain and threaded rod from bar joist's and "C" purlin's.
- **FHV4:** Extra long clip suspends plain and threaded rod from bar joist's.
- **FHZ:** Angled clip suspends plain and threaded rod from "Z" purlin's.
- Easy adjustment of rod after installation.
- Compatible with many industry standard installation tools.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Wire / Rod Size	Min. - Max. Flange Thickness
FHV3RH4	#8 Wire or 1/4" Plain or Threaded Rod	1/16" - 1/4"
FHV3RH6	3/8" Plain or Threaded Rod	
FHV4RH4	#8 Wire or 1/4" Plain or Threaded Rod	1/16" - 1/4"
FHV4RH6	3/8" Plain or Threaded Rod	
FHZRH4	#8 Wire or 1/4" Plain or Threaded Rod	1/16" - 1/4"
FHZRH6	3/8" Plain or Threaded Rod	



FVZ RT

Flange Hanger with Rod Hanger Threaded Install

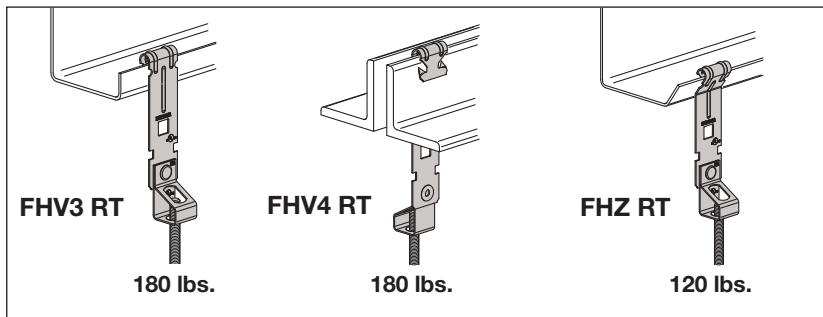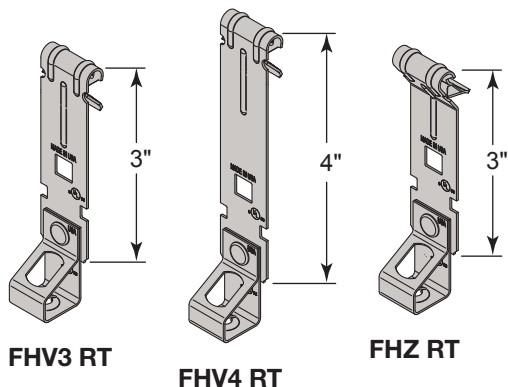


- **FHV3 RT:** Suspends threaded rod from bar joist's and "C" purlin's.
- **FHV4 RT:** Extra long clip suspends threaded rod from bar joist's.
- **FHZ RT:** Angled clip suspends threaded rod from "Z" purlin's.
- Compatible with many industry standard installation tools.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Rod Size	Min. - Max. Flange Thickness
FHV3RH4T	1/4"-20 Thread Form	1/16" - 1/4"
FHV3RH6T	3/8"-16 Thread Form	
FHV3RH6 *	13/32" Thru Hole for 1/4" or 3/8" Threaded Rod	
FHV4RH4T	1/4"-20 Thread Form	1/16" - 1/4"
FHV4RH6T	3/8"-16 Thread Form	
FHV4RH6 *	13/32" Thru Hole for 1/4" or 3/8" Threaded Rod	
FHZRH4T	1/4"-20 Thread Form	1/16" - 1/4"
FHZRH6T	3/8"-16 Thread Form	
FHZRTH6 *	13/32" Thru Hole for 1/4" or 3/8" Threaded Rod	


* Nuts sold separately

AB

Angle Bracket

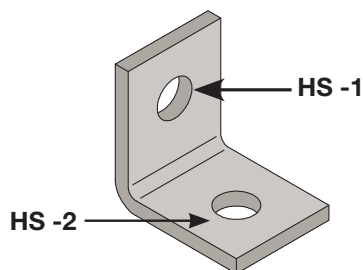

- Accepts wire, chain and rod drops from concrete or wood.
- **Material:** Steel
- **Finish:** Pregalvanized

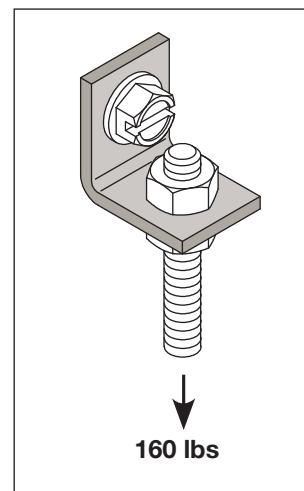



Part No.	HS - 1	HS - 2
AB04	9/32" (7.1mm)	9/32" (7.1mm)
AB06	9/32" (7.1mm)	13/32" (10.3mm)



Standard Finish: Black Zinc Phosphate or Pregalvanized (PG)

ABCC, NBCC

Angle Bracket and Nail Bracket with Conduit Clip

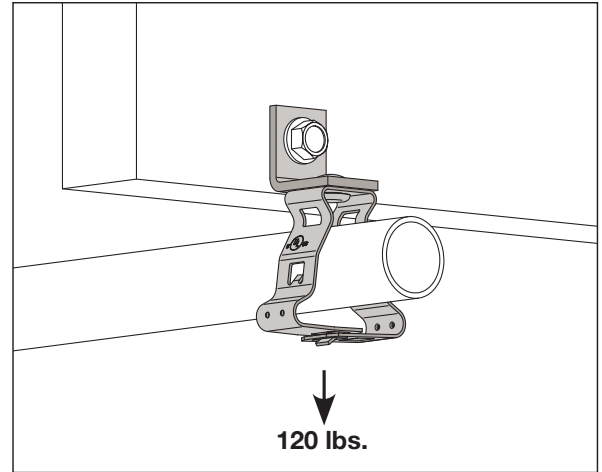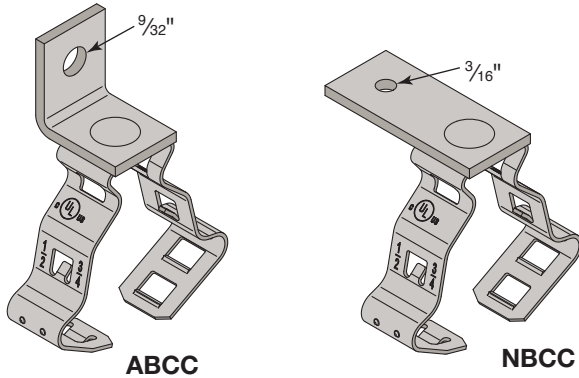



- **ABCC:** Supports horizontal runs of conduit through metal studs and prevents conduit from rattling in wall.
- **NBCC:** Attaches conduit to wood, concrete and steel, works with power tools and nails.
- Conduit clip rotates 360 degrees.
- **Material:** Steel & Spring Steel
- **Finish:** Pregalvanized & Black Zinc Phosphate

Part No.	Conduit Size
ABCC6 *	3/8" Flexible Conduit
ABCC812	1/2" or 3/4" EMT, Rigid
NBCC6 *	3/8" Flexible Conduit
NBCC812	1/2" or 3/4" EMT, Rigid

* Not a UL Listed Product

ABCCP, NBCCP

Angle and Nail Bracket with Conduit "Push In" Clip

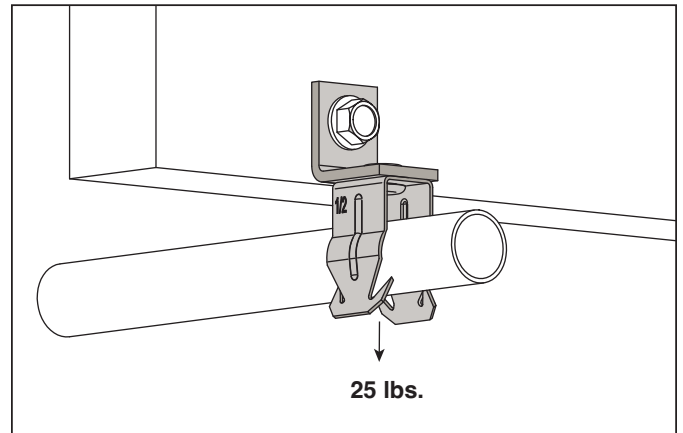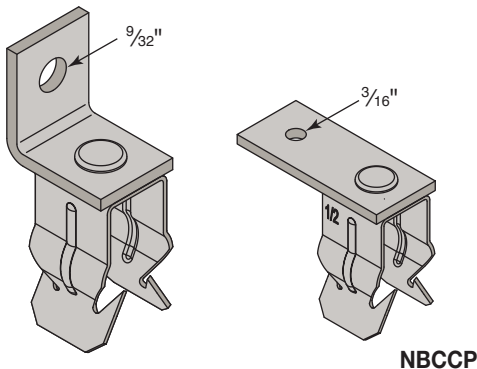

ABCCP



- **ABCCP:** Supports horizontal runs of conduit through metal studs and prevents conduit from rattling in wall.
- **NBCCP:** Attaches conduit to wood, concrete and steel, works with power tools and nails.
- Conduit clip rotates 360 degrees.
- **Material:** Steel & Spring Steel
- **Finish:** Pregalvanized & Black Zinc Phosphate

Part No.	Conduit Size
ABCCP8	1/2" EMT
ABCCP12	3/4" EMT, 1/2", Rigid
NBCCP8	1/2" EMT
NBCCP12	3/4" EMT, 1/2" Rigid



AB PCH, NB PCH

Angle & Nail Bracket with Pipe & Conduit Hanger

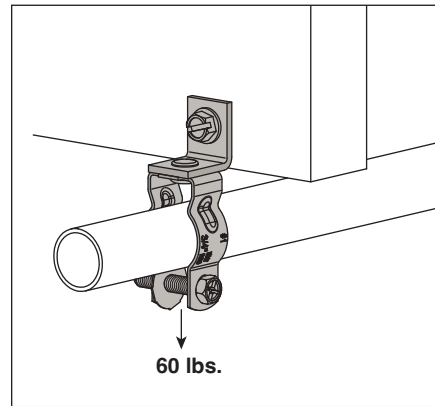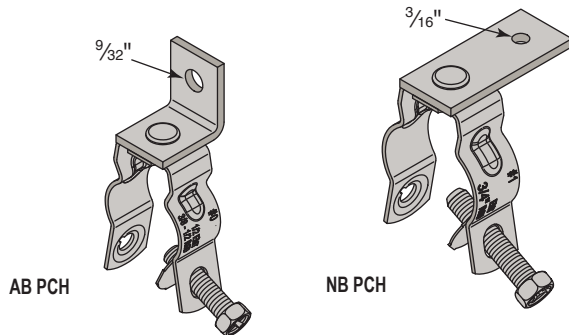


- **AB PCH:** Supports horizontal runs of conduit through metal studs and prevents conduit from rattling in wall.
- **NB PCH:** Attaches conduit to wood, concrete and steel, works with power tools and nails.
- Conduit clip rotates 360 degrees
- Suitable for air handling spaces (plenums) (remove washer at assembly)
- Retained combo head screw allows Robertson, Phillips/Slotted and Hex drivers.
- **Material:** Steel
- **Finish:** Pregalvanized


Part No.	Trade Size	Conduit Size	
		EMT	Rigid
ABPCH037050	0	1/2"	3/8", 1/2"
ABPCH075	1	3/4"	3/4"
ABPCH100	2	1"	1"
NBPCH037050	0	1/2"	3/8", 1/2"
NBPCH075	1	3/4"	3/4"
NBPCH100	2	1"	1"

ABR

Angle Bracket with Rod Hanger Push Install



- Attaches to concrete, wood and steel.
- Suspends plain and threaded rod from horizontal surfaces.
- Easy adjustment of rod after installation.
- **Material:** Steel & Spring Steel
- **Finish:** Pregalvanized & Black Zinc Phosphate

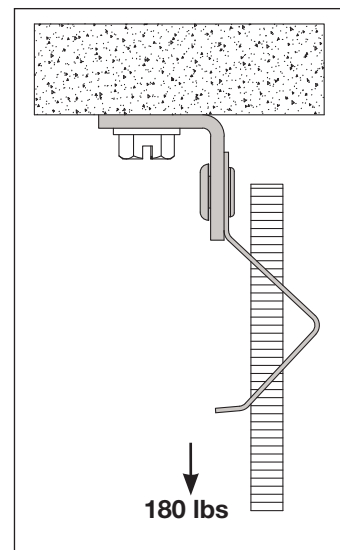

Part No.	Rod Size
ABRH4	#8 Wire or 1/4" Plain or Threaded Rod
ABRH6	3/8" Plain or Threaded Rod




Structural Attachment



Standard Finish: Black Zinc Phosphate or Pregalvanized (PG)

ABR T


Angle Bracket with Rod Hanger Thread Install



- Attaches to concrete, wood and steel.
- Suspends threaded rod from horizontal surfaces.
- **Material:** Steel & Spring Steel
- **Finish:** Pregalvanized & Black Zinc Phosphate


Part No.	Rod Size
ABRH4T	1/4 - 20 Thread Form
ABRH6T	3/8 - 16 Thread Form
ABRTH6 *	13/32" Thru Hole for 1/4" or 3/8" Threaded Rod

* Nuts sold separately

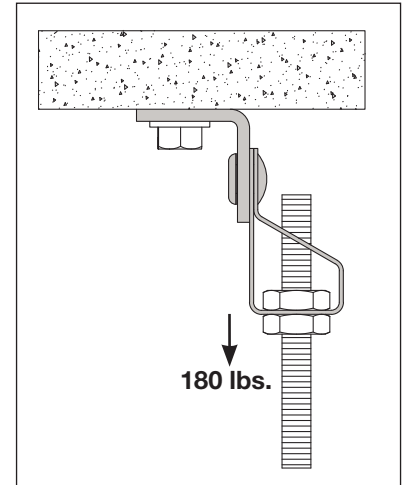


SH

Strap Hanger

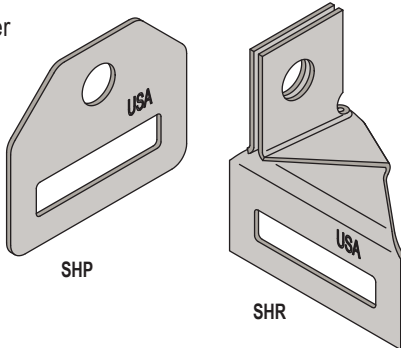


- Supports pipe or duct with strapping.
- Fits strap up to 1" wide.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

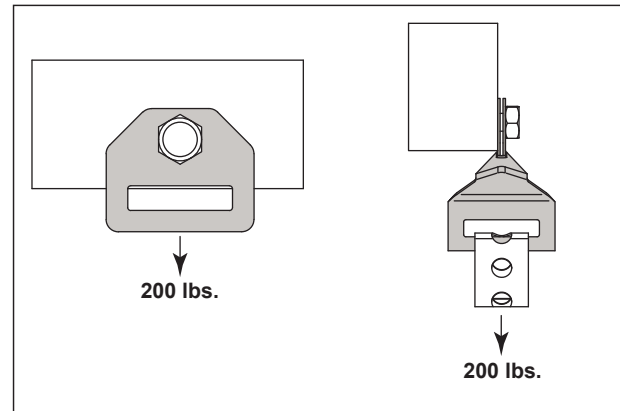


Part No.	Hole Size
SHP	9/16"
SHR	9/16"

ABSHP

Angle Bracket with Strap Hanger


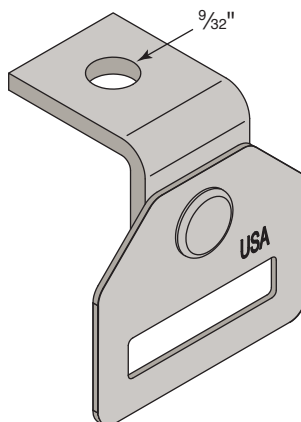


- Supports pipe or duct with strapping.
- Fits strap up to 1" wide.
- **Material:** Steel & Spring Steel
- **Finish:** Pregalvanized & Black Zinc Phosphate

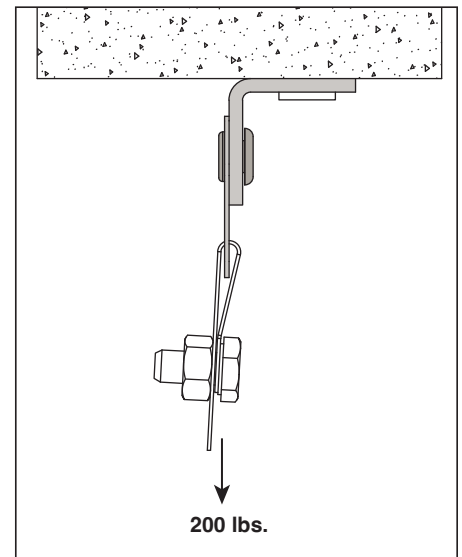

FHS SH

Flange Clip Side Mount with Strap Hanger

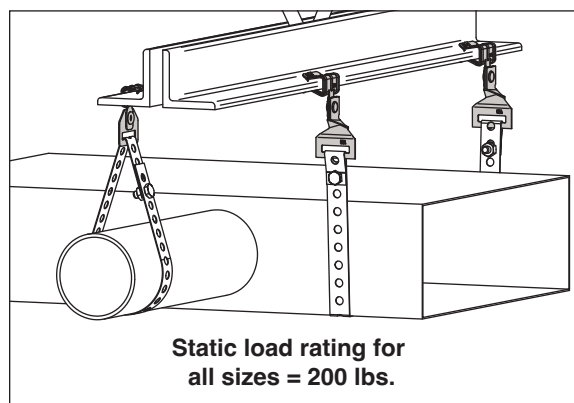
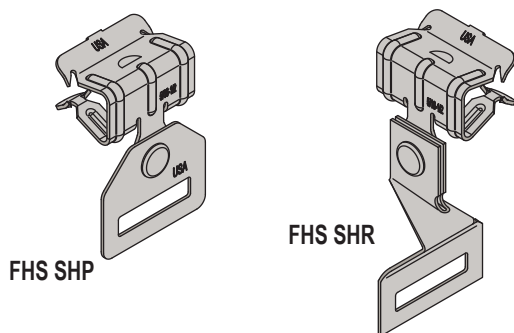


- Supports pipe or duct with strapping from beam flanges.
- Fits strap up to 1" wide.
- Flange thickness range stamped on part.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Min. - Max. Flange Thickness
FHS24SHP	$\frac{1}{8}" - \frac{1}{4}"$ (3mm - 6mm)
FHS58SHP	$\frac{5}{16}" - \frac{1}{2}"$ (8mm - 13mm)
FHS912SHP	$\frac{9}{16}" - \frac{3}{4}"$ (14mm - 19mm)
FHS24SHR	$\frac{1}{8}" - \frac{1}{4}"$ (3mm - 6mm)
FHS58SHR	$\frac{5}{16}" - \frac{1}{2}"$ (8mm - 13mm)
FHS912SHR	$\frac{9}{16}" - \frac{3}{4}"$ (14mm - 19mm)

FHV3 FHZ SH

Flange Hanger with Strap Hanger

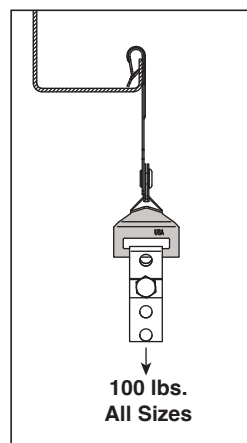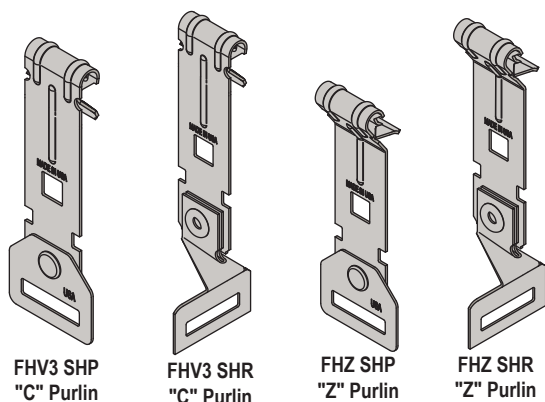

- FHV SHP and SHR supports pipe or duct with strapping from "C" purlin flanges.
- FHZ SHP and SHR supports pipe or duct with strapping from "Z" purlin flanges.
- Fits strap up to 1" wide.
- Compatible with many industry standard installation tools.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Min. - Max. Flange Thickness
FHV3SHP	$\frac{1}{16}" - \frac{1}{4}"$
FHV3SHR	$\frac{1}{16}" - \frac{1}{4}"$
FHZSHP	$\frac{1}{16}" - \frac{1}{4}"$
FHZSHR	$\frac{1}{16}" - \frac{1}{4}"$




Structural Attachment



Standard Finish: Black Zinc Phosphate or Zinc Electroplated


PSP, FSM

Pipe Sleeve Positioner



PSP


For 1/8" screw
or nail



FSM

For 1/4" screw or
nail


Part No.	Sleeve Diameter	Pipe Wall Thickness	Min./Max. Sleeve Thickness Range
PSP2-6	2" - 6" (51mm - 152mm)	Schedule #40 Pipe	0" - 5/16" (0 - 8mm)
PSPA	Any Dia.	Up to 5/16" (8mm)	
FSM58	6" (152mm)	Schedule #80 Pipe	1/4" - 1/2" (6mm - 13mm)
FSM58	8" - 10" (203mm - 254mm)	Schedule #40 Pipe	
FSM912	9" - 14" (229mm - 356mm)	Schedule #80 Pipe	1/2" - 3/4" (13mm - 19mm)

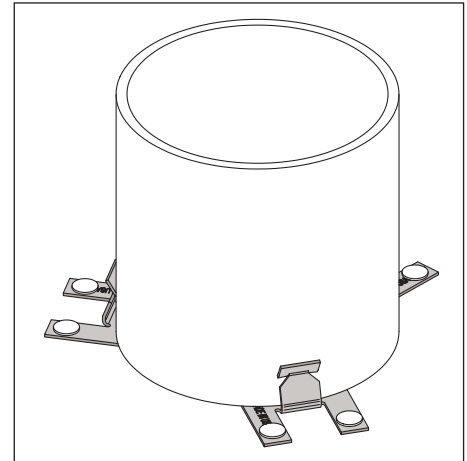

- Use to position pipe sleeves during concrete pours.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Silver Claw

Beam Clamp

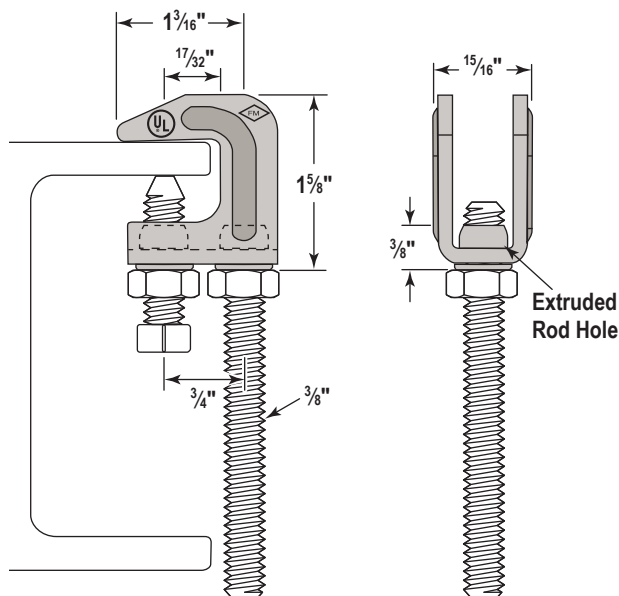

- Carbon Steel - Avoids Hydrogen Embrittlement
- Extruded Rod Hole - More Threads Captured
- Made in USA - Meets Requirements for Buy America
- Handles 3/8" Threaded Rod
- Attaches to 3/4" (19mm) Beam or Bar Joist
- Open Back for Easy Inspection and Adjustment
- 3/4" (19mm) Flange Beam
- Zinc Electroplate
- Installs in Upright Position
- Torque Value = 60 in-lbs
- Made in USA
- UL Listed for Top of Beam
- FM Approved for NFPA 13, Maximum Rated Pipe Size
- Complies with Manufacturers Standardization Society SP-69 (Type 19 & 23) and Federal Specification WW-H-171E




Part No.	Rod Size	Max. Load
SCL037EG	3/8"	400 Lbs.



BC92

Light Duty – Beam Clamps

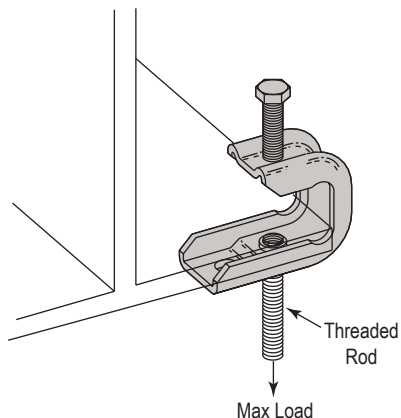


- **Material:** Carbon Steel
- **Finish:** Electrogalvanized


Part No.	Rod Size	Max Flange Thickness	Max Load (W) lbs
BC92025EG	1/4"-20	5/8" (16 mm)	100 (0.44kN)
BC92037EG	3/8"-16	3/4" (19 mm)	200 (0.89kN)

BCL

Beam Clamp

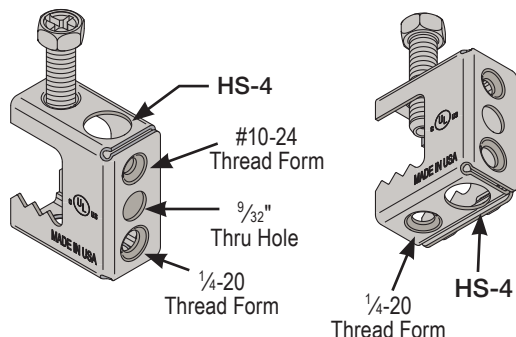

- UL Listed for box support.
- For installation on 1/2" maximum beam flanges.
- Included combo head set screw allows Robertson, Phillips/Slotted and Hex drivers.
- Accepts "S" hooks, threaded rod and bridal rings.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

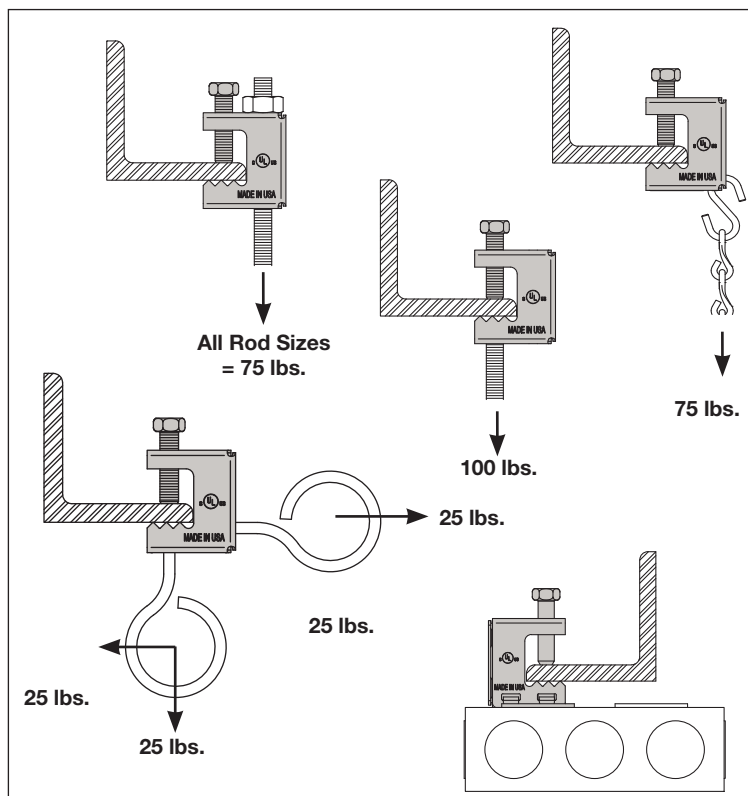

Part No.	Max. Flange Thickness	HS-4
BCL	1/2"	13/32" Thru Hole for 1/4" or 3/8" Rod




Stud Wall Applications



Standard Finish: Pregalvanized (PG)

ZBA Z-Bracket

Adjustable Screw Gun Bracket for Wood or Metal Studs

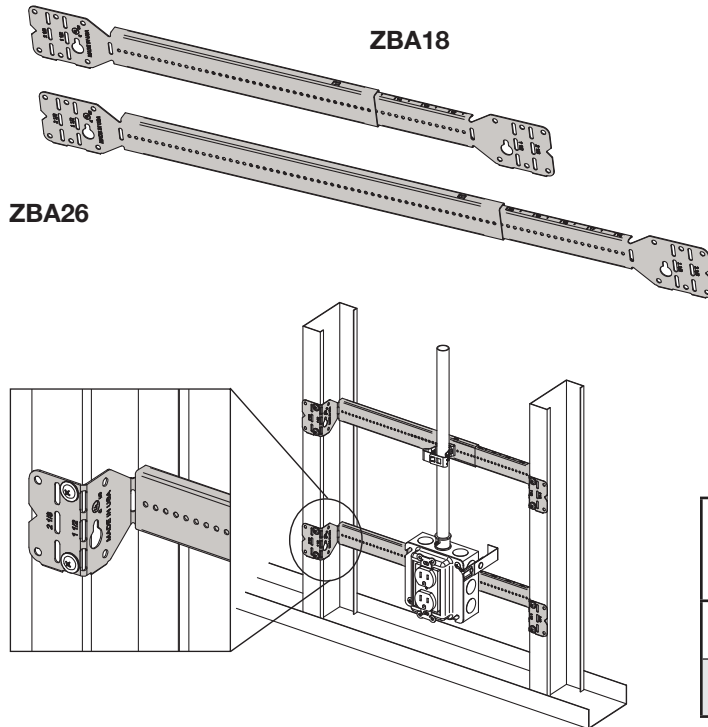


- Complete adjustability for infinite stud spacings.
- Requires only a screw gun to install.
- Pre-punched holes allow easy box or conduit attachment.
- Stud spacing scale stamped on bracket for precise preassembly.
- Locking tabs prevent disassembly.
- Use with SDTSLP8X1/2 screws, see page 236.
- **Material:** Steel
- **Finish:** Pregalvanized


Part No.	Stud Centers	Distance Between Studs	Box Depth
ZBA18PG	11" to 18" (279mm to 457mm)	10" to 16-3/4" (254mm to 425mm)	1-1/2" or 2-1/8" (38mm or 54mm)
ZBA26PG	16" to 26" (406mm to 660mm)	14" to 25-1/4" (356mm to 641mm)	

BBSM

Electrical Box Bracket for Wood or Metal Studs

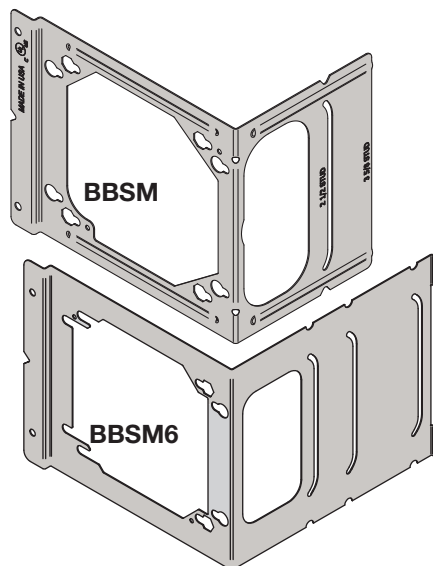

- Used to attach 4" and 4-11/16" outlet boxes to wood or metal studs.
- Large cutouts provided for conduit and fittings.
- Integral farside support prevents outlet box movement.
- Use with SDTSLP8X1/2 screws, see page 236
- **Material:** Steel
- **Finish:** Pregalvanized

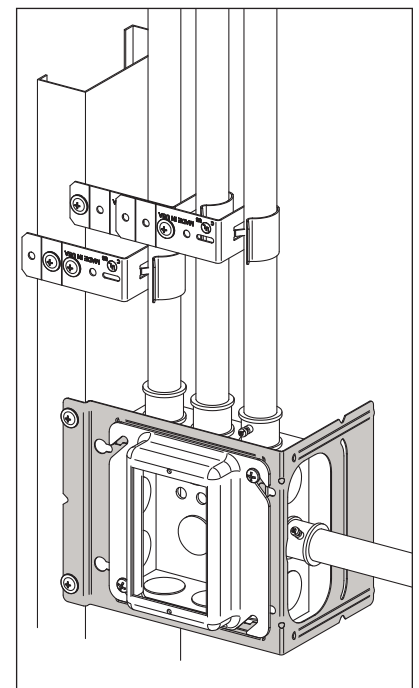

Part No.	Outlet Boxes	Box Depths	Stud Depths
BBSM	4" (102mm) Square, 4-11/16" (119mm) Square and Low Voltage Plaster Rings	1-1/4", 1-1/2", and 2-1/8" Deep (32mm, 38mm, and 54mm)	2-1/2", 3-5/8" (64 mm, 92 mm)
BBSM6 *			5-1/2", 6" (140 mm, 152 mm)

* Not a UL Listed Product



Introduction

Channel

Channel Nuts
& Hardware

General
Fittings

Brackets

Beam
Clamps

Pipe & Conduit
Supports

Electrical
Fittings

Spring
Steel

Concrete
Inserts



Rooftop
Supports

Fiberglass
System

Technical
Data

BB16SM

Rigid Box Mounting Bracket

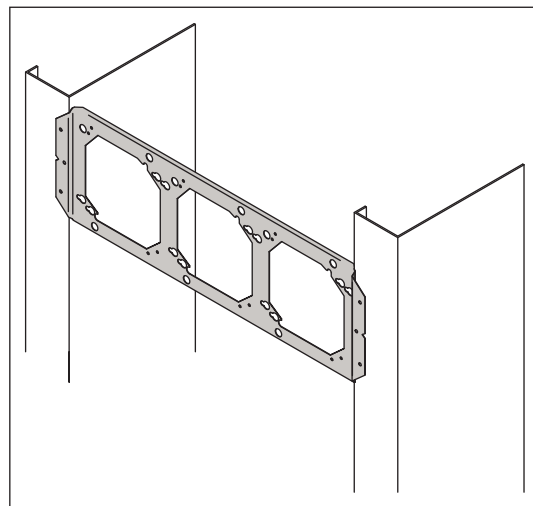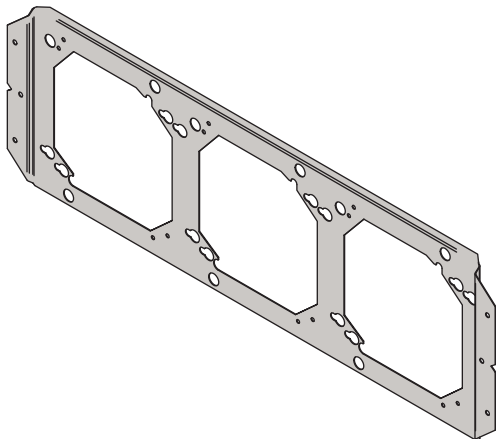


- Eliminates the need for electrical boxes in low voltage installations.
- Supports electrical boxes, plaster rings, or low voltage devices
- Use with SDTSLP8X1/2 screws, see page 236.
- **Material:** Steel
- **Finish:** Pregalvanized


Part No.	Stud Centers	Supports
BB16SM	16"	Mounts up to three 4" and 4-11/16" boxes, plaster rings

LVMN

Low Voltage Mounting Plate for New Construction

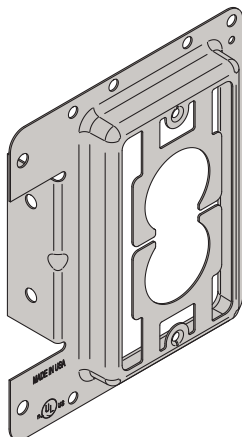

- Wood or Metal Studs
- New work design requires a screw gun for installation.
- Inner tabs allow 3/4" EMT or 1/2" EMT with reducer fitting for conduit applications if required.
- Can be mounted vertically or horizontally on wood or metal studs.
- Replaces electrical box in Class 2 low voltage installations.
- Use with SDTSLP8X1/2 screws, see page 236.
- **Material:** Steel
- **Finish:** Pregalvanized

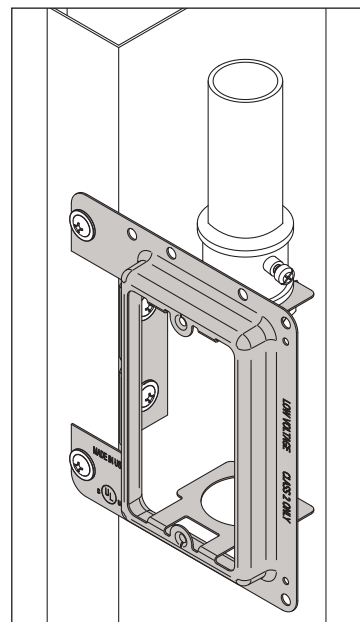

Part No.	Drywall Thickness
LVMN	1/2" thru 5/8" (13mm to 16mm)




Stud Wall Applications




Standard Finish: Pregalvanized (PG)

LVMS

Low Voltage Mounting Plate with Screws for Existing Construction

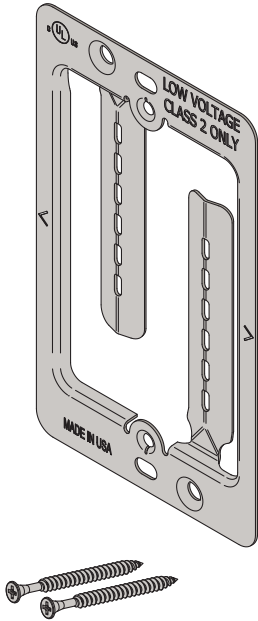


- Old work design requires a drywall saw and screw driver for installation.
- Provided screws make a more secure bracket installation.
- Replaces electrical box in Class 2 low voltage installations.
- **Material:** Steel
- **Finish:** Pregalvanized

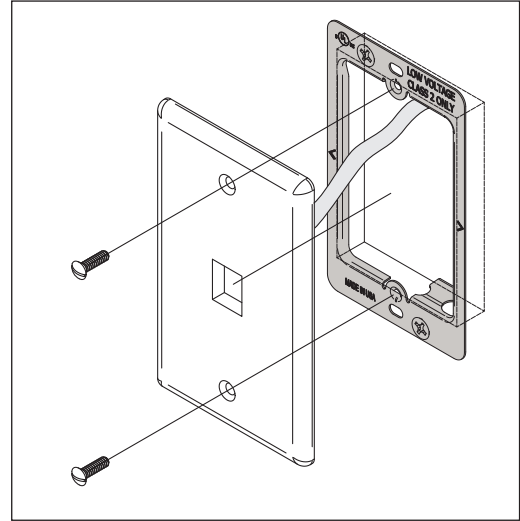


Part No.	Drywall Thickness
LVMS	1/2" thru 1-1/4" (13mm to 32mm)

LVMP

Low Voltage Mounting Plate for Existing Construction

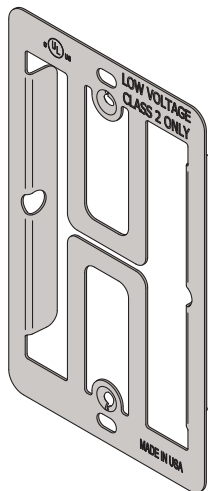

- Old work design requires a drywall saw and screw driver for installation.
- Replaces electrical box in Class 2 low voltage installations.
- **Material:** Steel
- **Finish:** Pregalvanized



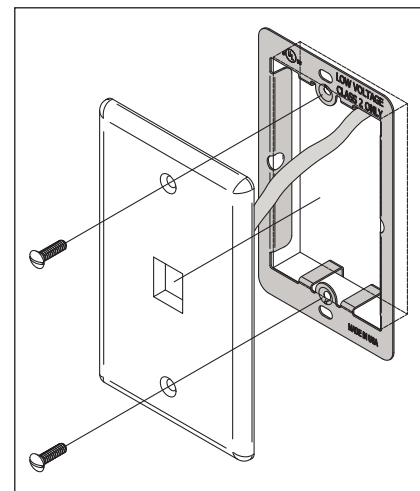


Part No.	Drywall Thickness
LVMP	1/2" thru 1-1/4" (13mm to 32mm)



MSCCC, MSCCCP

Metal Stud Clip with Conduit Clip & Conduit "Push In" Clip

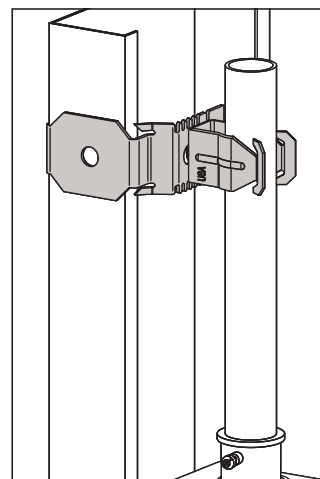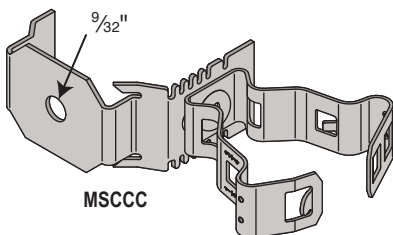


- Supports pipe and conduit to studs.
- Hole provided for additional support.
- Use with SDTSLP8X1/2 screws, see page 236.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Hole Size	Conduit Size
* MSCCC6	9/32"	3/8" Flexible Conduit
* MSCCC8-12		1/2" or 3/4" EMT, Rigid
* MSCCC16		1" EMT, Rigid
* MSCCC20		1-1/4" EMT, Rigid
MSCCCP8	9/32"	1/2" EMT
MSCCCP12		3/4" EMT, 1/2" Rigid
MSCCCP16		1" EMT, 3/4" Rigid


* Not a UL Listed Product

CSSTS

Cable Support Strap for Wood or Metal Studs

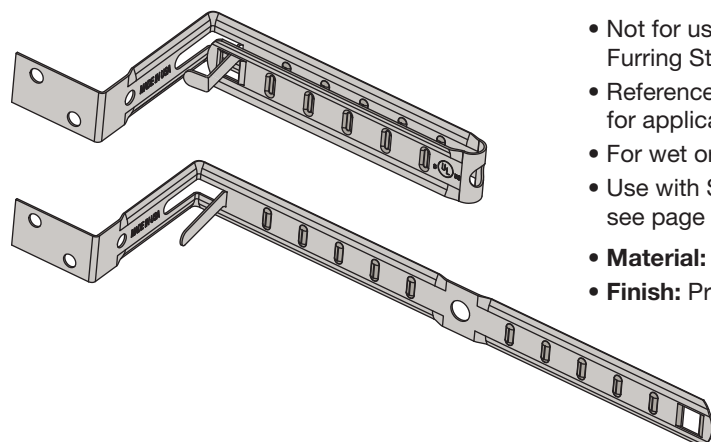

- Not for use with Hat Channel or Furring Strips.
- Reference NEC 1990 Article 300-4d for application
- For wet or dry applications.
- Use with SDTSLP8X1/2 screws, see page 236.
- **Material:** Steel
- **Finish:** Pregalvanized

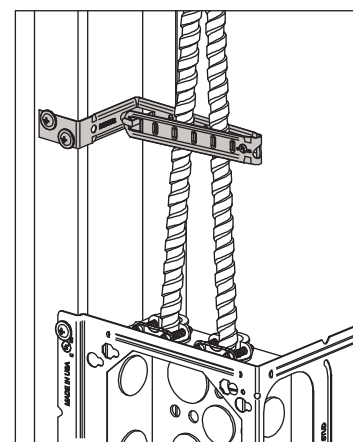

Part No.	Cable Type	Cable Size	Cables per Fastener	Description
CSSTS	Romex™ and Non-Metallic Sheathed Cable	14-2, 12-2, 10-2, 14-3, 12-3, and 10-3 with ground	6 Max.	To Attach Romex Non-Metallic Sheathed Cable, AC, BX, and MC Cable to Wood or Metal Stud
		8-2 and 6-2 with ground	4 Max.	
	Metal Clad (MC) Cable	14-2, 12-2, 10-2, 14-3, 12-3, 10-3, 14-4, 12-4, and 10-4 with ground	4 Max.	




Stud Wall Applications



Standard Finish: Black Zinc Phosphate or Polypropylene


CTS

Conduit Clip to Wood or Metal Stud




- Use with low profile screws SDTSLP8X1/2, see page 236.
- For positioning only.
- For wet or dry applications..
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

CTS812

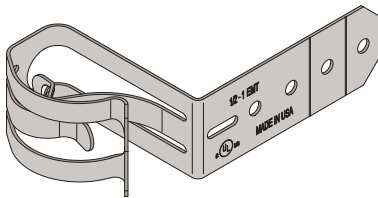


CTS816D

Part No.	Box Depth	MC/AC Cable Size	Conduit Size
CTS812	1-1/2" (38mm)	14-2, 14-3, 12-2, 12-3	1/2" or 3/4" EMT MC/AC (13mm or 19mm)
CTS816D	2-1/8" (54mm)		1/2" or 1" EMT (13mm or 25mm)

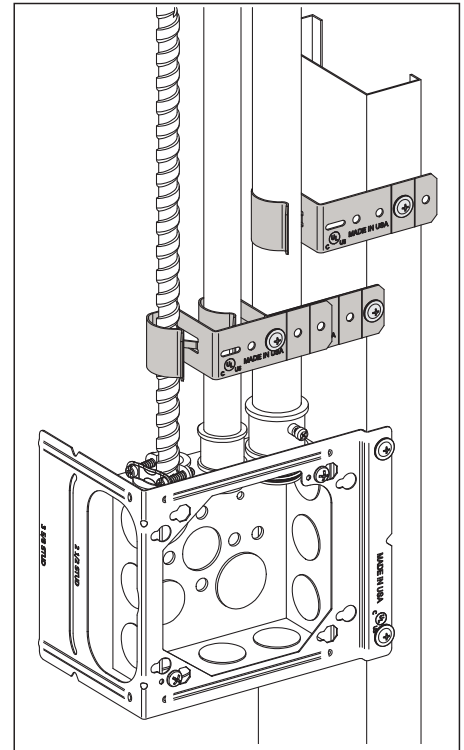


USG

Universal Stud Grommet




- Quick snap on design for 24 gauge to 12 gauge metal studs.
- Protects cable and conduit from damage.
- Makes cable pulling easy by preventing hang-ups on metal edges.
- Universal design for many pre-punched square and round hole sizes.
- **Material:** Polypropylene

Part No.	Pre-Punch Hole Grommet O.D.	Grommet I.D.
USG	1 1/2" (34.1mm)	1.20" (30mm)

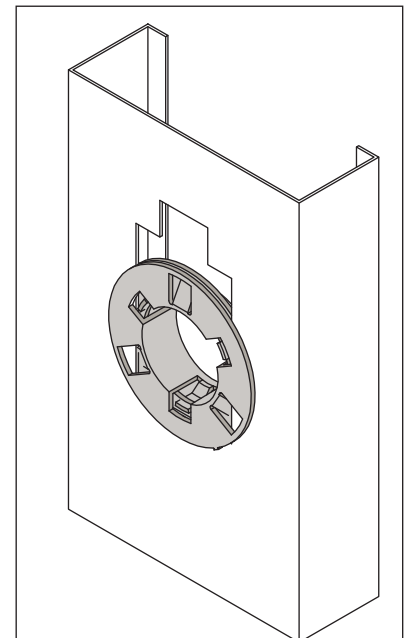


CCMS

MC/AC Cable Clip to Metal Stud




- Cable clip attaches MC/AC cable to metal studs.
- No tools required for application.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

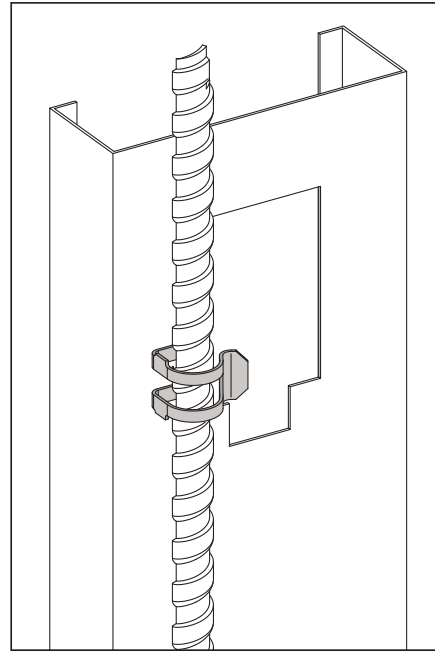


Part No.	Cable Type	Cable Size	Description
CCMS	MC/AC Cable	14-2, 14-3, 12-2, 12-3	MC/AC Cable Clip to Metal Stud

SDTSLP8X1/2

Self Drilling and Tapping Screw




- #8 x 1/2" Long Self drilling and tapping, low profile screws
- Thin head prevents drywall bulge.
- #2 phillips driver for screw gun use.
- **Material:** Steel
- **Finish:** Electrogalvanized

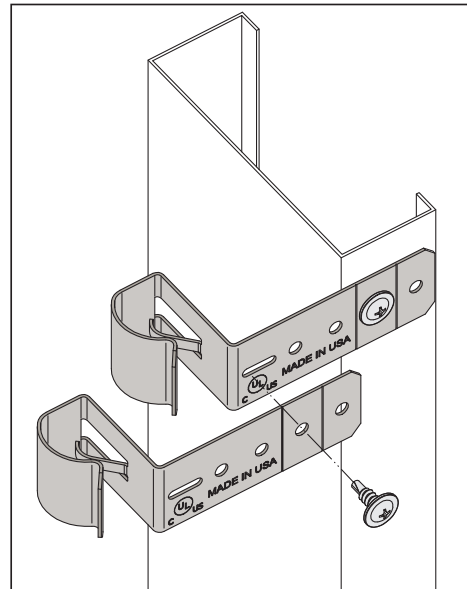


SCT

Support Clip for Troffer Lights & Lay-Ins

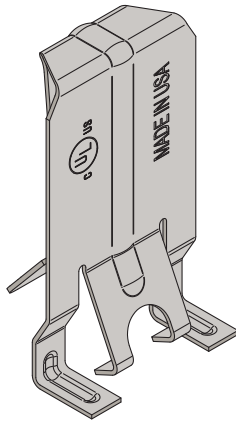

- Four clips per fixture required per UL listing.
- Compatible with straight lip or upturned lip fixtures.
- Tall grid compatible.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

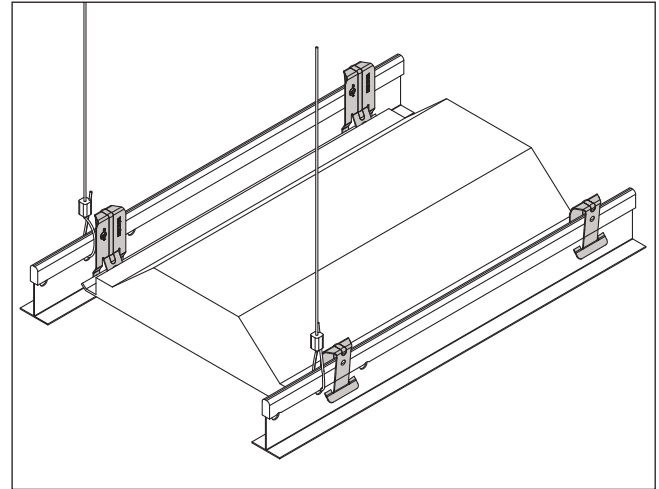


Part No.	Description
SCT15	Support clip for securing troffers, lay-ins and air diffusers to T-Grid

TCB, TCS


Twist Clip with Wing Nut



TCB16

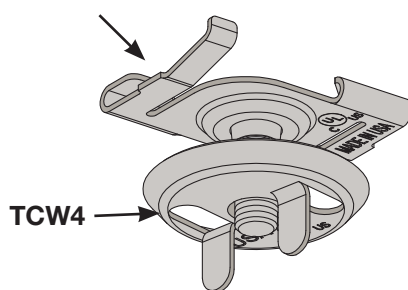

- Use to attach lighting to main T-bars.
- Simple twist on design eliminates the need for installation tools.
- Will not damage T-grid.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

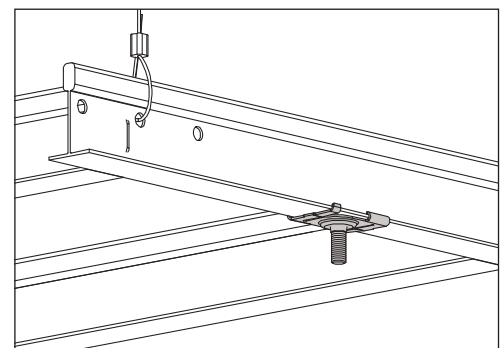


Part No.	Stud Length	Description	Static Load Limit per Fastener
TCB16	5/8"	15/16" Tee Twist Clip with Stud	50 Lbs.
TCW4	—	1/4"-20 Twist Clip Wing Nut	100 Lbs.
TCS16	5/8"	15/16" Tee Twist Clip and Wing Nut	50 Lbs.




EBH

Electrical Box Hanger with Box Mounting Clip

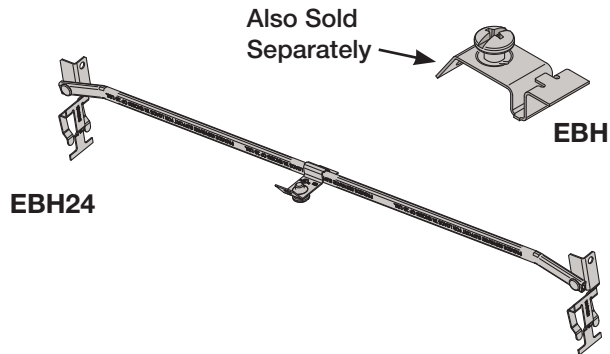


Part No.	Description
EBH24	Complete assembly to flush mount a 1-1/2" box with or without 3/4" device ring or 2-1/8" box to ceiling tile. Used for 24" on center T-grid spacing.
EBH	Box mounting clip and screw for attaching one or multiple boxes to EB 24 assembly.

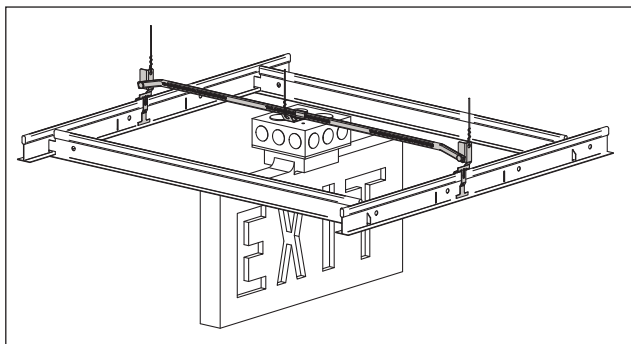

- Complete hanger assembly for supporting an electrical box above T-grid.
- Multiple holes provided for drop wire securement to building structure.
- Dual height feature permits 1-1/2" electrical box with or without 3/4" device ring and 2-1/8" box to be flush mounted with ceiling tile.
- Included mounting clip and 1/4" screw is compatible with standard knock-out configurations.
- **Material:** Steel & Spring Steel
- **Finish:** Pregalvanized & Black Zinc Phosphate

EBH24HD

T-Grid Box Electrical Box Hanger – Heavy Duty

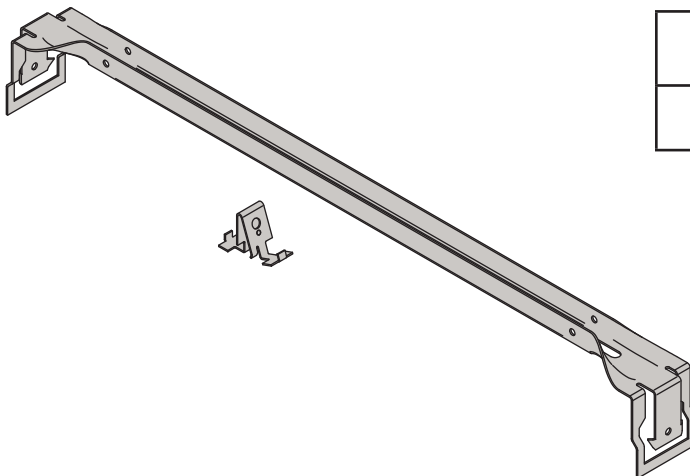



Part No.	Description
EBH24HD	Heavy duty electrical box hanger with box mounting clip for 24" span and 2-1/8" and 1-1/2" boxes

- Easy attachment for supporting an electrical box from T-grid.
- Easily adjust height for 1-1/2" box by breaking tabs.
- Easy attachment for drop wire securement to clip or bar.
- **Material:** Steel
- **Finish:** Pregalvanized



TBC

T-Bar Clip

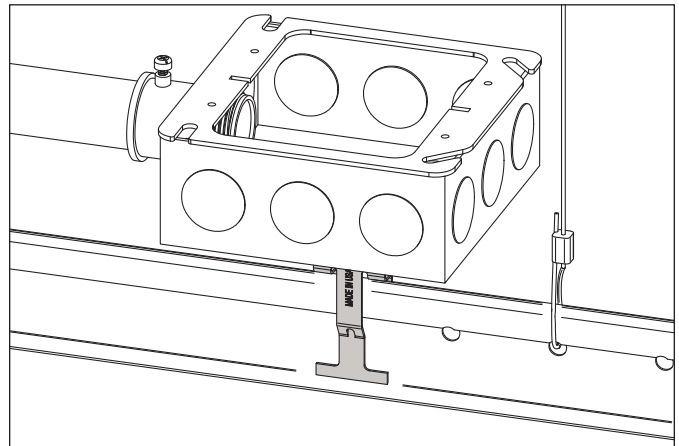
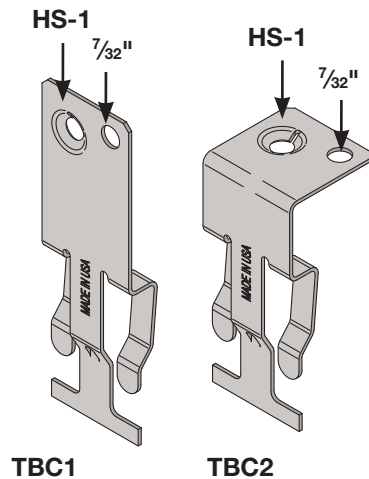


- Attaches outlet boxes and conduit clips above T-grid.
- $\frac{7}{32}$ " hole provided for drop wire.
- Clip snaps onto T-bar. No tools required.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	HS-1
TBC1	$\frac{1}{4}$ " x 20 Thread Form
TBC2	$\frac{1}{4}$ " x 20 Thread Form

TBC

T-Bar Clip with Conduit Clip

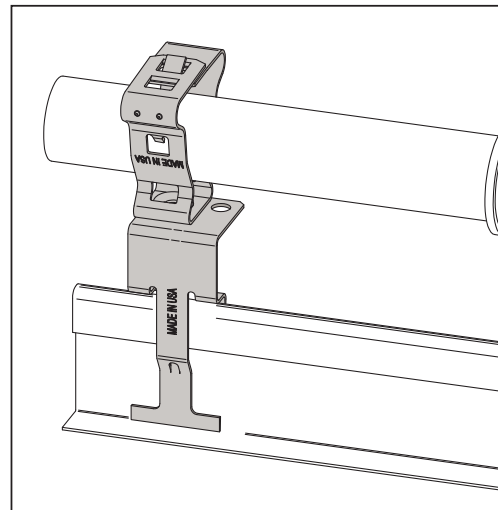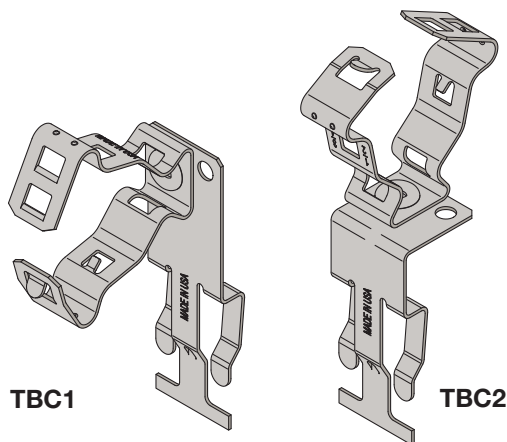



- Supports pipe and conduit above T-bars.
- Conduit clip rotates 360 degrees.
- No screws or bolts required. No installation tools required.
- $\frac{7}{32}$ " Hole provided for drop wire.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Conduit Size
TBC1C6	$\frac{3}{8}$ " Flexible Conduit
TBC1C812	$\frac{1}{2}$ " or $\frac{3}{4}$ " EMT, Rigid
TBC1C16	1" EMT, Rigid
TBC2C6	$\frac{3}{8}$ " Flexible Conduit
TBC2C812	$\frac{1}{2}$ " or $\frac{3}{4}$ " EMT, Rigid
TBC2C16	1" EMT, Rigid



TBC SMCCP, TMCCP

T-Bar Clip with Conduit "Push In" Clip

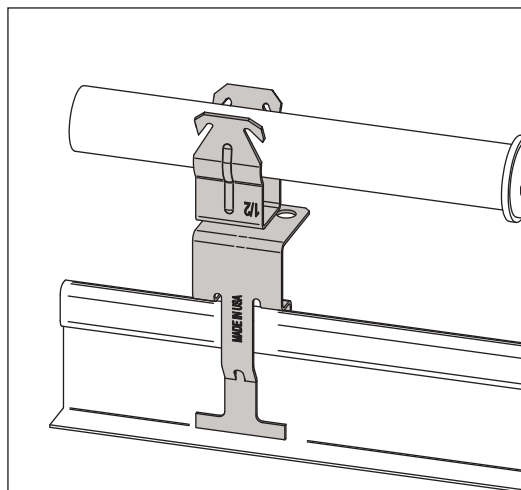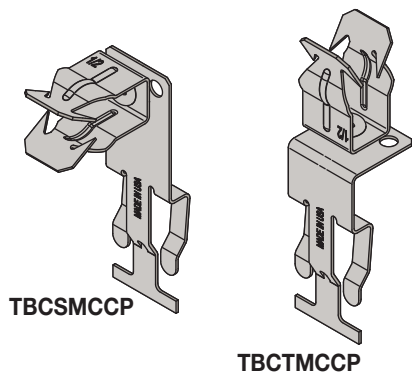

- Supports pipe and conduit above T-bars.
- Conduit clip rotates 360 degrees.
- No screws, bolts or installation tools required.
- 7/32" hole provided for drop wire.
- **Material:** Spring Steel
- **Finish:** Black Zinc Phosphate

Part No.	Mount	Conduit Size
TBCSMCCP8	Side Mount	1/2" EMT
TBCSMCCP12		3/4" EMT, 1/2" Rigid
TBCSMCCP16		1" EMT, 3/4" Rigid
TBCTMCCP8	Top Mount	1/2" EMT
TBCTMCCP12		3/4" EMT, 1/2" Rigid
TBCTMCCP16		1" EMT, 3/4" Rigid



Concrete Inserts




Channel Material Specifications		
Material	ASTM Designation	ASTM Description
Hot Rolled: Channel	A 1011SS GR33	Hot rolled carbon steel sheet and strip, structural quality.
Cold Rolled: Channel	A 1008SS GR33	Cold rolled carbon sheet steel.
Stainless Steel: Channel	A 240 TYPE 304	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	

Channel Finish Specifications	
Finish	Description
Mill-Galvanized (Pre-Galvanized)	Galvanized steel used in the manufacture of Channel sections conforms to ASTM A 653 GR33 G90. Uncoated edges resulted from slitting, punching and channel cut off are present.
Electroplated	Fittings and hardware supplied as "Electro-Galvanized" in accordance with ASTM B 633.
Hot Dip Galvanized After Fabrication	Channel and fittings which are hot dip galvanized after fabrication conform to one of the following specifications: ASTM A 123, ASTM A153, or ASTM A386.
Special Coatings	Other commercially available finishes can be supplied per specification when required to protect applications.

See page 23 for Material or Finish ordering codes for part numbers.


Spot Concrete Insert

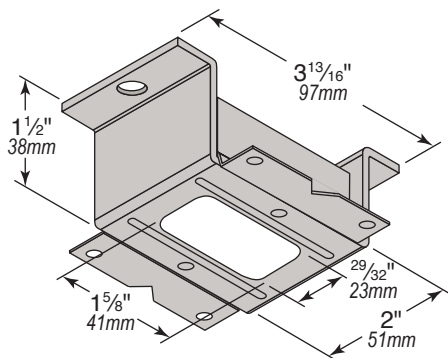

Designed to be used with spot concrete insert nuts
The $\frac{7}{8}$ " x 1- $\frac{5}{8}$ " knock-out is removed after concrete pour. The spot concrete insert nut is placed in the slot, and then the rod is screwed into the nut. The nut is secured in place by turning the rod. Lateral adjustment is made by loosening the nut and relocating. When selecting rod size, refer to "Load Ratings" of Thread Hanger Rods" chart on page 78.

SPECIFYING Brand & Part No.	Allowable Load Lbs. (kN)	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
 WESANCO			
W7000	1,300 (2.67 kN)	VC1	CI
Load based on adequate concrete			


Concrete Insert Nut

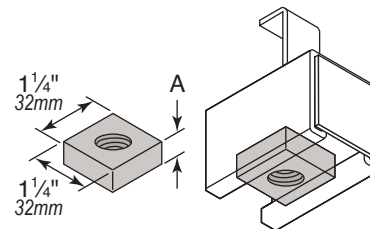

SPECIFYING Brand & Part No.	Tapped Size	Blank Size "A"	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
 WESANCO				
WCN25	¼"-20	¼" (6mm)	VCN25	CIN 0025
WCN31	⅝"-18		VCN31	--
WCN37	⅜"-16		VCN37	CIN 0037
WCN37+RP	⅜"-16 - Pipe Tap	½" (13mm)	VCN37-RP	--
WCN50	½"-13		VCN50	CIN 0050
WCN50-RP	½"-13 - Pipe Tap		VCN50-RP	--
WCN62	⅝"-11		VCN62	CIN 0062
WCN75	¾"-10		VCN75	CIN 0075
WCN87	⅞"- 9		--	CIN 0087

Continuous Concrete Insert Anchor End Cap Options

For Inserts on Pages 244 thru 246

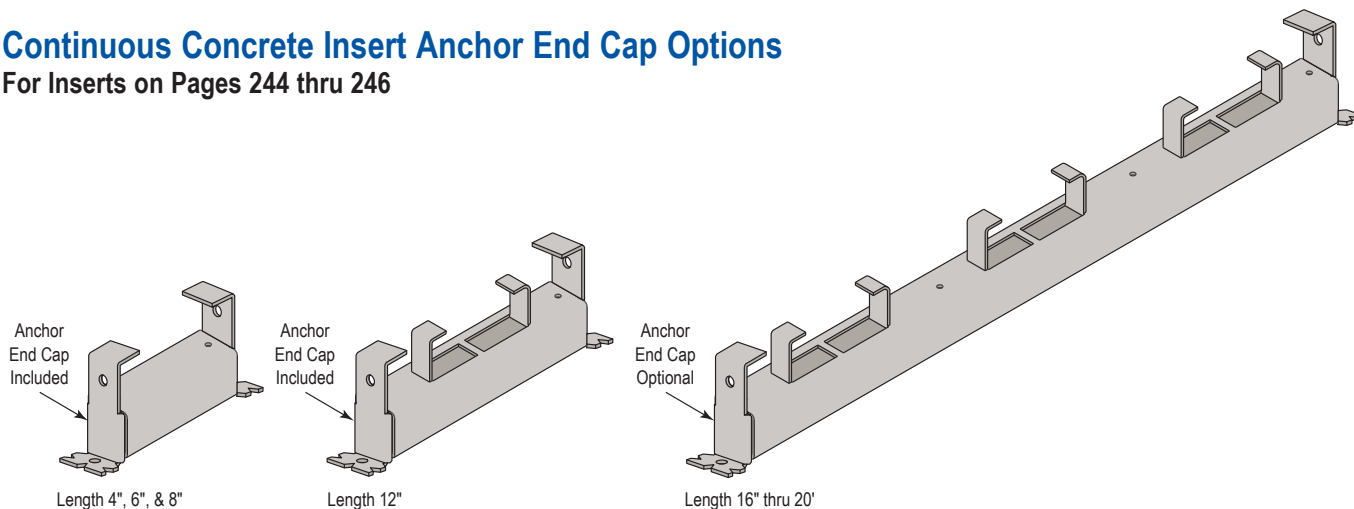

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.						
	See Page	Channel Gauge	Channel Size	Insert Length Options	Anchor End Caps Available	VERSABAR	FLORIDA STRUT
 WESANCO							
W7200 Series	244	12 gauge	1-5/8" (41mm) x 1-5/8" (41mm)	4" thru 20'	Yes	VC1000 Series	W7250 thru W7270 Series
W7300 Series	245		1-5/8" (41mm) x 1-3/8" (35mm)	4" thru 20'	Yes	VC6000 Series	W7350 thru W7370 Series
W7800 Series	246		1-5/8" (41mm) x 1" (35mm)	4" thru 20'	Yes	VC10000 Series	W7550 thru W7570 Series
W7900 Series	247		1-5/8" (41mm) x 7/8" (22mm)	16" thru 20'	--	--	W7954 thru W7970 Series

* Flared Wedge Insert

Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)



Continuous Inserts

Our Inserts Are Shipped Fully Assembled, Ready For Installation.

Hook style inserts are available in W200, W300, W800, and W900 channel sizes, with either a galvanized or plain finish. Continuous inserts provide economical and convenient attachment points for all strut system components without the use of hazardous powder actuated fasteners or costly drilling. Connections can be made at any point along the slot opening by using lateral locking nuts or square insert nuts. Square nuts shown on page 242 may be used with the following continuous concrete inserts. Hook style anchors are lanced out of the channel spine and spaced as shown in the accompanying diagram. $\frac{3}{16}$ " diameter knock-outs are spaced at 9" (229mm) intervals for nailing inserts to the form. Continuous hook style inserts are shipped ready for installation with factory installed Cello-Foam filler strip, taped spine openings, and end caps to prevent concrete seepage. Hook style inserts 18" or shorter are factory equipped with anchor style end caps.

NOTE: To reach maximum resistance to pull out of the nut in continuous concrete inserts, a fitting should be mounted on the slot surface and the rod or bolt connected. Without the exterior fitting, the nut pull out resistance is reduced to approximately one half the normal pull out

Pull out load ratings for channel nuts are shown on page 70 of this catalog.



NOTE: Under no circumstances subject any channel insert to a load without a $\frac{1}{4}$ " thick fitting, bracket or pipe support, mounted on the channel slot surface.

Continuous Concrete Insert Part Number Selection Chart Example

For All Inserts on Pages 244 thru 247

Continuous Concrete Insert Part Number Descriptions					
Base Profile Part Number	Add Finish Code	Add Option Code	Description of Options	Add Length Code	Completed Part Number
W7200	PG	N	Insert Only	36IN	W7200PGN36IN
W7200	PG	T	Insert & Tape	36IN	W7200PGT36IN
W7200	PG	TE	Insert, Tape, & Ethafoam	36IN	W7200PGTE36IN
W7200	PG	TA	Insert, Tape, & Anchor End Caps	36IN	W7200PGTA36IN
W7200	PG	TC	Insert, Tape, & End Caps	36IN	W7200PGTC36IN
W7200	PG	TEA	Insert, Tape, Ethafoam, & Anchor End Caps	36IN	W7200PGTEA36IN
W7200	PG	TEC	Insert, Tape, Ethafoam, & End Caps	36IN	W7200PGTEC36IN

**** Note:** When using welded strip, plastic end caps will be used.
Stainless steel sizes with Anchor end caps, the end caps will be hot dip galvanized

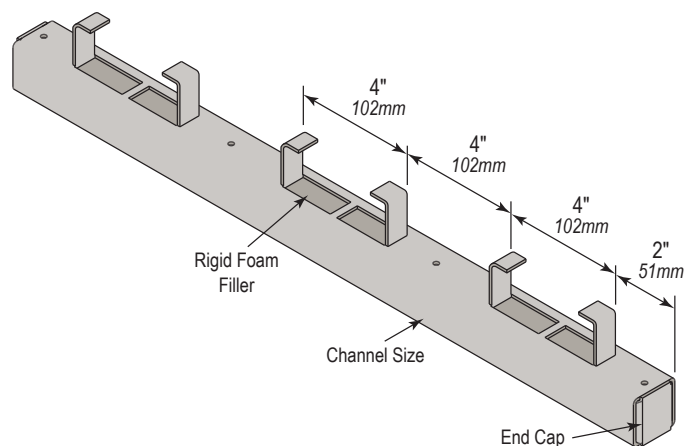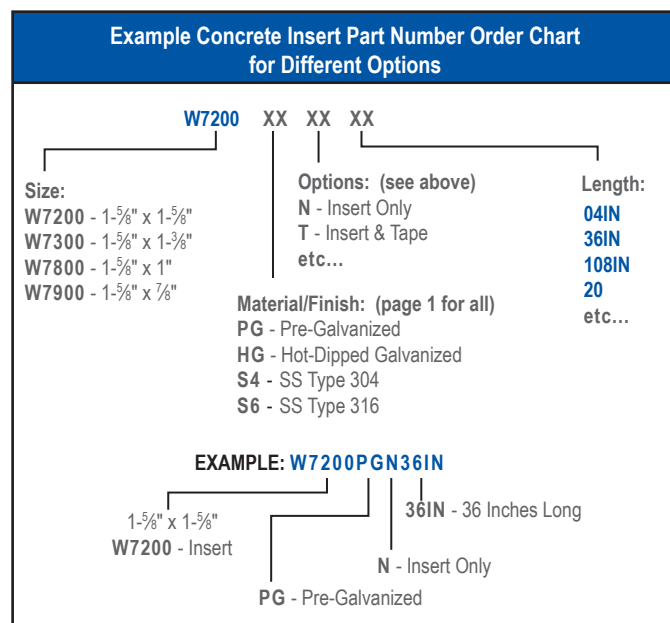

Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: 1- $\frac{7}{8}$ " (48mm); Width: 1- $\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)



Concrete Inserts - 1⁵/₈" x 1⁵/₈" - 12 Gauge

When ordering specify finish. Available in plain, pre-galvanized, hot dip galvanized after fabrication, type 304 and 316 stainless steel.
Stainless steel sizes with Anchor end caps, the end caps will be hot dip galvanized
Refer to page 243 for continuous concrete insert part number selection chart to build complete part number based on desired options.

SPECIFYING Brand & Part No.	Size	Note	Safe Uniform Load per L.F. † Lbs. (kN)	DISCONTINUED Brands & Part No.	
 WESANCO				VERSABAR	FLORIDA STRUT
W7200 x x 04IN	4" (102mm)	1	800 (3.56 kN)	--	W7250
W7200 x x 06IN	6" (152mm)		1000 (4.45 kN)	VC1006	W7251
W7200 x x 08IN	8" (203mm)		1200 (5.34 kN)	--	W7252
W7200 x x 12IN *	12" (305mm)	2	2000 (8.90 kN)	VC1012	W7253 *
W7200 x x 16IN	16" (406mm)	3		--	W7254
W7200 x x 20IN	20" (508mm)			--	W7255
W7200 x x 24IN	24" (610mm)			VC1024	W7256
W7200 x x 32IN	32" (813mm)			--	W7257
W7200 x x 36IN	36" (914mm)			VC1036	W7257A
W7200 x x 40IN	40" (1016mm)			--	W7258
W7200 x x 48IN	4' - 0" (1.2m)			VC1048	W7259
W7200 x x 60IN	5' - 0" (1.5m)			VC1060	W7260
W7200 x x 72IN	6' - 0" (1.8m)			VC1072	W7261
W7200 x x 84IN	7' - 0" (2.1m)			VC1084	W7262
W7200 x x 96IN	8' - 0" (2.4m)			VC1096	W7263
W7200 x x 108IN	9' - 0" (2.7m)			VC1108	W7264
W7200 x x 10	10' - 0" (3.0m)			VC1120	W7265
W7200 x x 144IN	12' - 0" (3.6m)			VC1144	W7266
W7200 x x 168IN	14' - 0" (4.2m)			VC1168	W7267
W7200 x x 192IN	16' - 0" (4.8m)			VC1192	W7268
W7200 x x 216IN	18' - 0" (5.4m)			VC1216	W7269
W7200 x x 20	20' - 0" (6.1m)			VC1240	W7270


* W7200 12IN utilizes tab channel (punched & anchor caps)

† Embedded in 3,000 psi or better concrete, Safety Factor = 3

Note 1: Unpunched channel will utilize only anchor end caps.

Note 2: Channel be punched and will utilize only anchor end caps.

Note 3: Channel be punched and anchor end caps are optional.

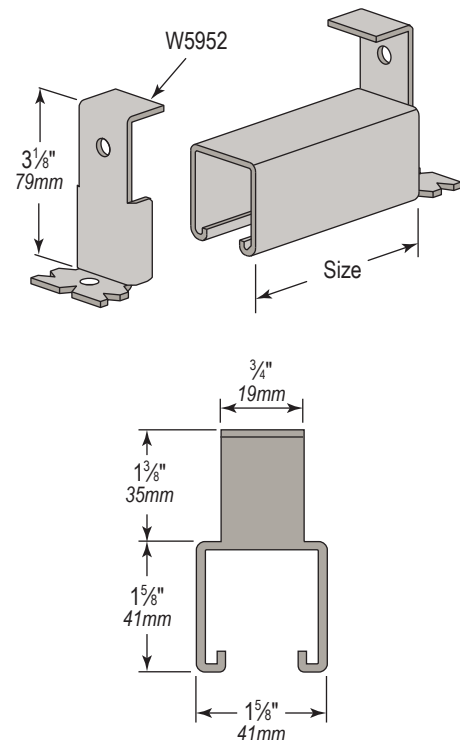

Concentrated load on the end 2" (51mm) of W7200 Series should not exceed 1000#. Inserts must be surrounded by sufficient concrete to conform to design shear stress. Concrete insert should be nailed to form every 16" to 24" (406mm to 635mm)

Continuous Concrete Insert Part Number Selection Chart

Continuous Concrete Insert Part Number Descriptions					
Base Profile Part Number	Add Finish Code	Add Options Code	Description of Options	Add Length Code	Completed Part Number
W7200	PG	N	Insert Only	36IN	W7200PGN36IN
W7200	PG	T	Insert & Tape	36IN	W7200PGT36IN
W7200	PG	TE	Insert, Tape, & Ethafoam	36IN	W7200PGTE36IN
W7200	PG	TA	Insert, Tape, & Anchor End Caps	36IN	W7200PGTA36IN
W7200	PG	TC	Insert, Tape, & End Caps	36IN	W7200PGTC36IN
W7200	PG	TEA	Insert, Tape, Ethafoam, & Anchor End Caps	36IN	W7200PGTEA36IN
W7200	PG	TEC	Insert, Tape, Ethafoam, & End Caps	36IN	W7200PGTEC36IN

** Note: When using welded strip, plastic end caps will be used.
Stainless steel sizes with Anchor end caps, the end caps will be hot dip galvanized

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/8" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)



Concrete Inserts - 1⁵/₈" x 1³/₈" - 12 Gauge

When ordering specify finish. Available in plain, pre-galvanized, hot dip galvanized after fabrication, type 304 and 316 stainless steel.
Stainless steel sizes with Anchor end caps, the end caps will be hot dip galvanized
Refer to page 243 for continuous concrete insert part number selection chart to build complete part number based on desired options.

SPECIFYING Part No.	Size	Note	Max Allowable Point Load Lbs. (kN)	Min. Spacing of Point Load In. (mm)	Max Allowable Uniform Load	DISCONTINUED Brands & Part No.	
						VERSABAR	FLORIDA STRUT
 WESANCO							
W7300 x x 04IN	4" (102mm)	1	800 (3.56 kN)	—	800 (3.56 kN)	—	W7350
W7300 x x 06IN	6" (152mm)		1,000 (4.45 kN)	—	1,000 Lbs. (4.45 kN)	VC6006	W7351
W7300 x x 08IN	8" (203mm)		1,200 (5.34 kN)	—	1,200 Lbs. (5.34 kN)	—	W7352
W7300 x x 12IN *	12" (305mm)	2	2,000 (8.90 kN)	—	2,000 Lbs. (8.90 kN)	VC6012	W7353 *
W7300 x x 16IN	16" (406mm)	3		12" (305mm)	4,000 Lbs. (17.79 kN)	—	W7354
W7300 x x 20IN	20" (508mm)					—	W7355
W7300 x x 24IN	24" (610mm)					VC6024	W7356
W7300 x x 32IN	32" (813mm)				—	W7357	
W7300 x x 36IN	36" (914mm)				VC6036	W7357A	
W7300 x x 40IN	40" (1016mm)				—	W7358	
W7300 x x 48IN	4' - 0" (1.2m)				VC6048	W7359	
W7300 x x 60IN	5' - 0" (1.5m)				VC6060	W7360	
W7300 x x 72IN	6' - 0" (1.8m)				VC6072	W7361	
W7300 x x 84IN	7' - 0" (2.1m)				VC6084	W7362	
W7300 x x 96IN	8' - 0" (2.4m)				VC6096	W7363	
W7300 x x 108IN	9' - 0" (2.7m)				VC6108	W7364	
W7300 x x 10	10' - 0" (3.0m)				VC6120	W7365	
W7300 x x 144IN	12' - 0" (3.6m)				VC6144	W7366	
W7300 x x 168IN	14' - 0" (4.2m)				VC6168	W7367	
W7300 x x 192IN	16' - 0" (4.8m)				VC6192	W7368	
W7300 x x 216IN	18' - 0" (5.4m)				VC6216	W7369	
W7300 x x 20	20' - 0" (6.1m)	VC6240		W7370			


* W7300 x x 12IN utilizes tab channel (punched & anchor caps)

† Embedded in 3,000 psi or better concrete, Safety Factor = 3

Note 1: Unpunched channel will utilize only anchor end caps.

Note 2: Channel be punched and will utilize only anchor end caps.

Note 3: Channel be punched and anchor end caps are optional.

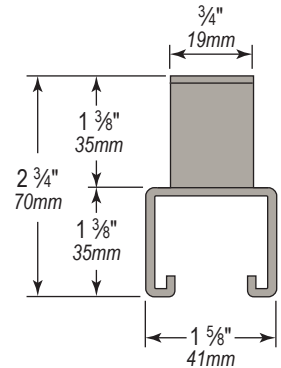

Continuous Concrete Insert Part Number Selection Chart

Continuous Concrete Insert Part Number Descriptions					
Base Profile Part Number	Add Finish Code	Add Option Code	Description of Options	Add Length Code	Completed Part Number
W7300	PG	N	Insert Only	36IN	W7300PGN36IN
W7300	PG	T	Insert & Tape	36IN	W7300PGT36IN
W7300	PG	TE	Insert, Tape, & Ethafoam	36IN	W7300PGTE36IN
W7300	PG	TA	Insert, Tape, & Anchor End Caps	36IN	W7300PGTA36IN
W7300	PG	TC	Insert, Tape, & End Caps	36IN	W7300PGTC36IN
W7300	PG	TEA	Insert, Tape, Ethafoam, & Anchor End Caps	36IN	W7300PGTEA36IN
W7300	PG	TEC	Insert, Tape, Ethafoam, & End Caps	36IN	W7300PGTEC36IN

** Note: When using welded strip, plastic end caps will be used.
Stainless steel sizes with Anchor end caps, the end caps will be hot dip galvanized

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)



Concrete Inserts - 1⁵/₈" x 1" - 12 Gauge

When ordering specify finish. Available in plain, pre-galvanized, hot dip galvanized after fabrication, type 304 and 316 stainless steel. Stainless steel sizes with Anchor end caps, the end caps will be hot dip galvanized. Refer to page 243 for continuous concrete insert part number selection chart to build complete part number based on desired options.

SPECIFYING Brand & Part No.				DISCONTINUED Brands & Part No.	
 WESANCO	Size	Note	Safe Uniform Load per L.F. † Lbs. (kN)	VERSABAR	FLORIDA STRUT
W7800 x x 04IN	4" (102mm)	1	500 (2.22 kN)	--	W7550
W7800 x x 06IN	6" (152mm)		750 (3.34 kN)	VC10006	W7551
W7800 x x 08IN	8" (203mm)		1000 (4.45 kN)	--	W7552
W7800 x x 12IN *	12" (305mm)	2	1500 (6.67 kN)	VC10012	W7553 *
W7800 x x 16IN	16" (406mm)	3		--	W7554
W7800 x x 20IN	20" (508mm)			--	W7555
W7800 x x 24IN	24" (610mm)			VC10024	W7556
W7800 x x 32IN	32" (813mm)			--	W7557
W7800 x x 36IN	36" (914mm)			VC10036	W7557A
W7800 x x 40IN	40" (1016mm)			--	W7558
W7800 x x 48IN	4' - 0" (1.2m)			VC10048	W7559
W7800 x x 60IN	5' - 0" (1.5m)			VC10060	W7560
W7800 x x 72IN	6' - 0" (1.8m)			VC10072	W7561
W7800 x x 84IN	7' - 0" (2.1m)			VC10084	W7562
W7800 x x 96IN	8' - 0" (2.4m)			VC10096	W7563
W7800 x x 108IN	9' - 0" (2.7m)			VC10108	W7564
W7800 x x 10	10' - 0" (3.0m)			VC10120	W7565
W7800 x x 144IN	12' - 0" (3.6m)			VC10144	W7566
W7800 x x 168IN	14' - 0" (4.2m)			VC10168	W7567
W7800 x x 192IN	16' - 0" (4.8m)			VC10192	W7568
W7800 x x 216IN	18' - 0" (5.4m)			VC10216	W7569
W7800 x x 20	20' - 0" (6.1m)	VC10240	W7570		

* W7800 12IN utilizes tab channel (punched & anchor caps)

† Embedded in 3,000 psi or better concrete, Safety Factor = 3

Note 1: Unpunched channel will utilize only anchor end caps.

Note 2: Channel be punched and will utilize only anchor end caps.

Note 3: Channel be punched and anchor end caps are optional.


* W7800 12IN utilizes tab channel (punched & anchor caps)

† Embedded in 3,000 psi or better concrete, Safety Factor = 3

Note 1: Unpunched channel will utilize only anchor end caps.

Note 2: Channel be punched and will utilize only anchor end caps.

Note 3: Channel be punched and anchor end caps are optional.



Continuous Concrete Insert Part Number Selection Chart

Continuous Concrete Insert Part Number Descriptions					
Base Profile Part Number	Add Finish Code	Add Option Code	Description of Options	Add Length Code	Completed Part Number
W7800	PG	N	Insert Only	36IN	W7800PGN36IN
W7800	PG	T	Insert & Tape	36IN	W7800PGT36IN
W7800	PG	TE	Insert, Tape, & Ethafoam	36IN	W7800PGTE36IN
W7800	PG	TA	Insert, Tape, & Anchor End Caps	36IN	W7800PGTA36IN
W7800	PG	TC	Insert, Tape, & End Caps	36IN	W7800PGTC36IN
W7800	PG	TEA	Insert, Tape, Ethafoam, & Anchor End Caps	36IN	W7800PGTEA36IN
W7800	PG	TEC	Insert, Tape, Ethafoam, & End Caps	36IN	W7800PGTEC36IN

** Note: When using welded strip, plastic end caps will be used.

Stainless steel sizes with Anchor end caps, the end caps will be hot dip galvanized

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/8" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Concrete Inserts - 1⁵/₈" x 7⁷/₈" - 12 Gauge

SPECIFYING Brand & Part No.	Size	Max Allowable Point Load Lbs. (kN)	Min. Spacing of Point Load In. (mm)	Max Allowable Uniform Load	DISCONTINUED Brands & Part No.	
					VERSA- BAR	FLORIDA STRUT
W7900						
W7900 x x 16IN	16" (406mm)	1,500 (6.67 kN)	12" (305mm)	3,000 Lbs. (13.34 kN)	--	W7954
W7900 x x 20IN	20" (508mm)				--	W7955
W7900 x x 24IN	24" (610mm)				--	W7956
W7900 x x 32IN	32" (813mm)			1,500 Lbs./Ft. (2,232.2 kg/m)	--	W7957
W7900 x x 36IN	36" (914mm)				--	W7957A
W7900 x x 40IN	40" (1016mm)				--	W7958
W7900 x x 48IN	4' - 0" (1.2m)				--	W7959
W7900 x x 60IN	5' - 0" (1.5m)				--	W7960
W7900 x x 72IN	6' - 0" (1.8m)				--	W7961
W7900 x x 84IN	7' - 0" (2.1m)				--	W7962
W7900 x x 96IN	8' - 0" (2.4m)				--	W7963
W7900 x x 108IN	9' - 0" (2.7m)				--	W7964
W7900 x x 10	10' - 0" (3.0m)				--	W7965
W7900 x x 144IN	12' - 0" (3.6m)				--	W7966
W7900 x x 168IN	14' - 0" (4.2m)				--	W7967
W7900 x x 192IN	16' - 0" (4.8m)				--	W7968
W7900 x x 216IN	18' - 0" (5.4m)				--	W7969
W7900 x x 20	20' - 0" (6.1m)				--	W7970

† Embedded in 3,000 psi or better concrete, Safety Factor = 3

When ordering specify finish. Available in plain, pre-galvanized, hot dip galvanized after fabrication, type 304 and 316 stainless steel. Stainless steel sizes with Anchor end caps, the end caps will be hot dip galvanized. Refer to page 243 for continuous concrete insert part number selection chart to build complete part number based on desired options.



Continuous Concrete Insert Part Number Selection Chart


Continuous Concrete Insert Part Number Descriptions					
Base Profile Part Number	Add Finish Code	Add Option Code	Description of Options	Add Length Code	Completed Part Number
W7900	PG	N	Insert Only	36IN	W7900PGN36IN
W7900	PG	T	Insert & Tape	36IN	W7900PGT36IN
W7900	PG	TE	Insert, Tape, & Ethafoam	36IN	W7900PGTE36IN
W7900	PG	TC	Insert, Tape, & End Caps	36IN	W7900PGTC36IN
W7900	PG	TEC	Insert, Tape, Ethafoam, & End Caps	36IN	W7900PGTEC36IN

** Note: When using welded strip, plastic end caps will be used.

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




End Caps




SPECIFYING Brand & Part No.	Channel Usage	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5909	3-1/4" - 12 gauge	VF100111	--
W5908	2-1/2" - 12 gauge	VF10013	--
W5910	2-7/16" - 12 gauge	--	--
W5930	1-5/8" - 12 gauge	VF1001	EC10
W5931	1-5/8" - 14 Gauge	VF10012	EC11
W5933	1-3/8" - 12 gauge	VF10016	--
W5938	1" - 12 gauge	VF100110	--
W5935	7/8" - 12 gauge	--	EC12
W5936	13/16" - 14 Gauge	VF10014	EC12

Polyurethane End Caps




SPECIFYING Brand & Part No.	Color	Channel Usage	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W5920PLASTICWHT	White	1-5/8"	--	--
W5920PLASTICRED	Red		--	--
W5920PLASTICGRY	Grey		--	--
W5925PLASTICWHT	White	13/16" & 7/8"	--	--
W5925PLASTICRED	Red		--	--
W5925PLASTICGRY	Grey		--	--

Cover Plastic End Caps




SPECIFYING Brand & Part No.	Color	Channel Usage	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W5900PLASTIC	White	3-1/4" or	VF100111PL	--
W5900PLASTICRED	Red	1-5/8" Back to Back	--	--
W5930PLASTIC	White	1-5/8" or	VF10011PL	EC09000VC
W5930PLASTICRED	Red	13/16" Back-to-Back	--	EC09000RVC
W5935PLASTIC	White	13/16"	VF10014PL	EC08000VC
W5935PLASTICRED	Red		--	EC08000RVC

Form Fit Plastic End Caps

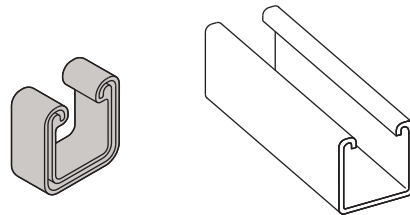

SPECIFYING Brand & Part No.	Channel Usage	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
WESANCO			
W5900-M	1-5/8" Back to Back 12 gauge	--	--
W5930-M	1-5/8" - 12 gauge 1-5/8" - 14 Gauge	--	--
W5935-M	13/16" - 14 Gauge	--	--

Anchor End Caps

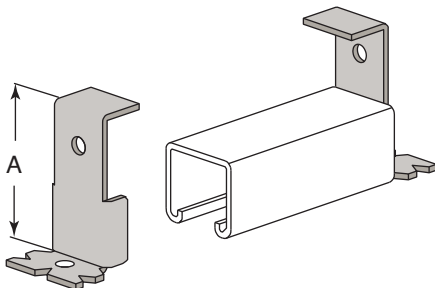

SPECIFYING Brand & Part No.	A Height	Channel Usage	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W5952	3-1/8" (79mm)	1-5/8"	VF2002	CI20
W5953	2-3/4" (70mm)	1-3/8"	VF20026 *	CI21
W5958	2-3/8" (60mm)	1"	VF200210 *	--
W5959	2-1/4" (57mm)	7/8"	--	--
W5951	2-5/16" (59mm)	13/16"	VF20024	--

* Height is slightly different, check with representative

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)



Cush-A-Block® Rooftop Supports


75% Faster Strut Install and Change-Out

Built-in Channel Guide



Straight Strut Installation

Embedded Fasteners

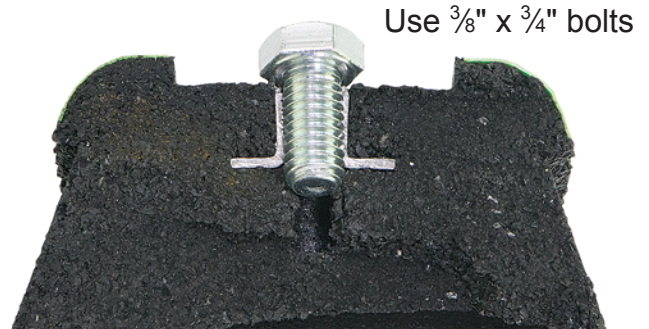

No Rust on the Roof


Easy-carry Hand Grip



Simple to Lift and Carry

- 100% Recycled Rubber Qualifies for LEED Credits
- Meets the Buy America Act and American Reinvestment Recovery Act
- Resistant to Freeze and Thaw

Water Flow-through

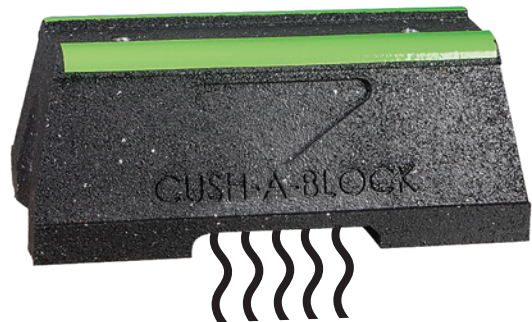

Helps Prevent Mold and Ice Dams


- Dampens Vibrations
- Compatible with Most Rooftop Materials
- Eco-Green Reflective Safety Strip Won't Peel or Flake

Cush-A-Block is manufactured under U.S. patent D824749 and one pending, and Canadian patents #175942 and one pending

Solar Racking | Pipe & Conduit | HVAC | Rooftop Walkways

The channel for Cush-A-Block support assemblies includes a variety of options. The strut can be made in special lengths, finishes, and alloys including Aluminum, Stainless Steel both 304 & 316, PVC coated, Powder coated, Zinc Trivalent Chromium, Pre-Galvanized and Hot Dipped Galvanized.

Embedded nut eliminates any thru holes and prevents leaks or any rust from forming on the underside of the fastener.

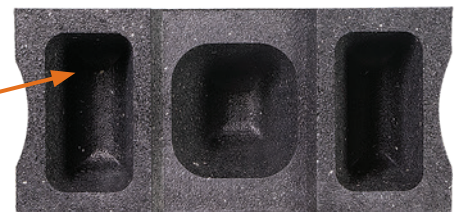

See page 23 for Material or Finish ordering codes for part numbers.

CBB “Biggie” Series

Plain Base



The “Biggie” Block



The channel for Cush-A-Block support assemblies includes a variety of options. The strut can be made in special lengths, finishes, and alloys including Aluminum, Stainless Steel both 304 & 316, PVC coated, Powder coated, Zinc Trivalent Chromium, Pre-Galvanized and Hot Dipped Galvanized.


Embedded Fasteners



Quick Strut Change-Out

- 100% Recycled Rubber Qualifies for LEED Credits
- Meets the Buy America Act and American Reinvestment Recovery Act
- Resistant to Freeze and Thaw

Water Flow-through

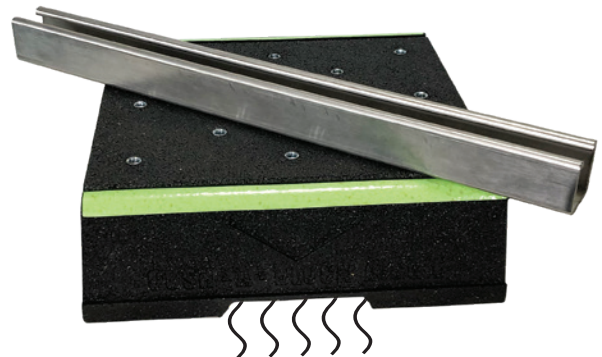

Helps Prevent Mold and Ice Dams

- Dampens Vibrations
- Compatible with Most Rooftop Materials
- Eco-Green Reflective Safety Strip Won't Peel or Flake



Cush-A-Block® Rooftop Supports






Finishes: Pre-galvanized (PG) or Hot Dipped Galvanized (HG)

CBB “Biggie” Series

Plain Base

Embedded Fastener Layout Provides an Amazing Variety of Channel or Fitting Options

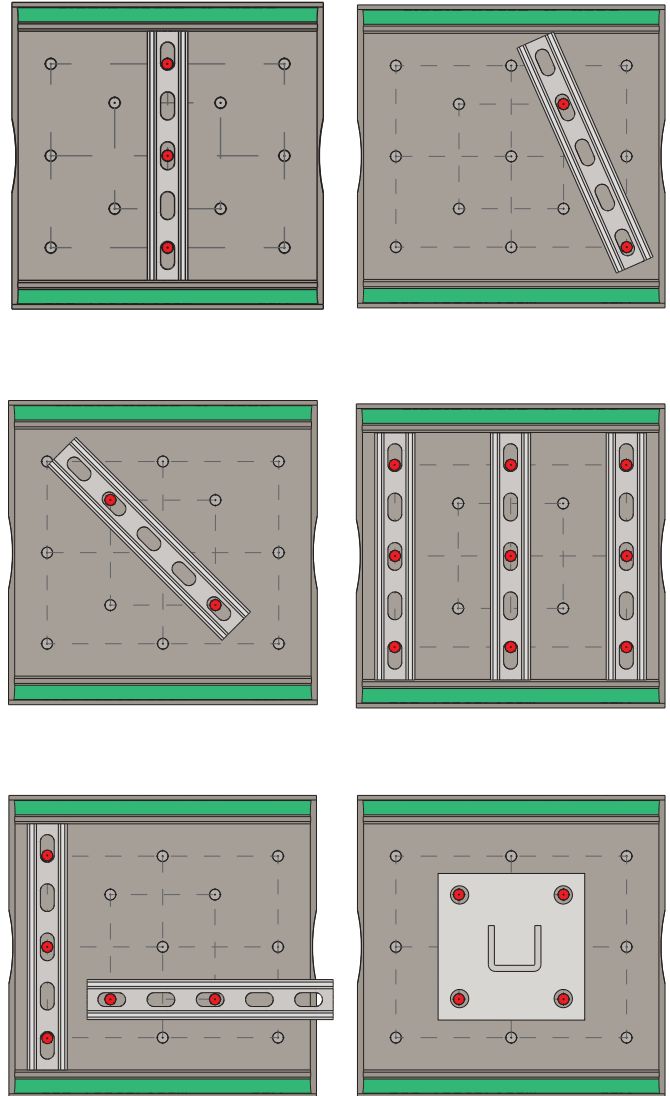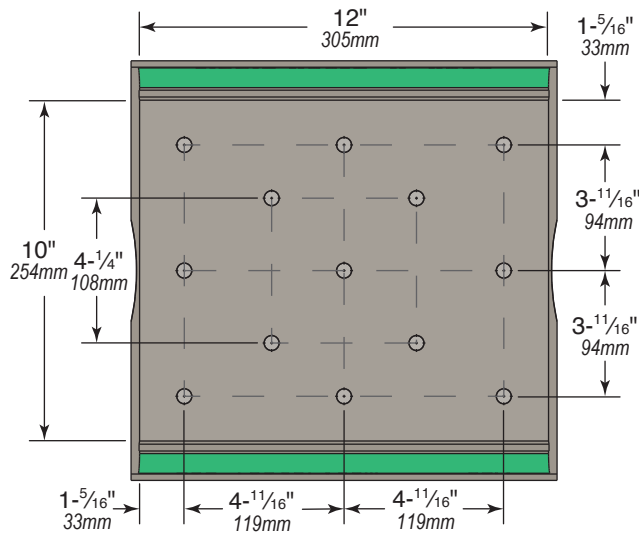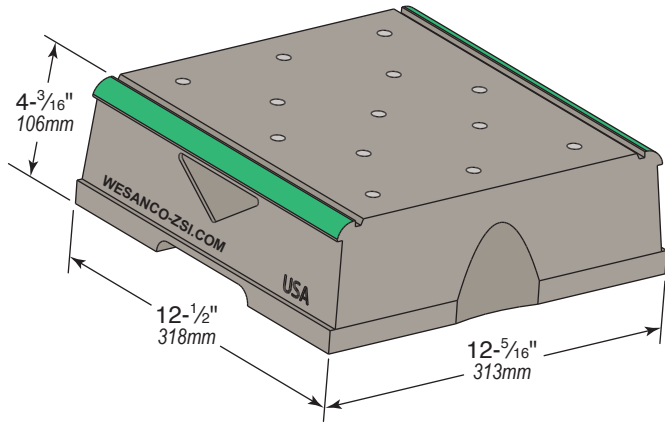


CBB “Biggie” Block Base	
Part No.	Uniform Load Capacity Lbs (kN)*
CBB	7,500 * (33.36 kN)
* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity. Surface Area of Block to Roof Contact = 62.8in²	



CBN Series

Plain Base

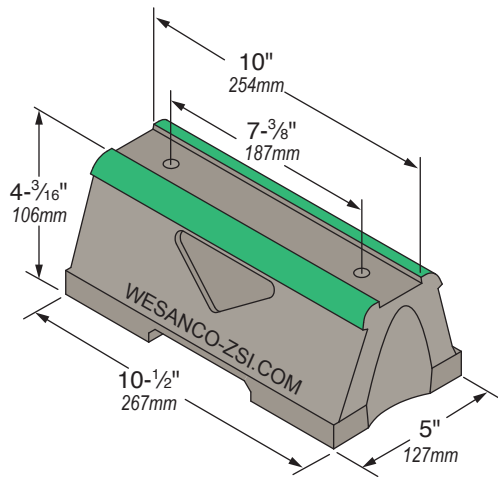

Note: The embedded fasteners are conveniently spaced to allow attachment of slotted channel.

The CBN-Base Rooftop Support is UV resistant and suitable for installation on most types of roofing material or other flat surfaces. Can be used as a curb (sleeper) replacement. Screw fasteners can be used to attach one or two hole pipe straps or a piece of strut (not included).



CBN-Base Series

Part No.	Uniform Load Capacity Lbs (kN)*
CBN	2,500 * (11.12 kN)

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

CBN-BR Bridge Series

Support With Channel

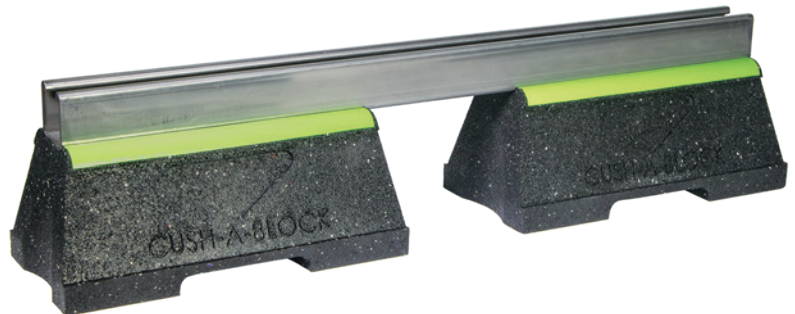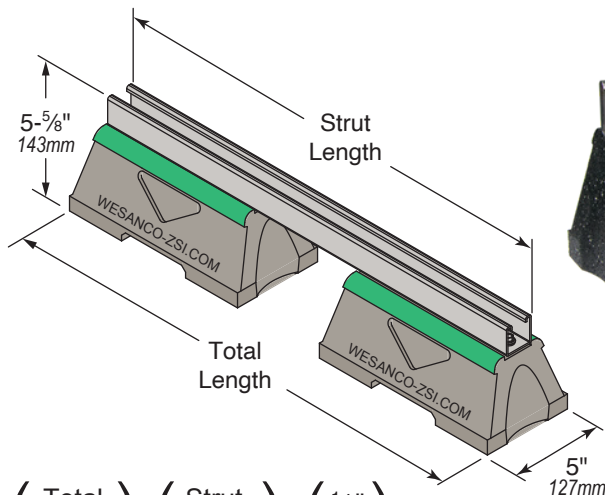

$$\left(\text{Total Length} \right) = \left(\text{Strut Length} \right) + \left(\frac{1}{2}'' \right) \left(\frac{13}{mm} \right)$$

Like all of the Cush-A-Block supports, the CBN-BR Bridge Rooftop Supports are perfect for supporting natural gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications.

The CBN-BR Series provides a longer mounting surface with strut lengths up to 60" (1.5m). Custom lengths are available upon request.

Standard strut mount pipe clamps are used to secure the pipes.

CBN-BR Bridge Series Supports with 1-5/8" (41mm) Pre-Galv. or Hot Dip Galv. Steel Channel

Part No.	Strut Length	Total Length	Uniform Load Lbs (kN)*
CBN28BR	28" (711mm)	28-1/2" (724mm)	1,491* (6.63 kN)
CBN36BR	36" (914mm)	36-1/2" (927mm)	1,160* (5.15 kN)
CBN42BR	42" (1m)	42-1/2" (1.08m)	994* (4.42 kN)
CBN50BR	50" (1.2m)	50-1/2" (1.28m)	835* (3.71 kN)
CBN60BR	60" (1.5m)	60-1/2" (1.54m)	696* (3.09 kN)

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.




Cush-A-Block® Rooftop Supports




Finishes: Pre-galvanized (PG) or Hot Dipped Galvanized (HG)

CBN Series

Support With Metal Channel

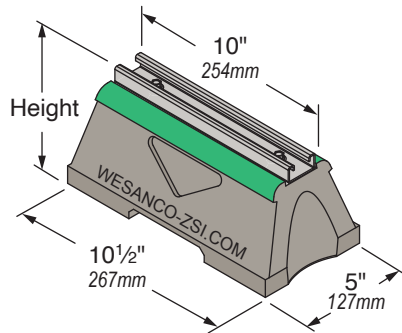

Shown with 1 3/16" Strut

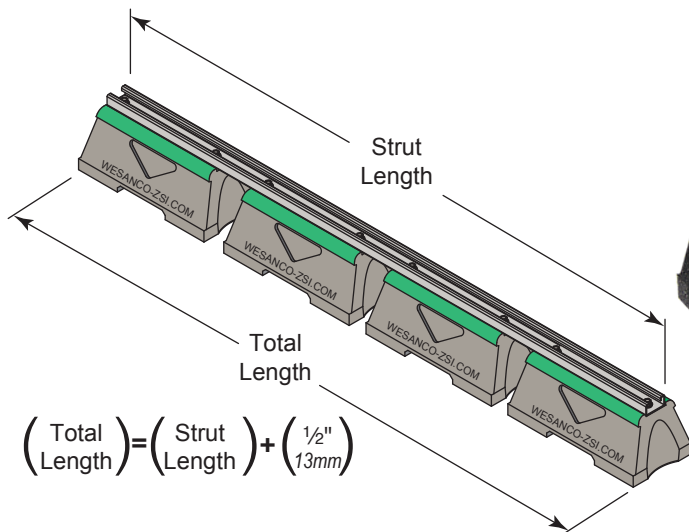

CBN2RD shown with two bases

The CBN Series provides a longer mounting surface with strut lengths up to 46.82" (1.2m). Custom lengths are available upon request

Part No.	No. of Bases	Height	Strut Length	Total Length	Uniform Load Lbs (kN)*
CBN-Support With ¹³ / ₁₆ " (21mm) Pre-Galv. or Hot Dip Galv. Steel Channel					
CBN1S	1	4- ¹³ / ₁₆ " (122mm)	10" (254mm)	10- ¹ / ₂ " (267mm)	2,500 * (11.12 kN)
CBN2S	2		22" (559mm)	22- ¹ / ₂ " (572mm)	5,000 * (22.24 kN)
CBN3S	3		34" (864mm)	34- ¹ / ₂ " (876mm)	7,500 * (33.36 kN)
CBN4S	4		46" (1.17m)	46- ¹ / ₂ " (1.18m)	10,000 * (44.48 kN)
CBN-Support With 1- ⁵ / ₈ " (41mm) Pre-Galv. or Hot Dip Galv. Steel Channel					
CBN1D	1	5- ⁵ / ₈ " (143mm)	10" (254mm)	10- ¹ / ₂ " (267mm)	2,500 * (11.12 kN)
CBN2D	2		22" (559mm)	22- ¹ / ₂ " (572mm)	5,000 * (22.24 kN)
CBN3D	3		34" (864mm)	34- ¹ / ₂ " (876mm)	7,500 * (33.36 kN)
CBN4D	4		46" (1.17m)	46- ¹ / ₂ " (1.18m)	10,000 * (44.48 kN)
CBN Support With 2- ⁷ / ₁₆ " (62mm) Pre-Galv. or Hot Dip Galv. Steel Channel					
CBN1RD	1	6- ⁷ / ₁₆ " (164mm)	10" (254mm)	10- ¹ / ₂ " (267mm)	2,500 * (11.12 kN)
CBN2RD	2		22" (559mm)	22- ¹ / ₂ " (572mm)	5,000 * (22.24 kN)
CBN3RD	3		34" (864mm)	34- ¹ / ₂ " (876mm)	7,500 * (33.36 kN)
CBN4RD	4		46" (1.17m)	46- ¹ / ₂ " (1.18m)	10,000 * (44.48 kN)
* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.					



CBN-EX Series


Support With Raised Channel

CBN-BR Extension Rooftop Supports are perfect for supporting natural gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications.



Standard strut mount pipe clamps are used to secure the pipes. Custom lengths are available upon request.



CBN8EX,
CBN12EX

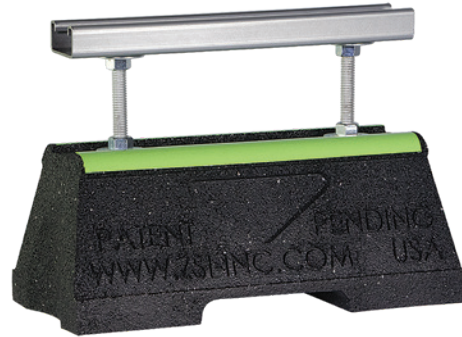

CBN16EX

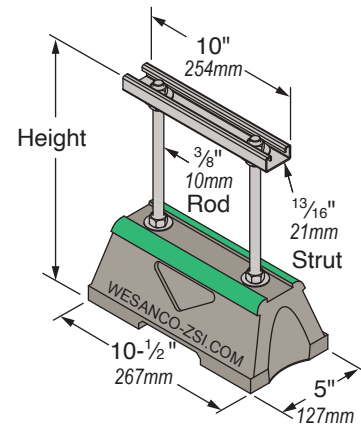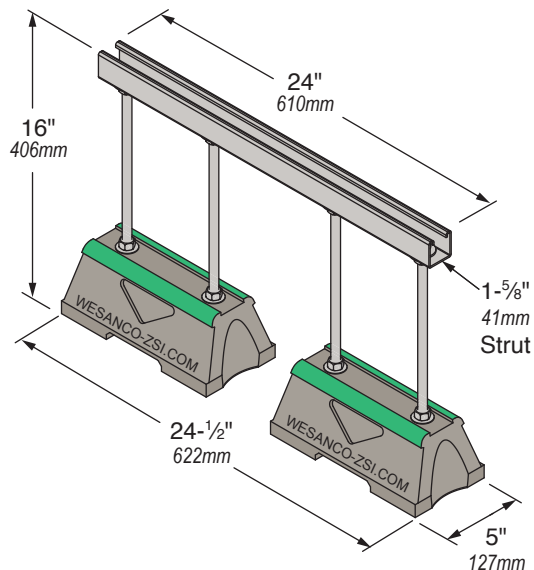

CBN-EX Extension Series Support with $\frac{3}{8}$ " Threaded Rod
Extension and Pre-Galv. or Hot Dip Galv. Steel Channel

Part No.	No. of Bases	Height	Strut Size	Uniform Load Lbs (kN) *
CBN8EX	1	8" (203mm)	$\frac{13}{16}$ " (21mm)	1,000 * (4.44 kN)
CBN12EX	1	12" (305mm)		1,000 * (4.44 kN)
CBN16EX	2	16" (406mm)	$1\text{-}\frac{5}{8}$ " (41mm)	2,000 * (8.89 kN)

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.



Cush-A-Block® Rooftop Supports






Finishes: Pre-galvanized (PG) or Hot Dipped Galvanized (HG)

CBN-PRB Series

Support With Pipe Roller

The CBN-PRB Rooftop Supports are designed for superior support of natural gas and refrigeration pipes. The roller allows for longitudinal movements of the pipe. This support is suitable for most types of roofing material or other flat surfaces.

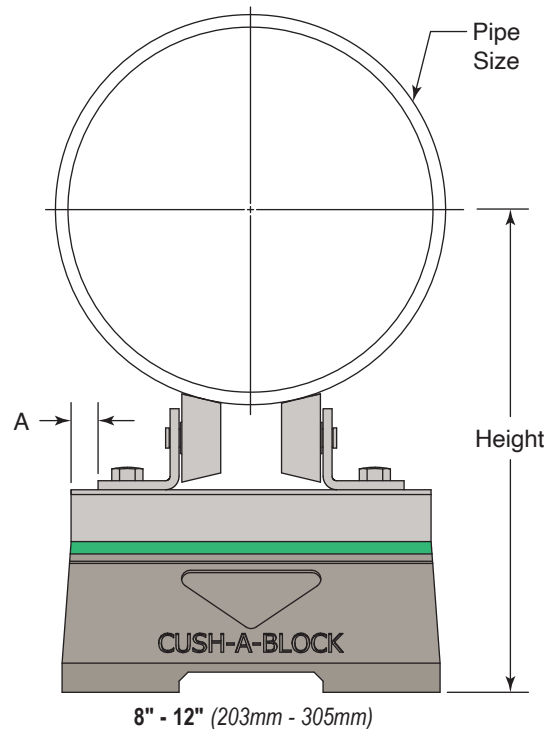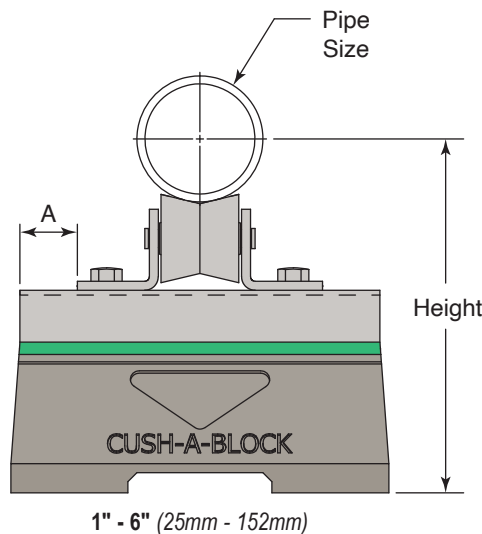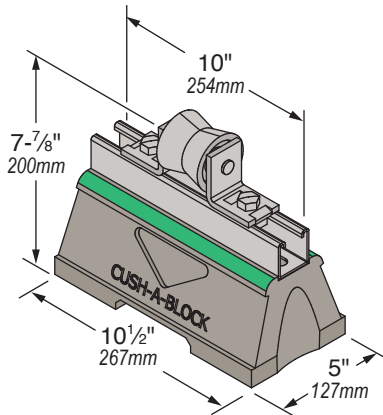

CBN-PRB Roller-Series with 1-5/8" (41mm) Pre-Galv or Hot Dip Galv. Steel Channel with Rollers					
Part No.	Pipe Size (O.D.)	Height	A	Uniform Load Lbs (kN)*	
CBNPRB	1"	8.707" (221mm)	1.594" (40mm)	2,500 * (11.12 kN)	
	1-1/2"	9.008" (229mm)			
	2"	9.252" (235mm)			
	2-1/2"	9.509" (242mm)			
	3"	9.831" (250mm)			
	4"	10.345" (263mm)			
	6"	11.437" (291mm)	1.000" (25mm)		
	8"	12.323" (313mm)			
	12"	14.384" (365mm)			
	18"	16.904" (429mm)	0" (0mm)		


* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.




CBN-RB Series

Support With Raised Bridge Medium Support

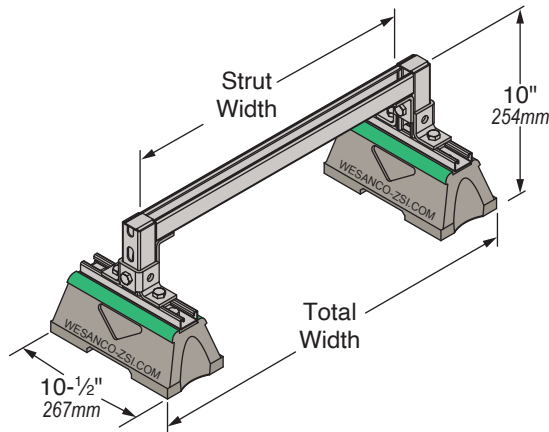

The CBN-RB Medium Rooftop Supports can support natural gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications. They are designed for rooftop applications requiring a heavier load bearing capacity, and are suitable for most types of roofing material or other flat surfaces. Custom lengths are available upon request.

Standard strut mount pipe clamps are used to secure the pipes.

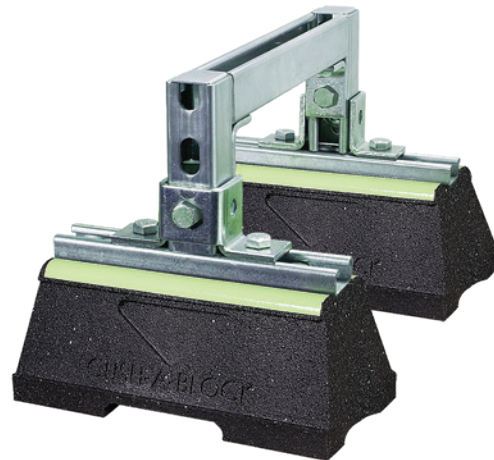


Raised Bridge Medium Support with 2 CBN Bases & 1-5/8" (41mm) Pre-Galv or Hot Dip Galv. Steel Channel

Part No.	Total Width	Strut Width	Uniform Load Lbs (kN)*
CBN1RB	18.65" (474mm)	12" (305mm)	3,000 * (13.34 kN)
CBN2RB	30.65" (779mm)	24" (610mm)	1,500 * (6.67 kN)

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

CBN-RB Series

Support With Raised Channel Heavy Support

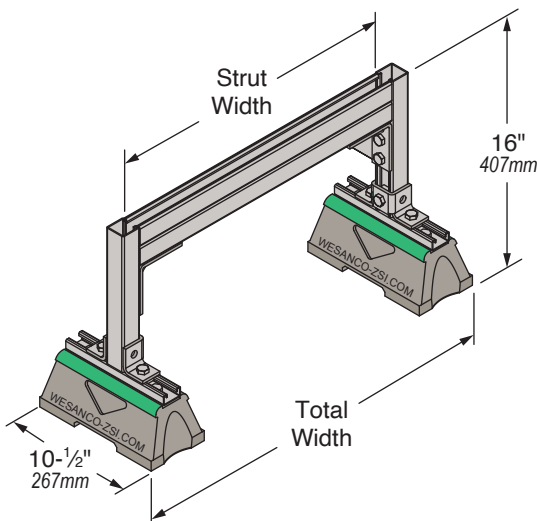

The CBN-RB Heavy Rooftop Supports is designed for rooftop applications requiring a heavier load bearing capacity. It is suitable for most types of roofing material or other flat surfaces. Custom lengths are available upon request.

Standard strut mount pipe clamps are used to secure the pipes.



Raised Bridge Heavy Support with 2 CBN Bases & 3-1/4" (83mm) Back-to-Back Pre-Galv or Hot Dip Galv. Steel Channel

Part No.	Total Width	Strut Width	Uniform Load Lbs (kN)*
CBN3RB	30.65" (779mm)	24" (610mm)	2,500†* (15.56 kN)
CBN4RB	42.65" (1.1m)	36" (914mm)	2,500†* (14.45 kN)

* This load is only for the capacity of the components in this assembly.

† Beam load is limited by weld shear

Please consult roofing manufacturer or engineer for roof load capacity.



Cush-A-Block® Rooftop Supports



Finishes: Pre-galvanized (PG) or Hot Dipped Galvanized (HG)


CBN-DSFW Series

Fixed Width Duct Support



The CBN-DSFW Series is designed specifically for supporting duct work. The cross beam provides easy size adjustments. Custom lengths are available upon request.

Standard strut mount pipe clamps are used to secure the pipes.

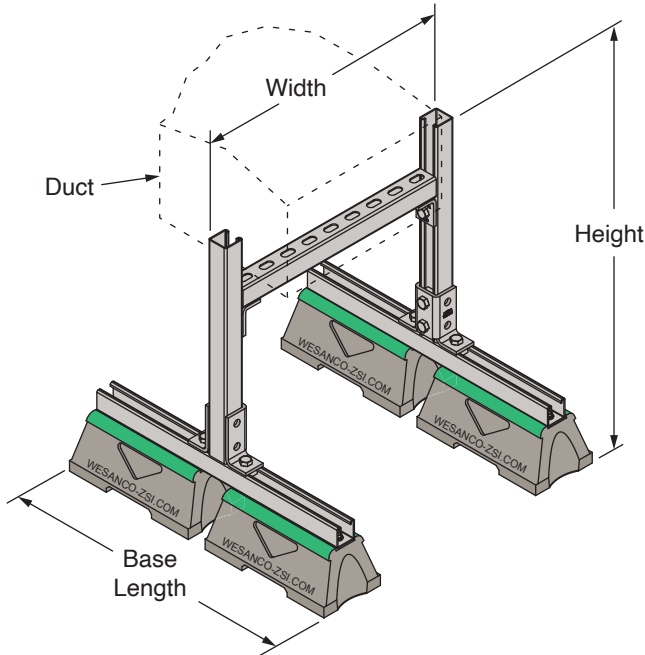

CBN-DSFW Duct Support Series With Fixed Width & Adjustable Height with 1-5/8" (41mm) Pre-Galv or Hot Dip Galv. Steel Channel					
Part No.	Height	Width	Base Length	No. of Bases	Uniform Load Capacity Lbs(kN) *
CBN1-DSFW	23" (584mm)	18" (457mm)	24" (610mm)	4	2042 * (9.08 kN)
CBN2-DSFW		24" (610mm)			1531 * (6.81 kN)
CBN3-DSFW		36" (914mm)			1021 * (4.54 kN)
CBN4-DSFW		48" (1.2m)			766 * (3.40 kN)
CBN5-DSFW	29" (737mm)	18" (457mm)	24" (610mm)	4	2042 * (9.08 kN)
CBN6-DSFW		24" (610mm)			1531 * (6.81 kN)
CBN7-DSFW		36" (914mm)			1021 * (4.54 kN)
CBN8-DSFW		48" (1.2m)			766 * (3.40 kN)
CBN9-DSFW	41" (1m)	18" (457mm)	24" (610mm)	4	2042 * (9.08 kN)
CBN10-DSFW		24" (610mm)			1531 * (6.81 kN)
CBN11-DSFW		36" (914mm)			1021 * (4.54 kN)
CBN12-DSFW		48" (1.2m)			766 * (3.40 kN)
CBN13-DSFW	53" (1.3m)	18" (457mm)	36" (914mm)	6	2042 * (9.08 kN)
CBN14-DSFW		24" (610mm)			1531 * (6.81 kN)
CBN15-DSFW		36" (914mm)			1021 * (4.54 kN)
CBN16-DSFW		48" (1.2m)			766 * (3.40 kN)

* This load is only for the capacity of the components in this assembly.
Please consult roofing manufacturer or engineer for roof load capacity.



Introduction

Channel

Channel Nuts
& Hardware

General
Fittings

Brackets

Beam
Clamps

Pipe & Conduit
Supports

Electrical
Fittings

Spring
Steel

Concrete
Inserts


Rooftop
Supports

Fiberglass
System

Technical
Data

CBM

Cush-A-Block Mini

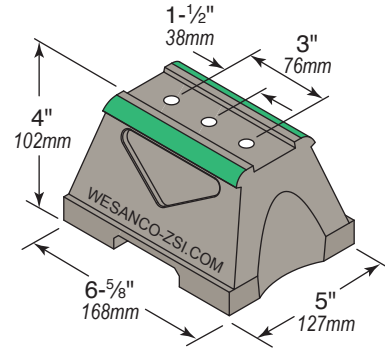



CBM-Base Series

Part No.	Uniform Load Capacity (Lbs) *
CBM	400 (1.78 kN)

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

CBM Series

Support with Metal Channel

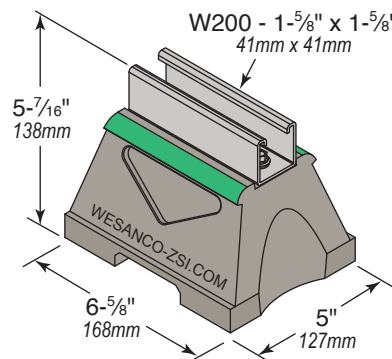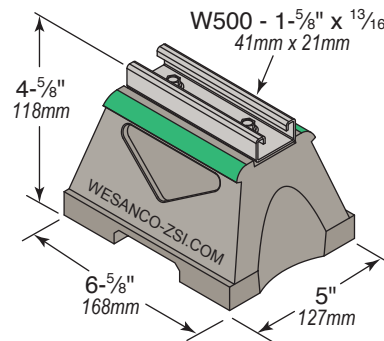

Part No.	Uniform Load Capacity (Lbs) *
CBM-Support with 13/16 inch (21mm) Pre-Galv or Hot Dip Galv. Steel Channel	
CBM1S	400 (1.78 kN)
CBM-Support with 1-5/8 inch (41mm) Pre-Galv or Hot Dip Galv. Steel Channel	
CBM1D	400 (1.78 kN)

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.




Cush-A-Block® Rooftop Supports



Finishes: Pre-galvanized (PG) or Hot Dipped Galvanized (HG)

CBM REX Series

Support with Raised 1-5/8" Metal Channel

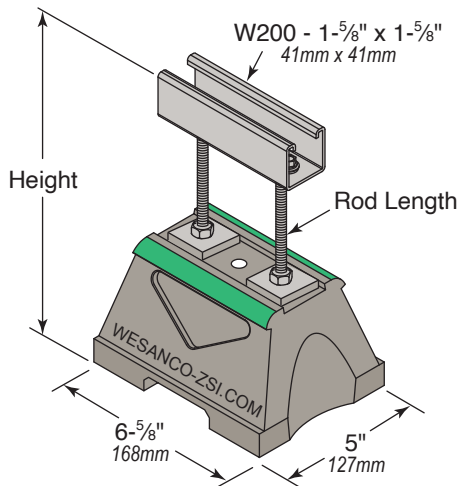



CBM-Support Extension with 3/8" Threaded Rod Extension & 1-5/8" (41mm) Pre-Galv or Hot Dip Galv. Steel Channel

Part No.	Height	Rod Length	Uniform Load Lbs (kN) *
CBM10REX	10" (254mm)	6" (152mm)	175 (0.78 kN)
CBM12REX	12" (305mm)	8" (203mm)	175 (0.78 kN)

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

CBMPH Series

Support with Raised SPH Cush-A-Ring Clamp for Copper Tube or Steel Tube or Pipe

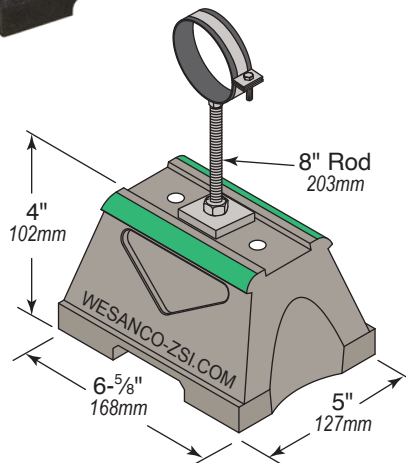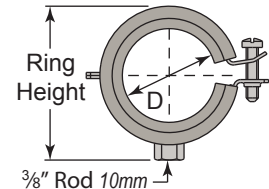

CBMPH Series Cush-A-Block Mini with Raised SPH Cush-A-Ring Clamp for Copper or Steel Tube or Pipe

Part No.	D	IP	CT	Ring Height	Uniform Load Lbs (kN) *
CBMPH1	0.433" - 0.551" (11 - 14mm)	1/4"	3/8"	1.4" (36mm)	125 (0.56 kN)
CBMPH2	0.591" - 0.709" (15 - 18mm)	3/8"	1/2"	1.4" (36mm)	
CBMPH3	0.787" - 0.906" (20 - 23mm)	1/2"	3/4"	1.6" (41mm)	
CBMPH4	0.984" - 1.102" (25 - 28mm)	3/4"	1"	1.8" (46mm)	
CBMPH5	1.22" - 1.378" (31 - 35mm)	1"	1 1/4"	2.0" (51mm)	
CBMPH6	1.575" - 1.693" (40 - 43mm)	1 1/4"	1 1/2"	2.4" (61mm)	
CBMPH7	1.89" - 2.087" (48 - 53mm)	1 1/2"	-	2.6" (66mm)	
CBMPH8	2.126" - 2.205" (54 - 56mm)	-	2"	2.8" (71mm)	
CBMPH9	2.244" - 2.48" (57 - 63mm)	2"	-	3.1" (79mm)	
CBMPH10	2.52" - 2.756" (64 - 70mm)	-	2 1/2"	3.9" (99mm)	

Below parts have 2 bolt configuration SPH Clamps

CBMPH11	2.874" - 3.15" (73 - 80mm)	2 1/2"	3"	4.3" (109 mm)	125 (0.56 kN)
CBMPH12	3.268" - 3.583" (83 - 91mm)	3"	-	4.8" (122 mm)	
CBMPH13	3.937" - 4.134" (100 - 105 mm)	-	4"	5.3" (135 mm)	
CBMPH14	4.252" - 4.488" (108 - 114mm)	4"	-	5.7" (145 mm)	



* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

See Page 148 for more information on the SPH Cush-A-Ring Clamps



CBMPP Series

Support with Raised SPP Cush-A-Ring Clamp for PEX, CPVC, or PVC Pipe

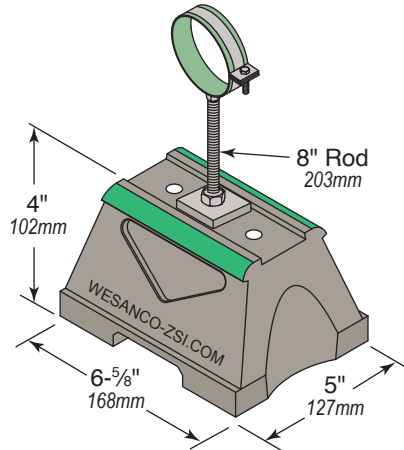

CBMPP Series Cush-A-Block Mini with Raised SPP Cush-A-Ring Clamp for PEX, CPVC or PVC Pipe

Part No.	D (mm)	PVC / CPVC	PEX	Ring Height	Load Capacity (Lbs) *
CBMPP2	0.591" - 0.709" (15 - 18mm)	3/8"	1/2"	1.4" (36mm)	125 (0.56 kN)
CBMPP3	0.787" - 0.906" (20 - 23mm)	1/2"	3/4"	1.7" (43mm)	
CBMPP4	0.984" - 1.102" (25 - 28mm)	3/4"	1"	1.9" (48mm)	
CBMPP5	1.22" - 1.378" (31 - 35mm)	1"	1 1/4"	2.2" (56mm)	
CBMPP6	1.575" - 1.693" (40 - 43mm)	1 1/4"	1 1/2"	2.6" (66mm)	
CBMPP7	1.89" - 2.087" (48 - 53mm)	1 1/2"	-	3.0" (76mm)	
CBMPP8	2.126" - 2.205" (54 - 56mm)	-	2"	3.0" (76mm)	
CBMPP9	2.362" - 2.559" (60 - 65mm)	2"	-	3.4" (86mm)	
CBMPP10	2.756" - 2.992" (70 - 76mm)	2 1/2"	-	4.1" (104mm)	
Below parts have 2 bolt configuration SPP Clamps					
CBMPP11	3.386" - 3.583" (86 - 91mm)	3"	-	4.6" (117mm)	125 (0.56 kN)
CBMPP12	4.331" - 4.488" (110 - 114mm)	4"	-	5.8" (147mm)	

* This load is only for the capacity of the components in this assembly.
Please consult roofing manufacturer or engineer for roof load capacity.

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

See Page 149 for more information on the SPP Cush-A-Ring Clamps

CBMTRH Series


Support with Raised TRH Hanger System for Cable runs or Insulated Flow and Return Lines



Supports a pair of insulated flow and return refrigerant lines on 3/8" threaded rod. The spring steel hanger grips the rod tightly, and the black zinc coating offers corrosion resistance while matching the insulation color.

See page 219 for TRH Hanger information

- Quick to Install & Adjust
- Rolled steel edges for safe cable runs
- Spring steel hanger grips rod tightly

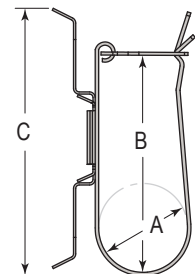

CBMTRH Series Cush-A-Block Mini with Raised TRH Hanger Clamp for Cable Runs or Insulated Pipe & Tubing

Part No.	Flow & Return Pipe Pairs	A	B	C	Uniform Load Lbs (kN) *
CBMTRH2	3/8" Liquid & 5/8" Gas	1.28" (33mm)	3.12" (79mm)	3.82" (97mm)	175 (0.78 kN)
CBMTRH3	1/2" Liquid & 7/8" Gas	1.40" (36mm)	3.28" (83mm)	3.70" (94mm)	
CBMTRH4	5/8" Liquid & 1-1/8" Gas	2.40" (61mm)	4.17" (106mm)	5.00" (127mm)	
CBMTRH5		3.38" (86mm)	6.26" (159mm)	7.03" (179mm)	

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.



Vibration Isolation Products from ZSI

When installing pipe, tube, hose, or equipment the effects of vibration, shock, surge, galvanic corrosion and unwanted noise are a major concern. Improperly cushioned equipment, pipe, tube, or hose invites failure and potential problems. New developments in cushioned clamping and vibration isolation products from ZSI provide the proper solutions to combat these effects.

ZSI's products have earned a well-deserved reputation for unparalleled quality and effectiveness. As industry develops new needs, ZSI can and will respond with superior quality products and innovative solutions.



EXTREME



STANDARD




ISO-CUBE



SHIELD



ANTI-VIBRATION PAD PERFORMANCE

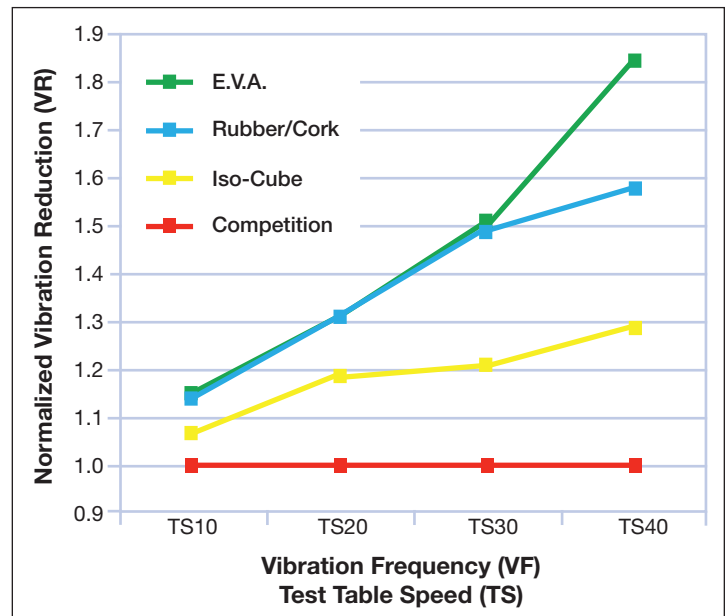

GAMMA Shield

Rubber Mat

Shields equipment from vibration and movement when lesser amounts of vibration absorption is needed.



Part No.	Description
AR-2	2" x 2" x 3/8" (51mm x 51mm x 10mm) All Rubber AV Pad
AR-3	3" x 3" x 3/8" (76mm x 76mm x 10mm) All Rubber AV Pad
AR-4	4" x 4" x 3/8" (102mm x 102mm x 10mm) All Rubber AV Pad
AR-6	6" x 6" x 3/8" (152mm x 152mm x 10mm) All Rubber AV Pad
AR-18	18" x 18" x 3/8" (457mm x 457mm x 10mm) All Rubber AV Pad

ISO - Cube

Solid Rubber Tough


Natural rubber pads designed to reduce vibration and noise emanating from refrigeration or AC equipment. Circular design offers a suction cup effect eliminating the need to bolt the pads down. A standard 18" (457mm) pad divides into eighty-one 2" (51mm) segments which may be cut or torn into smaller pads. The 50 durometer pads will withstand a load of 180 psi (12.4 bar) with great resiliency.



Part No.	Description
AS-2	2" x 2" x 3/4" (51mm x 51mm x 19mm) ISO-Cube
AS-18	18" x 18" x 3/4" (457mm x 457mm x 19mm) ISO-Cube

GAMMA Standard Pad


The Industry Standard Highest quality elastomeric oil resistant padding. Designed to withstand 50 psi (3.4 bar). The rubber pads are corrugated on both sides and laminated to the cork center.

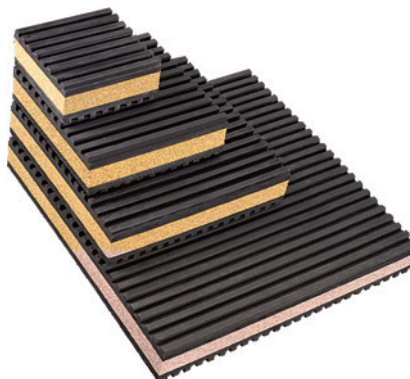

Part No.	Description
AC-2	2" x 2" x 7/8" (51mm x 51mm x 22mm) Cork / Rubber AV Pad
AC-3	3" x 3" x 7/8" (76mm x 76mm x 22mm) Cork / Rubber AV Pad
AC-4	4" x 4" x 7/8" (102mm x 102mm x 22mm) Cork / Rubber AV Pad
AC-6	6" x 6" x 7/8" (152mm x 152mm x 22mm) Cork / Rubber AV Pad
AC-18	18" x 18" x 7/8" (457mm x 457mm x 22mm) Cork / Rubber AV Pad

GAMMA Extreme Pad


The **BEST** Performer E.V.A. (Extreme Vibration Attenuation) is the latest generation in vibration dampening technology. In the most severe vibration extremes, testing shows the E.V.A. pad outperforms cork and rubber by greater than 3:1 and outperforms our competitor's "waffle" pad by greater than 8:1! The enhanced performance comes from the special composite foam center which is structurally more sound than cork. E.V.A. is not affected by oils or chemicals that can break down cork and is much more effective at vibration dampening than solid rubber. Designed to withstand 50 psi (3.4 bar). Choose E.V.A. to get the best of both worlds!

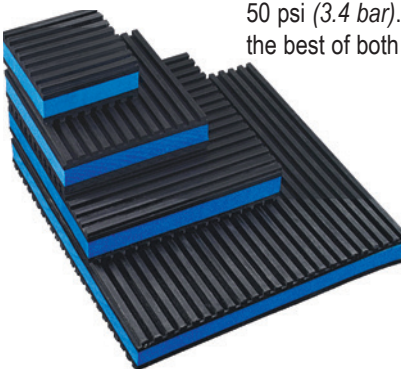

Part No.	Description
AV-2	2" x 2" x 7/8" (51mm x 51mm x 22mm) E.V.A. Pad
AV-3	3" x 3" x 7/8" (76mm x 76mm x 22mm) E.V.A. Pad
AV-4	4" x 4" x 7/8" (102mm x 102mm x 22mm) E.V.A. Pad
AV-6	6" x 6" x 7/8" (152mm x 152mm x 22mm) E.V.A. Pad
AV-18	18" x 18" x 7/8" (457mm x 457mm x 22mm) E.V.A. Pad




Fiberglass Framing System

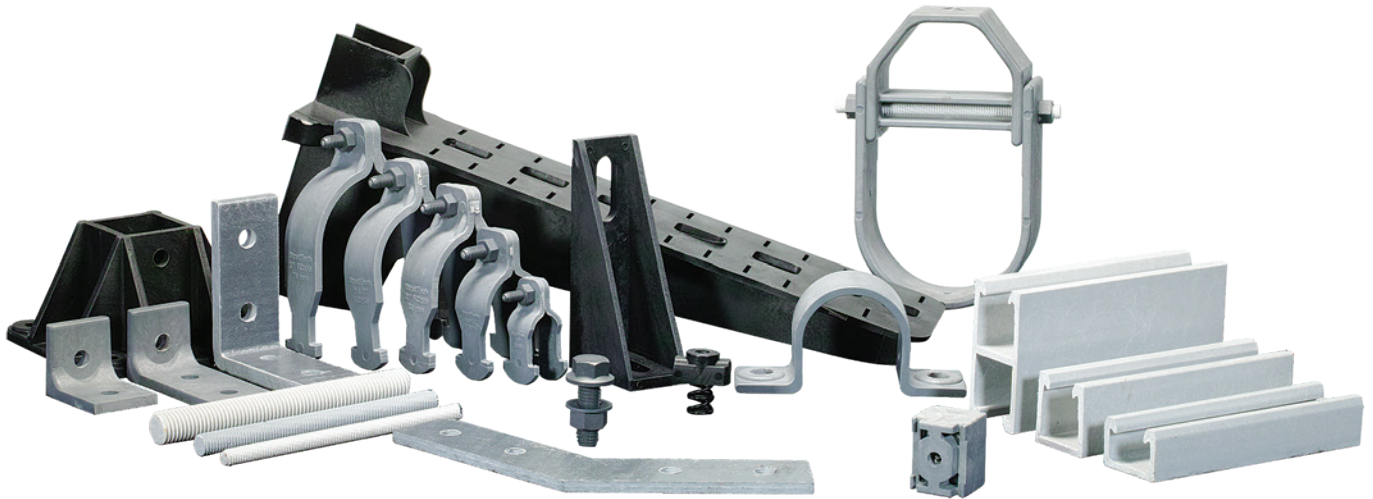


Channel

Pages 266 - 271




Channel Nuts & Hardware

Pages 272 - 274




Flat Plate Fittings

Pages 275 - 279




Angle & "U" Shape Fittings

Pages 280 - 281




Post Base

Page 282




Beam Clips & Beam Clamps

Pages 283 - 284




Pipe Clamps

Pages 285 - 290




Clevis Hanger

Page 291




Cable & Conduit Support

Pages 292 - 294



Concrete Inserts

Page 295



Technical Data

Pages 265, 296 - 298

Wesanco Fiberglass offers the many features and benefits:

- Interchangeable with Industry Standard Channel Systems
- Light Weight & Fire retardant
- Easy to cut and fabricate
- Cost competitive
- Corrosion Resistant
- Complete line of corrosion-resistant fiberglass components
- Easy to field cut and drill



Products

We offer a complete line of corrosion resistant pipe hangers, clevis hangers, angle brackets, splice plates, base plates and fasteners typically found in common pipe/conduit support systems.




Industries

Channel framing can be used in various industries:

- | | |
|-----------------------------|----------------------------|
| • Aquaculture | • Metal Processing |
| • Aquariums | • Metal Plating Facilities |
| • Bio Tech Industry | • MRI Rooms |
| • Bridge Utility Structures | • Oil Refineries |
| • Chemical Plants | • Server Farm Industry |
| • Commercial Refrigeration | • Sewage Treatment Plants |
| • Data Centers | • Shipbuilding |
| • Electrical Applications | • Underground Vaults |
| • Electronics Industry | • Water Rides |
| • Food Processing | • Water Treatment |
| • Greenhouses | • Water Desalination |
| • Marinas | |

Services

We have engineering assistance available and offer custom fabrication to solve you toughest support problems!.

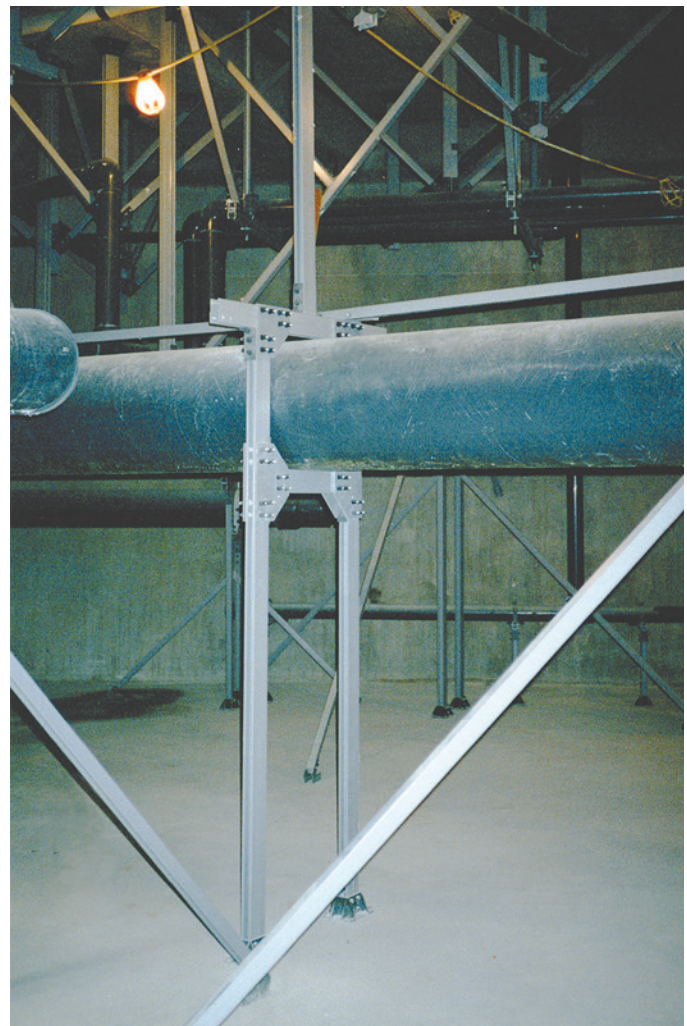

1.0 SCOPE

- 1.1 This specification covers the requirements for the Wesanco non-metallic channel framing system.

2.0 SYSTEM REQUIREMENTS

- 2.1 To provide single source responsibility, the channel framing and components including purchasing options after startup, the supplied system (including pipe clamps) must be interchangeable with industry standard 1-⁵/₈" (41mm) steel and fiberglass channel framing systems.

3.0 MATERIALS

- 3.1 This specification is for Polyester (standard) or Vinyl Ester (premium Corrosion Resistant resins as required for all fiberglass materials. Polyurethane thermoplastics are required for injection molded components.
- 3.2 Flame spread properties shall be as follows: Vinyl Ester Fiberglass (Series VF) Class 1 ASTM E-84 Polyester Fiberglass (Series PF) Class 1 ASTM E-84 Polyurethane V-O UL 94V PVC (Capping Strip) 5V & V-O UL 94
- 3.3 Fiberglass Channel physical properties shall be as shown in chart below:

4.0 CHANNEL FRAMING & SYSTEM COMPONENTS

4.1 Channel Framing Series 100 & 200

- 4.1.1 All fiberglass channels shall be manufactured using either vinyl ester or polyester resin. Resin selection must meet requirements of the Wesanco chemical resistance chart. Fiberglass channel sizes shall have polyester surface veil over 100% of the surface to provide protection against degradation from ultraviolet light.
- 4.1.2 Vertical channel sections supporting the horizontal piping require stop lock hardware at each pipe clamp to prevent slippage. Stop lock hardware combines a channel nut, bolt and mounting plate attached under the pipe clamp.

4.2 Pipe Clamps

- 4.2.1 Adjustable Pipe Clamps shall be non-metallic and non conductive, manufactured by the injection molded process using thermoplastic polyurethane. Maximum pipe diameter supported by adjustable clamps shall be 3" (76mm).
- 4.2.2 Glass Filled Rigid Pipe Clamps for pipe and conduit under 8 inches (203mm) shall be non-metallic and non-conductive; manufactured by the injection molded process using thermoplastic polyurethane or polyester. Resin selection must meet requirements of the Wesanco chemical resistance chart. Rigid pipe clamps for pipe and conduit over 8" (203mm) shall be thermoset vinyl ester fiberglass, and shall be manufactured by either hand laminations or resin transfer molded. Injection molded parts for pipe and conduit sizes over 8" (203mm) are not acceptable.

4.3 Channel Fittings & Post Bases

- 4.3.1 All channel fittings and post bases shall be made from glass filled polyurethane or polyester. Resin selection must meet requirements of the Wesanco chemical resistance chart.

4.4 Fasteners


- 4.4.1 All fasteners shall be made from one of the following materials: Glass filled polyurethane, vinyl ester fiberglass, stainless steel. Resin selection must meet requirements of the Wesanco chemical resistance chart.

5.0 ACCEPTABLE MANUFACTURER

- 5.1 Wesanco 800-323-7053 - www.Wesanco-ZSi.com

Item	Longitudinal Vinyl Ester	Transverse Vinyl Ester	Longitudinal Polyester	Transverse Polyester
Tensile Strength (psi)	37,000	10,000	30,000	7,000
Tensile Modulus (psi) x 10 6	3.0	1.0	2.5	0.8
Flexural Strength (psi)	37,000	14,000	20,000	10,000
Flexural Modulus (psi) x 10 6	2.0	1.0	1.6	0.8
Compressive Strength	37,500	20,000	30,000	15,000
Shear Strength (psi)	6,000	5,500	5,500	5,500
Izod Impact ft. lbs /in.	30	5	28	4



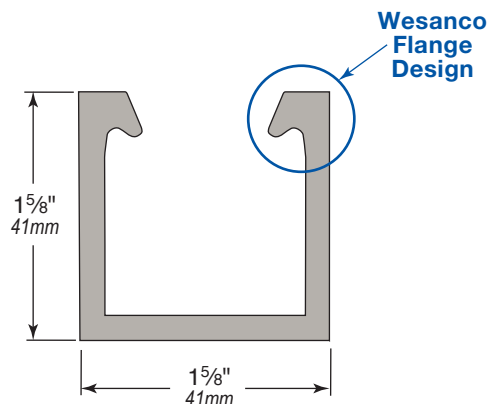

All Wesanco fiberglass strut channel profiles incorporate a superior flange design that provides for a reliably strong fastening and attachment method of Wesanco components and accessories.

Strut Channels are provided in standard 10' lengths with longer lengths being available upon request.

Wesanco fiberglass strut channel profiles will not only work with standard Wesanco Fiberglass components and accessories but will also work with standard Steel or Stainless Strut Clamps from the Wesanco Brand as well as many other Industry Standard Brands. Because of this unique profile design, the industry standard fiberglass strut profile known as the SST profile is not needed as with most other brands of Fiberglass Strut and Accessories that have to provide both for those users that prefer standard steel or stainless-steel strut straps to be used in their application.

Wesanco strut channels are available in two materials:

- Polyester (PF material) - Gray
- Vinyl Ester (VF material) - Beige

Polyester and Vinyl Ester Resins

Polyester and vinyl ester strut channels are manufactured by utilizing the pultrusion process shown below. In this process, the components are made by utilizing a reinforcing polymer resin that can be either polyester or vinyl ester that is combined with multiple strands of glass filaments along with alternating layers of glass mat and U.V. resistant surfacing veils. The combined glass is pulled through the liquid resin, which permeates all the fibers. The combination of glass, resin, mats, and veil is then continuously pultruded (pulled) through a heated die that has been shaped to create the dimensions of the strut channel profile being manufactured.

The resin and glass components are cured together in the die to form a permanent pultruded strut channel profile that can be fabricated or cut to different lengths that may be needed. Since the fully cured fiberglass pultruded strut channel profile is reinforced with an internal assortment of permanently bonded continuous glass fibers, mats, and external veils it possesses great strength.

Wesanco pultruded fiberglass strut channels have exceptional corrosion and fire resistance. These characteristics of fiberglass materials make it the choice for many harsh industrial applications.

Wesanco polyester and vinyl ester strut channels are color coded. Polyester channels are colored gray and the vinyl ester channels are colored beige giving you the assurance you have the correct product for your application.



Fiberglass channels are produced in two resins, Polyester (PF) and Vinyl Ester (VF), that contain continuous glass fibers. This provides excellent strength characteristics and thermal properties.

All pultruded channels are produced with U.V. resistant surface veils. These materials are Class 1 Fire Rated per ASTM E-84. Refer to the Corrosion Resistance Guide for your specific application.


Polyester:

- General Purpose
- Good Corrosion Resistance for most applications
- Temperature Range - 30°F to +150°F (-34°C to 66°C)
- Standard Color Gray

Vinyl Ester:



- Premium Grade
- Excellent Corrosion Resistance
- Temperature Range - 35°F to +200°F (-37°C to 93°C)
- Standard Color Beige

PULTRUSION PROCESS


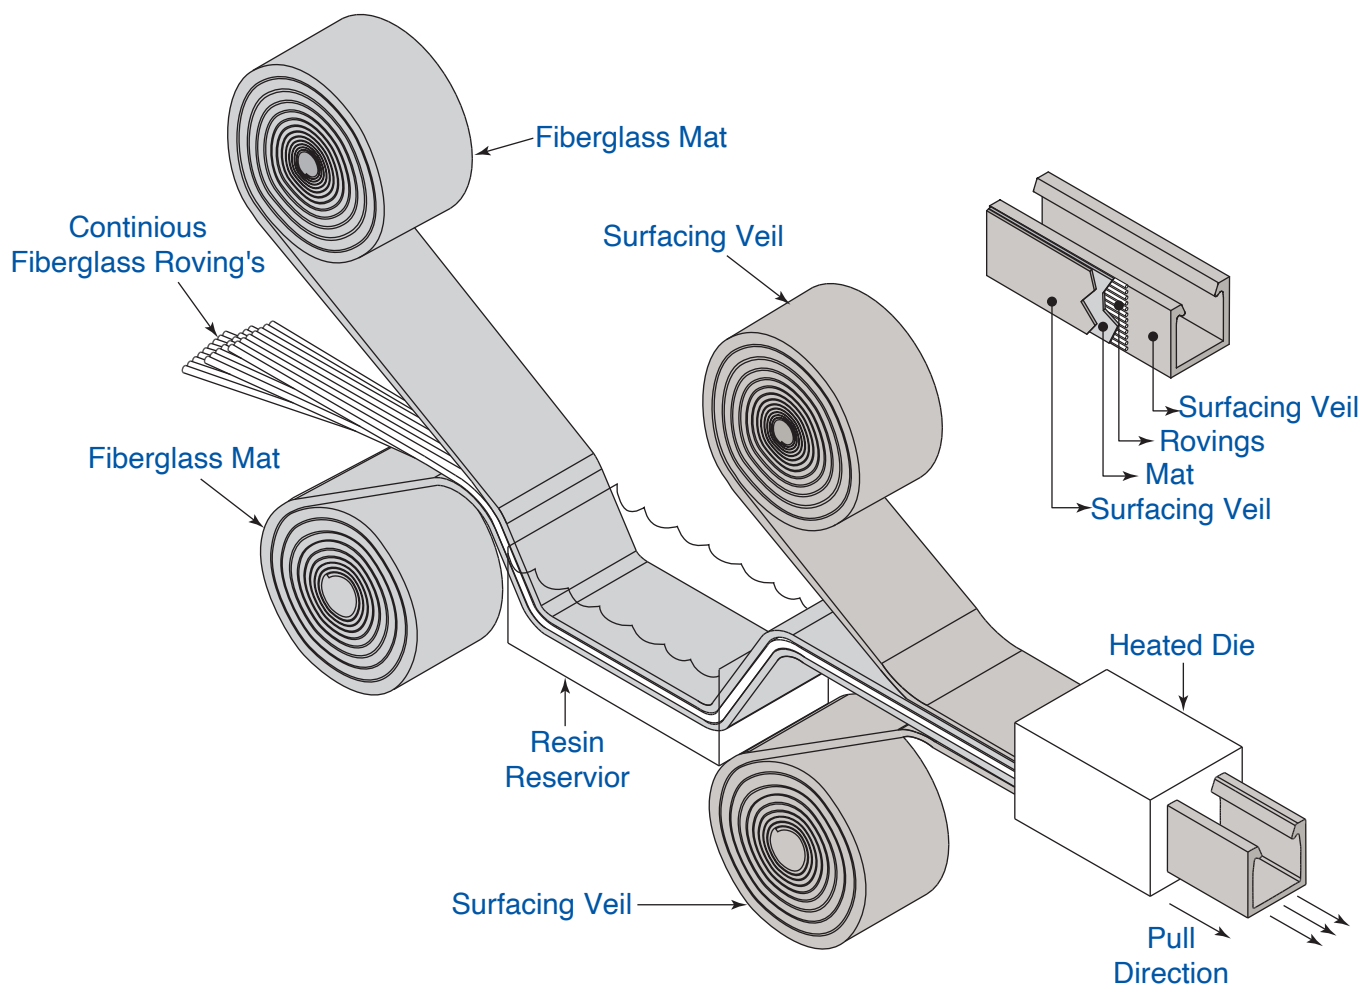





Standard: Polyester (PF) or Vinyl Ester (VF)

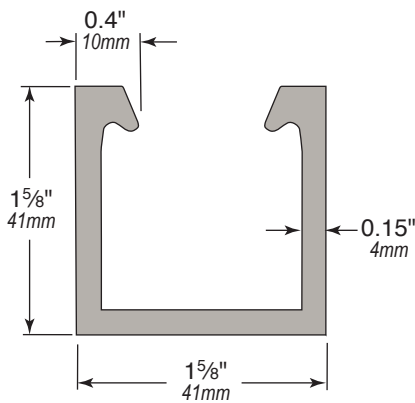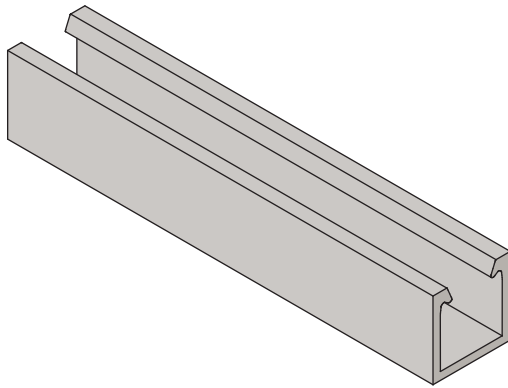W200PF 1-5/8" x 1-5/8"
Solid Channel


Part No.	Material
W200PF	Polyester Fire Rated Fiberglass
W200VF	Vinyl Ester Fire Rated Fiberglass

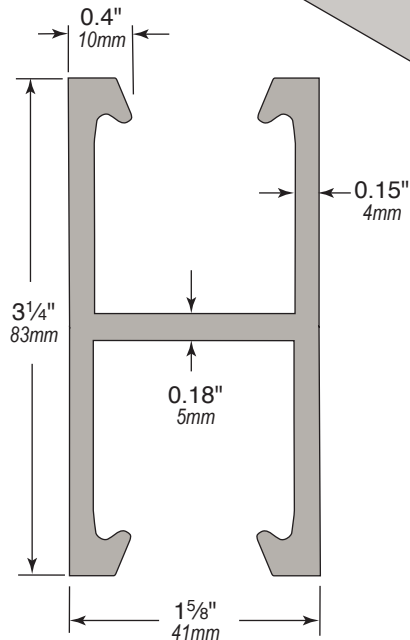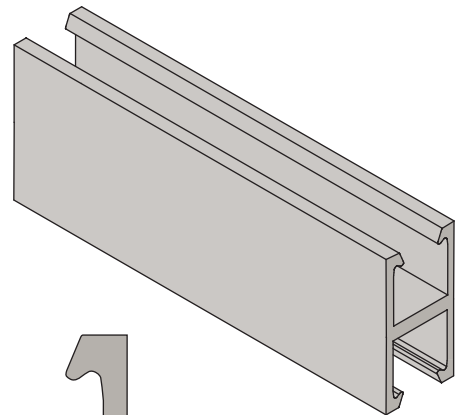W201PF 1-5/8" x 3-1/4"
Solid Back-to-Back Channel

Part No.	Material
W201PF	Polyester Fire Rated Fiberglass
W201VF	Vinyl Ester Fire Rated Fiberglass

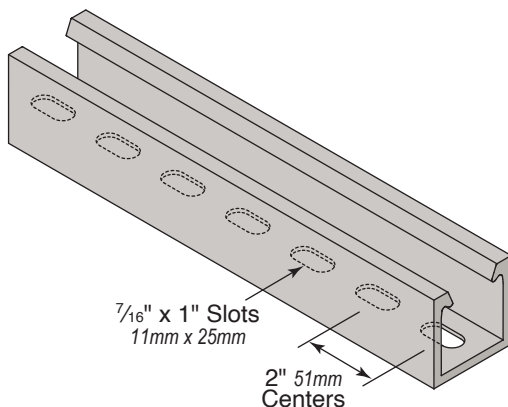W200EHPF 1-5/8" x 1-5/8"
Channel with Short Slots7/16" x 1" Slots
11mm x 25mm2" 51mm
Centers

Part No.	Material
W200EHPF	Polyester Fire Rated Fiberglass
W200EHVF	Vinyl Ester Fire Rated Fiberglass

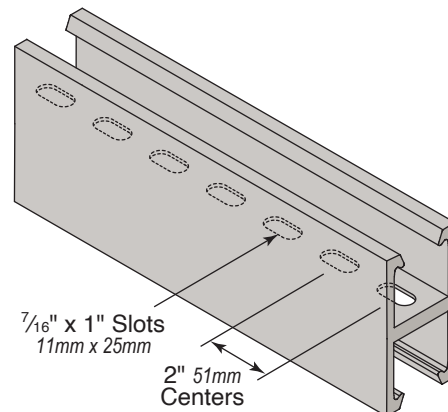W201EHPF 1-5/8" x 3-1/4"
Back-to-Back Channel with Short Slots7/16" x 1" Slots
11mm x 25mm2" 51mm
Centers

Part No.	Material
W201EHPF	Polyester Fire Rated Fiberglass
W201EHVF	Vinyl Ester Fire Rated Fiberglass



Channel Load Data

Elements of Sections

Part No.	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis		
			Ix in. ⁴ (Ix cm ⁴)	Sx in. ³ (Sx cm ³)	cx in. (cx. cm)	Iy in. ⁴ (Iy cm ⁴)	Sy in. ³ (Sy cm ³)	cy in. (cy cm)
1-5⁄8" x 1-5⁄8" (41mm x 41mm) Channel								
W200PF	0.82 (0.37)	1.06 (6.63)	0.31 (12.90)	0.54 (8.85)	0.70 (1.78)	0.42 (17.48)	0.63 (10.32)	0.82 (2.08)
1-5⁄8" x 3-1⁄4" (41mm x 83mm) Channel								
W201PF	1.64 (0.74)	2.12 (13.67)	1.77 (73.67)	0.91 (14.91)	1.63 (4.14)	0.85 (35.38)	0.63 (10.32)	0.82 (2.08)

Ultimate Design Flexural: 40,000 psi (longitudinal)
 Modulus of elasticity=E= 3,000,000 psi (longitudinal)
 Minimum Safety Factor= 3:1

1-5/8" x 1-5/8" (41mm x 41mm) Channel Beam and Column Loads

Span	Maximum Uniform Beam Load		Uniform Load at Deflection Span /360		Maximum Column Load
	Load	Deflection	Load	Deflection	
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	In (mm)	Lbs (kN)
12 (305)	3,565 (15.9)	0.1 (2.59)	1,160 (5.2)	0.03 (0.84)	5,165 (23.0)
18 (457)	2,376 (10.6)	0.23 (5.85)	516 (2.3)	0.05 (1.27)	4,709 (20.9)
24 (610)	1,783 (7.9)	0.41 (10.42)	290 (1.3)	0.07 (1.70)	4,172 (18.6)
30 (762)	1,425 (6.3)	0.64 (16.27)	185 (0.8)	0.08 (2.11)	3,557 (15.8)
36 (914)	1,188 (5.3)	0.92 (23.44)	129 (0.6)	0.10 (2.54)	2,862 (12.7)
48 (1,219)	891 (4.0)	1.64 (41.65)	72 (0.3)	0.13 (3.38)	1,638 (7.3)
60 (1,524)	713 (3.2)	2.56 (65.09)	46 (0.2)	0.17 (4.25)	1,048 (4.7)
72 (1,829)	595 (2.6)	3.69 (93.72)	32 (0.1)	0.20 (5.09)	728 (3.2)

1-5/8" x 3-1/4" (41mm x 83mm) Back-to-Back Channel Beam and Column Loads

Span	Maximum Uniform Beam Load		Uniform Load at Deflection Span /360		Maximum Column Load
	Load	Deflection	Load	Deflection	
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	In (mm)	Lbs (kN)
12 (305)	5,565 (24.8)	0.03 (0.71)	5,565 (24.8)	0.03 (0.84)	9,463 (42.1)
18 (457)	3,710 (16.5)	0.06 (1.63)	2,917 (13.0)	0.05 (1.27)	8,875 (39.5)
24 (610)	2,783 (12.4)	0.11 (2.87)	1,641 (7.3)	0.07 (1.70)	8,189 (36.4)
30 (762)	2,226 (9.9)	0.18 (4.50)	1,050 (4.7)	0.08 (2.11)	7,412 (33.0)
36 (914)	1,855 (8.3)	0.25 (6.46)	731 (3.3)	0.1 (2.54)	6,457 (28.7)
48 (1,219)	1,391 (6.2)	0.45 (11.49)	410 (1.8)	0.13 (3.38)	4,539 (20.2)
60 (1,524)	1,113 (5.0)	0.71 (17.98)	262 (1.2)	0.17 (4.25)	2,905 (12.9)
72 (1,829)	928 (4.1)	1.02 (25.88)	182 (0.8)	0.2 (5.09)	2,017 (9.0)

Published design loads are based on usage at 70°F. (21°C)
 All beams should be supported in a manner that prevents rotation at supports.
 Long, deep beams should be tied between supports to prevent twist
For concentrated loads: Reduce allowable loads by 50% and reduce deflections by 25%.

***Maximum loads** are based on full lateral support of the channel, rotation prevention at the support points and the design safety factor of 3:1

****Load exceeds** maximum allowable stress for 3:1 safety factor.


*****For Beam Spans** over 36" with loads approaching these maximum design limits, please contact the manufacturer's technical representative to confirm support configuration and lateral stability.

Column Loads:

Table lists the total allowable concentric axial load for various unsupported column heights based on a minimum safety factor of 3:1. Eccentric loads should be reduced according to standard practice. ***With column top and bottom pin connected n=1 and loads in table may increase by 3x.




W800PF 1-5/8" x 1-1/8" Solid Channel

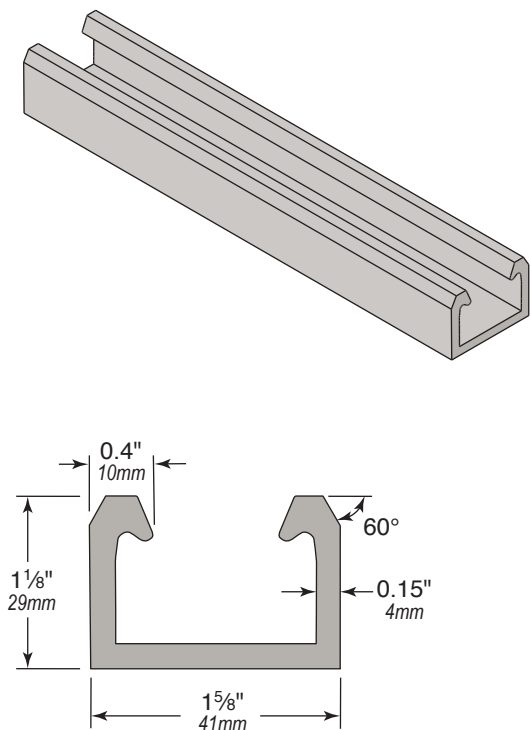


Part No.	Material
W800PF	Polyester Fire Rated Fiberglass
W800VF	Vinyl Ester Fire Rated Fiberglass

W801PF 1-5/8" x 2-1/4" Solid Back-to-Back Channel

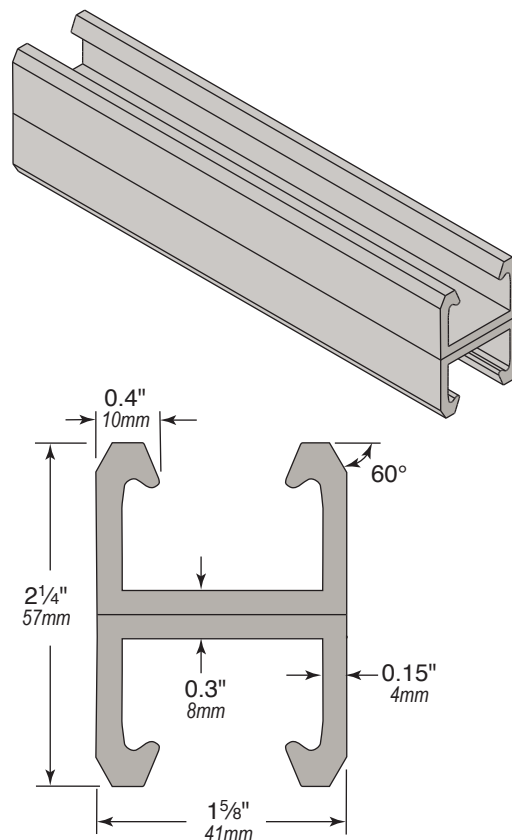


Part No.	Material
W801PF	Polyester Fire Rated Fiberglass
W801VF	Vinyl Ester Fire Rated Fiberglass

W800EHPF 1-5/8" x 1-1/8" Channel with Short Slots

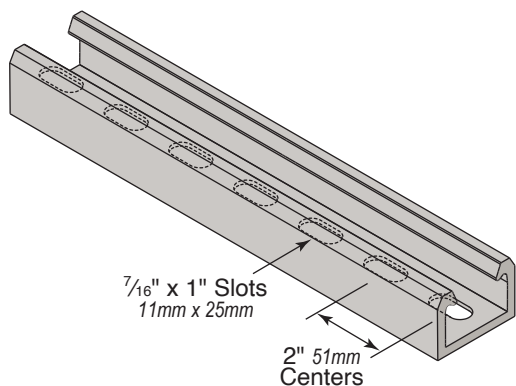

Part No.	Material
W800EHPF	Polyester Fire Rated Fiberglass
W800EHVF	Vinyl Ester Fire Rated Fiberglass

W801EHPF 1-5/8" x 2-1/4" Back-to-Back Channel with Short Slots

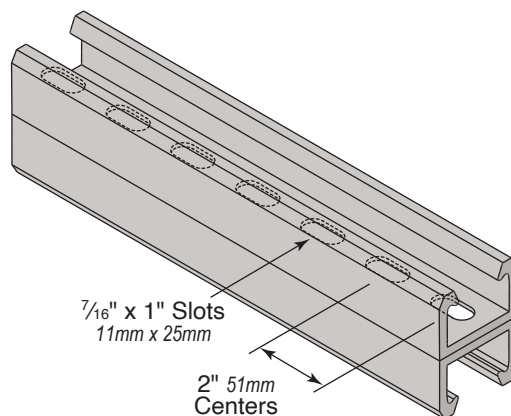

Part No.	Material
W801EHPF	Polyester Fire Rated Fiberglass
W801EHVF	Vinyl Ester Fire Rated Fiberglass



Channel Load Data

Elements of Sections

Part No.	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis		
			Ix in. ⁴ (Ix cm ⁴)	Sx in. ³ (Sx cm ³)	cx. in. (cx. cm)	Iy in. ⁴ (Iy cm ⁴)	Sy in. ³ (Sy cm ³)	cy in. (cy cm)
1-5/8" x 1-1/8" (41mm x 29mm) Channel								
W800PF	0.47 (0.21)	0.61 (3.94)	0.10 (4.16)	0.40 (6.56)	0.51 (1.30)	0.22 (9.16)	0.60 (9.83)	0.75 (1.91)
1-5/8" x 2-1/4" (41mm x 57mm) Back to Back Channel								
W801PF	0.94 (1.61)	1.22 7.87)	0.42 (17.48)	0.59 (9.67)	1.13 (2.87)	0.44 (18.31)	0.60 (9.83)	0.75 (1.91)

Ultimate Design Flexural: 40,000 psi (longitudinal)
 Modulus of elasticity=E= 3,000,000 psi (longitudinal)
 Minimum Safety Factor= 3:1

1-5/8" x 1-1/8" (41mm x 29mm) Channel Beam and Column Loads

Span	Maximum Uniform Beam Load		Uniform Load at Deflection Span /360		Maximum Column Load
	Load	Deflection	Load	Deflection	
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	In (mm)	Lbs (kN)
12 (305)	1,710 (7.6)	0.16 (4.03)	377 (1.7)	0.03 (0.88)	2,897 (12.9)
18 (457)	1,140 (5.1)	0.36 (9.07)	168 (0.7)	0.05 (1.33)	2,469 (11.0)
24 (610)	856 (3.8)	0.64 (16.14)	95 (0.4)	0.07 (1.79)	1,955 (8.7)
30 (762)	685 (3.0)	0.99 (25.20)	60 (0.3)	0.09 (2.21)	1,363 (6.1)
36 (914)	570 (2.5)	1.43 (36.27)	42 (0.2)	0.11 (2.67)	946 (4.2)
48 (1,219)	427 (1.9)	2.54 (64.49)	23 (0.1)	0.14 (3.55)	532 (2.4)
60 (1,524)	342 (1.5)	3.97 (100.79)	15 (0.1)	0.18 (4.45)	340 (1.5)
72 (1,829)	286 (1.3)	5.71 (145.11)	11 (0.05)	0.21 (5.33)	236 (1.1)

1-5/8" x 2-1/4" (41mm x 57mm) Back-to-Back Channel Beam and Column Loads

Span	Maximum Uniform Beam Load		Uniform Load at Deflection Span /360		Maximum Column Load
	Load	Deflection	Load	Deflection	
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	In (mm)	Lbs (kN)
12 (305)	3,994 (17.8)	0.09 (2.19)	1,634 (7.3)	0.03 (0.88)	6,259 (27.8)
18 (457)	2,663 (11.8)	0.19 (4.88)	726 (3.2)	0.05 (1.33)	5,784 (25.7)
24 (610)	1,997 (8.9)	0.34 (8.69)	408 (1.8)	0.07 (1.79)	5,228 (23.3)
30 (762)	1,598 (7.1)	0.53 (13.58)	261 (1.2)	0.09 (2.21)	4,594 (20.4)
36 (914)	1,331 (5.9)	0.77 (19.58)	182 (0.8)	0.11 (2.67)	3,883 (17.3)
48 (1,219)	999 (4.4)	1.37 (34.78)	102 (0.5)	0.14 (3.55)	2,367 (10.5)
60 (1,524)	799 (3.6)	2.14 (54.35)	65 (0.3)	0.18 (4.45)	1,514 (6.7)
72 (1,829)	666 (3.0)	3.08 (78.28)	45 (0.2)	0.21 (5.33)	1,051 (4.7)

Published design loads are based on usage at 70°F. (21°C)
 All beams should be supported in a manner that prevents rotation at supports.
 Long, deep beams should be tied between supports to prevent twist
For concentrated loads: Reduce allowable loads by 50% and reduce deflections by 25%.

***Maximum loads** are based on full lateral support of the channel, rotation prevention at the support points and the design safety factor of 3:1

****Load exceeds** maximum allowable stress for 3:1 safety factor.

*****For Beam Spans** over 36" with loads approaching these maximum design limits, please contact the manufacturer's technical representative to confirm support configuration and lateral stability.


Column Loads:

Table lists the total allowable concentric axial load for various unsupported column heights based on a minimum safety factor of 3:1. Eccentric loads should be reduced according to standard practice. ***With column top and bottom pin connected n=1 and loads in table may increase by 3x.



Channel Nuts


- Spring channel nuts primary use is to attach fittings to the open face of channels
- Nut is molded with integral spring
- Spring nut can be installed at any location from the open side of the channel
- Highly Corrosion Resistant.
- Standard Material is Delrin

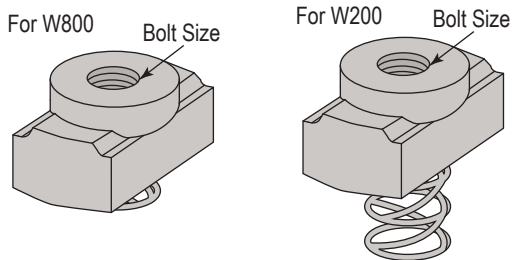

Part No.	Bolt Size	Spring	For Use With Channel Size
W5-4FG	1/4" (6mm)	Short Spring	W800 Series 1-5/8" x 1-1/8" (41mm x 29mm)
W5-6FG	3/8" (10mm)		
W5-8FG	1/2" (13mm)		
W2-4FG	1/4" (6mm)	Standard Spring	W200 Series 1-5/8" x 1-5/8" (41mm x 41mm)
W2-6FG	3/8" (10mm)		
W2-8FG	1/2" (13mm)		

Note: Standard quantity 25 each

Stop-Lock Kit

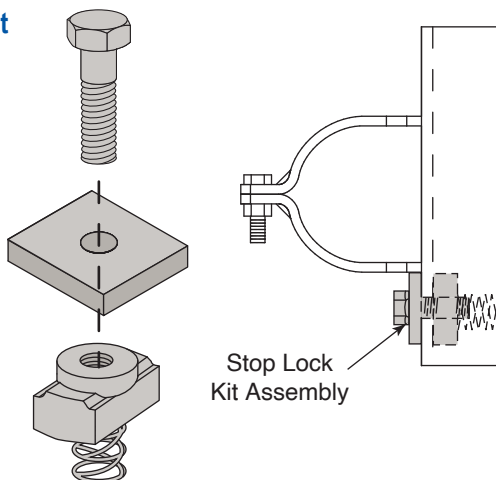


Part No.	Size	Kit Contains
SLK-375	3/8" (10mm)	W2-6FG, W5053PU, & 37X125HHCSPU
SLK-500	1/2" (13mm)	W2-8FG, W5054PU, & 50X125HHCSPU

Note: Standard quantity 25 each

Channel Nuts

- Channel Nuts can be used for attaching fittings to the open or back side of channel
- Nuts are also used to "double nut" threaded rod to channels
- Channel Nuts will not rotate in the channel
- Channel Nut can only be installed by sliding the nut into position from the end of the channel
- Material is Polyurethane (PU)

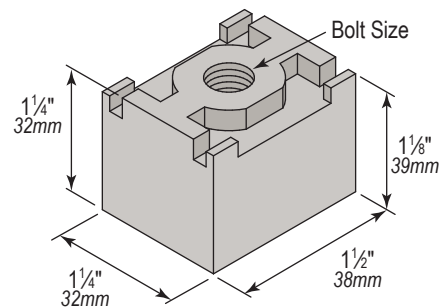


Part No.		Bolt Size	For Use With Channel Size
Polyurethane Gray (PU)	Nylon Black (NY)		
W2-6WSPU	W2-6WSNY	3/8" (10mm)	W200 Series 1-5/8" x 1-5/8" (41mm x 41mm)
W2-8WSPU	W2-8WSNY	1/2" (13mm)	
W2-10WSPU	W2-10WSNY	5/8" (16mm)	
W2-12WSPU	W2-12WSNY	3/4" (19mm)	

Note: Standard quantity 25 each

Channel Space

When attaching fittings to side walls of channels, through bolting requires a channel spacer to prevent wall compression under heavy load conditions. Spacer is beveled on opposite sides for easy rotation into channel

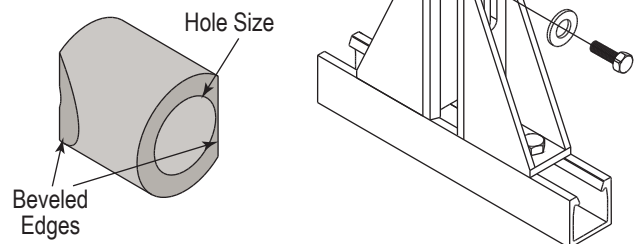

Part No.	Hole Size
SPA037PVC	3/8" (10mm)
SPA050PVC	1/2" (13mm)

Note: Standard quantity 25 each




- Standard fasteners are used with Wesanco channel fittings and fiberglass structural shapes in the fabrication of pipe support systems
- Standard fasteners are available in two corrosion resistant grades:
 - Glass filled Polyurethane
 - 316 Stainless Steel

Notes

- Inquire about additional Polyurethane Bolt sizes
- Polyurethane physical properties are affected at elevated temperatures. Physical properties will decrease by 50% at 150°F (66°C)


Spring Nut Hex Bolts



Part No.		Bolt Size
Polyurethane Gray (PU)	Stainless Steel Type 316 (S6)	
HHCS25X075PU	HHCS25X075S6	1/4" x 3/4" (6 x 19mm)
HHCS25X100PU *	HHCS25X100S6 *	1/4" x 1" (6 x 25mm)
HHCS25X125PU	HHCS25X125S6	1/4" x 1-1/4" (6 x 32mm)
HHCS31X125PU	HHCS31X125S6	5/16" x 1-1/4" (8 x 32mm)
HHCS31X200PU	HHCS31X200S6	5/16" x 2" (8 x 51mm)
HHCS37X100PU *	HHCS37X100S6 *	3/8" x 1" (10 x 25mm)
HHCS37X125PU	HHCS37X125S6	3/8" x 1-1/4" (10 x 32mm)
HHCS37X150PU	HHCS37X150S6	3/8" x 1-1/2" (10 x 38mm)
HHCS37X200PU	HHCS37X200S6	3/8" x 2" (10 x 51mm)
HHCS37X250PU	HHCS37X250S6	3/8" x 2-1/2" (10 x 64mm)
HHCS37X300PU	HHCS37X300S6	3/8" x 3" (10 x 76mm)
HHCS50X100PU *	HHCS50X100S6 *	1/2" x 1" (13 x 25mm)
HHCS50X125PU	HHCS50X125S6	1/2" x 1-1/4" (13 x 32mm)
HHCS50X150PU	HHCS50X150S6	1/2" x 1-1/2" (13 x 38mm)
HHCS50X200PU	HHCS50X200S6	1/2" x 2" (13 x 51mm)
HHCS50X250PU	HHCS50X250S6	1/2" x 2-1/2" (13 x 64mm)
HHCS50X300PU	HHCS50X300S6	1/2" x 3" (13 x 76mm)
HHCS75X200PU	HHCS75X200S6	3/4" x 2" (19 x 51mm)

* For use with W800 1-5/8" x 1-1/8" Channel and spring nuts attachments.
Note: Standard quantity 25 each

Flanged Hex Bolts




Part No. Polyurethane Gray (PU)	Bolt Size
HHFB25X075PU	1/4" x 3/4" (6 x 19mm)
HHFB25X100PU *	1/4" x 1" (6 x 25mm)
HHFB25X125PU	1/4" x 1-1/4" (6 x 32mm)
HHFB25X150PU	1/4" x 1-1/2" (6 x 38mm)
HHFB31X150PU	5/16" x 1-1/2" (8 x 32mm)
HHFB37X100PU *	3/8" x 1" (10 x 25mm)
HHFB37X125PU	3/8" x 1-1/4" (10 x 32mm)
HHFB37X150PU	3/8" x 1-1/2" (10 x 38mm)
HHFB37X200PU	3/8" x 2" (10 x 51mm)
HHFB37X250PU	3/8" x 2-1/2" (10 x 64mm)
HHFB37X300PU	3/8" x 3" (10 x 76mm)
HHFB50X100PU *	1/2" x 1" (13 x 25mm)
HHFB50X125PU	1/2" x 1-1/4" (13 x 32mm)
HHFB50X150PU	1/2" x 1-1/2" (13 x 38mm)
HHFB50X200PU	1/2" x 2" (13 x 51mm)
HHFB50X250PU	1/2" x 2-1/2" (13 x 64mm)
HHFB50X300PU	1/2" x 3" (13 x 76mm)
HHFB50X350PU	1/2" x 3-1/2" (13 x 89mm)

* For use with W800 1-5/8" x 1-1/8" Channel and spring nuts attachments.
Note: Standard quantity 25 each
Other sizes available upon request
Flanged bolts not available in Stainless Steel




Standard Duty Polyurethane Nuts



Part No.		Hex Nut Size
Polyurethane Gray (PU)	Stainless Steel Type 316 (S6)	
HN25PU	HN25S6	1/4" (6mm)
HN31PU	HN31S6	5/16" (8mm)
HN37PU	HN37S6	3/8" (10mm)
HN50PU	HN50S6	1/2" (13mm)
HN62PU	HN62S6	5/8" (16mm)
HN75PU	HN75S6	3/4" (19mm)

Note: Standard quantity 25 each


Heavy Duty Flanged Hex Nuts



Part No. Polyurethane Gray (PU)	Heavy Duty Nut Size
FHN31PU	5/16" (8mm)
FHN37PU	3/8" (10mm)
FHN50PU	1/2" (13mm)
FHN62PU	5/8" (16mm)
FHN75PU	3/4" (19mm)
FHN100PU	1" (25mm)

Note: Standard quantity 25 each


Washers



Part No. Polyurethane Gray (PU)	Washer Size
FW25PU	1/4" (6mm)
FW37PU	3/8" (10mm)
FW50PU	1/2" (13mm)
FW62PU	5/8" (16mm)
FW75PU	3/4" (19mm)
FW100PU	1" (25mm)

Note: Standard quantity 25 each

Fender Washers




Part No. Polyurethane Gray (PU)	Washer Size
FEN75X225PU	3/4" (19mm)

Note: Standard quantity 25 each

Threaded Rod

- Wesanco offers all thread rod in two materials, Vinyl Ester Fiberglass and 316 Stainless Steel
- Fiberglass threaded rod is stocked in 8' lengths. Cut to length sizes available
- Stainless Steel is available in 3', 4', 6' & 12' foot (0.9m, 1.2m, 1.8m, 3.6m) length

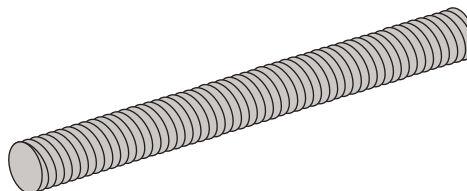


Part No.		Threaded Rod Size	Thread Shear for Vinyl Ester (VE)
Vinyl Ester (VE) 8 Foot (2.4m)	Stainless Steel Type 316 (STS6) 12 Foot (3.7m)		
W7125VE8FT	W7125STS612FT	3/8" (10mm)	415 lb (1.85kN)
W7126VE8FT	W7126STS612FT	1/2" (13mm)	570 lb (2.54kN)
W7127VE8FT	W7127STS612FT	5/8" (16mm)	1,260 lb (5.60kN)
W7128VE8FT	W7128STS612FT	3/4" (19mm)	1,700 lb (7.56kN)
W7131VE8FT	W7131STS612FT	1" (25mm)	3,000 lb (13.35kN)

Note: Standard quantity 25 each
Thread shear values represent a 3:1 safety factor.

Threaded Rod Couplers

- Wesanco offers rod couplers in two materials, Polyurethane, and 316 Stainless Steel
- Couplers provide a simple way to connect threaded rod




Part No.		Threaded Rod Coupler Size	Thread Shear for Polyurethane (PU)
Polyurethane Gray (PU)	Stainless Steel Type 316 (S6)		
W7135PU	W7135S6	3/8" (10mm)	800 lb (3.56kN)
W7136PU	W7136S6	1/2" (13mm)	870 lb (3.87kN)
W7137PU	W7137S6	5/8" (16mm)	1,500 lb (6.67kN)
W7138PU	W7138S6	3/4" (19mm)	1,500 lb (6.67kN)

Note: Standard quantity 25 each
Thread shear values represent a 3:1 safety factor.




Flat Plate Fittings

- Industry standard channel fittings for fabricating structures with Wesanco channel
- Fittings can be attached with channel nuts or through bolted to strut back of side walls
- No Special Tools Required
- Highly Corrosion Resistant. See Chemical Resistant Guide on pages 296 - 298
- Standard fitting material is either:
 - Polyester (PF) FRP Gray
 - Vinyl Ester (VF) FRP Beige
 - Injection Molded Thermoplastics
 - Polyurethane (PU)
 - Polyester (PE);
- NOTES: When attaching fittings to side walls of channels, through bolting requires a channel spacer to prevent wall compression under heavy load conditions. Order part # SPA037PVC for $\frac{3}{8}$ " (10mm) bolts and part # SPA050PVC for $\frac{1}{2}$ " (13mm) bolts.




Two Hole Splice

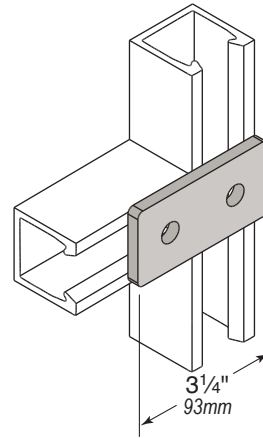


Part No.	Material
W5007PF	Polyester Fire Rated FRP Gray
W5007VF	Vinyl Ester Fire Rated FRP Beige

One Hole Washer



Part No.		Bolt Size
Polyester Fire Rated FRP Gray (PF)	Vinyl Ester Fire Rated FRP Beige (VF)	
W5053PF	W5053VF	$\frac{3}{8}$ " (10mm)
W5054PF	W5054VF	$\frac{1}{2}$ " (13mm)
W5055PF	W5055VF	$\frac{5}{8}$ " (16mm)
W5056PF	W5056VF	$\frac{3}{4}$ " (19mm)

Three Hole Splice

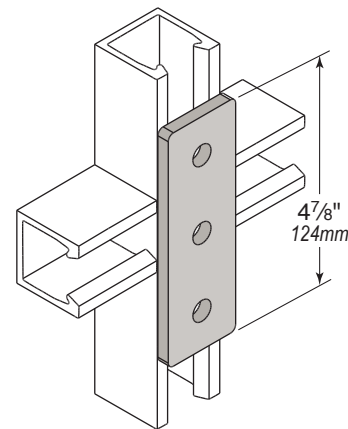


Part No.	Material
W5008PF	Polyester Fire Rated FRP Gray
W5008VF	Vinyl Ester Fire Rated FRP Beige

Hole Diameter: $\frac{7}{16}$ " (11mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)




Four Hole Splice

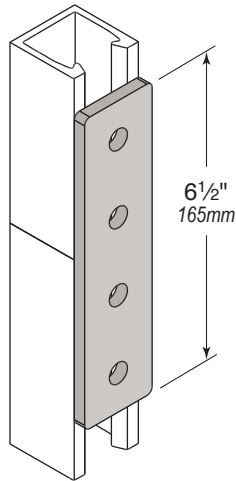


Part No.	Material
W5009PF	Polyester Fire Rated FRP Gray
W5009VF	Vinyl Ester Fire Rated FRP Beige

Five Hole Splice

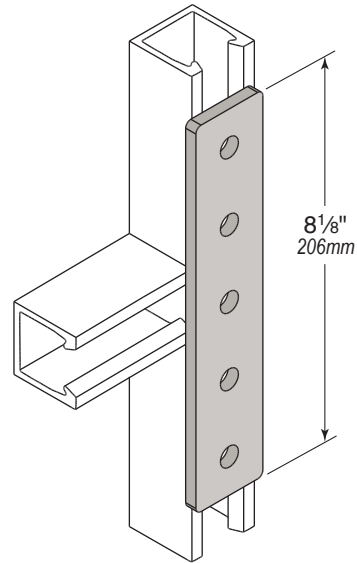


Part No.	Material
W5010PF	Polyester Fire Rated FRP Gray
W5010VF	Vinyl Ester Fire Rated FRP Beige

Three Hole Corner

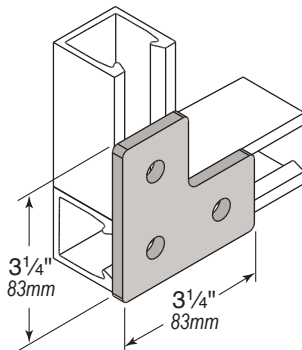

Part No.	Material
W5021PF	Polyester Fire Rated FRP Gray
W5021VF	Vinyl Ester Fire Rated FRP Beige

Four Hole Corner

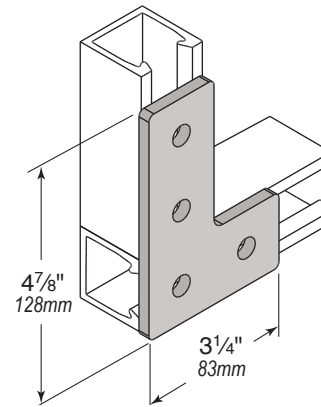


Part No.	Material
W5025PF	Polyester Fire Rated FRP Gray
W5025VF	Vinyl Ester Fire Rated FRP Beige

Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)




Three Hole Corner Gusset

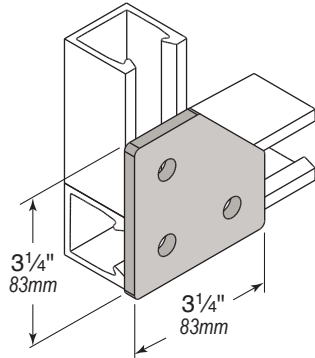


Part No.	Material
W5020PF	Polyester Fire Rated FRP Gray
W5020VF	Vinyl Ester Fire Rated FRP Beige

Four Hole Corner Gusset

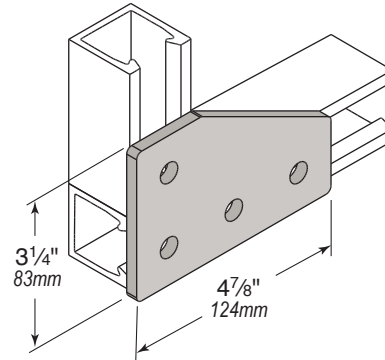


Part No.	Material
W5024PF	Polyester Fire Rated FRP Gray
W5024VF	Vinyl Ester Fire Rated FRP Beige

Four Hole Tee

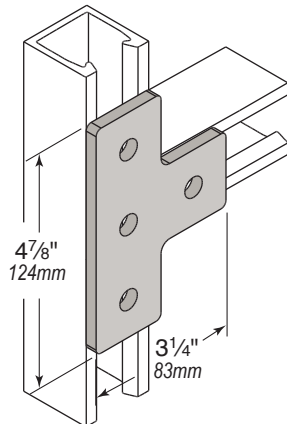

Part No.	Material
W5022PF	Polyester Fire Rated FRP Gray
W5022VF	Vinyl Ester Fire Rated FRP Beige

Five Hole Tee

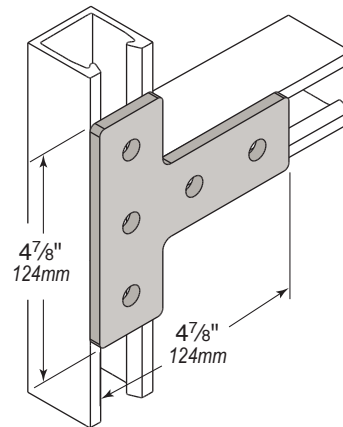


Part No.	Material
W5022MPF	Polyester Fire Rated FRP Gray
W5022MVF	Vinyl Ester Fire Rated FRP Beige

Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Five Hole Cross

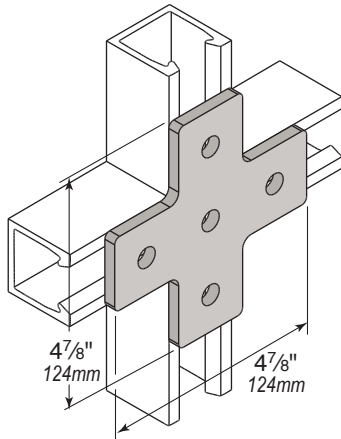


Part No.	Material
W5023PF	Polyester Fire Rated FRP Gray
W5023VF	Vinyl Ester Fire Rated FRP Beige

Five Hole Tee Gusset

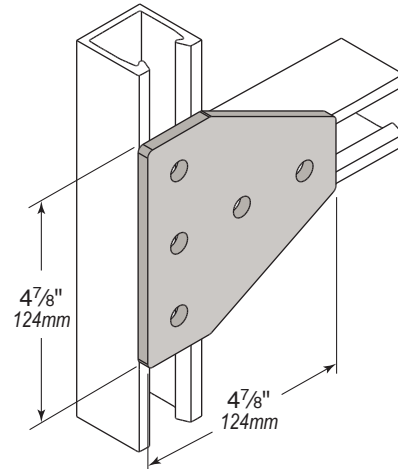


Part No.	Material
W5027PF	Polyester Fire Rated FRP Gray
W5027VF	Vinyl Ester Fire Rated FRP Beige

Six Hole Corner Gusset

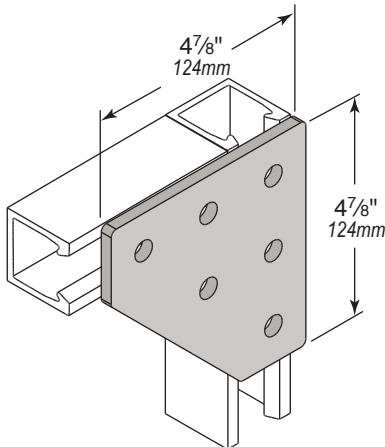

Part No.	Material
W5028PF	Polyester Fire Rated FRP Gray
W5028VF	Vinyl Ester Fire Rated FRP Beige

Six Hole Tee Gusset

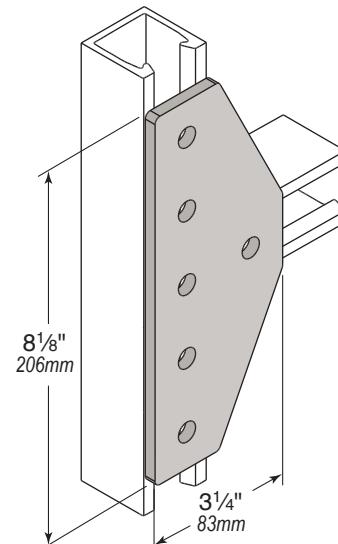


Part No.	Material
W5032PF	Polyester Fire Rated FRP Gray
W5032VF	Vinyl Ester Fire Rated FRP Beige

Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




Seven Hole Cross Gusset

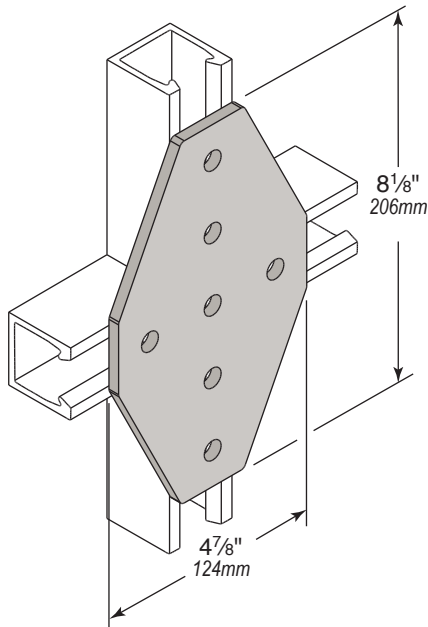

Part No.	Material
W5029PF	Polyester Fire Rated FRP Gray
W5029VF	Vinyl Ester Fire Rated FRP Beige


Two Hole Swivel Plate

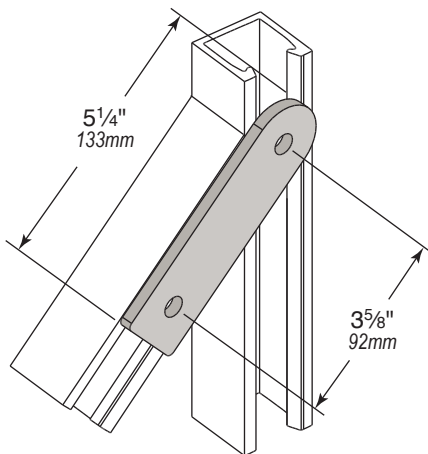

Part No.	Material
W5011PF	Polyester Fire Rated FRP Gray
W5011VF	Vinyl Ester Fire Rated FRP Beige

Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)

Four Hole 45° Angle

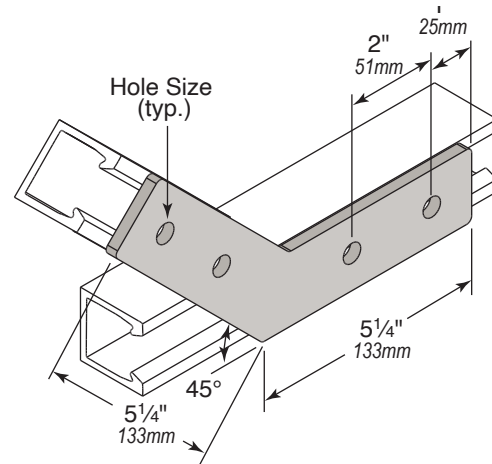


Part No.	Hole Size *	Material
W5035PF-375	7/16" (11mm)	Polyester Fire Rated FRP Gray
W5035VF-375	7/16" (11mm)	Vinyl Ester Fire Rated FRP Beige
W5035PF-500	9/16" (14mm)	Polyester Fire Rated FRP Gray
W5035VF-500	9/16" (14mm)	Vinyl Ester Fire Rated FRP Beige

* 5/8" and 3/4" Available on request




Angle Fittings

- Industry standard angle fittings for fabricating structures with Wesanco channel
- Fittings can be attached using either SS or PU bolts with Wesanco Channel or Spring Nuts or through bolting to strut back or side walls
- Highly Corrosion Resistant. See Chemical Resistant Chart on pages 296 - 298
- Standard fitting material is either:
 - Polyester (PF) FRP Gray
 - Vinyl Ester (VF) FRP Beige
 - Injection Molded Thermoplastics
 - Polyurethane (PU)
 - Polyester (PE);
- Note: When attaching fittings to side walls of channels, through bolting requires a channel spacer to prevent wall compression under heavy load conditions. Order part # SPA037PVC for $\frac{3}{8}$ " (10mm) bolts and part # SPA050PVC for $\frac{1}{2}$ " (13mm) bolts.




Three Hole 90° Angle

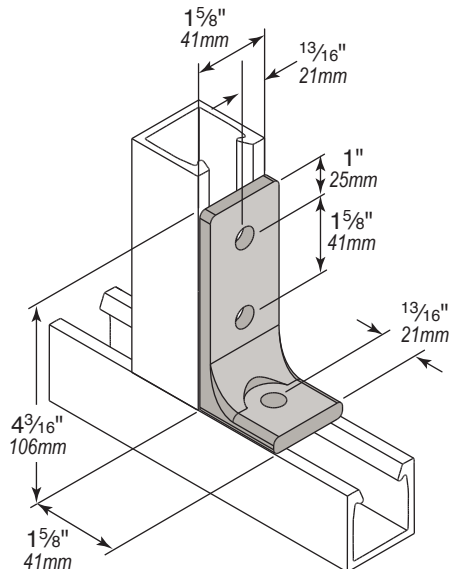


Part No.	Material
W5113PF	Polyester Fire Rated FRP Gray
W5113VF	Vinyl Ester Fire Rated FRP Beige

Two Hole 90° Angle

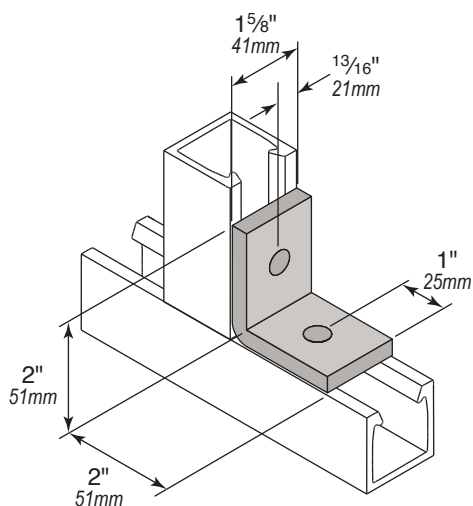

Part No.	Material
W5103PF	Polyester Fire Rated FRP Gray
W5103VF	Vinyl Ester Fire Rated FRP Beige

Four Hole 90° Angle

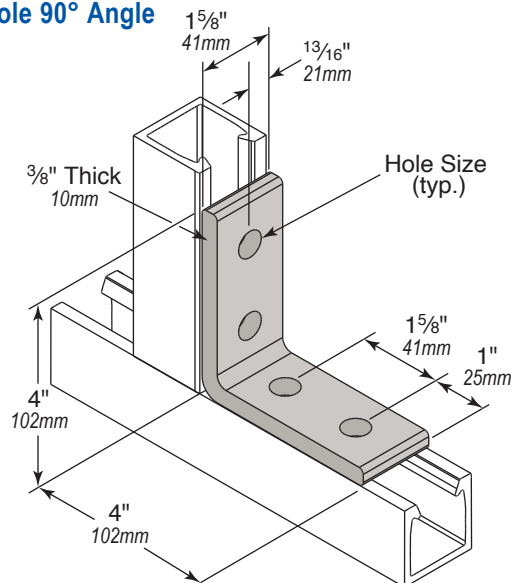


Part No.	Hole Size *	Material
W5125MPF	$\frac{7}{16}$ " (11mm)	Polyester Fire Rated FRP Gray
W5125MVF	$\frac{7}{16}$ " (11mm)	Vinyl Ester Fire Rated FRP Beige
W5125PF	$\frac{9}{16}$ " (14mm)	Polyester Fire Rated FRP Gray
W5125VF	$\frac{9}{16}$ " (14mm)	Vinyl Ester Fire Rated FRP Beige

* $\frac{5}{8}$ " and $\frac{3}{4}$ " Available on request

Hole Diameter: $\frac{7}{16}$ " (11mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)




Four Hole Self 90° Angle

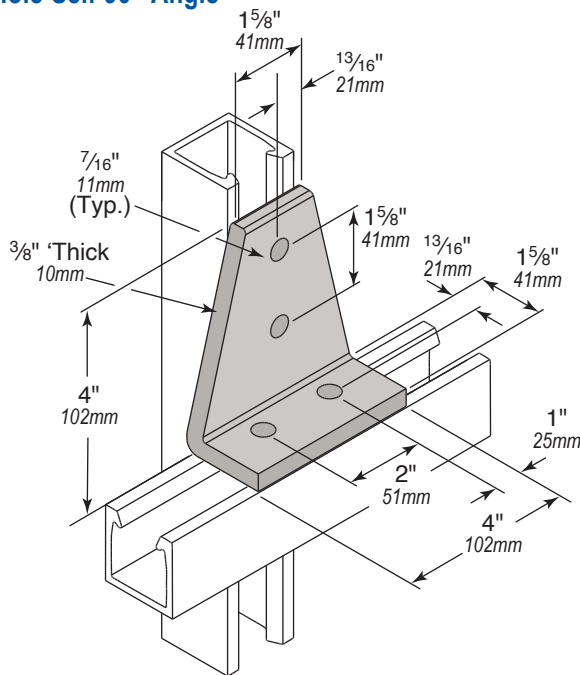


Part No.	Material
W5109PF	Polyester Fire Rated FRP Gray
W5109VF	Vinyl Ester Fire Rated FRP Beige

Universal 90° Angle

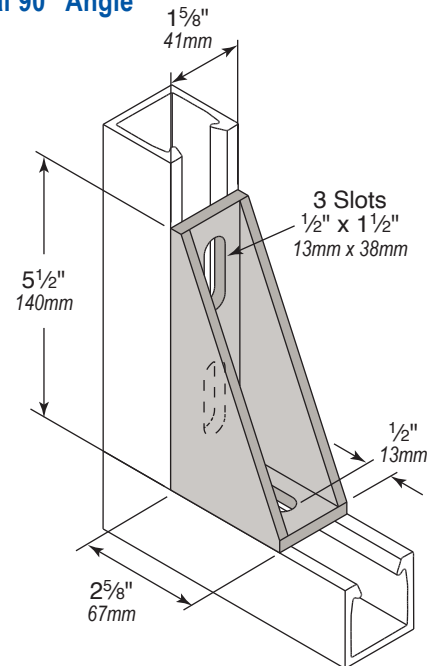

Part No.	Material
W5124PF	Polyester Fire Rated FRP Gray
W5124PU	Polyurethane Gray (PU)

Three Hole "U" Shape Support

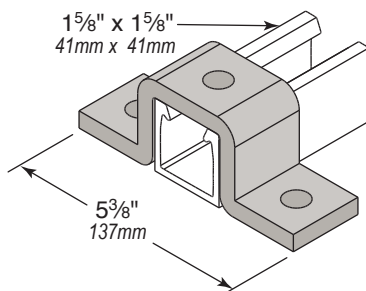

Part No.	Material
W5312PF	Polyester Fire Rated FRP Gray
W5312PU	Polyurethane Gray (PU)


Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)



Post Bases


- Wesanco Post Bases can be attached with channel nuts or through bolted to strut back or side walls
- Highly Corrosion Resistant. See Chemical Resistant Guide on pages 296 - 298
- Standard fitting material is either Injection molded Polyester PE (Black) or Polyurethane PU (Gray)

Single Post Base

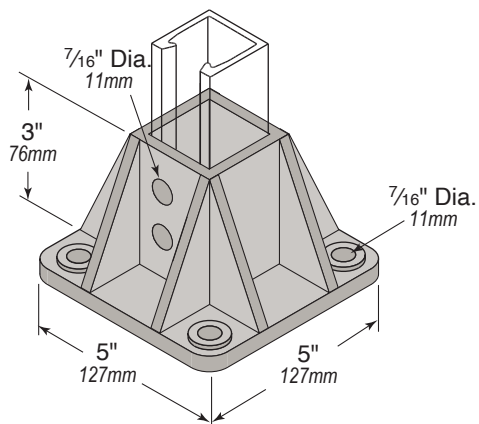

Part No.	Material
W5814SQPE	Polyester Black (PE)
W5814SQPU	Polyurethane Gray (PU)

Double Post Base

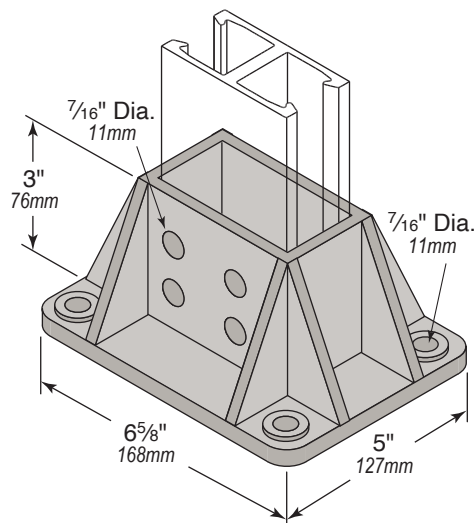

Part No.	Material
W5816SQPE	Polyester Black (PE)
W5816SQPU	Polyurethane Gray (PU)



Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)



Beam Clips


- Wesanco Beam Clips provide a secure method for attaching strut channel and or trapeze configurations to various size beams
- Fastener $\frac{1}{2}$ " x 2" (13 x 51mm) Flange Bolt Polyurethane (PU)
- Connection to channel is with Spring Nuts
- Beam Clips and Shims are Vinyl Ester Fiberglass

Beam Clips


Each Assembly Includes:

- 2 each - $\frac{1}{2}$ " x 5 $\frac{3}{8}$ " (13 x 137mm) Beam Clips
- 4 each - $\frac{1}{2}$ " x 2" (13 x 51mm) Flange Bolt Polyurethane (PU)
- 4 each - $\frac{1}{2}$ " (13mm) Standard Spring Nuts
- (Also needed, but sold separately are various thicknesses of Shims. Providing adjustment depending on the thickness of your beam flange).


General Beam Clip Application

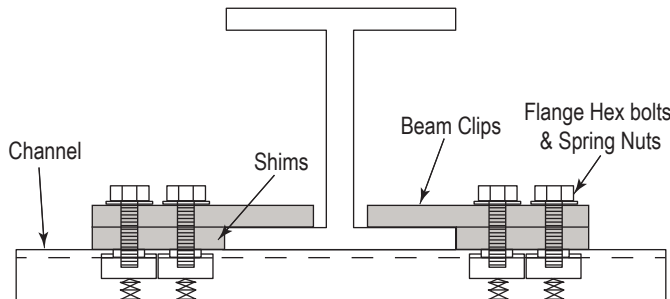

Trapeze Application Using Beam Clips

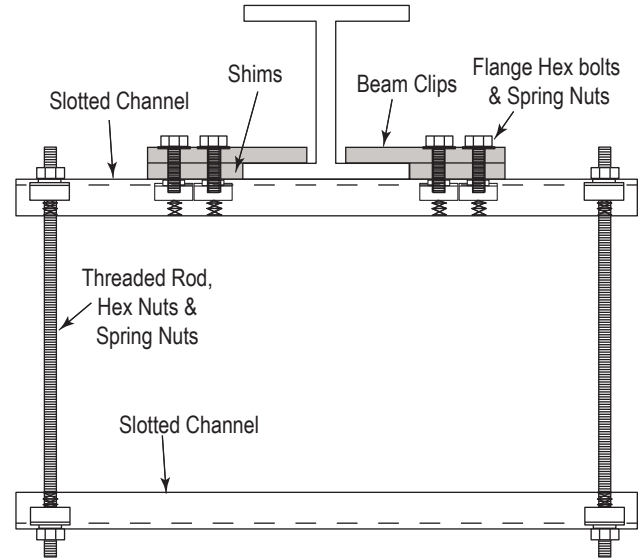


Standard Beam Clip Assembly - Sold in Pairs

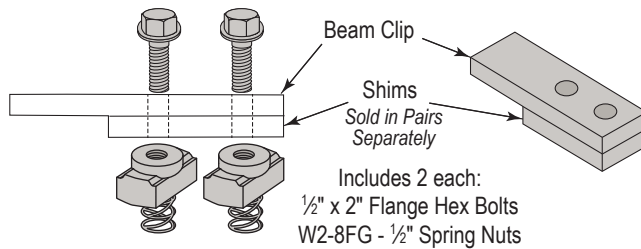


Part No.	Beam Clip Assembly Description	Beam Clip Thickness	Load Rating
BC500VFP-2	$\frac{1}{2}$ " (13mm) Beam Clip Assemblies, Beam Clips & $\frac{1}{2}$ " (13mm) thick Shims (2 of each included) W2-8FG - $\frac{1}{2}$ " (13mm) Standard Spring Nuts (4 included) HHFB50X200PU - $\frac{1}{2}$ " x 2" (13 x 51mm) Flange Bolts (4 included)	$\frac{1}{2}$ " (13mm)	250 lb (1.1kN)

Beam Clip Dimensions

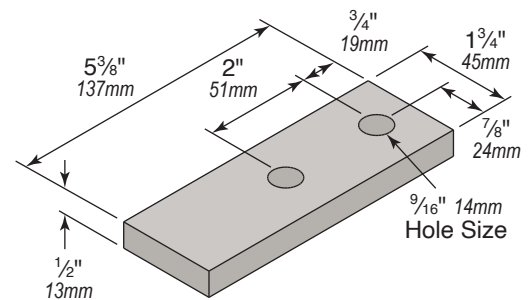

Beam Clip Shims

Part No.	Shim Description	Thickness
BCS250VF-2	$\frac{1}{4}$ " (6mm) Flange Beam Clip Shims Vinyl Ester (2 each)	$\frac{1}{4}$ " (6mm)
BCS375VF-2	$\frac{3}{8}$ " (10mm) Flange Beam Clip Shims Vinyl Ester (2 each)	$\frac{3}{8}$ " (10mm)
BCS500VF-2	$\frac{1}{2}$ " (13mm) Flange Beam Clip Shims Vinyl Ester (2 each)	$\frac{1}{2}$ " (13mm)

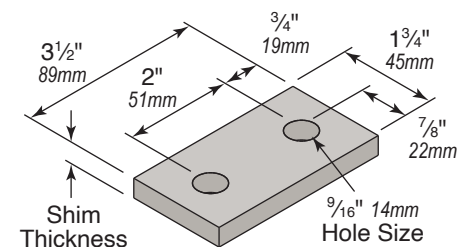

Hole Diameter: $\frac{7}{16}$ " (11mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)




Beam Clamps

- Wesanco Beam Clamps provide a simple and secure method for attaching strut channel and or trapeze configurations to various size of beams
- Beam Clamps are offered in two sizes, Large or Small
- Beam Clamps come with either $\frac{3}{8}$ " or $\frac{1}{2}$ " (10mm or 13mm) thread for threaded rod, sold separately
- Material of construction is Glass Filled Polyurethane

Beam Clamp Order Information


- Included with each Beam Clamp is a SS bolt to secure clamp to beam
- See threaded rod section for your application requirements, sold separately

Large Beam Clamp

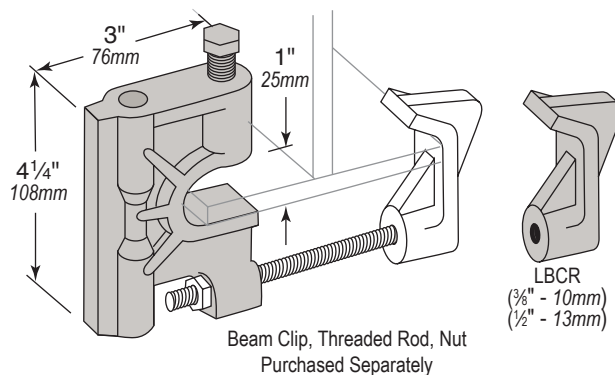

Part No.	Description	Load Rating
LBC375PU	Large Beam Clamp for $\frac{3}{8}$ " -16 Rod	600 lb (2.7kN)
LBC500PU	Large Beam Clamp for $\frac{1}{2}$ " -19 Rod	600 lb (2.7kN)
LBCR375PU	Large Beam Clamp Retaining Clip for $\frac{3}{8}$ " -16 Rod	—
LBCR500PU	Large Beam Clamp Retaining Clip for $\frac{1}{2}$ " -19 Rod	—

Small Beam Clamp

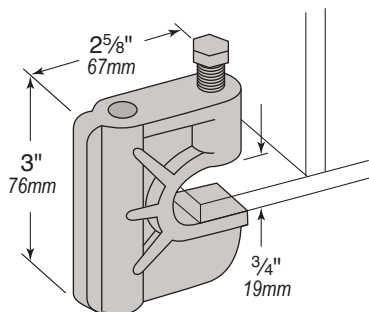



Part No.	Description	Load Rating
SBC375PU	Small Beam Clamp for $\frac{3}{8}$ " -16 Rod	600 lb (2.7kN)
SBC500PU	Small Beam Clamp for $\frac{1}{2}$ " -19 Rod	600 lb (2.7kN)

Hole Diameter: $\frac{7}{16}$ " (11mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)



Standard U-Bolts

- Non-Metallic U-Bolts with 2 Hex Nuts included
Additional nuts and washers can be purchased separately
See page 274
- Highly Corrosion Resistant: See Chemical Compatibility
Table on page 296 - 298
- Standard Material is glass-reinforced Polyurethane

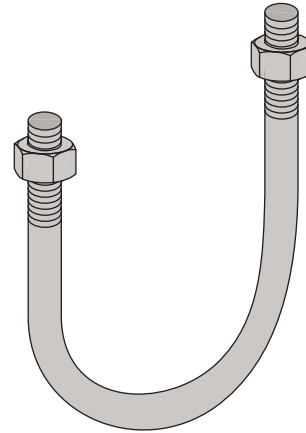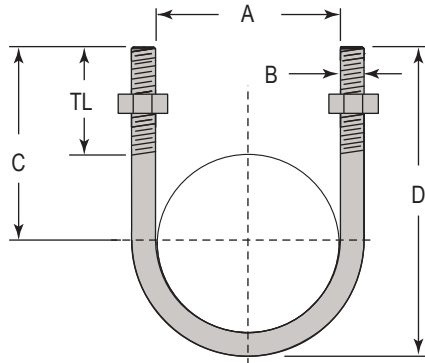

Part No.	Pipe Size	Pipe OD	A	B	C	D	Thread Length	Max. Rec. Torque
W6304FG	½" (13mm)	0.840 (21mm)	0.93" (24mm)	⅜" (10mm)	1.56" (40mm)	2.41" (61mm)	1.25" (32mm)	20 In/lbs (2.26N/m)
W6306FG	¾" (19mm)	1.050 (27mm)	1.12" (28mm)	⅜" (10mm)	1.66" (42mm)	2.60" (66mm)	1.25" (32mm)	20 In/lbs (2.26N/m)
W6308FG	1" (25mm)	1.315 (33mm)	1.37" (35mm)	⅜" (10mm)	1.78" (45mm)	2.85" (73mm)	1.25" (32mm)	20 In/lbs (2.26N/m)
W6310FG	1-¼" (32mm)	1.660 (42mm)	1.68" (43mm)	⅜" (10mm)	1.94" (49mm)	3.16" (80mm)	1.25" (32mm)	20 In/lbs (2.26N/m)
W6312FG	1-½" (38mm)	1.900 (48mm)	2.00" (51mm)	⅜" (10mm)	2.10" (53mm)	3.47" (88mm)	1.25" (32mm)	20 In/lbs (2.26N/m)
W6314FG	2" (51mm)	2.375 (60mm)	2.43" (62mm)	½" (13mm)	2.46" (63mm)	4.18" (106mm)	1.50" (38mm)	40 In/lbs (4.52N/m)
W6316FG	2-½" (61mm)	2.875 (70mm)	2.93" (74mm)	½" (13mm)	2.71" (69mm)	4.68" (119mm)	1.50" (38mm)	40 In/lbs (4.52N/m)
W6318FG	3" (76mm)	3.500 (89mm)	3.56" (90mm)	½" (13mm)	3.03" (77mm)	5.31" (135mm)	1.50" (38mm)	40 In/lbs (4.52N/m)
W6320FG	3-½" (89mm)	4.500 (114mm)	4.06" (103mm)	½" (13mm)	3.28" (83mm)	5.81" (148mm)	1.50" (38mm)	40 In/lbs (4.52N/m)
W6322FG	4" (102mm)	5.563 (141mm)	4.56" (116mm)	½" (13mm)	3.53" (90mm)	6.31" (160mm)	1.50" (38mm)	40 In/lbs (4.52N/m)


U-bolts should not be torqued above recommended values.

Hole Diameter: ⅞" (11mm); Hole Spacing - From End: 1⅜" (21mm); Hole Spacing - On Center: 1-⅞" (48mm); Width: 1-⅝" (41mm); Thickness: ¼" (6mm)



Extended Reach U-Bolts

- Extended-reach U-bolts provide a larger saddle area and longer threaded area
- Non-Metallic U-Bolts with 2 Hex Nuts included
- Highly Corrosion Resistant: See Chemical Compatibility Table on page 296 - 298
- Standard Material is glass-reinforced Polyurethane

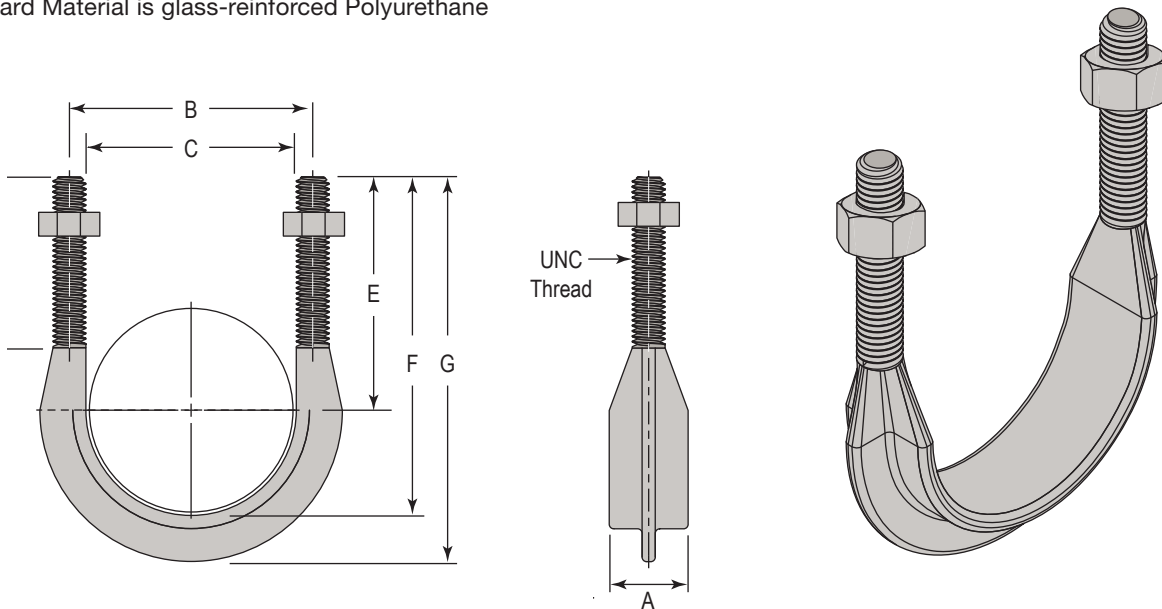

Part No.	Nominal Size	IPS Pipe Size	Bolt Torque	UNC Thread Size
W6308ERFG	1" (25mm)	1.315 (33mm)	40 In/lbs (4.52N/m)	$\frac{3}{8}$ "-16
W6312ERFG	1- $\frac{1}{2}$ " (38mm)	1.900 (48mm)	40 In/lbs (4.52N/m)	$\frac{3}{8}$ "-16
W6314ERFG	2" (51mm)	2.375 (60mm)	80 In/lbs (9.04N/m)	$\frac{1}{2}$ "-13
W6318ERFG	3" (76mm)	3.500 (89mm)	80 In/lbs (9.04N/m)	$\frac{1}{2}$ "-13
W6322ERFG	4" (102mm)	4.500 (114mm)	80 In/lbs (9.04N/m)	$\frac{1}{2}$ "-13
W6326ERFG	6" (152mm)	6.625 (168mm)	80 In/lbs (9.04N/m)	$\frac{5}{8}$ "-11

U-bolts should not be torqued above recommended values.



Part No.	Nominal Size	IPS Pipe Size	A	B	C	D	E	F	G
W6308ERFG	1" (25mm)	1.315 (33mm)	$\frac{9}{16}$ " (14mm)	1- $\frac{3}{4}$ " (45mm)	1- $\frac{3}{8}$ " (35mm)	1- $\frac{7}{8}$ " (48mm)	2- $\frac{5}{16}$ " (59mm)	3" (76mm)	3- $\frac{3}{8}$ " (86mm)
W6312ERFG	1- $\frac{1}{2}$ " (38mm)	1.900 (48mm)	$\frac{9}{16}$ " (14mm)	2- $\frac{3}{8}$ " (60mm)	2" (51mm)	2- $\frac{1}{8}$ " (54mm)	2- $\frac{21}{32}$ " (68mm)	3- $\frac{21}{32}$ " (93mm)	4- $\frac{1}{32}$ " (102mm)
W6314ERFG	2" (51mm)	2.375 (60mm)	$\frac{3}{4}$ " (19mm)	2- $\frac{15}{16}$ " (75mm)	2- $\frac{7}{16}$ " (62mm)	2- $\frac{3}{8}$ " (60mm)	3- $\frac{5}{32}$ " (80mm)	4- $\frac{3}{8}$ " (111mm)	5" (127mm)
W6318ERFG	3" (76mm)	3.500 (89mm)	$\frac{3}{4}$ " (19mm)	4- $\frac{1}{8}$ " (105mm)	3- $\frac{5}{8}$ " (92mm)	2- $\frac{5}{8}$ " (67mm)	3- $\frac{11}{16}$ " (94mm)	5- $\frac{1}{2}$ " (140mm)	6- $\frac{1}{8}$ " (156mm)
W6322ERFG	4" (102mm)	4.500 (114mm)	$\frac{3}{4}$ " (19mm)	5- $\frac{1}{8}$ " (130mm)	4- $\frac{5}{8}$ " (118mm)	2- $\frac{5}{8}$ " (67mm)	4- $\frac{3}{16}$ " (106mm)	6- $\frac{1}{2}$ " (165mm)	7- $\frac{1}{8}$ " (181mm)
W6326ERFG	6" (152mm)	6.625 (168mm)	$\frac{7}{8}$ " (22mm)	7- $\frac{3}{8}$ " (187mm)	6- $\frac{3}{4}$ " (172mm)	3- $\frac{1}{4}$ " (83mm)	5- $\frac{3}{4}$ " (146mm)	9- $\frac{1}{8}$ " (232mm)	9- $\frac{7}{8}$ " (251mm)

Hole Diameter: $\frac{7}{16}$ " (11mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: 1- $\frac{7}{8}$ " (48mm); Width: 1- $\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)





Rigid Pipe Clamps

- Interchangeable with Industry Standard Channel Framing
- Non-Metallic Clamps with Fasteners included
- Stainless Steel or Non-Metallic Fasteners
- Clamps fit IPS sizes 1/2" to 8" (13mm to 203mm)
- Ease of Installation
- No Special tools required
- Highly Corrosion Resistant: See Chemical Compatibility Table on page 296 - 298, Type PU

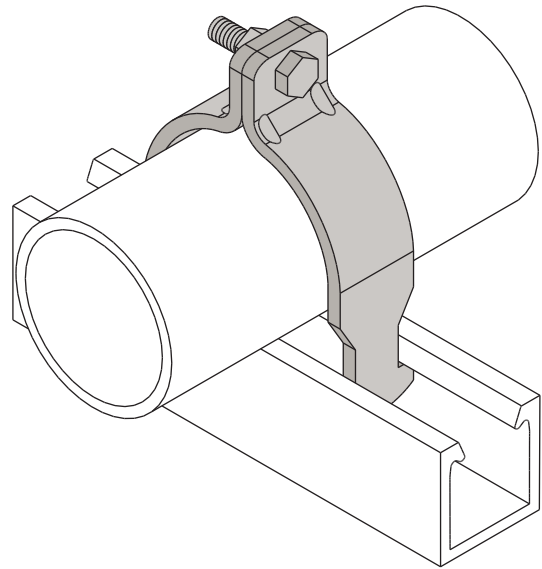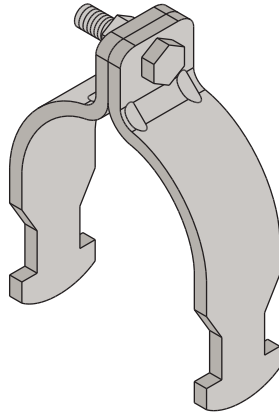

Part No.	Pipe Size	Pipe OD	Design Load	
			Horizontal	Vertical
W6126APU	1/2" (13mm)	0.840 (21mm)	160 lb (0.71kN)	60 lb (0.27kN)
W6128APU	3/4" (19mm)	1.050 (27mm)	160 lb (0.71kN)	70 lb (0.31kN)
W6130APU	1" (25mm)	1.315 (33mm)	195 lb (0.87kN)	90 lb (0.40kN)
W6132APU	1-1/4" (32mm)	1.660 (42mm)	215 lb (0.96kN)	115 lb (0.51kN)
W6134APU	1-1/2" (38mm)	1.900 (48mm)	240 lb (1.07kN)	115 lb (0.51kN)
W6138APU	2" (51mm)	2.375 (60mm)	250 lb (1.11kN)	125 lb (0.56kN)
W6142APU	2-1/2" (61mm)	2.875 (70mm)	265 lb (1.18kN)	125 lb (0.56kN)
W6146APU	3" (76mm)	3.500 (89mm)	285 lb (1.27kN)	145 lb (0.65kN)
W6154APU	4" (102mm)	4.500 (114mm)	340 lb (1.51kN)	150 lb (0.67kN)
W6162APU	5" (127mm)	5.563 (141mm)	365 lb (1.62kN)	160 lb (0.71kN)
W6170APU	6" (152mm)	6.625 (168mm)	405 lb (1.80kN)	170 lb (0.76kN)
W6174APU	8" (203mm)	8.625 (219mm)	420 lb (1.87kN)	185 lb (0.82kN)

Standard material is Polyurethane (PU) Gray
 Fasteners are available in Stainless 316. (Add ST to the end of the part number)
 Design loads are based on minimum ultimate clamp failure safety factor of 3:1
 Load Ratings based on PU Fasteners. Higher load ratings are typically achieved with SS Fasteners



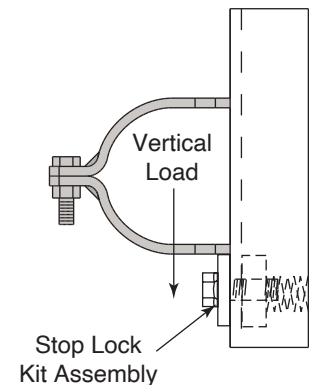
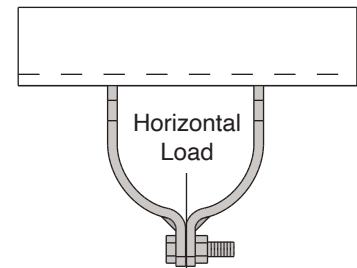


Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)



Adjustable Pipe Clamps

- Interchangeable with Industry Standard Channel Framing
- Non-Metallic
- Adjustable to U.S. and Metric Pipe Diameters
- Clamps fit Pipe Sizes $\frac{1}{2}$ " to $3\frac{1}{2}$ " (13mm to 89mm)
- Larger sizes available for non-load bearing applications
- Simple installation
- No Special Tools Required
- Highly Corrosion Resistant: Type DLR

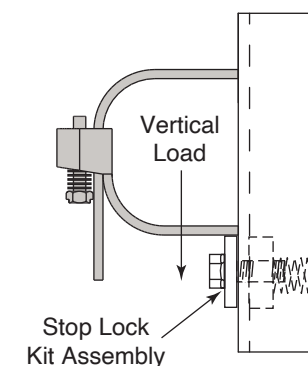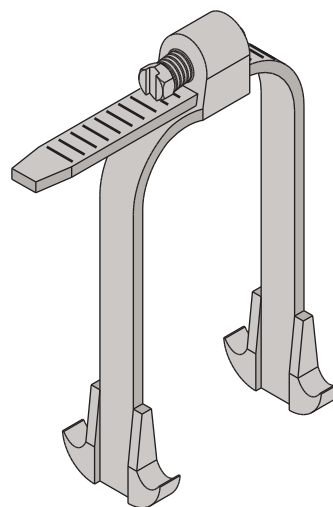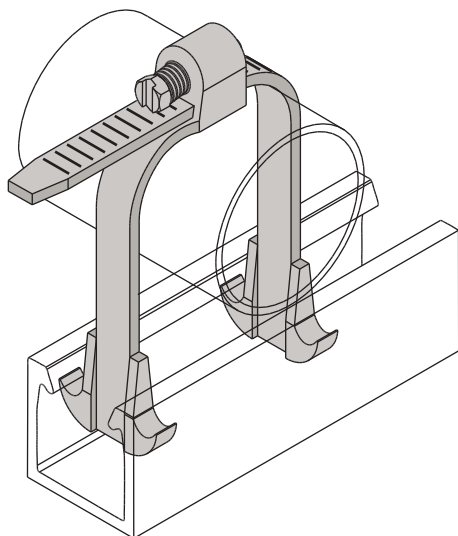

Part No.	Pipe Size	Pipe OD	Design Load		Maximum Torque
			Horizontal	Vertical	
APC050PU	$\frac{1}{2}$ " to $\frac{3}{4}$ " (13 to 19mm)	0.75" to 1.05" (19 to 27mm)	135 lb (0.60kN)	70 lb (0.29kN)	15 in-lbs
APC100PU	1" to $1\frac{1}{2}$ " (25 to 38mm)	1.05" to 1.90" (27 to 48mm)	150 lb (0.67kN)	125 lb (0.57kN)	22 in-lbs
APC200PU	$1\frac{1}{2}$ " to $2\frac{1}{2}$ " (38 to 61mm)	1.90" to 2.87" (48 to 73mm)	150 lb (0.67kN)	125 lb (0.57kN)	22 in-lbs
APC300PU	$2\frac{1}{2}$ " to $3\frac{1}{2}$ " (61 to 89mm)	2.87" to 4.00" (73 to 102mm)	150 lb (0.67kN)	125 lb (0.57kN)	22 in-lbs

Standard material is Polyurethane (PU) Gray

Design loads are based on minimum ultimate clamp failure safety factor of 3:1


Note: Standard bag quantity of 25 each

Hole Diameter: $\frac{7}{16}$ " (11mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)





Two Hole Pipe Straps

- Non-Metallic
- Stainless Steel or Non-Metallic Fasteners
- Straps fit sizes 2" to 6" (51mm to 152mm)
- Mount to Wesanco channel or directly to other surfaces
- Highly Corrosion Resistant: See Chemical Compatibility Table on pages 296 - 298
- Design Loads are stated for Horizontal and Vertical applications
- Higher design loads possible when mounted to solid surface. Consult factory

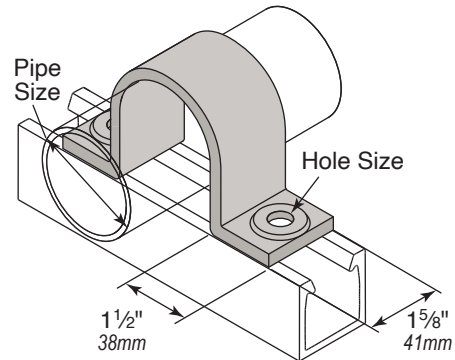

Part No.	Pipe Size	Pipe OD	Hole Size	Design Load	
				Horizontal	Vertical
W7938PU	2" (51mm)	2.375 (60mm)	7/16" (11mm)	175 lb (0.78kN)	125 lb (0.57kN)
W7846PU	3" (76mm)	3.500 (89mm)		200 lb (0.89kN)	125 lb (0.57kN)
W7854PU	4" (102mm)	4.500 (114mm)		200 lb (0.89kN)	125 lb (0.57kN)
W7870PU	6" (152mm)	6.625 (168mm)	9/16" (14mm)	225 lb (1.00kN)	125 lb (0.57kN)

Standard strap material is Polyurethane, Polyester is available (substitute PE for PU in part number)
 Fasteners are separate order items
 Design loads are based on minimum ultimate clamp failure safety factor of 3:1
 Note: Standard bag quantity of 25 each for sizes 2" (51mm) thru 4" (102mm)
 Note: Call factory for design assistance

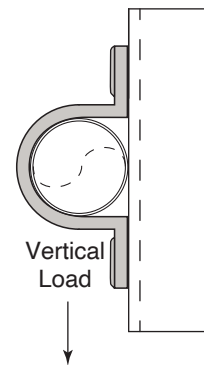



Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)



Adjustable Tubing Clamps

Designed for supporting process and instrumentation tubing under $\frac{3}{4}$ " (19mm) in diameter. Industry standard cable ties are held in place with modified Wesanco spring nuts.

- Non-Metallic
- Clamps fit tubing under $\frac{3}{4}$ " (19mm)
- Simple Installation
- No Special Tools Required
- Highly Corrosion Resistant: See Chemical Compatibility Table on pages 296 - 298, Type DLR

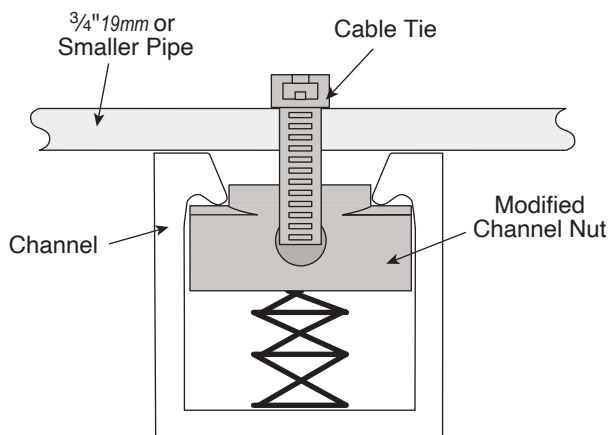

Part No.	Description	Channel Size	Design Load	
			Horizontal	Vertical
ABSN100PU	Attachment Block for Cable Tie	1- $\frac{1}{8}$ " (29mm)	--	--
ABSN200PU	Attachment Block for Cable Tie	1- $\frac{5}{8}$ " (41mm)	--	--
CT084PP50	Polypropylene Cable Tie 8.5" (216mm) Long	1- $\frac{1}{8}$ " (29mm) & 1- $\frac{5}{8}$ " (41mm)	20 lb (0.089kN)	10 lb (0.045kN)


Note: Standard bag quantity of 25 each

Hole Diameter: $\frac{7}{16}$ " (11mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: 1- $\frac{7}{8}$ " (48mm); Width: 1- $\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)




Clevis Hanger

- Sizes 1" to 4" (25mm to 102mm) Injection molded Polyester PE (Black) Special Order or Polyurethane PU (Gray) Stocked
- Size 6" (152mm) Injection molded Polyurethane PU (Gray). Profile is different that 1" thru 4"
- See Chemical Resistant Chart for material selection on pages 296 - 298
- No special tools required

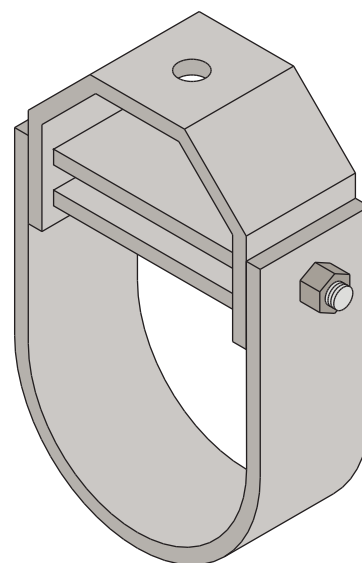

Part No.		Pipe Size	Hanger OD	Hanger Rod Diameter	Design Load Uniform
Polyester FRP Black (PE)	Polyurethane Gray (PU)				
SCH100PE	SCH100PU	½" (13mm) to 1" (25mm)	1-½" (38mm)	⅜" (10mm)	225 lb (1.0kN)
SCH200PE	SCH200PU	1-¼" (32mm) to 2" (51mm)	2-½" (61mm)	½" (13mm)	280 lb (1.2kN)
SCH300PE	SCH300PU	2-½" (61mm) to 3" (76mm)	3-⅞" (98mm)	½" (13mm)	550 lb (2.5kN)
SCH400PE	SCH400PU	3-½" (89mm) to 4" (102mm)	5" (127mm)	½" (13mm)	650 lb (2.9kN)
SCH600PE	SCH600PU	4-½" (114mm) to 6" (152mm)	7" (178mm)	½" (13mm)	1,000 lb (4.5kN)

Design loads stated with a 3:1 safety factor.

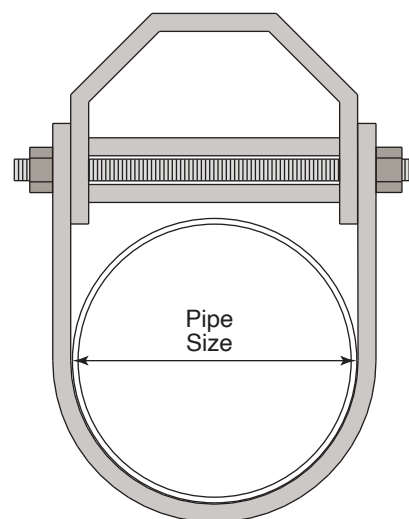


Hole Diameter: ⅞" (11mm); Hole Spacing - From End: 1⅜" (21mm); Hole Spacing - On Center: 1-⅞" (48mm); Width: 1-⅝" (41mm); Thickness: ¼" (6mm)



SuperHanger™

SuperHanger™ pipe hangers are comprised of all nonmetallic, corrosion resistant materials and maintenance free properties. SuperHanger™ is available for sizes 1" to 10" (25mm to 254mm) pipe size.

The patented SuperHanger™ pipe hanger design allows for ease of installation on both new and used pipe, structural strength for pipe loadings and sizes to support various pipe diameters. They come in multiple sizes and are ready for immediate availability.

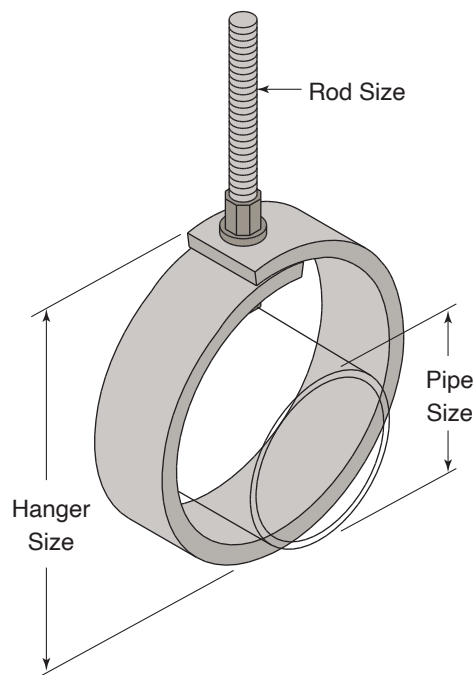

Part No.	Pipe Size	Hanger Size	Threaded Rod Size	Design Load Lbs (kN)
SH001	¾" - 1"	3" (76mm)	⅜" (10mm)	100 Lbs (0.45kN)
SH002	1-¼" to 2"	4" (102mm)	⅜" (10mm)	450 Lbs (2.00kN)
SH003	2-½" - 3"	5" (127mm)	⅜" (10mm)	450 Lbs (2.00kN)
SH004	4"	6" (152mm)	⅜" (10mm) or ½" (13mm)	450 Lbs (2.00kN)
SH006	6"	10" (254mm)	½" (13mm)	650 Lbs (2.89kN)
SH008	8"	12" (305mm)	⅝" (16mm)	650 Lbs (2.89kN)
SH010	10"	14" (356mm)	⅝" (16mm)	650 Lbs (2.89kN)

Design loads are based on minimum ultimate hanger failure safety ratio factor of 3:1




Hole Diameter: ⅞" (11mm); Hole Spacing - From End: 1⅜" (21mm); Hole Spacing - On Center: 1-⅞" (48mm); Width: 1-⅝" (41mm); Thickness: ¼" (6mm)



SuperLoop™

SuperLoop™ pipe hangers are comprised of all nonmetallic, corrosion resistant materials and maintenance free properties. For larger pipes use Super Loop Hanger. The SuperLoop™ is available for sizes from 3" to 16" (76mm to 406mm) diameter pipes.

The SuperLoop Hanger is great for industrial applications or commercial drainage pipes, where pipes sizes are considerably larger. The biggest advantage of using the Super Loop Hanger is that in any environment the Super Loop performs better than metallic counterparts, because of its rust-free properties.

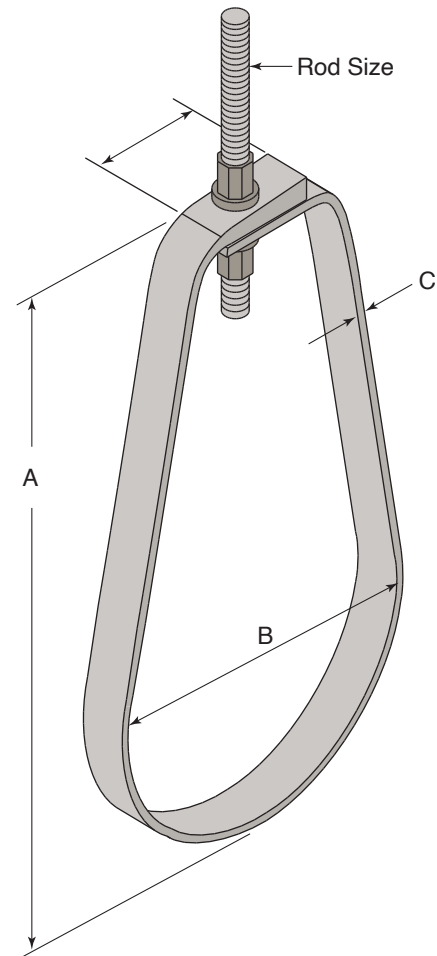

Part No.	Pipe Size	Hanger O.D.	Hanger Rod Size	A	B	C	D	Design Load Lbs (kN)
SLH1200	12" (305mm)	13-½" (343mm)	¾" (19mm)	20.5" (521mm)	13.50" (343mm)	0.40 (10mm)	2.76 (70mm)	1,330 Lbs (5.92kN)
SLH1400	14" (356mm)	14" (356mm)	1" (25mm)	21.1" (536mm)	14.02" (356mm)	0.40 (10mm)	2.76 (70mm)	1,500 Lbs (6.67kN)
SLH1600	16" (406mm)	16" (406mm)	1" (25mm)	24.3" (617mm)	16.00" (406mm)	0.40 (10mm)	2.76 (70mm)	2,070 Lbs (9.21kN)
SLH1800	18" (457mm)	18" (457mm)	1" (25mm)	27.0" (686mm)	18.39" (467mm)	0.40 (10mm)	2.76 (70mm)	2,070 Lbs (9.21kN)
SLH2000	20" (508mm)	20" (508mm)	1" (25mm)	30.0" (762mm)	20.00" (508mm)	0.40 (10mm)	2.76 (70mm)	2,070 Lbs (9.21kN)
SLH2400	24" (610mm)	24" (610mm)	1" (25mm)	36.0" (914mm)	23.98" (609mm)	0.40 (10mm)	2.76 (70mm)	2,070 Lbs (9.21kN)


Design loads are based on minimum ultimate hanger failure safety ratio factor of 3:1

Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)



Rack Arms

- Cables, tubing, conduit or piping can be attached to rack arm using Wesanco adjustable or rigid clamps, or Tie-Wraps
- Rack arms can be attached to Wesanco channel with $\frac{1}{2}$ " (13mm) spring nut P/N W2-8FG or $\frac{1}{2}$ " (13mm) channel nut P/N W2-8WSPU
- All Non-Metallic - Non-Conductive & Corrosion Resistant
- Available in Nylon (NY), Polyester (PE), or Polyurethane (PU)
- Ease of Installation
- No Special tools required
- Available in several different glass filled plastics
- Consult with the factory regarding your application

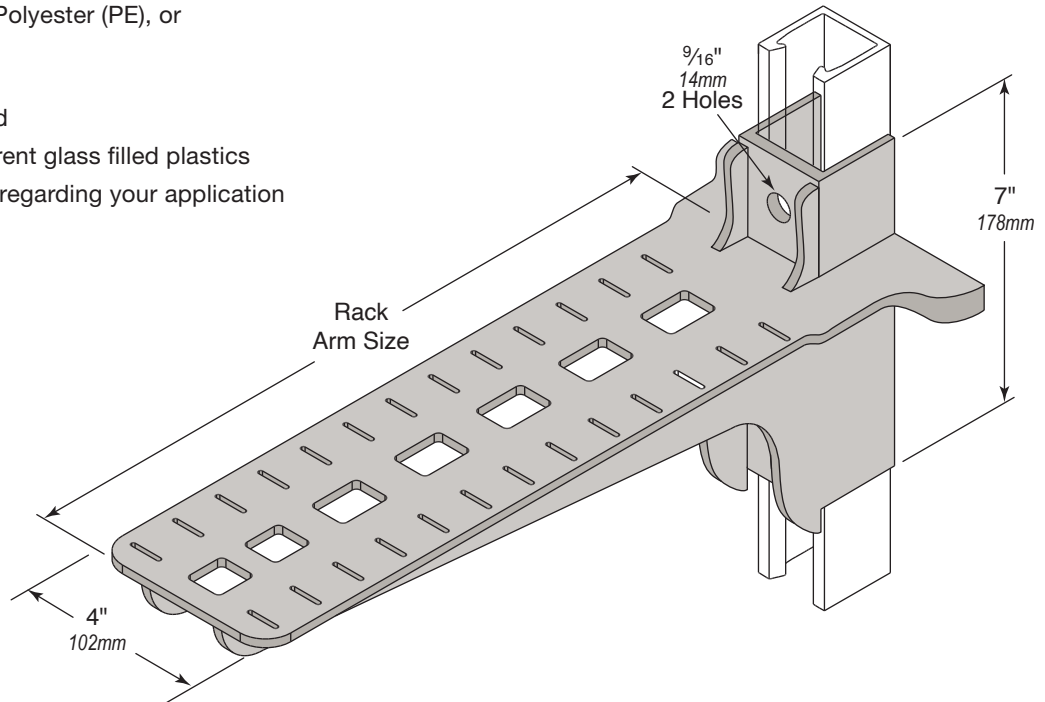

Part No.		Rack Arm Size	Design Load Concentrated	Design Load Uniform
Polyurethane Gray (PU)	Glass Filled Nylon Black (NY)			
RA1400PU	RA1400NY	14" (356mm)	600 lb (2.7kN)	600 lb (2.7kN)
RA2000PU	RA2000NY	20" (508mm)	600 lb (2.7kN)	600 lb (2.7kN)


Uniform Load applied over full length of arm
 Concentrated Load applied 8" (203mm) from bolted surface
 Factor of Safety: 3:1

Hole Diameter: $\frac{7}{16}$ " (11mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)





Concrete Inserts

In certain applications, it is necessary to embed a corrosion resistant channel into a new pouring of concrete. For these applications, concrete insert channel is recommended. Channel is available in two material types; polyester and vinyl ester. The concrete insert is available in either 1- $\frac{1}{8}$ " or 1- $\frac{5}{8}$ " channel profiles. Mounting the insert flush with the concrete surface is a convenient way to secure piping, conduits or electrical enclosures. Insert is shipped ready for installation with factory installed Cello-Foam filler strip.


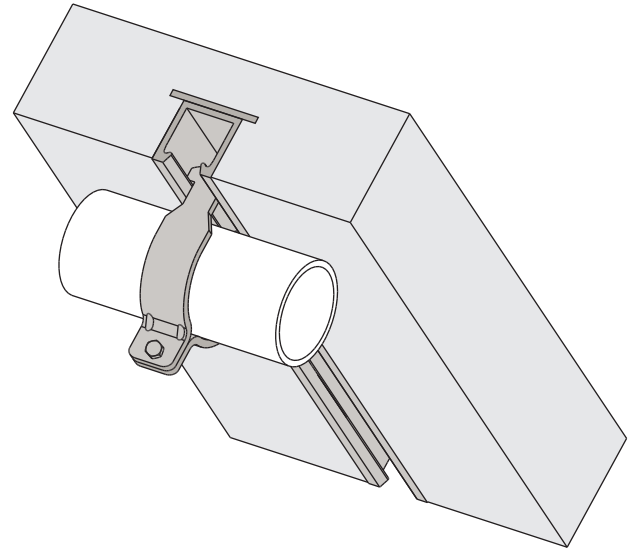


1- $\frac{5}{8}$ " x 1- $\frac{1}{8}$ " Concrete Insert

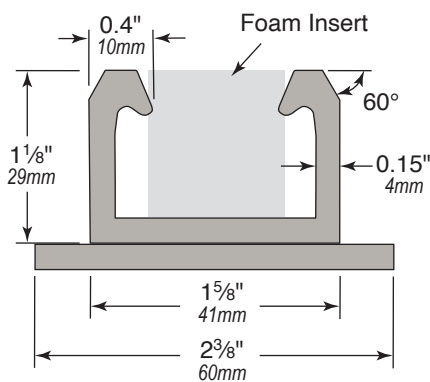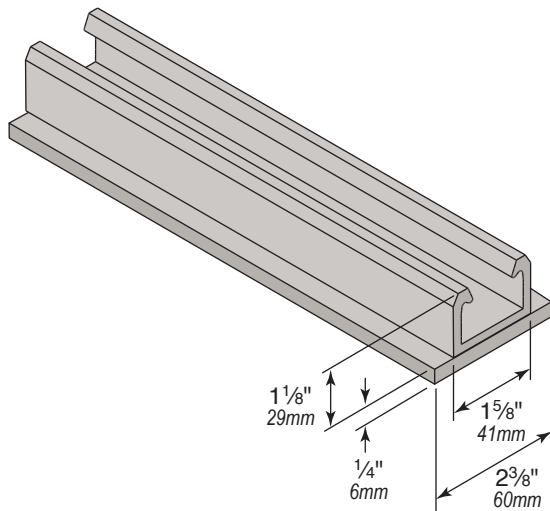

Part No.	Material
W7565EPF	Polyester Fire Rated FRP Gray
W7565EVF	Vinyl Ester Fire Rated FRP Beige

1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " Concrete Insert

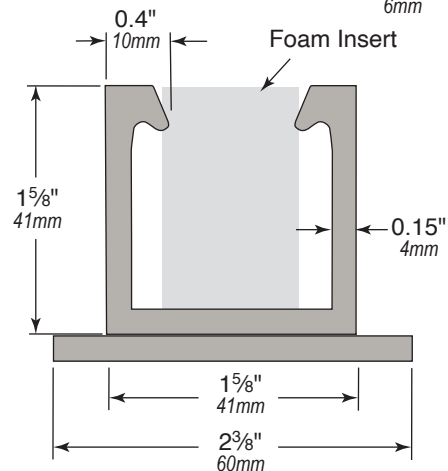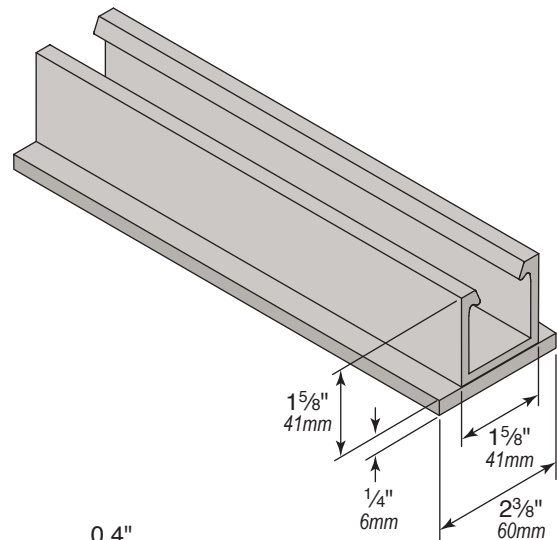

Part No.	Material
W7265EPF	Polyester Fire Rated FRP Gray
W7265EVF	Vinyl Ester Fire Rated FRP Beige



Use the following guide to determine which material in the Wesanco system provides the best performance for your application.

Chemical	Polyester Fire Rated Fiberglass (PF)		Vinyl Ester Fire Rated Fiberglass (VF)		Polyurethane (PU)	
	70°F (21°C)	160°F (71°C)	70°F (21°C)	160°F (71°C)	70°F (21°C)	160°F (71°C)
Acetic Acid, Up to 10%	R	R	R	R	R	–
Acetic Acid, Up to 50%	R	R	R	R	R	–
Acetone, Up to 10%	NR	NR	NR	NR	R	–
Aluminum Hydroxide	R	R	R	R	R	–
Ammonia Gas (dry)	NR	NR	R	100	R	–
Ammonium Hydroxide (Aqueous Ammonia), Up to 5%	NR	NR	R	R	R	–
Ammonium Hydroxide, Up to 10%	NR	NR	R	150°	R	–
Ammonium Hydroxide, Up to 20%	NR	NR	R	150°	R	–
Ammonium Nitrate	R	R	R	R	R	–
Ammonium Phosphate	R	R	R	R	R	–
Ammonium Sulfide, saturated	NR	NR	R	120°	R	–
Aqua Regia, fumes	NR	NR	R	150°	NR	–
Barium Hydroxide 10%	NR	NR	R	120°	R	–
Benzene	NR	NR	NR	NR	R	R
Benzoic Acid	R	R	R	R	R	–
Bromine, wet gas	NR	NR	R	100°	–	–
Butylene Glycol, Up to 100%	R	R	R	R	R	–
Butyric Acid, Up to 50%	R	R	R	R	R	–
Calcium Hydroxide	R	NR	R	R	R	–
Chlorine, Dry Gas	NR	NR	R	R	R	–
Chlorine, Wet Gas	NR	NR	R	R	–	–
Chlorine, Liquid	NR	NR	NR	NR	–	–
Chlorine, Water	R	R	R	R	R	–
Chromic Acid, Up to 5%	NR	NR	R	R	–	–
Chromic Acid, Up to 20%	NR	NR	R	R	–	–
Citric Acid	R	R	R	R	R	–
Copper Chloride	R	R	R	R	R	–
Copper Cyanide	R	NR	R	R	R	–
Copper Fluoride	R	NR	R	R	R	–
Copper Nitrate	R	R	R	R	R	–
Copper Sulfate	R	R	R	R	R	–
Dechlorinated Brine Storage	–	–	R	R	R	–
Esters, Fatty Acid	R	R	R	R	R	–
Fatty Acids	R	R	R	R	R	–
Ferric Chloride	R	R	R	R	R	–
Ferric Nitrate	R	R	R	R	R	–
Ferrous Chloride	R	R	R	R	R	–



Chemical	Polyester Fire Rated Fiberglass (PF)		Vinyl Ester Fire Rated Fiberglass (VF)		Polyurethane (PU)	
	70°F (21°C)	160°F (71°C)	70°F (21°C)	160°F (71°C)	70°F (21°C)	160°F (71°C)
Fluoboric Acid	R	120°	R	R	-	-
Fluosilicic Acid, Up to 10%	NR	NR	R	R	-	-
Fluosilicic Acid, Up to 32%	NR	NR	R	100°	-	-
Formic Acid, Up to 10%	NR	NR	R	R	R	-
Formic Acid, Up to 50%	NR	NR	R	100°	R	-
Gasoline, Aviation	R	NR	R	R	R	-
Green Liquor, Pulp Mill	-	-	R	R	-	-
Hydrochloric Acid, Up to 15%	R	NR	R	R	R	-
Hydrochloric Acid, Up to 37%	R	NR	R	R	R	-
Hydrofluoric Acid, Up to 10%	NR	NR	R	150°	-	-
Hydrofluoric Acid, Up to 20%	NR	NR	R	100°	-	-
Hydrogen Chloride Wet Gas	R	NR	R	R	NR	-
Hydrogen Peroxide 50%	NR	NR	R	R	R	-
Hydrogen Sulfide Wet Gas	R	NR	R	R	R	-
Lactic Acid	R	NR	R	R	R	-
Lead Nitrate	-	-	R	R	R	-
Magnesium Hydroxide	NR	NR	R	R	R	-
Mercurous Chloride	R	NR	R	R	-	-
Methyl Ethyl Ketone	NR	NR	NR	NR	NR	-
Methylene Chloride	NR	NR	NR	NR	NR	-
Nickel Sulfate, Low PH	NR	NR	R	R	R	-
Nitric Acid, Up to 5%	NR	NR	R	150°	R	-
Nitric Acid, Up to 35%	NR	NR	R	120°	R	-
Nitric Acid, Vapor	NR	NR	R	R	-	-
Perchloric Acid, Up to 10%	NR	NR	R	150°	-	-
Pickling Acid, 3-5% H2SO4	R	R	R	R	R	-
Phosphoric Acid, (115%, P20%)	NR	NR	R	R	-	-
Phosphoric Acid, Vapor or Condensate	NR	NR	R	R	-	-
Potassium Chloride	R	R	R	R	R	-
Potassium Nitrate	R	R	R	R	R	-
Potassium Persulfate	NR	NR	R	R	R	-
Sea Water	R	R	R	R	R	-
Silver Cyanide, Up to 5%	NR	NR	R	R	R	-
Sodium Chloride	R	R	R	R	-	-
Sodium Hydroxide, Up to 25%	NR	NR	R	150°	R	-
Sodium Hydroxide, Up to 50%	NR	NR	R	180°	-	-
Sodium Hypochlorite, Up to 15%	NR	NR	R	150°	R	-
Sodium Nitrate	R	R	R	R	R	-
Sodium Sulfate	R	NR	R	R	R	-



Chemical	Polyester Fire Rated Fiberglass (PF)		Vinyl Ester Fire Rated Fiberglass (VF)		Polyurethane (PU)	
	70°F (21°C)	160°F (71°C)	70°F (21°C)	160°F (71°C)	70°F (21°C)	160°F (71°C)
Sodium Sulfide	NR	NR	R	R	R	–
Sulfuric Acid, Up to 25%	R	R	R	R	R	–
Sulfuric Acid, Up to 50%	NR	NR	R	R	R	–
Sulfuric Acid, Up to 70%	NR	NR	R	R	R	–
Sulfuric Acid, Up to 75%	NR	NR	R	120°	–	–
Sulfuric Acid, Up to 80%	NR	NR	NR	NR	NR	–
Sulfuric Acid, Vapor	R	NR	R	R	R	–
Tannic Acid	R	NR	R	R	R	–
Trichlorethylene, Fumes	NR	120°	R	R	R	–
Trisodium Phosphate	R	NR	R	R	R	–
Urea	R	NR	R	150°	R	–
Vegetable Oils	R	R	R	R	R	–
Vinegar	R	R	R	R	R	–
Water, Deionized	R	R	R	R	R	–
White Liquor, Pulp Mill	–	–	R	R	–	–
Zinc Chloride	R	R	R	R	–	–

Note:

The recommendations contained in this guide are made without representation as to results. Since the actual use by others is beyond our control, no guarantee expressed or implied, is made by Wesanco, as to the effects of such use or the results to be obtained nor does Wesanco assume any liability arising out of the use by others of the products referenced in this guide. Nor is this information herein to be construed as absolutely complete since additional information may be needed or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. We suggest that you evaluate these recommendations and suggestions in your own laboratory prior to use. Our responsibility for claims arising from breach of warranty, negligence, or otherwise is limited to the purchase price of the material.



Technical Data


Material Specifications

Page 300




Design & Dimensional Information

Pages 301 - 302

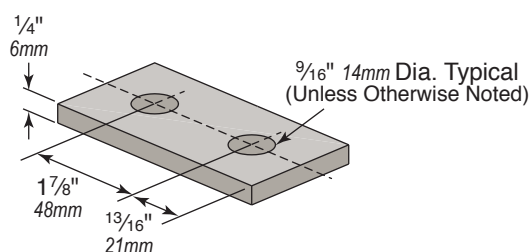


Channel Engineering Data Crush Load for Channel

Pages 303 - 305

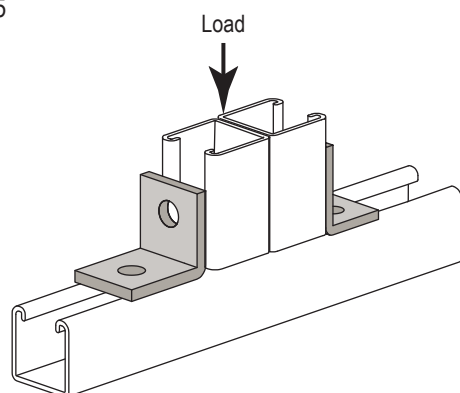


Safe Thru-Bolting and Trapeze Information

Pages 306 - 307

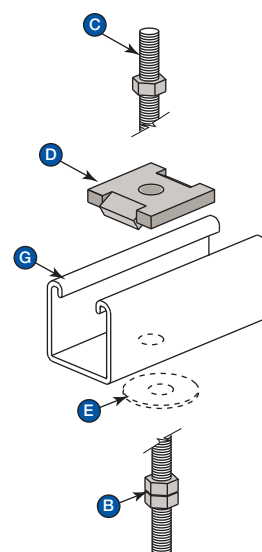


Electrical Instructions

Page 308



Beta Clamp Technical Data

Pages 309 - 310



Conversion Tables

Pages 311 - 313

Versabar to Wesanco Cross References

Pages 314 - 320

Florida Strut to Wesanco Cross References

Pages 321 - 325

Indexes

Pages 326 - 339

Stainless Steel Channel

Channel is available as roll formed sections in stainless steel, conforming to ASTM A 240 Type 304 (**S4**), or ASTM A 240 Type 316 (**S6**). Consult factory for sizes and availability.

To order, see page 23 for material codes to use for channel designation.

Examples: W500**S4**, W200**S6**.

Stainless Steel Nuts (Channel Type)

Channel Nuts are available in Type 316 Stainless Steel. Consult factory for sizes and availability.

- Sintered 316 - "Domestic Nut" ASTM: B783

- Bar Stock 316 - "Import Nut" ASTM: A240

To order add "S6" to nut designation. Example: W2-8S6

Stainless Steel Engineering Data

The properties of section for stainless steel channels are the same as shown starting on page 38 of this catalog for mild steel channel. Load ratings for stainless steel channel meet or exceed corresponding mild steel ratings published throughout this catalog.

Stainless Steel, Aluminum, and Copper Plated Pipe Clamps

Pipe Clamps are available from stock in Stainless Steel Types 304 (S4) and 316 (S6) and by special order in Aluminum and Copper Plated. Consult factory for details.

Aluminum Channel

Channel is available as extruded aluminum sections type 6063T6, conforming to ASTM B221. Consult factory for sizes and availability.

To order add "AL" to channel designation.

Example: W200**AL**.


Aluminum Nuts (Channel Type)

Available by special order. Consult factory for details. ASTM B221.


Aluminum Engineering Data

To determine the appropriate beam load capacity for extruded Aluminum Channel Sections, refer to Channel Engineering Data, W200AL see pages 38 thru 41, W500AL see pages 50 thru 54 in this catalog and multiply published values by 40%. To determine the approximate pull out slip load of Channel Nuts in extruded Aluminum Channel sections, refer to page 70 in this catalog and multiply the resistance to slip value by 75% and the resistance to pull out value by 50%.

Aluminum Channel - W200AL - $1\frac{5}{8}" \times 1\frac{5}{8}"$ (41 x 41mm)

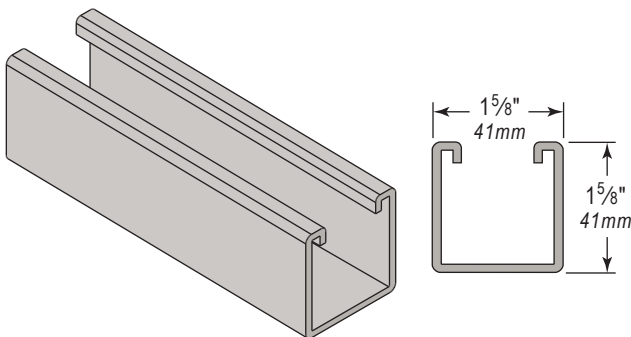

Aluminum Channel - W500AL - $1\frac{5}{8}" \times 1\frac{3}{16}"$ (41 x 21mm)

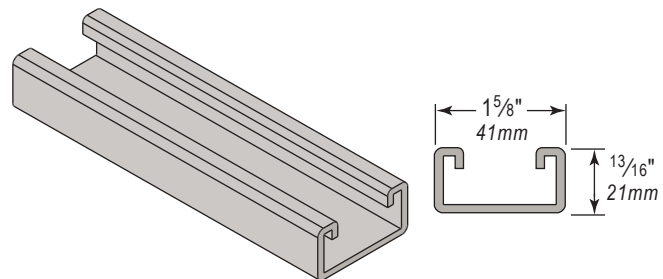



The majority of fittings, are designed to engage at the face of continuous slot channel sections, anywhere along this 1- $\frac{5}{8}$ " surface. Incorporation of either the Holes "H" ($\frac{9}{16}$ " holes, 1- $\frac{7}{8}$ " on center) or the Short Slots "EH" ($\frac{9}{16}$ " x 1- $\frac{1}{8}$ " - 2" on center short slot) configuration has been considered in the fittings' design, especially in hole spacing and placement.

TYPICAL FITTING DIMENSIONS AND CONTROL DATA (BAR STOCK AND PLATE FABRICATED COMPONENTS)

Unless otherwise indicated:

- **Width:** 1- $\frac{5}{8}$ " (1.625") unless otherwise specified.
- **Thickness:** $\frac{1}{4}$ " (material utilized is within nominal tolerance range).
- **Lengths:** As specified on drawing(s).
- **Hole Dimension:** $\frac{9}{16}$ " (unless specified otherwise).
- **Hole Placement:** $\frac{9}{16}$ " Diameter holes are aligned along a single or single intersecting centerline ($\mathcal{C}$), which bisects the 1- $\frac{5}{8}$ " (1.625") wide material (flat stock) dimension.
- **Hole Lead-In/Centering:** The $\frac{9}{16}$ " Diameter holes are located in from leading edges (leading edge to hole center) $\frac{13}{16}$ " (0.813"). This lead-in dimension controls subsequent center to center positioning and unless otherwise specified or controlled by a fittings gross dimension along a specific axis, field holes are 1- $\frac{7}{8}$ " (1.875") center to center along the material's centerline ($\mathcal{C}$). Dimension from trailing hole center to trailing edge will also be $\frac{13}{16}$ " (0.813"). (ref drawing: **A**)
- **Bend Design:** Design of each individual bend in this wide selection of fittings has been developed to maximize the material's strength while reducing stress at those bend points. This allows for cohesive nesting with the formed edge radiuses of the channel sections. This design detail provides a minimum tolerance envelope to assure a clean accurate fit and ease of assembly into structural strut/fitting elements.
- **Flat Fittings:** Without any bend from that single plane: For use with channel sections: arranged and co-dependently utilized in a double axis or parallel single axis, single plane situation.

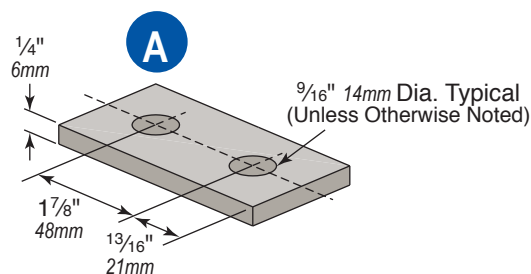

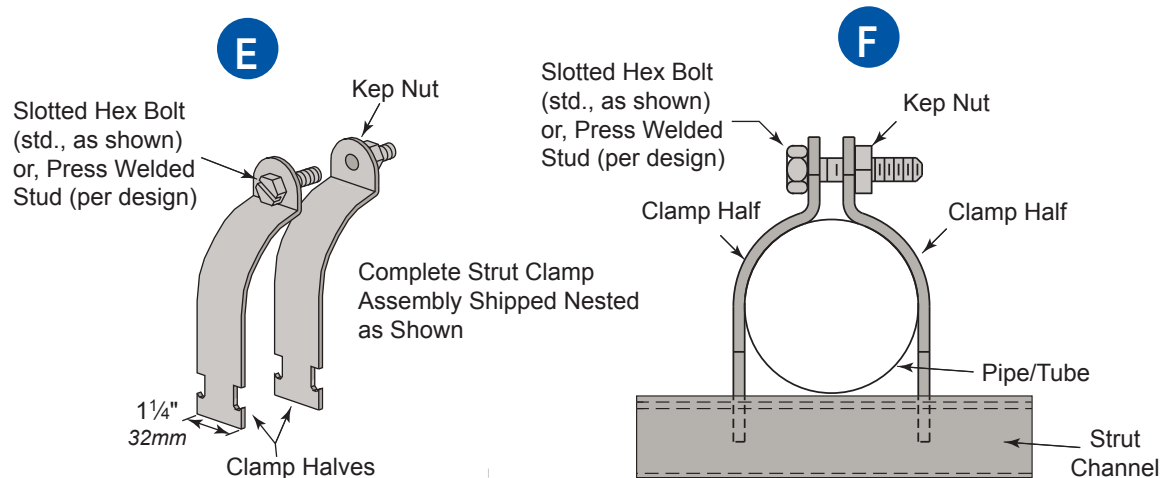

Clamp halves are pushed laterally into place. Ninety degrees to the channel face and touching the pipe element sides. The bolt and nut are installed. The grip design at the channel lips tightens during assembly, securely holding the Strut Clamp assembly in-place.

FITTING DIMENSIONS AND CONTROL DATA (STRIP I GAUGE MATERIAL FORMED PIPE CLAMP HALVES):

Unless otherwise indicated:


- **Materials width:** 1-1/4" (1.250") side to side, forming two identically matching strut clamp sides. (Ref: E and F)
- **Thickness:** Gauge dimensional material is utilized, specific to each individual strut clamp size. Ref. Part Number I Size chart for each style clamp. (Ref: E)
- **Material length:** Specific lengths of material required to fabricate each size strut clamp is not provided. The bolt tang also varies from clamp size to size and style to style.
- **Channel twist-grip feature:** Each clamp half is formed with an in-line, twist-on feature, allowing close proximity installation with a simple insert-twist maneuver. The clamp halves are pushed laterally into place, ninety degrees to the channel face and touching the pipe element sides, and the bolt / nut is installed. The grip design at the channel lip's tightens during assembly, securely holding the strut clamp assembly in place. (Ref: E and F)
- **Hole dimension / Placement:** The receiving hole and bolt pass-thru hole(s) positioned in the punched tang(s), (except in the studded version clamps) are identical sized with standard practice clearance tolerances. Placement and size of holes to accommodate the mechanical studs are similarly positioned for strength and utilization in an appropriately sized punched tang.
- **Bolt dimensions:** National Coarse Sized threaded mild steel hex head/slotted bolts are utilized; dimensions vary from clamp size to clamp size. Ref: Number / Size chart for each style clamp. (Ref: E)
- **Stud attachment:** The mild steel, ASTM conformant National Coarse Size threaded studs, are press fit into an appropriately sized receiving hole and then high resistance welded in place to further secure them against accidental loosening while the Kep nuts are turned into position (use per specific part data call-out).
- **Kep hex nuts** are utilized on all direct contact clamps; .

NOTE: Illustrations of Components throughout are representational. Utilize specific data as shown.


Crush Load for Channel

Load Data for Channel Sections, Subject to Crushing Loads


These values are based on a minimum yield point of 33,000 PSI at safety factor of 1.85.

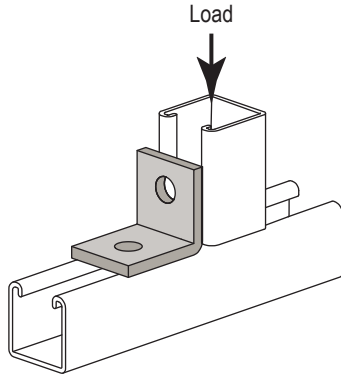


Channel Used	Reaction Load Lbs. (kN)
W200 - 1-5/8" x 1-5/8" - 12 gauge	7,000# (31.14 kN)
W210 - 1-5/8" x 1-5/8" - 14 gauge	3,600# (16.01 kN)
W300 - 1-5/8" x 1-3/8" - 12 gauge	6,900# (30.69 kN)
W500 - 1-5/8" x 13/16" - 14 gauge	3,400# (15.12 kN)

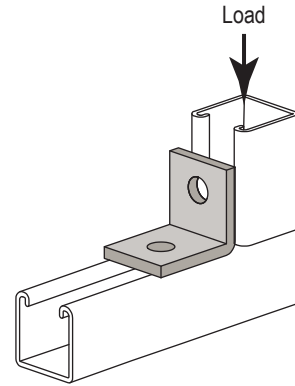

Channel Used	Reaction Load Lbs. (kN)
W200 - 1-5/8" x 1-5/8" - 12 gauge	2,900# (12.90 kN)
W210 - 1-5/8" x 1-5/8" - 14 gauge	1,500# (6.67 kN)
W300 - 1-5/8" x 1-3/8" - 12 gauge	2,800# (12.46 kN)
W500 - 1-5/8" x 13/16" - 14 gauge	1,400# (6.23 kN)

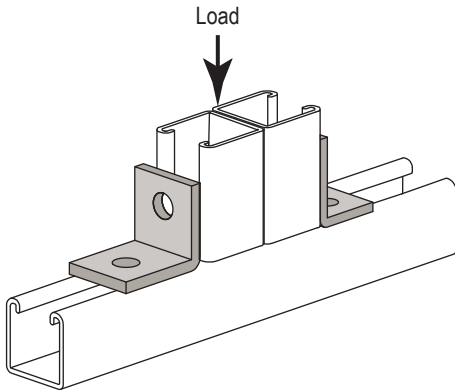

Channel Used	Reaction Load Lbs. (kN)
W200 - 1-5/8" x 1-5/8" - 12 gauge	7,000# (31.14 kN)
W210 - 1-5/8" x 1-5/8" - 14 gauge	3,600# (16.01 kN)
W300 - 1-5/8" x 1-3/8" - 12 gauge	6,900# (30.69 kN)
W500 - 1-5/8" x 13/16" - 14 gauge	3,400# (15.12 kN)

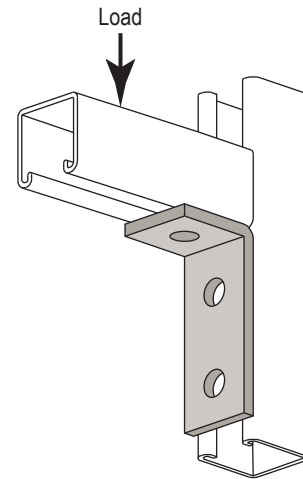

Channel Used	Reaction Load Lbs. (kN)
W200 - 1-5/8" x 1-5/8" - 12 gauge	2,900# (12.90 kN)
W210 - 1-5/8" x 1-5/8" - 14 gauge	1,500# (6.67 kN)
W300 - 1-5/8" x 1-3/8" - 12 gauge	2,800# (12.46 kN)
W500 - 1-5/8" x 13/16" - 14 gauge	1,400# (6.23 kN)

Point Load


Design Load Data for Channel Connections

Load diagrams indicate two design loads;
 one for 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 12 gauge sections (see page 39) and
 one for 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 14 gauge sections (see page 40)
 Safety factor = 2- $\frac{1}{2}$ based on ultimate strength of connection.

90° Fittings


(When used in position shown)

2-Hole Rack Connector

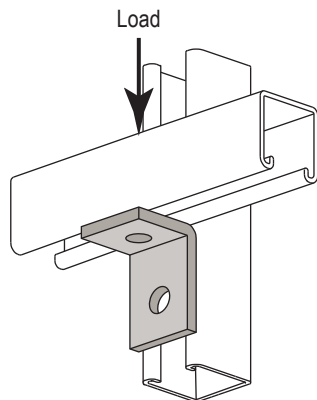

Channel Used	Design Load Lbs. (kN)
W200 - 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 12 gauge	1,500# (6.67 kN)
W210 - 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 14 gauge	1,000# (4.45 kN)


2-Hole End Connector

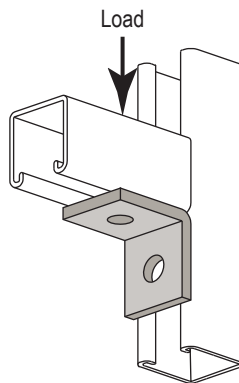

Channel Used	Design Load Lbs. (kN)
W200 - 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 12 gauge	1,500# (6.67 kN)
W210 - 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 14 gauge	1,000# (4.45 kN)

2-Hole End Connector


Both Ends Supported



Channel Used	Design Load Lbs. (kN)
W200 - 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 12 gauge	1,000# (4.45 kN)
W210 - 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 14 gauge	650# (2.89 kN)


3-Hole End Connector

Both Ends Supported

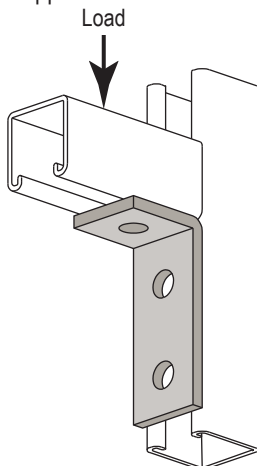

Channel Used	Design Load in LBS.
W200 - 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 12 gauge	2,000# (8.90 kN)
W210 - 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 14 gauge	1,500# (6.67 kN)

3-Hole Column Stringer Connector

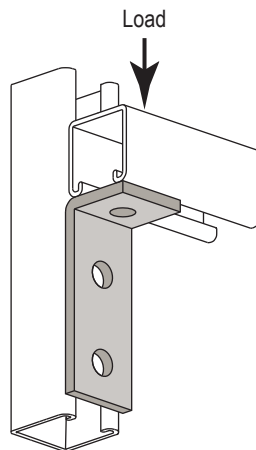


Channel Used	Design Load Lbs. (kN)
W200 - 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 12 gauge	500# (2.22 kN)

Flat Plate Fittings

2-Hole Splice Plate

Both Ends Supported



Channel Used	Design Load in LBS.
W200 - 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 12 gauge	1,000# (4.45 kN)
W210 - 1- $\frac{5}{8}$ " x 1- $\frac{5}{8}$ " - 14 gauge	800# (3.56 kN)


Uniform Load - 90° Fittings

Design Load Data for Channel Connections

Load diagrams indicate two design loads;
 one for 1-5/8" x 1-5/8" - 12 gauge sections
 (see page 39) and
 one for 1-5/8" x 1-5/8" - 14 gauge sections
 (see page 40)
 Safety factor = 2-1/2 based on ultimate strength
 of connection.

3-Hole Rack Corner Angle


Both Ends Supported

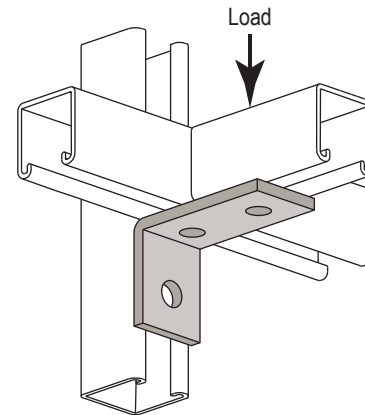

Channel Used	Design Load Lbs. (kN)
W200 - 1-5/8" x 1-5/8" - 12 gauge	1,500# (6.67 kN)
W210 - 1-5/8" x 1-5/8" - 14 gauge	1,000# (4.45 kN)

4-Hole Rack Corner Angle


Both Ends Supported

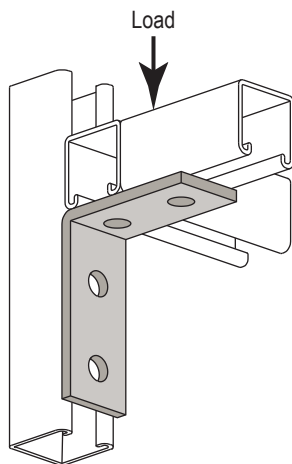

Channel Used	Design Load Lbs. (kN)
W200 - 1-5/8" x 1-5/8" - 12 gauge	2,000# (8.90 kN)
W210 - 1-5/8" x 1-5/8" - 14 gauge	2,000# (8.90 kN)


4-Hole Gusset Corner Angle, Left or Right Hand

Both Ends Supported

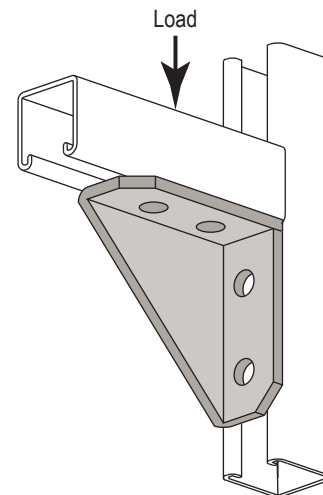


Channel Used	Design Load Lbs. (kN)
W200 - 1-5/8" x 1-5/8" - 12 gauge	2,000# (8.90 kN)
W210 - 1-5/8" x 1-5/8" - 14 gauge	2,000# (8.90 kN)

Safe Thru-Bolting and Trapeze Information

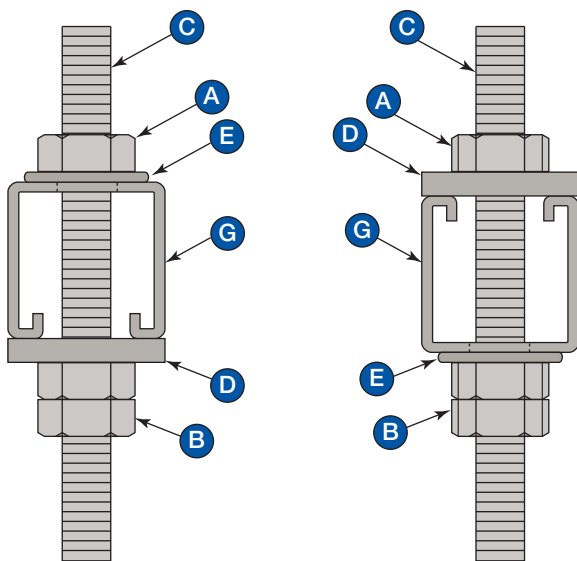

Single Section Perforated Channel

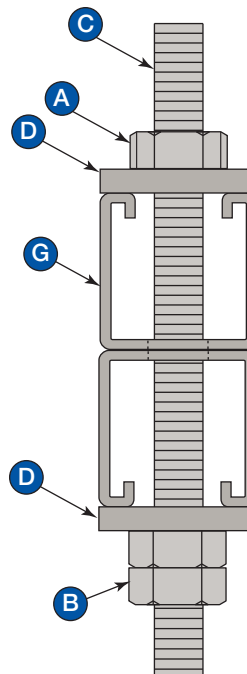


Double Section Perforated Channel

Common Components

- A: Top Hex Nut
- B: Bottom Double Hex Nuts
- C: All Thread Rod
- D: Flat Fitting (With Indents Shown).
- E: Fender or "Cut" Washer. (Recommended).
- F: (Not Shown) Lock Washer (S), Kep Nut(S), or Other Security Measures as Required.
- G: Perforated Strut (Recommended).

Over tightening face supported through bolted all thread rod or other mechanical fasteners can distort the channel section beyond its intended maximum safe configuration causing serious distortion and possible failure.

Utilize bolting security measures to prevent accidental loosening.

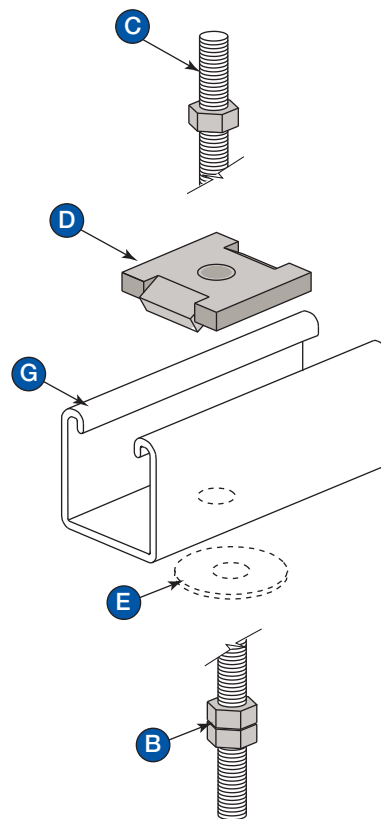

Bolted Channel

Attachment Information



Introduction

Channel

Channel Nuts
& Hardware

General
Fittings

Brackets

Beam
Clamps

Pipe & Conduit
Supports

Electrical
Fittings


Spring
Steel

Concrete
Inserts


Rooftop
Supports

Fiberglass
System


Technical
Data




Shallow channel bolted thru from inside to backing plate with $\frac{1}{2}$ " dia. Allen head bolt and washer; hex nut behind.



Shallow channel bolted thru from face to backing plate with $\frac{1}{4}$ " face fitting and $\frac{1}{2}$ " hex bolt; hex nut behind.

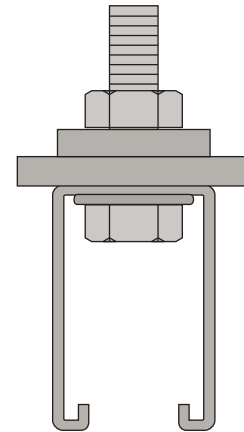

Deep style channel bolted thru from inside to beam flange utilizing $\frac{1}{2}$ " dia. hex bolt washer (inside channel), beveled washer and hex nut on top of flange.




1- $\frac{5}{8}$ " Deep channel type bolted thru from inside to backing plate with $\frac{3}{8}$ " dia. hex bolt, and washer; hex nut behind.


**Do not over tighten faced thru bolts.
Utilize bolting security measures
to prevent accidental loosening.**

OVER TIGHTENING CAUTION


Over tightening "bottoming" a threaded fastener against the bottom of a channel section will result in serious damage and possible failure. Use proper length fasteners and leave a slight gap; fastener face to channel surface.



Shallow channel with $\frac{1}{4}$ " thick fitting and $\frac{15}{16}$ " max. bolt length.



1- $\frac{5}{8}$ " Channel with $\frac{1}{4}$ " fitting and 1- $\frac{1}{4}$ " working length bolt.



1- $\frac{5}{8}$ " Deep Channel with $\frac{1}{4}$ " thick fitting and $\frac{1}{2}$ " all thread.

Instructions

These surface metal raceways are intended for use in the installation of electrical wiring using external joiners. The number, type and size of conductors, which may be installed in these raceways, are tabulated in table below.

Fluorescent and Incandescent Lighting

Consult your local, state and federal electrical code for all installations

While the metal wire raceway cover provides electrical continuity to the base and ground wires, if screws are required, they are to be installed in the field. Installation shall conform to Strut-Type Channel Raceway and Fittings UL5B.O

Wire		Maximum Number of Electrical Wires (at 40% fill)					
Type	Gauge	W150 1 ⁵ / ₈ " x 3 ¹ / ₄ " 12 gauge	W100 1 ⁵ / ₈ " x 2 ⁷ / ₁₆ " 12 gauge	W200 1 ⁵ / ₈ " x 1 ⁵ / ₈ " 12 gauge	W210 1 ⁵ / ₈ " x 1 ⁵ / ₈ " 14 gauge	W300 1 ⁵ / ₈ " x 1 ³ / ₈ " 12 gauge	W400 1 ⁵ / ₈ " x 1 ³ / ₁₆ " 16 gauge
FEP, FEPB	14	172	127	81	81	67	36
	12	126	92	59	59	49	26
	10	90	66	42	42	35	19
	8	51	38	24	24	20	11
	6	24	17	11	12	9	5
RH, RHH, RHW	14	52	38	24	26	20	12
	12	45	33	21	22	17	10
	10	37	27	17	18	14	8
	8	20	14	9	10	7	4
	6	14	10	6	7	5	3
T, TW	14	124	91	58	58	48	26
	12	95	70	45	45	37	20
	10	69	51	33	33	27	14
	8	36	26	17	18	14	8
	6	21	15	9	10	8	5
THHN, THWN	14	178	131	84	84	69	37
	12	130	95	61	61	50	27
	10	82	60	38	38	32	17
	8	46	34	21	22	17	10
	6	33	24	15	16	12	7
THW	14	82	61	39	39	32	17
	12	66	49	31	31	26	14
	10	52	38	24	24	20	11
	8	29	21	13	14	11	6
	6	21	15	10	10	8	5
XHHW	14	124	91	58	58	48	26
	12	95	70	45	45	37	20
	10	71	52	33	33	28	15
	8	37	27	17	19	14	8
	6	27	20	13	14	10	6

Maximum Number Of Wires

Also suitable for the number of wires in table below when installed to support and supply electric discharge type lighting fixtures when raceway wiring is suitable for at least 70°C and clearance between fixture and raceway is at least 1/8". In all cases, a snap-in cover is required to complete the raceway enclosure.



Wire Types - R, RH, T, THW, TW, TF, RUH, and RUW

Wire Size AWG	W200, W200KO W210, W210KO	W300, W300KO	W500, W500KO
14	10	10	6
12	10	10	6
10	8	6	-
8	6	4	-
6	3	2	-


Installation on Channel

The ZSA Nuts can be used with any clamp using a 1/4"-20 mounting bolt. This includes:

- Standard-Series
- Twin-Series (T1 Only)
- Beta Rubber Inserts

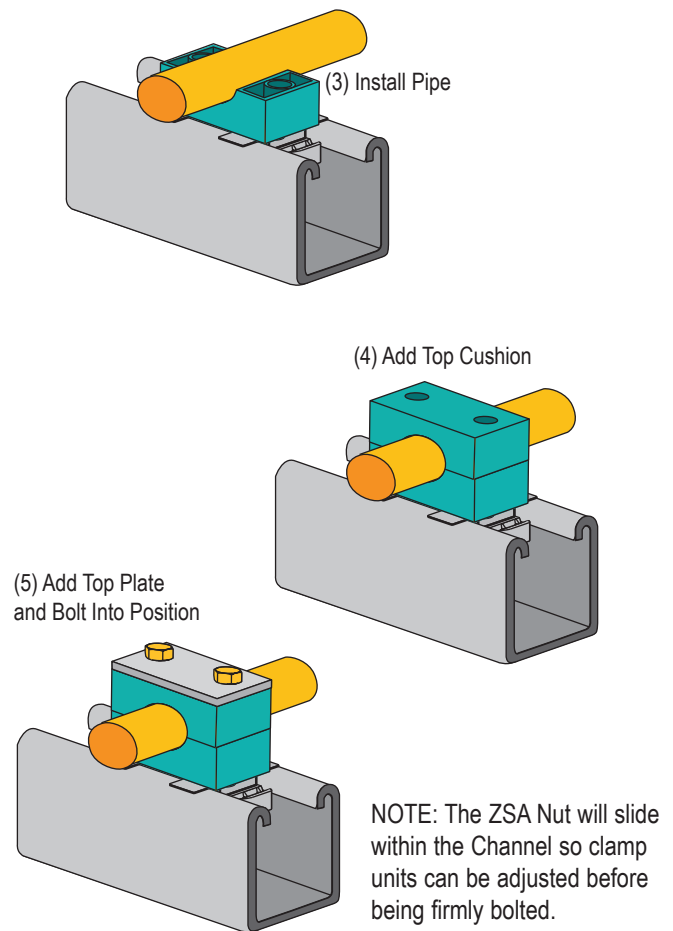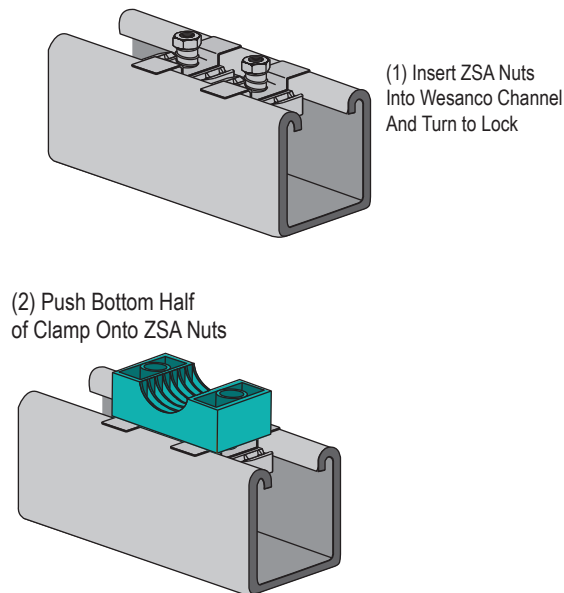

Maximum Slip Load




Max. Pipe Slip indicates that Sliding starts when the specified values (A) are reached.

Beta Standard Series


ZSI (DIN)	Hex Head Bolt UNC Thread (Metric ISO)	Polypropylene		Polyamide		Aluminium	
		Tightening Torque ft•lb (N•m)	Max. Pipe Slip lbf (kN)	Tightening Torque ft•lb (N•m)	Max. Pipe Slip lbf (kN)	Tightening Torque ft•lb (N•m)	Max. Pipe Slip lbf (kN)
S1 (1)	1/4" - 20 UNC (M6)	6 (8)	247 (11)	7 (10)	157 (7)	9 (12)	944 (42)
S2 (2)			292 (13)		180 (8)		967 (43)
S3 (3)			315 (14)		360 (16)		1,101 (49)
S4 (4)			337 (15)		382 (17)		1,124 (50)
S5 (5)			427 (19)		450 (20)		1,641 (73)
S6 (6)			450 (20)		562 (25)		2,000 (89)
S7 (7)			517 (23)		719 (32)		-

Recommended Pipe Clamp Spacing



Pipe OD in (mm)	Spacing ft - in. (m)
0.24" - 0.5" (6 - 12.7)	3' - 3" (1)
0.5" - 0.87" (12.7 - 22)	3' - 11" (1.2)
0.87" - 1.26" (22 - 32)	4' - 11" (1.5)
1.26" - 1.5" (32 - 38)	6' - 7" (2)
1.5" - 2.24" (38 - 57)	8' - 10" (2.7)
2.24" - 2.95" (57 - 75)	9' - 10" (3)
2.95" - 3" (75 - 76.1)	11' - 6" (3.5)
3" - 3.5" (76.1 - 88.9)	12' - 2" (3.7)
3.5" - 4" (88.9 - 102)	13' - 1" (4)
4" - 4.5" (102 - 114)	14' - 9" (4.5)
4.5" - 6.6" (114 - 168)	16' - 5" (5)
6.6" - 8.6" (168 - 219)	19' - 8" (6)
8.6" - 12.8" (219 - 324)	21' - 12" (6.7)
12.8" - 14" (324 - 356)	22' - 12" (7)
14" - 16" (356 - 406)	24' - 7" (7.5)
16" - 16.5" (406 - 419)	26' - 11" (8.2)
16.5" - 20" (419 - 508)	27' - 11" (8.5)
20" - 20.5" (508 - 521)	29' - 6" (9)
20.5" - 22" (521 - 558)	32' - 10" (10)
22" - 31.5" (558 - 800)	41' - 0" (12.5)

Recommended Clamping for Bends



Bends in the line should be clamped on BOTH sides of the bend as shown.

BETA CLAMP MATERIAL PROPERTIES Polypropylene (PP) Cushion

Material Properties		
Density	–	0.906 g/cm3
Tensile strength	DIN 53454	25-35 N/mm2
Flexure stress limit	DIN 53452	36N N/mm2
Compressive strength	DIN 53454	90 N/mm2
Impact strength	DIN 53453	No break
Thermo Properties		
Max. temp. resistance	-30 to 90°C	
Thermal conductivity	15 x 10-5 /°C	
Linear expansion coeff.	0.22 W/[mk]	
Electrical Properties		
Specific volume	DIN 53482	1016 ohm x cm
Chemical Properties		
Consistent for weak acids, solvents, mineral oils and seawater.		

Beta Bolt Tightening Torque

Clamp	Group	Bolt Size	Aluminum Cushion		Polypropylene Cushion		Polyamide Cushion	
			Lbf	Nm	Lbf	Nm	Lbf	Nm
Beta Standard	S1 - S7	1/4"-20	7	10	6	8	6	8
Beta Heavy	H3, H4	3/8"-16	22	30	9	12	15	20
	H5	3/8"-16	26	35	11	15	18	25
	H6	1/2"-13	41	55	29	30	30	40
	H7	5/8"-11	89	120	33	45	41	55
Beta Twin	T1	1/4"-20	-	-	4	6	4	6
	T2 - T5	5/16"-18	-	-	9	12	9	12

The outlined particulars are approximate values and are only valid as references, which are not binding, also with regard to possible protection of third parties, and they do not exempt you from your own examination of suitability of the products delivered by us. Therefore, these values can only be used in a limited sense for construction purposes. The application of the products is carried out outside our control possibilities and, therefore, is exclusively subject to your own area of responsibility. If, however, liability should be possible, it would be limited for all damages to the value of the goods supplied by us and in use by you. It goes without saying, that we guarantee the perfect quality of our products according to our general sales and delivery conditions.

Drill Sizes for NPT Pipe Taps		
Tap Size (In.)	Threads/Inch	Drill Dia. (In.)
1/8"	27	R
1/4"	18	7/16"
3/8"	18	37/64"
1/2"	14	23/32"
3/4"	14	59/64"
1"	11 1/2	1 5/32"
1 1/4"	11 1/2	1 1/2"
1 1/2"	11 1/2	1 47/64"
2"	11 1/2	2 7/32"
2 1/2"	8	2 5/8"
3"	8	3 3/4"
3 1/2"	8	3 3/4"
4"	8	4 1/4"

Tap & Drill Sizes (Unified National Coarse)		
Tap Size (In.)	Threads/Inch	Drill Size (In.)
1/4"	20	7
5/16"	18	F
3/8"	16	5/16"
7/16"	14	U
1/2"	13	27/64"
9/16"	12	31/64"
5/8"	11	17/32"
3/4"	10	21/32"
7/8"	9	49/64"
1"	8	7/8"
1 1/8"	7	63/64"
1 1/4"	7	1 1/64"
1 3/8"	6	1 1/32"
1 1/2"	6	1 1/32"
1 3/4"	5	1 9/16"
2"	4 1/2	1 25/32"

Standard Weight Pipe Data					
Nom. Diameter (In.)			Nom. Wt./Ft. (lbs.)	Length Containing One Cu. Ft.	Gallons / Linear Ft. (Gallons)
Pipe	Inside	Outside			
1/8"	0.269"	0.405"	0.245	2,526.000	0.0030
1/4"	0.364"	0.540"	0.425	1,383.800	0.0054
3/8"	0.493"	0.675"	0.568	754.360	0.0099
1/2"	0.622"	0.840"	0.851	473.910	0.0158
3/4"	0.824"	1.050"	1.131	270.030	0.0277
1"	1.049"	1.315"	1.679	166.620	0.0449
1 1/4"	1.380"	1.660"	2.273	96.275	0.0777
1 1/2"	1.610"	1.900"	2.718	70.733	0.1058
2"	2.067"	2.375"	3.653	49.913	0.1743
2 1/2"	2.469"	2.875"	5.793	30.077	0.2487
3"	3.068"	3.500"	7.580	19.479	0.3840
3 1/2"	3.548"	4.000"	9.110	14.565	0.5136
4"	4.026"	4.500"	10.790	11.312	0.6613
5"	5.047"	5.563"	14.620	7.198	1.0393
6"	6.065"	6.625"	18.970	4.984	1.5008
8"	7.981"	8.625"	28.550	2.878	2.5988
10"	10.020"	10.750"	40.480	1.826	4.0963

Copper Tube Data - Type L					
Size (In.)	O.D. (In.)	O.D. (In.)	Wall Thick. (In.)	Weight per Foot (lbs)	Weight of Water / Ft. (lbs)
1/4"	3/8"	0.375"	0.030"	0.126	0.034
3/8"	1/2"	0.500"	0.035"	0.198	0.062
1/2"	5/8"	0.625"	0.040"	0.285	0.100
5/8"	3/4"	0.750"	0.042"	0.362	0.151
3/4"	7/8"	0.875"	0.045"	0.455	0.209
1"	1 1/8"	1.125"	0.050"	0.655	0.357
1 1/4"	1 3/8"	1.375"	0.055"	0.884	0.546
1 1/2"	1 5/8"	1.625"	0.060"	1.140	0.767
2"	2 1/8"	2.125"	0.070"	1.750	1.341
2 1/2"	2 5/8"	2.625"	0.080"	2.480	2.064
3"	3 1/8"	3.125"	0.090"	3.330	2.949
3 1/2"	3 5/8"	3.625"	0.100"	4.290	3.989
4"	4 1/8"	4.125"	0.110"	5.380	5.188
5"	5 1/8"	5.125"	0.125"	7.610	8.081
6"	6 1/8"	6.125"	0.140"	10.200	11.616
8"	8 1/8"	8.125"	0.200"	19.290	20.289
10"	10 1/8"	10.125"	0.250"	30.100	31.590
12"	12 1/8"	12.125"	0.280"	40.400	45.426

Copper Tube Data - Type K					
Size (In.)	O.D. (In.)	O.D. (In.)	Wall Thick. (In.)	Weight per Foot (lbs)	Weight of Water / Ft. (lbs)
1/4"	3/8"	0.375"	0.035"	0.145	0.032
3/8"	1/2"	0.500"	0.049"	0.269	0.055
1/2"	5/8"	0.625"	0.049"	0.344	0.094
5/8"	3/4"	0.750"	0.049"	0.418	0.144
3/4"	7/8"	0.875"	0.065"	0.641	0.188
1"	1 1/8"	1.125"	0.065"	0.839	0.337
1 1/4"	1 3/8"	1.375"	0.065"	1.040	0.527
1 1/2"	1 5/8"	1.625"	0.072"	1.360	0.743
2"	2 1/8"	2.125"	0.083"	2.060	1.310
2 1/2"	2 5/8"	2.625"	0.095"	2.920	2.000
3"	3 1/8"	3.125"	0.109"	4.000	2.960
3 1/2"	3 5/8"	3.625"	0.120"	5.120	3.900
4"	4 1/8"	4.125"	0.134"	6.510	5.060
5"	5 1/8"	5.125"	0.160"	9.670	8.000
6"	6 1/8"	6.125"	0.192"	13.870	11.200
8"	8 1/8"	8.125"	0.271"	25.900	19.500
10"	10 1/8"	10.125"	0.338"	40.300	30.423
12"	12 1/8"	12.125"	0.405"	57.800	43.675

Steel Pipe Data — Schedule No 40 & 80					
Nominal Size (In.)	O.D. (In.)	Schedule No.	Wall Thick. (In.)	Weight per Foot (lbs)	Weight of Water per Foot (lbs)
3/8"	0.675"	40	0.091"	0.567	0.083
		80	0.126"	0.738	0.061
1/2"	0.840"	40	0.109"	0.850	0.132
		80	0.147"	1.087	0.101
3/4"	1.050"	40	0.113"	1.130	0.230
		80	0.154"	1.473	0.186
1"	1.315"	40	0.133"	1.678	0.374
		80	0.179"	2.171	0.311
1 1/4"	1.660"	40	0.140"	2.272	0.647
		80	0.191"	2.996	0.555
1 1/2"	1.900"	40	0.145"	2.717	0.882
		80	0.200"	3.631	0.765
2"	2.375"	40	0.154"	3.652	1.452
		80	0.218"	5.022	1.279
2 1/2"	2.875"	40	0.203"	5.790	2.072
		80	0.276"	7.660	1.834
3"	3.500"	40	0.216"	7.570	3.200
		80	0.300"	10.250	2.860
3 1/2"	4.000"	40	0.226"	9.110	4.280
		80	0.318"	12.510	3.850
4"	4.500"	40	0.237"	10.790	5.510
		80	0.337"	14.980	4.980
5"	5.563"	40	0.258"	14.620	8.660
		80	0.375"	20.780	7.870
6"	6.625"	40	0.280"	18.970	12.510
		80	0.432"	28.570	11.290
8"	8.625"	40	0.322"	28.550	21.600
		80	0.500"	43.390	19.800
10"	10.750"	40	0.365"	40.480	34.100
		80	0.593"	64.400	31.100
12"	12.75"	40	0.406"	53.600	48.500
		80	0.687"	88.600	44.000
14"	14.000"	40	0.437"	63.000	58.500
		80	0.750"	107.000	51.200
16"	16.000"	40	0.500"	83.000	76.500
		80	0.843"	137.000	69.700
18"	18.000"	40	0.563"	105.000	97.200
		80	0.937"	171.000	88.500
20"	20.000"	40	0.593"	123.000	120.400
		80	1.031"	209.000	109.400

PVC and CPVC Pipes - Schedule 40 (inches)					
Nominal Pipe Size	Outside Diameter	Minimum Wall Thickness	Nominal Inside Diameter	Weight (lb/100 ft)	
				PVC	CPVC
1/2"	0.840"	0.109"	0.622"	16	17
3/4"	1.050"	0.113"	0.824"	21	23
1"	1.315"	0.133"	1.049"	32	34
1 1/4"	1.660"	0.140"	1.380"	43	46
1 1/2"	1.900"	0.145"	1.610"	51	55
2"	2.375"	0.154"	2.067"	68	74
2 1/2"	2.875"	0.203"	2.469"	107	118
3"	3.500"	0.216"	3.068"	141	154
4"	4.500"	0.237"	4.026"	201	220
5"	5.563"	0.258"	5.047"	273	—
6"	6.625"	0.280"	6.065"	353	386
8"	8.625"	0.322"	7.981"	539	581
10"	10.750"	0.365"	10.020"	755	824
12"	12.750"	0.406"	11.938"	1001	1089
14"	14.000"	0.438"	13.124"	1180	—
16"	16.000"	0.500"	15.000"	1543	—

PVC and CPVC Pipes - Schedule 80 (inches)					
Nominal Pipe Size	Outside Diameter	Minimum Wall Thickness	Nominal Inside Diameter	Weight (lb/100 ft)	
				PVC	CPVC
1/2"	0.840"	0.147"	0.546"	20	22
3/4"	1.050"	0.154"	0.742"	27	30
1"	1.315"	0.179"	0.957"	41	44
1 1/4"	1.660"	0.191"	1.278"	52	61
1 1/2"	1.900"	0.200"	1.500"	67	74
2"	2.375"	0.218"	1.939"	95	102
2 1/2"	2.875"	0.276"	2.323"	145	156
3"	3.500"	0.300"	2.900"	194	209
4"	4.500"	0.337"	3.826"	275	305
5"	5.563"	0.375"	4.813"	387	—
6"	6.625"	0.432"	5.761"	542	582
8"	8.625"	0.500"	7.625"	805	883
10"	10.750"	0.593"	9.564"	1200	1309
12"	12.750"	0.687"	11.376"	1650	180
14"	14.000"	0.750"	12.500"	1930	—
16"	16.000"	0.843"	14.314"	2544	—

PVC - Wall Schedule 40 - Support Spacing (feet)			
NPS (inches)	Operating Temperature (°F)		
	60	100	140
1/2"	4 1/2	4	2 1/2
3/4"	5	4	2 1/2
1"	5 1/2	4 1/2	2 1/2
1 1/4"	5 1/2	5	3
1 1/2"	6	5	3
2"	6	5	3
3"	7	6	3 1/2
4"	7 1/2	6 1/2	4
6"	8 1/2	7 1/2	4 1/2
8"	9	8	4 1/2

PVC - Wall Schedule 80 - Support Spacing (feet)			
NPS (inches)	Operating Temperature (°F)		
	60	100	140
1/2"	5	4 1/2	2 1/2
3/4"	5 1/2	4 1/2	2 1/2
1"	6	5	3
1 1/4"	6 1/2	5 1/2	3 1/2
1 1/2"	7	6	3 1/2
2"	8	7	4
3"	9	7 1/2	4 1/2
4"	10	9	5
6"	11	9 1/2	5 1/2
8"	9	8	4 1/2

Hydraulic Hose - No Skive SAE 100R1 Type AT				
SAE Number	Hose I.D.		Hose O.D.	
	(in.)	(mm)	(in.)	(mm)
SAE-3	3/16"	5.0	0.46"	12
SAE-4	1/4"	6.3	0.53"	13
SAE-5	5/16"	8.0	0.59"	15
SAE-6	3/8"	10.0	0.68"	17
SAE-8	1/2"	12.5	0.81"	21
SAE-10	5/8"	16.0	0.94"	24
SAE-12	3/4"	19.0	1.09"	28
SAE-16	1"	25.0	1.41"	36
SAE-20	1 1/4"	31.5	1.79"	45
SAE-24	1 1/2"	38.0	2.00"	51
SAE-32	2"	51.0	2.54"	64

Hydraulic Hose - No Skive SAE 100R2 Type AT - ISO 1436 Type 2AT - EN 853 Type 2SN				
SAE Number	Hose I.D.		Hose O.D.	
	(in.)	(mm)	(in.)	(mm)
SAE-4	1/4"	6.3	0.53"	13
SAE-5	5/16"	8.0	0.59"	15
SAE-6	3/8"	10.0	0.68"	17
SAE-8	1/2"	12.5	0.81"	21
SAE-10	5/8"	16.0	0.94"	24
SAE-12	3/4"	19.0	1.09"	28
SAE-16	1"	25.0	1.41"	36
SAE-20	1 1/4"	31.5	1.79"	45
SAE-24	1 1/2"	38.0	2.00"	51
SAE-32	2"	51.0	2.54"	64

Hydraulic Hose - SAE 100R16 Type AT				
SAE Number	Hose I.D.		Hose O.D.	
	(in.)	(mm)	(in.)	(mm)
SAE-4	1/4"	6.3	0.53"	13
SAE-5	5/16"	8.0	0.59"	15
SAE-6	3/8"	10.0	0.68"	17
SAE-8	1/2"	12.5	0.81"	21
SAE-10	5/8"	16.0	0.94"	24
SAE-12	3/4"	19.0	1.09"	28
SAE-16	1"	25.0	1.41"	36

Hydraulic Hose - No Skive SAE 100R17 Abrasion Resistant "Tough Cover" and "Super Tough" Cover				
SAE Number	Hose I.D.		Hose O.D.	
	(in.)	(mm)	(in.)	(mm)
SAE-4	1/4"	6.3	0.53"	13
SAE-6	3/8"	10.0	0.68"	17
SAE-8	1/2"	12.5	0.81"	21
SAE-10	5/8"	16.0	0.94"	24
SAE-12	3/4"	19.0	1.09"	28
SAE-16	1"	25.0	1.41"	36
SAE-20	1 1/4"	31.5	1.79"	45

Fraction Conversion Table



Fractions	Decimal (in)	Metric (mm)	Fractions	Decimal (in)	Metric (mm)	Fractions	Decimal (in)	Metric (mm)	Fractions	Decimal (in)	Metric (mm)
1/64	0.016"	0.40	23/32	0.719"	18.26		2.165"	55	3 7/8	3.875"	98.43
1/32	0.031"	0.79	47/64	0.734"	18.65	2 3/16	2.188"	55.56	3 29/32	3.906"	99.22
	0.039"	1		0.748"	19	2 7/32	2.219"	56.36		3.937"	100
3/64	0.047"	1.19	3/4	0.750"	19.05	2 1/4	2.250"	57.15	3 15/16	3.938"	100.01
1/16	0.063"	1.59	49/64	0.766"	19.45	2 9/32	2.281"	57.94	3 31/32	3.969"	100.81
5/64	0.078"	1.98	25/32	0.781"	19.84	2 5/16	2.313"	58.74	4	4"	101.60
	0.079"	2		0.787"	20	2 11/32	2.344"	59.53	4 1/16	4.063"	103.19
3/32	0.094"	2.38	51/64	0.797"	20.24		2.362"	60	4 1/8	4.125"	104.78
7/64	0.109"	2.78	13/16	0.813"	20.64	2 3/8	2.375"	60.33	4 3/16	4.188"	106.36
	0.118"	3	53/64	0.828"	21.03	2 13/32	2.406"	61.12	4 1/4	4.250"	107.95
1/8	0.125"	3.18	27/32	0.844"	21.43	2 7/16	2.438"	61.91	4 5/16	4.313"	109.54
9/64	0.141"	3.57	55/64	0.859"	21.83	2 15/32	2.469"	62.71		4.331"	110
5/32	0.156"	3.97	7/8	0.875"	22.23	2 1/2	2.500"	63.50	4 3/8	4.375"	111.13
	0.157"	4	57/64	0.891"	22.62	2 17/32	2.531"	64.29	4 7/16	4.438"	112.71
11/64	0.172"	4.37	29/32	0.906"	23		2.559"	65	4 1/2	4.500"	114.30
3/16	0.188"	4.76	59/64	0.922"	23.42	2 9/16	2.563"	65.09	4 9/16	4.563"	115.89
	0.197"	5	15/16	0.938"	23.81	2 19/32	2.594"	65.88	4 5/8	4.625"	117.48
13/64	0.203"	5.16	61/64	0.953"	24.21	2 5/8	2.625"	66.68	4 11/16	4.688"	119.06
7/32	0.219"	5.56	31/32	0.969"	24.61	2 21/32	2.656"	67.47		4.724"	120
15/64	0.234"	5.95	63/64	0.984"	25	2 11/16	2.688"	68.26	4 3/4	4.750"	120.65
	0.236"	6	1	1"	25.40	2 23/32	2.719"	69.06	4 13/16	4.813"	122.24
1/4	0.250"	6.35	1 1/32	1.031"	26.19	2 3/4	2.750"	69.85	4 7/8	4.875"	123.83
17/64	0.266"	6.75	1 1/16	1.063"	26.99		2.756"	70	4 15/16	4.938"	125.41
	0.276"	7	1 3/32	1.094"	27.78	2 25/32	2.781"	70.64	5	5"	127.00
9/32	0.281"	7.14	1 1/8	1.125"	28.58	2 13/16	2.813"	71.44		5.118"	130
19/64	0.297"	7.54	1 5/32	1.156"	29.37	2 27/32	2.844"	72.23	5 1/4	5.250"	133.35
5/16	0.313"	7.94		1.181"	30	2 7/8	2.875"	73.03	5 1/2	5.500"	139.70
	0.315"	8	1 3/16	1.188"	30.16	2 29/32	2.906"	73.82		5.512"	140
21/64	0.328"	8.33	1 7/32	1.219"	30.96	2 15/16	2.938"	74.61	5 3/4	5.750"	146.05
11/32	0.344"	8.73	1 1/4	1.250"	31.75		2.953"	75		5.906"	150
	0.354"	9	1 9/32	1.281"	32.54	2 31/32	2.969"	75.41	6	6"	152.40
23/64	0.359"	9.13	1 5/16	1.313"	33.34	3	3"	76.20	6 1/4	6.250"	158.75
3/8	0.375"	9.53	1 11/32	1.344"	34.13	3 1/32	3.031"	76.99		6.299"	160
25/64	0.391"	9.92	1 3/8	1.375"	34.93	3 1/16	3.063"	77.79	6 1/2	6.500"	165.10
	0.394"	10		1.378"	35	3 3/32	3.094"	78.58		6.693"	170
13/32	0.406"	10.32	1 13/32	1.406"	35.72	3 1/8	3.125"	79.38	6 3/4	6.750"	171.45
27/64	0.422"	10.72	1 7/16	1.438"	36.51		3.150"	80	7	7"	177.80
	0.433"	11	1 15/32	1.469"	37.31	3 5/32	3.156"	80.17		7.087"	180
7/16	0.438"	11.11	1 1/2	1.500"	38.10	3 3/16	3.188"	80.96		7.480"	190
29/64	0.453"	11.51	1 17/32	1.531"	38.89	3 7/32	3.219"	81.76	7 1/2	7.500"	190.50
15/32	0.469"	11.91	1 9/16	1.563"	39.69	3 1/4	3.250"	82.55		7.874"	200
	0.472"	12		1.575"	40	3 9/32	3.281"	83.34	8	8"	203.20
31/64	0.484"	12.30	1 19/32	1.594"	40.48	3 5/16	3.313"	84.14	8 1/2	8.500"	215.90
1/2	0.500"	12.70	1 5/8	1.625"	41.28	3 11/32	3.344"	84.93	9	9"	228.60
	0.512"	13	1 21/32	1.656"	42.07		3.346"	85	9 1/2	9.500"	241.30
33/64	0.516"	13.10	1 11/16	1.688"	42.86	3 3/8	3.375"	85.73		9.843"	250
17/32	0.531"	13.49	1 23/32	1.719"	43.66	3 13/32	3.406"	86.52	10	10"	254.00
35/64	0.547"	13.89	1 3/4	1.750"	44.45	3 7/16	3.438"	87.31	11	11"	279.40
	0.551"	14		1.772"	45	3 15/32	3.469"	88.11		11.811"	300
9/16	0.563"	14.29	1 25/32	1.781"	45.24	3 1/2	3.500"	88.90	12	12"	304.80
37/64	0.578"	14.68	1 13/16	1.813"	46.04	3 17/32	3.531"	89.69	13	13"	330.20
	0.591"	15	1 27/32	1.844"	46.83		3.543"	90		13.780"	350
19/32	0.594"	15.08	1 7/8	1.875"	47.63	3 9/16	3.563"	90.49	14	14"	355.60
39/64	0.609"	15.48	1 29/32	1.906"	48.42	3 19/32	3.594"	91.28	15	15"	381.00
5/8	0.625"	15.88	1 15/16	1.938"	49.21	3 5/8	3.625"	92.08		15.748"	400
	0.630"	16		1.969"	50	3 21/32	3.656"	92.87	16	16"	406.40
41/64	0.641"	16.27	1 31/32	1.969"	50.01	3 11/16	3.688"	93.66	17	17"	431.80
21/32	0.656"	16.67	2	2"	50.80	3 23/32	3.719"	94.46		17.717"	450
	0.669"	17	2 1/32	2.031"	51.59		3.740"	95	18	18"	457.20
43/64	0.672"	17.07	2 1/16	2.063"	52.39	3 3/4	3.750"	95.25	19	19"	482.60
11/16	0.688"	17.46	2 3/32	2.094"	53.18	3 25/32	3.781"	96.04		19.685"	500
45/64	0.703"	17.86	2 1/8	2.125"	53.98	3 13/16	3.813"	96.84	20	20"	508.00
	0.709"	18	2 5/32	2.156"	54.77	3 27/32	3.844"	97.63			

Introduction
Channel
Channel Nuts & Hardware
General Fittings
Brackets
Beam Clamps
Pipe & Conduit Supports
Electrical Fittings
Spring Steel
Concrete Inserts
Roofing Supports
Fiberglass System
Technical Data

Versabar to Wesanco

Part Number Cross Reference

Versabar	Wesanco	Page	Versabar	Wesanco	Page	Versabar	Wesanco	Page
25FW	FW25	75	50X225HHCS	HHCS50X225.	74	SN37075	W6-075SNWS	72
25HN	HN25	75	50X250HHCS	HHCS50X250.	74	SN37087	W6-087SNWS	72
25LW	LW25	75	50X350HHCS	HHCS50X350.	74	SN37100	W6-100SNWS	72
25SQN.	SQN25	75	50X93HHCS	HHCS50X093.	74	SN37112	W6-0112SNWS	72
25X125HHCS	HHCS25X125.	74	62FN	HN62	75	SN37125	W6-125SNWS	72
25X125RHMS	RHMS25X125	74	62FW	FW62	75	SN37137	W6-137SNWS	72
25X150HHCS	HHCS25X150.	74	62LW	LW62	75	SN37150	W6-150SNWS	72
25X1HHCS	HHCS25X100.	74	62SQN.	SQN62	75	SN37162	W6-162SNWS	72
25X1RHMS	RHMS25X100	74	BMU050	BMU050.	144	SN37175	W6-175SNWS	72
25X50HHCS	HHCS25X050.	74	BMU075	BMU075.	144	SN37187	W6-187SNWS	72
25X50RHMS	RHMS25X050	74	BMU100	BMU100.	144	SN37200	W6-200SNWS	72
25X62FLMS.	FLMS25X062.	74	BMU125	BMU125.	144	SN37212	W6-212SNWS	72
25X75FLMS.	FLMS25X075.	74	BMU150	BMU150.	144	SN37225	W6-225SNWS	72
25X75HHCS	HHCS25X075.	74	BMU200	BMU200.	144	SN37250	W6-250SNWS	72
25X75RHMS	RHMS25X075	74	BMU250	BMU250.	144	SN50062	W8-062SNWS	72
25X75SLHHCS	SLHHCS25X075	75	BMU300	BMU300.	144	SN50087	W8-087SNWS	72
31FW	FW31	75	BMU350	BMU350.	144	SN50112	W8-112SNWS	72
31HN	HN31	75	BMU400	BMU400.	144	SN50137	W8-137SNWS	72
31LW	LW31	75	EB19A50	W6446	200	SN50162	W8-162SNWS	72
31SQN.	SQN31	75	EB19A75	W6447	200	SN50187	W8-187SNWS	72
31X125RHMS	RHMS31X125	74	EB20A50	W6442	200	SN50212	W8-212SNWS	72
31X150RHMS	RHMS31X150	74	EB20A75	W6443	200	SN50225	W8-225SNWS	72
31X1RHMS	RHMS31X100	74	EB22	W6462	205	SN50250	W8-250SNWS	72
31X1SLHHCS	SLHHCS31X100	75	EB23A	W6400	205	SN50275	W8-275SNWS	72
37FW	FW37	75	EB25A75	W6449	201	SN50300	W8-300SNWS	72
37HN	HN37	75	FEN25	FEN25	75	SN50325	W8-325SNWS	72
37LW	LW37	75	FEN31	FEN31	75	SSN25075	W4-075SN	71
37SQN.	SQN37	75	FEN37	FEN37	75	SSN25087	W4-087SN	71
37X125HHCS	HHCS37X125.	74	FEN50	FEN50	75	SSN25100	W4-100SN	71
37X125RHMS	RHMS37X125	74	FF100	W6460	199	SSN25125	W4-125SN	71
37X125SLHHCS	SLHHCS37X125	75	FF200	W6463	205	SSN25127	W4-112SN	71
37X150HHCS	HHCS37X150.	74	LL21A	W6401	199	SSN25137	W4-137SN	71
37X150RHMS	RHMS37X150	74	LL41NC	W6445	204	SSN25150	W4-150SN	71
37X1FLMS.	FLMS37X100.	74	LL42.	W6469	206	SSN25175	W4-175SN	71
37X1HHCS	HHCS37X100.	74	LL60.	W6402	199	SSN25200	W4-200SN	71
37X1RHMS	RHMS37X100	74	LLG1	W6403	201	SSN31075	W5-075SN	71
37X200HHCS	HHCS37X200.	74	RW25.	RW25.	199	SSN31100	W5-100SN	71
37X225FLMS.	FLMS37X225	74	SN25075	W4-075SNWS	72	SSN31125	W5-125SN	71
37X225HHCS	HHCS37X225.	74	SN25087	W4-087SNWS	72	SSN31150	W5-150SN	71
37X250FLMS.	FLMS37X250.	74	SN25100	W4-100SNWS	72	SSN31175	W5-175SN	71
37X250HHCS	HHCS37X250.	74	SN25125	W4-125SNWS	72	SSN31200	W5-200SN	71
37X250RHMS	RHMS37X250	74	SN25127	W4-112SNWS	72	SSN37075	W6-075SN	71
37X2FLMS.	FLMS37X200.	74	SN25137	W4-137SNWS	72	SSN37087	W6-087SN	71
37X75HHCS	HHCS37X075.	74	SN25150	W4-150SNWS	72	SSN37100	W6-100SN	71
50FN	HN50	75	SN25175	W4-175SNWS	72	SSN37112	W6-112SN	71
50FW	FW50	75	SN25200	W4-200SNWS	72	SSN37125	W6-125SN	71
50LW	LW50	75	SN31075	W5-075SNWS	72	SSN37137	W6-137SN	71
50SQN.	SQN50	75	SN31100	W5-100SNWS	72	SSN37150	W6-150SN	71
50X125HHCS	HHCS50X125.	74	SN31125	W5-125SNWS	72	SSN37162	W6-162SN	71
50X150HHCS	HHCS50X150.	74	SN31150	W5-150SNWS	72	SSN37175	W6-175SN	71
50X175HHCS	HHCS50X175.	74	SN31175	W5-175SNWS	72	SSN37187	W6-187SN	71
50X200HHCS	HHCS50X200.	74	SN31200	W5-200SNWS	72	SSN37200	W6-200SN	71

Part Number Cross Reference

Versabar	Wesanco	Page	Versabar	Wesanco	Page	Versabar	Wesanco	Page	
SSN37212	W6-212SN	71	VA1P15	W200H15	38	VB1180X	W5633	111	Introduction
SSN37225	W6-225SN	71	VA1P187	W200H	38	VB1180XD	W5637	111	
SSN37250	W6-250SN	71	VA1P3S	W200SL	38	VB1240	W5648	110	
SSN50062	W8-062SN	71	VA1PLH	W200EH	38	VB1240FP	W5664	112	Channel
SSN50087	W8-087SN	71	VA1PLW	W200EH58	38	VB1240X	W5634	111	
SSN50112	W8-112SN	71	VA2	W210 . . . 29, 30, 38, 40		VB1240XD	W5638	111	
SSN50137	W8-137SN	71	VA2201	W211 . . . 29, 30, 38, 40		VB2106LSL	W5601	116	Channel Nuts & Hardware
SSN50162	W8-162SN	71	VA2201P187	W211H	38	VB2106RSL	W5602	116	
SSN50187	W8-187SN	71	VA2201PLH	W211EH	38	VB2108LSL	W5603	116	
SSN50212	W8-212SN	71	VA2201PLW	W211EH58	38	VB2108RSL	W5604	116	General Fittings
SSN50225	W8-225SN	71	VA2KO6	W210KO	38	VB2110LSL	W5605	116	
SSN50250	W8-250SN	71	VA2P15	W210H15	38	VB2110RSL	W5606	116	
SSN50275	W8-275SN	71	VA2P187	W210H	38	VB2112LSL	W5607	116	Brackets
SSN50300	W8-300SN	71	VA2P3S	W210SL	38	VB2112RSL	W5608	116	
SSN50325	W8-325SN	71	VA2PLH	W210EH	38	VB2114LSL	W5609	116	
VA1	W200 29, 28, 30, 38, 39		VA2PLW	W210EH58	38	VB2114RSL	W5610	116	Beam Clamps
VA10	W800 29, 28, 30, 44, 45		VA4	W500 . . . 29, 30, 50, 51		VB2116LSL	W5611	116	
VA10201	W801 29, 28, 30, 44, 45		VA4201	W501 . . . 29, 30, 50, 51		VB2116RSL	W5612	116	
VA10201PLH	W801EH	44	VA4201PLH	W501EH	50	VB2118LSL	W5613	116	Pipe & Conduit Supports
VA10201PLW	W801EH58	44	VA4201PLW	W501EH58	50	VB2118RSL	W5614	116	
VA10CHD	W800CX	44	VA4KO6	W500KO	50	VB2120LSL	W5615	116	
VA10P187	W800H	44	VA4P187	W500H	50	VB2120RSL	W5616	116	Electrical Fittings
VA10P3S	W800SL	44	VA4P3S	W500SL	50	VB2122LSL	W5617	116	
VA10PLH	W800EH	44	VA4PLH	W500EH	50	VB2122RSL	W5618	116	
VA10PLW	W800EH58	44	VA4PLW	W500EH58	50	VB2124LSL	W5619	116	Spring Steel
VA11	W150 . . . 28, 30, 56, 57		VA6	W300 . . . 28, 30, 42, 43		VB2124RSL	W5620	116	
VA11201	W151 . . . 28, 30, 56, 57		VA6201	W301 . . . 28, 30, 42, 43		VB2126LSL	W5621	116	
VA11201PLH	W151EH	56	VA6201PLH	W301EH	42	VB2126RSL	W5622	116	Concrete Inserts
VA11201PLW	W151EH58	56	VA6201PLW	W301EH58	42	VB2128LSL	W5623	116	
VA11P187	W150H	56	VA6KO6	W300KO	42	VB2128RSL	W5624	116	
VA11P3S	W150SL	56	VA6P187	W300H	42	VB2130LSL	W5625	116	Rooftop Supports
VA11PLH	W150EH	56	VA6P3S	W300SL	42	VB2130RSL	W5626	116	
VA11PLW	W150EH58	56	VA6PLH	W300EH	42	VB4085	W5669	113	
VA1201	W201 29, 28, 30, 38, 39		VA6PLW	W300EH58	42	VB4105	W5671	113	Fiberglass System
VA1201P187	W201H	38	VA9	W6500	204	VB4120	W5682	113	
VA1201PLH	W201EH	38	VB1060	W5641	110	VB4125	W5673	114	
VA1201PLW	W201EH58	38	VB1060D	W5645	110	VB4125D	W5673D	115	Technical Data
VA1202	W202	32	VB1060FP	W5661	112	VB4145	W5675	114	
VA1203	W203	32	VB1060X	W5631	111	VB4145D	W5675D	115	
VA1204	W204	32	VB1060XD	W5635	111	VB4165	W5677	114	
VA1208	W221	32	VB11120	W5652	112	VB4165D	W5681	115	
VA1209	W220	32	VB11180	W5653	112	VB4180	W5683	113	
VA1302	W204A3	32	VB1120	W5642	110	VB4185	W5678	114	
VA1303	W203B3	32	VB1120D	W5646	110	VB4185D	W5678D	115	
VA1304	W205	32	VB1120FP	W5662	112	VB4205	W5679	114	
VA1308	W206	32	VB1120X	W5632	111	VB4205D	W5679D	115	
VA1308	W208	32	VB1120XD	W5636	111	VB4240	W5684	113	
VA1401	W207	32	VB11240	W5654	112	VB4300	W5685	113	
VA1402	W209	32	VB11300	W5655	112	VB4360	W5686	113	
VA1405	W222	32	VB11360	W5656	112	VB4420	W5687	113	
VA1CHD	W200CX	38	VB1180	W5647	110	VB4480	W5688	113	
VA1KO6	W200KO	38	VB1180FP	W5663	112	VC1	W7000	242	

Versabar to Wesanco

Part Number Cross Reference

Versabar	Wesanco	Page	Versabar	Wesanco	Page	Versabar	Wesanco	Page
VC10006	W7800 x x 06IN . . .	246	VCN50	WCN50	242	VF1203	W5011	79
VC10012	W7800 x x 12IN . . .	246	VCN50-RP	WCN50-RP	242	VF1204	W5013	79
VC10024	W7800 x x 24IN . . .	246	VCN62	WCN62	242	VF1211	W5015	79
VC10036	W7800 x x 36IN . . .	246	VCN75	WCN75	242	VF1301	W5021	80
VC10048	W7800 x x 48IN . . .	246	VF1001	W5930	207, 248	VF1302	W5008	79
VC1006	W7200 x x 06IN . . .	244	VF100110	W5938	207, 248	VF1302H	W5497	92
VC10060	W7800 x x 60IN . . .	246	VF100111	W5909	207, 248	VF1304	W5030	80
VC10072	W7800 x x 72IN . . .	246	VF100111PL	W5900PLASTIC	207, 248	VF1305	W5031	80
VC10084	W7800 x x 84IN . . .	246	VF10011PL	W5930PLASTIC	207, 248	VF1306	W5016	79
VC10096	W7800 x x 96IN . . .	246	VF10012	W5931	207, 248	VF1310	W5012	79
VC10108	W7800 x x 108IN . . .	246	VF10013	W5908	207, 248	VF1316	W5017	80
VC1012	W7200 x x 12IN . . .	244	VF10014	W5936	207, 248	VF1401	W5022	81
VC10120	W7800 x x 10	246	VF10014PL	W5935PLASTIC	207, 248	VF1402	W5009	80
VC10144	W7800 x x 144IN . . .	246	VF10016	W5933	207, 248	VF1402H	W5498	92
VC10168	W7800 x x 168IN . . .	246	VF1003A1150	W5945	206	VF1403	W5018	81
VC10192	W7800 x x 192IN . . .	246	VF1003A1175	W5946	206	VF1404	W5026	81
VC10216	W7800 x x 216IN . . .	246	VF1003A150	W5940	206	VF1406	W5024	81
VC1024	W7200 x x 24IN . . .	244	VF1003A175	W5941	206	VF1406A	W5025	80
VC10240	W7800 x x 20	246	VF1003A350	W5947	206	VF1411	W5019	81
VC1036	W7200 x x 36IN . . .	244	VF1003A375	W5944	206	VF1412	W5014	81
VC1048	W7200 x x 48IN . . .	244	VF1003A650	W5942	206	VF1419	W5036	82
VC1060	W7200 x x 60IN . . .	244	VF1003A675	W5943	206	VF1501	W5023	82
VC1072	W7200 x x 72IN . . .	244	VF110125	W5051	78	VF1504	W5027	82
VC1084	W7200 x x 84IN . . .	244	VF110125	W5052	78	VF1505	W5028	82
VC1096	W7200 x x 96IN . . .	244	VF110137	W5053	78	VF1506	W5010	82
VC1108	W7200 x x 108IN . . .	244	VF110150	W5054	78	VF1602	W5037	82
VC1120	W7200 x x 10	244	VF110162	W5055	78	VF1704	W5029	83
VC1144	W7200 x x 144IN . . .	244	VF110175	W5056	78	VF2002	W5952	248
VC1168	W7200 x x 168IN . . .	244	VF110187	W5057	78	VF200210	W5958	248
VC1192	W7200 x x 192IN . . .	244	VF1101CN25	W2-4NW	70	VF20024	W5951	248
VC1216	W7200 x x 216IN . . .	244	VF1101CN37	W2-6NW	70	VF20026	W5953	248
VC1240	W7200 x x 20	244	VF1101CN50	W2-8NW	70	VF210010	W5520	102
VC6006	W7300 x x 06IN . . .	245	VF1101N25	W5002	78, 78	VF2102	W5713	132
VC6012	W7300 x x 12IN . . .	245	VF1101N37	W5003	78	VF2121	W5160	83
VC6024	W7300 x x 24IN . . .	245	VF1101N50	W5004	78	VF2201	W5103	83
VC6036	W7300 x x 36IN . . .	245	VF1101N62	W5005	78	VF2202	W5102	83
VC6048	W7300 x x 48IN . . .	245	VF1101N75	W5006	78	VF2204N	W5104	84
VC6060	W7300 x x 60IN . . .	245	VF1101QN25	QN25	73	VF2205A	W5142	83
VC6072	W7300 x x 72IN . . .	245	VF1101QN37	QN37	73	VF2205B	W5143	83
VC6084	W7300 x x 84IN . . .	245	VF1101QN50	QN50	73	VF2205C	W5144	83
VC6096	W7300 x x 96IN . . .	245	VF110225	W5052U	78	VF2208	W5107	88
VC6108	W7300 x x 108IN . . .	245	VF110237	W5053U	78	VF2208A	W5108	88
VC6120	W7300 x x 10	245	VF110250	W5054U	78	VF2209N	W5101	84
VC6144	W7300 x x 144IN . . .	245	VF110262	W5055U	78	VF2216L	W5511	100
VC6168	W7300 x x 168IN . . .	245	VF110275	W5056U	78	VF2216R	W5510	100
VC6192	W7300 x x 192IN . . .	245	VF1107A	W5053T	78	VF2217	W5105	88
VC6216	W7300 x x 216IN . . .	245	VF1107C	W5055T	78	VF2228A	W5106	88
VC6240	W7300 x x 20	245	VF1201	W5007	78	VF2301L	W5138	85
VCN25	WCN25	242	VF1201H	W5496	92	VF2301R	W5139	85
VCN31	WCN31	242				VF230345	W5425	89
VCN37	WCN37	242				VF2304	W5112	84
VCN37-RP	WCN37+RP	242				VF2305	W5113	84

Part Number Cross Reference

Versabar	Wesanco	Page	Versabar	Wesanco	Page	Versabar	Wesanco	Page	
VF2308	W5115	84	VF32482250	W5470-225	89	VF4302	W5210	94	Introduction
VF2310	W5110	85	VF324830	W5470-30	89	VF4303	W5202	95	
VF2315L	W5136	84	VF32483750	W5470-375	89	VF43034	W5205	95	
VF2315R	W5135	84	VF324845	W5470-45	89	VF5203A	W5324	95	Channel
VF2320	W5158	87	VF324852150	W5470-525	89	VF5203B	W5325	95	
VF2401	W5137	85	VF324860	W5470-60	89	VF5203C	W5326	95	
VF2402L	W5140	85	VF32486750	W5470-675	89	VF5203D	W5327	95	Channel Nuts & Hardware
VF2402R	W5141	85	VF324875	W5470-75	89	VF5203E	W5328	95	
VF2403	W5125	86	VF3248750	W5470-075	89	VF5204	W5344	99	
VF2407	W5123	86	VF32488250	W5470-825	89	VF52044	W5342	99	General Fittings
VF2410	W5109	85	VF325012	W5472	93	VF5304	W5346	99	
VF2411L	W5133	86	VF325018	W5474	93	VF53044	W5343	99	
VF2411R	W5134	86	VF325024	W5475	93	VF5401	W5301	98	Brackets
VF2417	W5126	85	VF32508	W5471	93	VF5402	W5345	99	
VF2418	W5159	87	VF330145	W5431	90	VF540211	W5348	98	
VF2419L	W5146	100	VF340215	W5449	89	VF54023	W5340	98	Beam Clamps
VF2419R	W5147	100	VF34022250	W5448	89	VF54024	W5347	99	
VF2420L	W5148	102	VF340230	W5447	89	VF5403A	W6432	201	
VF2420R	W5149	102	VF34023750	W5446	89	VF5403A4	W6435	201	Pipe & Conduit Supports
VF2426L	W5121	86	VF340245	W5445	89	VF5404A	W6404	201	
VF2426R	W5122	86	VF34025250	W5444	89	VF5803GRS	W6608	71	
VF2504	W5513	100	VF340260	W5443	89	VF5901A	EJ330162	202	Electrical Fittings
VF2506	W5152	86	VF34026750	W5442	89	VF5902A	W6417	202	
VF2507	W5111	88	VF340275	W5441	89	VF5903A	W6416	202	
VF2510	W5117	87	VF3402750	W5450	89	VF5904A	W6418	202	Spring Steel
VF2511	W5153	88	VF34028250	W5440	89	VF5905A	W6415	202	
VF2512	W5118	86	VF3405	W5512	100	VF61002	W5523	101	
VF2604	W5154	87	VF34248250	W5410	90	VF6108	W102312	93	Concrete Inserts
VF2703L	W5156	87	VF342575	W5411	90	VF6110	W102318	93	
VF2703R	W5157	87	VF34266750	W5412	90	VF6111	W1017B	93	
VF2708	W5124	87	VF342760	W5413	90	VF6112	W1017C	93	Rooftop Supports
VF2708W	W5124W	87	VF34285250	W5414	90	VF6113	W1017D	93	
VF31201	W5522	101	VF342945	W5415	90	VF6114	W1017E	93, 123	
VF31202	W5521	102	VF34303750	W5416	90	VF6115	W1017F	93	Fiberglass System
VF320245	W5465	90	VF3601	W5518	100	VF6302	W5307	96	
VF320560	W5463	90	VF3602	W5514	101	VF6303	W5308	96	
VF320660	W5423	89	VF3802	W5515	101	VF63034	W5305	96	Technical Data
VF32078250	W5420	89	VF3803	W5516	102	VF6304	W5310	96	
VF320875	W5421	89	VF3807	W5525	103	VF6317	W5316	95	
VF32106750	W5422	89	VF3901	W5517	101	VF6319	W5314	95	Fiberglass System
VF32115250	W5424	89	VF4202	W5203	94	VF6401	W5317	96	
VF32123750	W5426	89	VF4204A	W5224	94	VF6402	W5312	96	
VF321430	W5427	89	VF4204B	W5225	94	VF640210	W5318	95	Fiberglass System
VF32152250	W5428	89	VF4204C	W5226	94	VF64023	W5320	95	
VF321615	W5429	89	VF4204D	W5227	94	VF64023U	W5322	96	
VF3217750	W5430	89	VF4204E	W5228	94	VF64024	W5315	95	Fiberglass System
VF32188250	W5460	90	VF4205	W5209	94	VF64026	W5313	95	
VF321975	W5461	90	VF4301	W5212	94	VF6403	W5330	97	
VF32206750	W5462	90	VF430110	W5218	94	VF6409L45	W5562L	90	Technical Data
VF32215250	W5464	90	VF43013	W5214	94	VF6409R45	W5562R	90	
VF32223750	W5466	90	VF43014	W5215	94	VF6618	W5319	97	
VF324815	W5470-15	89	VF43016	W5213	94	VF6619	W5323	97	

Versabar to Wesanco

Part Number Cross Reference

Versabar	Wesanco	Page	Versabar	Wesanco	Page	Versabar	Wesanco	Page
VF6801	W5519	100	VN4062	W5-10WS	68	VP3300	W4300	150
VF6802	W5329	97	VN4075	W5-12WS	68	VP3300	W4300H	149
VF7046	W5480	91	VP10000	W6176A	141	VP3350	W4350	150
VF7047	W5485	92	VP1037	W6125A	141	VP3350	W4350H	149
VF7101	W6604	107	VP1050	W6126A	141	VP3400	W4400	150
VF7101A	W6603	107	VP1075	W6128A	141	VP3400	W4400H	149
VF7104	W6419	198	VP1100	W6130A	141	VP4050	W7826	144
VF710411	W6426	198	VP1125	W6132A	141	VP4075	W7828	144
VF7106	W6420	198	VP1150	W6134A	141	VP4100	W7830	144
VF710611	W6422	198	VP1200	W6138A	142, 141	VP4125	W7832	144
VF7207L	W5639L	118	VP12000	W6178A	141	VP4150	W7834	144
VF7207R	W5639R	118	VP13050	SHH050	145	VP4200	W7838	144
VF7208L	W5640L	118	VP13075	SHH075	145	VP4250	W7842	144
VF7208R	W5640R	118	VP13100	SHH100	145	VP4300	W7846	144
VF7301	W5651	117	VP13125	SHH125	145	VP4350	W7850	144
VF7301B	W5650	117	VP13150	SHH150	145	VP4400	W7854	144
VF7407	W5643	118	VP13200	SHH200	145	VP4500	W7862	144
VF7408	W5644	118	VP13250	SHH250	145	VP4600	W7870	144
VF7803	W5811	106	VP13300	SHH300	145	VP6037	W6005	148
VF9311	W5818	106	VP13350	SHH350	145	VP6050	W6006	148
VF9601	W5814	104	VP13400	SHH400	145	VP6075	W6007	148
VF9601A	W5813	104	VP1450	W620500A	141	VP6100	W6008	148
VF9601AFL	W5813FL	103	VP1500	W6162A	141	VP6125	W6009	148
VF9601ASQ	W5813SQ	104	VP1600	W6170A	141	VP6150	W6010	148
VF9601FL	W5814FL	103	VP1800	W6174A	141	VP6200	W6011	148
VF9601SQ	W5814SQ	104	VP2050	SCH050	149	VP6250	W6012	148
VF9602	W5816	105	VP2075	SCH075	149	VP6300	W6013	148
VF9602A	W5815	105	VP2100	SCH100	149	VP6350	W6014	148
VF9602AFL	W5815FL	104	VP2125	SCH125	149	VP6400	W6015	148
VF9602ASQ	W5815SQ	105	VP2150	SCH150	149	VP7050	BHK050	145
VF9602FL	W5816FL	104	VP2200	SCH200	149	VP7075	BHK075	145
VF9602SQ	W5816SQ	105	VP2250	SCH250	149	VP7100	BHK100	145
VF9605	W5821	106	VP2300	SCH300	149	VP7125	BHK125	145
VJB1	W6450	203	VP2350	SCH350	149	VP7150	BHK150	145
VJB2	W6451	203	VP2400	SCH400	149	VP7200	BHK200	145
VJB3	W6452	203	VP2500	SCH500	149	VP7250	BHK250	145
VJB4	W6453	203	VP2600	SCH600	149	VP7300	BHK300	145
VJB5	W6454	203	VP2800	SCH800	149	VP7400	BHK400	145
VN1	W6461	73	VP3050	W4050	150	VP7500	BHK500	145
VN1010-0832	W2-0832WS	68	VP3050	W4050H	149	VP7600	BHK600	145
VN10101024	W2-1024WS	68	VP3075	W4075	150	VP7800	BHK800	145
VN10101032	W2-1032WS	68	VP3075	W4075H	149	VP8050	RCL050	148
VN1025	W2-4WS	68	VP3100	W4100	150	VP8075	RCL075	148
VN1031	W2-5WS	68	VP3100	W4100H	149	VP8100	RCL100	148
VN1037	W2-6WS	68	VP3125	W4125	150	VP8125	RCL125	148
VN1044	W2-7WS	68	VP3125	W4125H	149	VP8150	RCL150	148
VN1050	W2-8WS	68	VP3150	W4150	150	VP8200	RCL200	148
VN1062	W1-10WS	68	VP3150	W4150H	149	VP8250	RCL250	148
VN1075	W2-12WS	68	VP3200	W4200	150	VP8300	RCL300	148
VN1RS	W2486	70	VP3200	W4200H	149	VP8350	RCL350	148
VN1ST	W4-100LDSN	73	VP3250	W4250	150	VP8400	RCL400	148
VN4050	W5-8WS	68	VP3250	W4250H	149	VP8500	RCL500	148

Part Number Cross Reference

Versabar	Wesanco	Page	Versabar	Wesanco	Page	Versabar	Wesanco	Page	
VP8600	RCL600	148	VSN40101032	W5-1032	69	VT1362CP	W620362ACP	143	Introduction
VP8800	RCL800	148	VSN4025	W5-4	69	VT1375	W620375A	142	
VP9050	W6056A	143	VSN4031	W5-5	69	VT1387	W620387A	142	
VP9075	W6058A	143	VSN4037	W5-6	69	VT1400	W6150A	143, 142	Channel
VP9100	W6060A	143	VSN4044	W5-044	69	VT1412	W620412A	142	
VP9125	W6062A	143	VSN4050	W5-8	69	VT1412CP	W620412ACP	143	
VP9150	W6064A	143	VSN4062	W5-10	69	VT1425	W620425A	142	Channel Nuts & Hardware
VP9200	W6068A	143	VSN4075	W5-075	69	VT1437	W620437A	142	
VP9250	W6142A	143, 142, 141	VT10000	W621000A	142	VT1450	W6154A	143, 142	
VP9300	W6146A	143, 142, 141	VT10075	W621075A	142	VT1462	W620462A	142	General Fittings
VP9350	W6150A	143, 142, 141	VT1025	W620025A	142	VT1475	W620475A	142	
VP9400	W6154A	143, 142, 141	VT1037	W620037A	142	VT1487	W620487A	142	
VPR	SPR14	151	VT1037CP	W620037ACP	143	VT1500	W620500A	141, 142	Brackets
VPR1	SPRA3	151	VT1050	W620050A	142	VT1512	W620512A	142	
VPR2	SPRA4	151	VT1050CP	W620050ACP	143	VT1512CP	W620512ACP	143	
VPR2000	SPRHD18	152	VT1062	W620062A	142	VT1525	W620525A	142	Beam Clamps
VPR3	SPRA5	151	VT1062CP	W620062ACP	143	VT1537	W620537A	142	
VPR3000	SPRHD24	152	VT1075	W620075A	142	VT1550	W620550A	142	
VPR4	SPRA6	151	VT1075CP	W620075ACP	143	VT1562	W620562A	142	Pipe & Conduit Supports
VPR5	SPRA8	151	VT1087	W620087A	142	VT1575	W620575A	142	
VPT1037	W6025A	141	VT1087CP	W620087ACP	143	VT1587	W620587A	142	
VPT1050	W6026A	141	VT1100	W620100A	142	VT1600	W620600A	142	Electrical Fittings
VPT1075	W6028A	141	VT11037	W621137A	142	VT1612	W620612A	142	
VPT1100	W6030A	141	VT1112	W620112A	142	VT1612CP	W620612ACP	143	
VPT1125	W6032A	141	VT1112CP	W620112ACP	143	VT1625	W620625A	142	Spring Steel
VPT1200	W6038A	141	VT1125	W620125A	142	VT1637	W620637A	142	
VSN10100832	W2-0832	68	VT1137	W620137A	142	VT1650	W620650A	142	
VSN10101024	W2-1024	68	VT1137CP	W620137ACP	143	VT1662	W620662A	142	Concrete Inserts
VSN10101032	W2-1032	68	VT1150	W620150A	142	VT1675	W620675A	142	
VSN1025	W2-4	68	VT1162	W620162A	142	VT1687	W620687A	142	
VSN1025TMS	W2-4TL	70	VT1162CP	W620162ACP	143	VT1700	W620700A	142	Rooftop Supports
VSN1031	W2-5	68	VT1175	W6034A	141, 142	VT1712	W620712A	142	
VSN1031TMS	W2-5TL	70	VT1187	W620187A	142	VT1725	W620725A	142	
VSN1037	W2-6	68	VT1200	W620200A	142	VT1737	W620737A	142	Fiberglass System
VSN1037TMS	W2-6TL	70	VT12000	W621200A	142	VT1750	W620750A	142	
VSN1044	W2-7	68	VT12075	W621275A	142	VT1762	W620762A	142	
VSN1050	W2-8	68	VT1212	W620212A	142	VT1775	W620775A	142	Technical Data
VSN1050TMS	W2-8TL	70	VT1212CP	W620212ACP	143	VT1787	W620787A	142	
VSN1062	W2-10	68	VT1225	W620225A	142	VT1800	W620800A	142	
VSN1075	W2-12	68	VT1237	W6138A	142	VT1812	W620812A	142	
VSN30100832	W1-0832	69	VT1250	W620250A	142	VT1812CP	W620812ACP	143	
VSN30101024	W1-1032	69	VT1262	W620262A	142	VT1825	W620825A	142	
VSN30101032	W1-1024	69	VT1262CP	W620262ACP	143	VT1837	W620837A	142	
VSN3025	W1-4	69	VT1275	W620275A	142	VT1850	W620850A	142	
VSN3031	W1-5	69	VT1287	W6142A	143, 142	VT1862	W620862A	142	
VSN3037	W1-6	69	VT1300	W620300A	142	VT1887	W620887A	142	
VSN3044	W1-7	69	VT1312	W620312A	142	VT2025	W7724	144	
VSN3050	W1-8	69	VT1312CP	W620312ACP	143	VT2031	W7724A	144	
VSN3062	W1-10	69	VT1325	W620325A	142	VT2037	W7725	144	
VSN3075	W1-12	69	VT1337	W620337A	142	VT2050	W7726	144	
VSN40100832	W5-0832	69	VT1350	W6146A	143, 142	VT2062	W7727	144	
VSN40101024	W5-1024	69	VT1362	W620362A	142	VT2075	W7728	144	

Versabar to Wesanco

Part Number Cross Reference

Versabar	Wesanco	Page	Versabar	Wesanco	Page	Versabar	Wesanco	Page
VT2087	W7729	144	VX6402OH	W5351	98	VX7045B12	W5774-15	138
VT2100	W7730	144	VX7001	W5715	131	VX7045B4	W5774-6	138
VTR2510	W7124_10	74	VX7002A	W5721	127	VX7045B6	W5774-9	138
VTR2512	W7124_12	74	VX7002AL	W5714	129	VX7045B9	W5774-12	138
VTR256	W7124_6	74	VX7003A	W5722	127	VX7045C12	W5777-12	138
VTR3710	W7125_10	74	VX7004A	W5723	127	VX7045C15	W5777-15	138
VTR3712	W7125_12	74	VX7005A	W5724	127	VX7045C4	W5777-4	138
VTR376	W7125_6	74	VX7006A	W5725	127	VX7045C6	W5777-6	138
VTR5010	W7126_10	74	VX7007A	W5726	127	VX7045C9	W5777-9	138
VTR5012	W7126_12	74	VX7008A	W5727	127	VX7050A	W7050A	134
VTR506	W7126_6	74	VX7009A	W5728	127	VX7050B	W7050B	134
VTR6210	W7127_10	74	VX7010A	W5729	127	VX7070A	W5746	129
VTR6212	W7127_12	74	VX7011A	W5731	127	VX7070B	W5747	129
VTR626	W7127_6	74	VX7012A	W5732	127	VX7070C	W5748	129
VTR7510	W7128_10	74	VX7013A	W5733	127	VX7070D	W5749	129
VTRC25	W7134	73	VX7014A	W5734	127	VX7101A	W5779A	132
VTRC31	W7134A	73	VX7015A	W5735	127	VX7101S	W5779	132
VTRC37	W7135	73	VX7016A	W5736	127	VX7106A	W5712	132
VTRC50	W7136	73	VX7017A	W5737	127	VX7715A	W5760	133
VTRC62	W7137	73	VX7018A	W5738	127	VX7715B	W5791	133
VTRC75	W7138	73	VX7019A	W5739	127	VX7715B4	W5790	133
VX1000A	W5750	126	VX7026	W6602	108	VX9000	W5792-6	129
VX1000B	W5752-6	126	VX7026N	W6602N	108	VX9001	W5792-9	129
VX1000C	W5752-10	126	VX7026NSS	W6602NSS	108	VX9002	W5792-12	129
VX1006	W5781	127	VX7027	W6600	108	VX9003	W5792-15	129
VX1007	W5782	127	VX7027N	W6600N	108	VX9004	BC9025	128
VX1008	W5783	127	VX7027NSS	W6600NSS	108	VX9004WM	BC9325	128
VX1009	W5785	127	VX7028	W6610	108	VX9005	BC9037	128
VX1010	W5786	127	VX7028N	W6610N	108	VX9005WM	BC9337	128
VX1090A	W5751	126	VX7029	W6607	108	VX9006	BC9050	128
VX1099	W5350	98	VX7029N	W6607N	108	VX9006WM	BC9350	128
VX111137	W5741	128	VX7037A	W5702	132	VX9007	W5710	135
VX111137T	BC81037	130	VX7037A4	W5705	132	VX9008	W5711	135
VX111150	W5742	128	VX7038A	W5709	136	VXE137	W6915	76
VX111150T	BC81050	130	VX7038B	W5708	136	VXE150	W6916	76
VX111162	W5743	128	VX7041A12	W5771-15	137	VXE237	W6905	76
VX111162T	BC81062	130	VX7041A4	W5771-6	137	VXE250	W6906	76
VX111175	W5744	128	VX7041A6	W5771-9	137	VXE337	W6920	76
VX111175T	BC81075	130	VX7041A9	W5771-12	137	VXE350	W6921	76
VX111187	W5745	128	VX7041B12	W5761-15	137	VXE437	W6910	76
VX2037	RTA037	136	VX7041B4	W5761	137	VXE450	W6911	76
VX2050	RTA050	136	VX7041B6	W5761-9	137	VXH1	W5780	130
VX2075	RTA075	136	VX7041B9	W5761-12	137			
VX2100	RTA100	136	VX7041C12	W5772-15	137			
VX2125	RTA125	136	VX7042	W5716	131			
VX2150	RTA150	136	VX7043	W5717	131			
VX2200	RTA200	136	VX704450	W5707	129			
VX2250	RTA250	136	VX7045A12	W5773-15	138			
VX2300	RTA300	136	VX7045A4	W5773-6	138			
VX2350	RTA350	136	VX7045A6	W5773-9	138			
VX2400	RTA400	136	VX7045A9	W5773-12	138			

Florida Strut to Wesanco

Part Number Cross Reference



Florida Strut	Wesanco	Page	Florida Strut	Wesanco	Page	Florida Strut	Wesanco	Page	
B2486	W2486	70	BC900037	BC9037	128	BR8L2200	W5617	116	Introduction
B6445S	W6445S	204	BC900050	BC9050	128	BR8L2400	W5619	116	
BC10	W5750	126	BC910025	BC91025	132	BR8L2600	W5621	116	
BC110600	W5752-6	126	BR200850	W5669	113	BR8L2800	W5623	116	Channel
BC110900	W5752-9	126	BR201050	W5671	113	BR8L3000	W5625	116	
BC111200	W5752-12	126	BR211250	W5673	114	BR8R0600	W5602	116	
BC120025	W5753-25	126	BR211450	W5675	114	BR8R0800	W5604	116	Channel Nuts & Hardware
BC120037	W5753-37	126	BR221650	W5677	114	BR8R1000	W5606	116	
BC120050	W5753-50	126	BR221850	W5678	114	BR8R1200	W5608	116	
BC130900	W5782	127	BR222050	W5679	114	BR8R1400	W5610	116	General Fittings
BC131200	W5784	127	BR30	W5651	117	BR8R1600	W5612	116	
BC131500	W5786	127	BR31	W5650	117	BR8R1800	W5614	116	
BC14	W5751	126	BR400600	W5661	112	BR8R2000	W5616	116	Brackets
BC150037	W5723	127	BR400900	W5661M9	112	BR8R2200	W5618	116	
BC150050	W5725	127	BR401200	W5662	112	BR8R2400	W5620	116	
BC150062	W5727	127	BR401800	W5663	112	BR8R2600	W5622	116	Beam Clamps
BC160037	W5724	127	BR402400	W5664	112	BR8R2800	W5624	116	
BC160050	W5726	127	BR411800	W5647	110	BR8R3000	W5626	116	
BC160062	W5728	127	BR412400	W5648	110	CA-10 GAL	W6500	204	Pipe & Conduit Supports
BC170037	W5733	127	BR421200	W5652	112	CA-10 PVC	W6500PLASTIC	204	
BC170050	W5735	127	BR421800	W5653	112	CH0050	SCH050	149	
BC170062	W5737	127	BR422400	W5654	112	CH0075	SCH075	149	Electrical Fittings
BC20	W5715	131	BR423000	W5655	112	CH0100	SCH100	149	
BC21	W5716	131	BR423600	W5656	112	CH0125	SCH125	149	
BC22	W5714	129	BR430600	W5631	111	CH0150	SCH150	149	Spring Steel
BC30	W5712	132	BR431200	W5632	111	CH0200	SCH200	149	
BC40	W5702	132	BR431800	W5633	111	CH0250	SCH250	149	
BC60	W5709	136	BR432400	W5634	111	CH0300	SCH300	149	Concrete Inserts
BC61	W5708	136	BR440600	W5635	111	CH0400	SCH400	149	
BC620600	W5771-6	137	BR441200	W5636	111	CI	W7000	242	
BC620900	W5771-9	137	BR441800	W5637	111	CI20	W5952	248	Roofing Supports
BC621200	W5771-12	137	BR442400	W5638	111	CI21	W5953	248	
BC630600	W5761	137	BR451200	W5682	113	CIN 0025	WCN25	242	
BC630900	W5761-9	137	BR451800	W5683	113	CIN 0037	WCN37	242	Fiberglass System
BC631200	W5761-12	137	BR452400	W5684	113	CIN 0050	WCN50	242	
BC690600	W5772-6	137	BR453000	W5685	113	CIN 0062	WCN62	242	
BC690900	W5772-9	137	BR453600	W5686	113	CIN 0075	WCN75	242	Technical Data
BC691200	W5772-12	137	BR454200	W5687	113	CIN 0087	WCN87	242	
BC70	W5713	132	BR454800	W5688	113	CND25087	W4-087SN	71	
BC800037	BC8037	130	BR8L0600	W5601	116	CND37112	W6-087SN	71	
BC800050	BC8050	130	BR8L0800	W5603	116	CND37125	W6-125SN	71	
BC800062	BC8062	130	BR8L1000	W5605	116	CND37162	W6-162SN	71	
BC800075	BC8075	130	BR8L1200	W5607	116	CNL20025	W1-4	69	
BC810037	BC81037	130	BR8L1400	W5609	116	CNL30037	W1-6	69	
BC810050	BC81050	130	BR8L1600	W5611	116	CNL40050	W1-8	69	
BC810062	BC81062	130	BR8L1800	W5613	116	CNN20025	W2-4WS	68	
BC900025	BC9025	128	BR8L2000	W5615	116	CNN30031	W2-5WS	68	

Florida Strut to Wesanco

Part Number Cross Reference

Florida Strut	Wesanco	Page	Florida Strut	Wesanco	Page	Florida Strut	Wesanco	Page
CNN30037	W2-6WS	68	EF220075	W6443	200	FS12100NS	W800 29, 28, 30, 44, 45	
CNN30050	W5-8WS	68	EF30	W6440	200	FS12100NSBB	W801 29, 28, 30, 44, 45	
CNN30062	W5-10WS	68	EF31	W6439	200	FS12100SL	W800SL	44
CNN30075	W5-12WS	68	EF40	W6445	204	FS121078EHBB	W901EH	47
CNN40050	W2-8WS	68	F090031	W5052	78	FS12138EH	W300EH	42
CNN40062	W1-10WS	68	F100025	W5051	78	FS12138EHBB	W301EH	42
CNN40075	W2-12WS	68	F110037	W5053	78	FS12138HS	W300H	42
CNR20025	W2-4	68	F120050	W5054	78	FS12138NS	W300 . . . 28, 30, 42, 43	
CNR20031	W2-5025	68	F130062	W5055	78	FS12138NSBB	W301 . . . 28, 30, 42, 43	
CNR20037	W2-6025	68	F140075	W5056	78	FS12138SL	W300SL	42
CNR30031	W2-5	68	F150087	W5057	78	FS12158EH	W200EH	38
CNR30037	W2-6	68	F210037	W5003	78	FS12158EHBB	W201EH	38
CNR30050	W2-7	68	F220050	W5004	78	FS12158HS	W200H	38
CNR40050	W2-8	68	F230062	W5005	78	FS12158HSBB	W201H	38
CNR40062	W2-10	68	F240075	W5006	78	FS12158NS	W200 29, 28, 30, 38, 39	
CNR40075	W2-12	68	F30	W5007	78	FS12158NSBB	W201 29, 28, 30, 38, 39	
CNR40087	W2-14	68	F31	W5008	79	FS12158SL	W200SL	38
CNS20025	W5-4	69	F32	W5009	80	FS122716EH	W100EH	53
CNS20037	W5-6025	69	F33	W5010	82	FS122716EHBB	W101EH	53
CNS30031	W5-5	69	F34	W5013	79	FS122716HS	W100H	53
CNS30037	W5-6	69	F35	W5014	81	FS122716NS	W100 . . . 28, 30, 53, 54	
CNS30050	W5-8	69	F40	W5011	79	FS122716NSBB	W101 . . . 28, 30, 53, 54	
CNS30062	W5-10	69	F41	W5012	79	FS122716SL	W100SL	53
CNT20025	W2-4TL	70	F50	W5021	80	FS12314EH	W150EH	56
CNT30037	W2-6TL	70	F51	W5025	80	FS12314EHBB	W151EH	56
CNT30050	W5-8TL	70	F52	W5030	80	FS12314HS	W150H	56
CNT40050	W2-8TL	70	F53	W5024	81	FS12314NS	W150 . . . 28, 30, 56, 57	
EC080000VC	W5935PLASTIC	207, 248	F54	W5028	82	FS12314NSBB	W151 . . . 28, 30, 56, 57	
EC08000RVC	W5935PLASTICRED	207, 248	F60	W5022	81	FS141316EH	W500EH	50
EC090000VC	W5930PLASTIC	207, 248	F61	W5031	80	FS141316EHBB	W501EH	50
EC09000RVC	W5930PLASTICRED	207, 248	F62	W5026	81	FS141316HS	W500H	50
EC10	W5930	207, 248	F63	W5027	82	FS141316NS	W500 . . . 29, 30, 50, 51	
EC11	W5931	207, 248	F70	W5023	82	FS141316NSBB	W501 . . . 29, 30, 50, 51	
EC12	W5935	207, 248	F71	W5029	83	FS141316SL	W500SL	50
EC12	W5936	207, 248	FLW0025	LW25	75	FS14158EH	W210EH	38
EF10	W6420	198	FLW0037	LW37	75	FS14158EHBB	W211EH	38
EF11	W6422	198	FLW0050	LW50	75	FS14158HS	W210H	38
EF14	W6419	198	FLW0062	LW62	75	FS14158HSBB	W211H	38
EF15	W6426	198	FS12078EH	W900EH	47	FS14158NS	W210 . . . 29, 30, 38, 40	
EF19	W6460	199	FS12078HS	W900H	47	FS14158NSBB	W211 . . . 29, 30, 38, 40	
EF200050	W5940	206	FS12078HSBB	W901H	47	FS14158SL	W210SL	38
EF200075	W5941	206	FS12078NS	W900 . . . 28, 30, 47, 48		FW0025	FW25	75
EF21	W6462	205	FS12078NSBB	W901 . . . 28, 30, 47, 48		FW0037	FW37	75
EF220050	W6442	200	FS12078SL	W900SL	47	FW0050	FW50	75
			FS12100EH	W800EH	44	FW0062	FW62	75
			FS12100EHBB	W801EH	44	FW0075	FW75	75
			FS12100HS	W800H	44	HCS2507	HHCS25X075	74

Part Number Cross Reference

Florida Strut	Wesanco	Page	Florida Strut	Wesanco	Page	Florida Strut	Wesanco	Page	
HCS2510	HHCS25X100	74	L63	W5415	90	R214350	SPRA5	151	Introduction
HCS2512	HHCS25X125	74	L70	W5160	83	R214360	SPRA6	151	
HCS2515	HHCS25X150	74	L80	W5471	93	R216380	SPRA8	151	
HCS3707	HHCS37X075	74	L81	W5472	93	R219010	SPRA10	151	Channel
HCS3710	HHCS37X100	74	L82	W5473	93	R22	SPRHD18	152	
HCS3712	HHCS37X125	74	L83	W5474	93	R23	SPRHD24	152	
HCS3715	HHCS37X150	74	L84	W5475	93	RA0050	RTA050	136	Channel Nuts & Hardware
HCS3720	HHCS37X200	74	LH0050EG	BHK050	145	RA0075	RTA075	136	
HCS5010	HHCS50X100	74	LH0075EG	BHK075	145	RA0100	RTA100	136	
HCS5012	HHCS50X125	74	LH0100EG	BHK100	145	RA0125	RTA125	136	General Fittings
HCS5015	HHCS50X150	74	LH0125EG	BHK125	145	RA0150	RTA150	136	
HCS5017	HHCS50X175	74	LH0150EG	BHK150	145	RA0200	RTA200	136	
HCS5020	HHCS50X200	74	LH0200EG	BHK200	145	RA0250	RTA250	136	Brackets
HN0025	HN25	75	LH0250EG	BHK250	145	RA0300	RTA300	136	
HN0037	HN37	75	LH0300EG	BHK300	145	RA0350	RTA350	136	
HN0050	HN50	75	LH0400EG	BHK400	145	RA0400	RTA400	136	Beam Clamps
HN0062	HN62	75	LH0500EG	BHK500	145	RC0025	W7134	73	
HN0075	HN75	75	LH0600EG	BHK600	145	RC0037	W7135	73	
L10	W5104	84	LH0800EG	BHK800	145	RC0050	W7136	73	Pipe & Conduit Supports
L11	W5103	83	P10	W5810	103	RC0100	RCL100	148	
L12	W5113	84	P11	W5810FL	103	RC0125	RCL125	148	
L13	W5125	86	P12	W5813	104	RC0150	RCL150	148	Electrical Fittings
L14	W5142	83	P13	W5814	104	RC0200	RCL200	148	
L15	W5143	83	P14	W5814SQ	104	RC0250	RCL250	148	
L16	W5144	83	P15	W5811	106	RC0300	RCL300	148	Spring Steel
L20	W5102	83	P16	W5818	106	RC0400	RCL400	148	
L21	W5112	84	P17	W5817	105	RC0600	RCL600	148	
L22	W5110	85	P18	W5815	105	RC0800	RCL800	148	Concrete Inserts
L23	W5118	86	P19	W5816	105	SA0150	SLA0150	64	
L24	W5109	85	P20	W5816SQ	105	SA0225	SLA0225	64	
L30	W5115	84	P22	W5813SQ	104	SA0300	SLA0300	64	Rooftop Supports
L31	W5123	86	PS20050	W7826	144	SCE0037	W6025A	141	
L33	W5117	87	PS20075	W7828	144	SCE0050	W6026A	141	
L34	W5124	87	PS20100	W7830	144	SCE0075	W6028A	141	Fiberglass System
L34W	W5124W	87	PS20125	W7832	144	SCE0100	W6030A	141	
L35	W5121	86	PS20150	W7834	144	SCE0125	W6032A	141	
L36	W5122	86	PS20200	W7838	144	SCE0200	W6038A	141	Technical Data
L40	W5106	88	PS20250	W7842	144	SCH0050	BMU050	144	
L41	W5107	88	PS20300	W7846	144	SCH0075	BMU075	144	
L42	W5108	88	PS20350	W7850	144	SCH0100	BMU100	144	
L43	W5111	88	PS20400	W7854	144	SCH0125	BMU125	144	
L50	W5137	85	PS20500	W7862	144	SCH0150	BMU150	144	
L51	W5140	85	PS20600	W7870	144	SCH0200	BMU200	144	
L52	W5141	85	R10	W6602	108	SCH0250	BMU250	144	
L60	W5425	89	R11	W6600	108	SCH0300	BMU300	144	
L61	W5465	90	R20	SPR14	151	SCH0350	BMU350	144	
L62	W5445	89	R213740	SPRA4	151	SCH0400	BMU400	144	

Florida Strut to Wesanco

Part Number Cross Reference

Florida Strut	Wesanco	Page	Florida Strut	Wesanco	Page	Florida Strut	Wesanco	Page
SCO0025	W620025A	142	SCO0600	W620600A	142	SCU0100	W6060A	143
SCO0037	W620037A	142	SCO0612	W620612A	142	SCU0125	W6062A	143
SCO0050	W620050A	142	SCO0625	W620625A	142	SCU0150	W6064A	143
SCO0062	W620062A	142	SCO0637	W620637A	142	SCU0200	W6068A	143
SCO0075	W620075A	142	SCO0650	W620650A	142	SW100037	W6905	76
SCO0087	W620087A	142	SCO0662	W620662A	142	SW100050	W6906	76
SCO0100	W620100A	142	SCO0675	W620675A	142	SW110037	W6910	76
SCO0112	W620112A	142	SCO0687	W620687A	142	SW110050	W6911	76
SCO0125	W620125A	142	SCO0700	W620700A	142	SW120037	W6915	76
SCO0137	W620137A	142	SCO0712	W620712A	142	SW120050	W6916	76
SCO0150	W620150A	142	SCO0725	W620725A	142	SW130037	W6920	76
SCO0162	W620162A	142	SCO0737	W620737A	142	SW130050	W6921	76
SCO0175	W6034A	141, 142	SCO0750	W620750A	142	TC10025	W7724	144
SCO0187	W620187A	142	SCO0762	W620762A	142	TC10031	W7724A	144
SCO0200	W620200A	142	SCO0775	W620775A	142	TC10037	W7725	144
SCO0212	W620212A	142	SCO0787	W620787A	142	TC10050	W7726	144
SCO0225	W620225A	142	SCO0800	W620800A	142	TC10062	W7727	144
SCO0237	W6138A	142	SCO0812	W620812A	142	TC10075	W7728	144
SCO0250	W620250A	142	SCO0825	W620825A	142	TC10087	W7729	144
SCO0262	W620262A	142	SCO0837	W620837A	142	TC10100	W7730	144
SCO0275	W620275A	142	SCO0850	W620850A	142	U10	W5315	95
SCO0287	W6142A	143, 142	SCO0862	W620862A	142	U11	W5312	96
SCO0300	W620300A	142	SCO0875	W620887A	142	U12	W5311	95
SCO0312	W620312A	142	SCO1000	W621000A	142	U13	W5316	95
SCO0325	W620325A	142	SCO1075	W621075A	142	U14	W5314	95
SCO0337	W620337A	142	SCO1137	W621137A	142	U15	W5319	97
SCO0350	W6146A	143, 142	SCO1200	W621200A	142	U16	W5317	96
SCO0362	W620362A	142	SCO1275	W621275A	142	U20	W5307	96
SCO0375	W620375A	142	SCR0037	W6125A	141	U21	W5308	96
SCO0387	W620387A	142	SCR0050	W6126A	141	U22	W5310	96
SCO0400	W6150A	143, 142	SCR0075	W6128A	141	U30	W5344	99
SCO0412	W620412A	142	SCR0100	W6130A	141	U31	W5346	99
SCO0425	W620425A	142	SCR0125	W6132A	141	U32	W5345	99
SCO0437	W620437A	142	SCR0150	W6134A	141	U33	W5347	99
SCO0450	W6154A	143, 142	SCR0200	W6138A	142, 141	U40	W6604	107
SCO0462	W620462A	142	SCR0250	W6142A	143, 142, 141	U41	W6603	107
SCO0475	W620475A	142	SCR0300	W6146A	143, 142, 141	U600400	W5324	95
SCO0487	W620487A	142	SCR0350	W6150A	143, 142, 141	U600500	W5325	95
SCO0500	W620500A	141, 142	SCR0400	W6154A	143, 142, 141	U600600	W5326	95
SCO0512	W620512A	142	SCR0500	W6162A	141	U600700	W5327	95
SCO0525	W620525A	142	SCR0600	W6170A	141	U600800	W5328	95
SCO0537	W620537A	142	SCR0800	W6174A	141	W1-10	W1-10	69
SCO0550	W620550A	142	SCR1000	W6176A	141	W1-12	W1-12	69
SCO0562	W620562A	142	SCR1200	W6178A	141	W10	W5510	100
SCO0575	W620575A	142	SCU0050	W6056A	143	W11	W5511	100
SCO0587	W620587A	142	SCU0075	W6058A	143	W14	W5524R	102

Part Number Cross Reference

Florida Strut	Wesanco	Page	Florida Strut	Wesanco	Page	Florida Strut	Wesanco	Page	
W15	W5524L	102	W7265	W7200 x x 10	244	W7558	W7800 x x 40IN	246	Introduction
W2-0832TL	W2-0832TL	70	W7266	W7200 x x 144IN	244	W7559	W7800 x x 48IN	246	
W2-1024TL	W2-1024TL	70	W7267	W7200 x x 168IN	244	W7560	W7800 x x 60IN	246	
W2-1032TL	W2-1032TL	70	W7268	W7200 x x 192IN	244	W7561	W7800 x x 72IN	246	Channel
W2-5TL	W2-5TL	70	W7269	W7200 x x 216IN	244	W7562	W7800 x x 84IN	246	
W20	W5512	100	W7270	W7200 x x 20	244	W7563	W7800 x x 96IN	246	
W21	W5518	100	W7350	W7300 x x 04IN	245	W7564	W7800 x x 108IN	246	Channel Nuts & Hardware
W22	W5515	101	W7351	W7300 x x 06IN	245	W7565	W7800 x x 10	246	
W23	W5516	102	W7352	W7300 x x 08IN	245	W7566	W7800 x x 144IN	246	
W24	W5531	102	W7353	W7300 x x 12IN	245	W7567	W7800 x x 168IN	246	General Fittings
W30	W5513	100	W7354	W7300 x x 16IN	245	W7568	W7800 x x 192IN	246	
W31	W5519	100	W7355	W7300 x x 20IN	245	W7569	W7800 x x 216IN	246	
W32	W5523	101	W7356	W7300 x x 24IN	245	W7570	W7800 x x 20	246	Brackets
W33	W5520	102	W7357	W7300 x x 32IN	245	W7954	W7900 x x 16IN	247	
W40	W5514	101	W7357A	W7300 x x 36IN	245	W7955	W7900 x x 20IN	247	
W41	W5517	101	W7358	W7300 x x 40IN	245	W7956	W7900 x x 24IN	247	Beam Clamps
W42	W5522	101	W7359	W7300 x x 48IN	245	W7957	W7900 x x 32IN	247	
W43	W5521	102	W7360	W7300 x x 60IN	245	W7957A	W7900 x x 36IN	247	
W5-0832	W5-0832	69	W7361	W7300 x x 72IN	245	W7958	W7900 x x 40IN	247	Pipe & Conduit Supports
W5-1024	W5-1024	69	W7362	W7300 x x 84IN	245	W7959	W7900 x x 48IN	247	
W5-1032	W5-1032	69	W7363	W7300 x x 96IN	245	W7960	W7900 x x 60IN	247	
W5002	W5002	78, 78	W7364	W7300 x x 108IN	245	W7961	W7900 x x 72IN	247	Electrical Fittings
W5641	W5641	110	W7365	W7300 x x 10	245	W7962	W7900 x x 84IN	247	
W5642	W5642	110	W7366	W7300 x x 144IN	245	W7963	W7900 x x 96IN	247	
W5645	W5645	110	W7367	W7300 x x 168IN	245	W7964	W7900 x x 108IN	247	Spring Steel
W5646	W5646	110	W7368	W7300 x x 192IN	245	W7965	W7900 x x 10	247	
W5741	W5741	128	W7369	W7300 x x 216IN	245	W7966	W7900 x x 144IN	247	
W5742	W5742	128	W7370	W7300 x x 20	245	W7967	W7900 x x 168IN	247	Concrete Inserts
W5743	W5743	128	W7470	RHMS25X075	74	W7968	W7900 x x 192IN	247	
W5744	W5744	128	W7471	RHMS25X100	74	W7969	W7900 x x 216IN	247	
W5745	W5745	128	W7472	RHMS25X125	74	W7970	W7900 x x 20	247	Roofing Supports
W7250	W7200 x x 04IN	244	W7473	RHMS31X100	74	Z10	W5215	94	
W7251	W7200 x x 06IN	244	W7474	RHMS31X125	74	Z12	W5211	94	Fiberglass System
W7252	W7200 x x 08IN	244	W7475	RHMS31X150	74	Z14	W5218	94	
W7253	W7200 x x 12IN	244	W7476	RHMS37X100	74	Z20	W5203	94	
W7254	W7200 x x 16IN	244	W7477	RHMS37X125	74	Z30	W5224	94	Technical Data
W7255	W7200 x x 20IN	244	W7478	RHMS37X150	74	Z31	W5225	94	
W7256	W7200 x x 24IN	244	W7479	RHMS37X250	74	Z32	W5226	94	
W7257	W7200 x x 32IN	244	W7550	W7800 x x 04IN	246	Z33	W5227	94	
W7257A	W7200 x x 36IN	244	W7551	W7800 x x 06IN	246	Z34	W5228	94	
W7258	W7200 x x 40IN	244	W7552	W7800 x x 08IN	246	Z60	W5202	95	
W7259	W7200 x x 48IN	244	W7553	W7800 x x 12IN	246				
W7260	W7200 x x 60IN	244	W7554	W7800 x x 16IN	246				
W7261	W7200 x x 72IN	244	W7555	W7800 x x 20IN	246				
W7262	W7200 x x 84IN	244	W7556	W7800 x x 24IN	246				
W7263	W7200 x x 96IN	244	W7557	W7800 x x 32IN	246				
W7264	W7200 x x 108IN	244	W7557A	W7800 x x 36IN	246				

"Handi-Clamp" Rod Suspension Clamps Wide jaw	130
"U" Shape Fittings	95 - 99, 281
"Z" Shape Fittings	94 - 95
3/4" Nipple Assembly	205
1" Nipple End Cap	199
1-5/8" x 1-1/8" Concrete Insert	295
1-5/8" x 1-5/8" Concrete Insert	295
1-Hole Angle Washer	83
1-Hole O.D. Tubing Clamp	144
1-Hole U-Fitting 2 Slot for Channel	96
1-Hole Wrap Around Channel Bracket	110
1-Way Extended Gusset Wing	102
2-Hole Adjustable Hinge Connection	91
2-Hole Adjustable Hinge Fitting for Seismic Bracing	92
2-Hole Adjustment Angle	88
2-Hole Bracket Arms	113
2-Hole Closed Angle	90
2-Hole Corner Angle Washer	83
2-Hole End Connector	83, 304
2-Hole Horizontal Adjustment Angle	88
2-Hole Offset Support	94
2-Hole Open Angle	89
2-Hole Parallel Splice Plate	79
2-Hole Perpendicular Splice Plate	79
2-Hole Rack Connector	83, 84, 304
2-Hole Small Open Angle	89
2-Hole Splice Plate	78, 99, 304
2-Hole Swivel Plate	79
2-Hole U-Fitting Clevis	95
2-Hole U-Fitting Splice	99
2-Hole Vertical Adjustment Angle	88
2-Hole Wrap Around Channel Bracket	110
2-Hole Z Connector	94
2-Hole Z Fitting	94
2-Hole, 1/4" Plate with 1-5/8" Channel Bracket Arms	112
2-Hole, 3/8" Plate with Double 1-5/8" Channel Bracket Arms	112
3-Hole "U" Support	95
3-Hole 45° Open Angle	90
3-Hole Adjustable Hinge Connection	91
3-Hole Adjustable Hinge Fitting for Seismic Bracing	92
3-Hole Adjustment Angle	88
3-Hole Angle Connector	84, 85
3-Hole Column Stringer Connector	84
3-Hole Corner Gusset Plate	80
3-Hole End Connector	84, 304
3-Hole Flat Angle Plate	80
3-Hole Flat Plate	79, 80
3-Hole Girder Style Bracket	113
3-Hole Rack Corner Angle	84, 304
3-Hole Rack Splice Connector	85
3-Hole Right Angle End Splice	87
3-Hole Splice for 13/16" Channel	99
3-Hole Splice Plate	79
3-Hole Swivel Brace Connector	79
3-Hole Tee Gusset Plate	80
3-Hole U-Fitting Splice	99
3-Hole Wing Fitting Single Corner	100
3-Hole Z Fitting	94
4-Hole "C" Fitting 3-1/4" Inside	98
4-Hole 45° Angle Wing Fitting	90
4-Hole Adjustable Angle Fitting	91

4-Hole Adjustable Hinge Connection	91
4-Hole Adjustable Hinge Fitting for Seismic Bracing	92
4-Hole Angle Connector	85
4-Hole Closed Angle	90
4-Hole Corner Connector	86
4-Hole Corner Gusset Plate	82
4-Hole Corner Plate	81
4-Hole Double Brace Connector	81
4-Hole Extended Flat Angle	80
4-Hole Gusset Corner Angle	86, 305
4-Hole Gusset Plate	81
4-Hole Offset Corner Angle	85
4-Hole Open Angle	89
4-Hole Parallel Splice Plate	81
4-Hole Post/Stringer Connector	86
4-Hole Rack Corner Angle	86, 305
4-Hole Rack Splice Connector	85
4-Hole Right Angle End Splice	87
4-Hole Splice	99
4-Hole Splice plate	80
4-Hole Strap	96
4-Hole Tapped Splice Plate	200
4-Hole Tee Plate	81
4-Hole Triangle Flat Plate	81
4-Hole U-Fitting Splice for 1-5/8" Channel	98, 99
4-Hole Wing Fitting Double Corner	100
4-Hole, Two Column Strut Splice Connector	85
5 Different Base Threads	130
5-Hole "U" Support	96
5-Hole Connector For Double Diagonal Brace	97
5-Hole Corner Gusset Plate	82
5-Hole Corner Splice Connector	87
5-Hole Cross Plate	82
5-Hole Cross With 90° Angle Leg	86
5-Hole Girder Style Bracket	114
5-Hole Gusset Plate	82
5-Hole Right Hand Gusset Angle Connector	86
5-Hole Splice Plate	82
5-Hole Wing Fitting Corner Connector Opposed	100
6-Hole Bracket with Brace	114
6-Hole Gusset Corner Angle	87
6-Hole Gusseted Cross Connector	82
6-Hole U-Fitting	96, 97
6-Hole Wing Fitting	100 - 102
6-Hole, 1-Way Extended Wing	100
6-Hole, 3-Way Mid Column Connector	87
7-Hole Cross Gusset Plate	83
8-Hole Double Corner Gussetted Connector	103
8-Hole U-Fitting	97
8-Hole Wing Fitting Double Corner	101 - 102
9-Hole Wing Fitting Triple Corner	101
10-Hole Base Wing Fitting	101
10-Hole Wing Fitting Corner Connector Opposed	101 - 102
12-Hole U-Fitting for 3-1/4" Channel	97
12-Hole Wide Girder Style Bracket	115
12-Hole Wing Fitting Triple Corner	101
12-Hole Wing Fitting Triple Corner Gusset	102
45° Angular Corner Brace	93
90° Angle Fittings	83 - 88
90° Intersplice	202
About Fiberglass	264

Accessories	197	Channel Brackets	109 - 112
Adjustable Clevis Hangers	149	Channel Custom Pierced	33
Adjustable J-Hanger	150	Channel Engineering Data	299, 303 - 305
Adjustable Pipe Clamps	288	Channel Nut Top Spring	70
Adjustable Tubing Clamps	290	Channel Nut with Cone	70
Adjustable Z Connector	95	Channel Nut with Long Spring	69
AIRSTRIP®	179	Channel Nut with Regular Spring	68
Airtight Crush-Resistant Insulation Clamp	163	Channel Nut with Short Spring	69
All Purpose Beam Clamps	125, 126	Channel Nut Without Spring	68
Alpha Series™	174 - 175	Channel Nuts	272, 68 - 73
Aluminum Nuts	65	Channel Nuts & Hardware	65 - 76, 272 - 274
Aluminum Wiring Stud	205	Channel Nuts Overview	67
Anchor End Caps	248	Channel Selection Chart	28 - 29
Angle Fittings	89 - 90, 280 - 281	Channel Space	272
Anti-Rotation Bracket	122	Channel With Holes	28 - 31
BCL	131	Channel With Knock-Outs	28 - 31
Beam & Column Loads	34 - 37	Channel With Long Slots	28 - 31
Beam Clamp Anchor Strap	127	Channel With Short Slots	41
Beam Clamp Formed Steel with J-Hook	126	Channel With Short Slots	28 - 31
Beam Clamp Order Information	284	Channel with Specialty Custom Perforations	31
Beam Clamp Swivel Adapter	126	Chemical Resistance Chart	296 - 298
Beam Clamps	125 - 138, 283 - 284	CI - 1-5/8" x 1" - 12 Gauge	246
Beam Clips	283	CI - 1-5/8" x 1-3/8" - 12 Gauge	245
Bending Moment	36	CI - 1-5/8" x 1-5/8" - 12 Gauge	244
Beta Clamp Technical Data	299, 309 - 310	CI - 1-5/8" x 7/8" - 12 Gauge	247
Beta Clamps	139	Clevis Hanger	263, 291
Black Zinc Phosphate	23, 24	Clevis Hanger Insulation	170
Bolted Channel Attachment	307	Closure Strip	204
Brace Fittings	91 - 93	Column Loading	37
Bracket Arms	111	Combination Washer Channel Nut	70
Bracket Assembly	122	Combination/Ceiling Support	33
Brackets	109 - 124	Concrete Insert Nut	242
Bronco II®	181 - 182	Concrete Inserts	241 - 248, 263, 295
C-Type & Z-Type Beam Clamps	125, 131 - 132	Conduit & Cable Supports	210 - 219
Cable & Conduit Support	263	Conduit & Loop Hangers	145
Cantilever Support Bracket	117	Conduit and Cable Supports	209
CBB "Biggie" Series	250 - 251	Conduit Connection Plate	200
CBM	258	Conduit Connectors	197, 199 - 200
CBM REX Series	259	Conduit Hangers	145
CBM Series	258 - 260	Conduit Standoff Bracket	121
CBMPH Series	259	Contact Information	Back Cover
CBMPP Series	260	Continuous Concrete Inserts Overview	242 - 247
CBMTRH Series	260	Conversion Tables	299
CBN Series	252 - 257	Copper Tube Strut Clamp	143
CBN-BR Bridge Series	252	Cover Plastic End Caps	207, 248
CBN-DSFW Series	257	Cross Back Extended Riser Bracket	120
CBN-EX Series	254	Cross Intersplice	202
CBN-PRB Series	255	Cross-Sectional Shape	37
CBN-RB Series	256	Cush-a-Block Rooftop Supports	249 - 260
Ceiling & Acoustical Apps	209, 237 - 240	Cush-A-Clamp®	158 - 159
Channel	27 - 64, 263	Cush-A-Claw®	171
Channel 1-5/8" x 1-1/8" (41 x 29mm)	270 - 271	Cush-A-Click	178
Channel 1-5/8" x 1-3/8" (41 x 35mm)	42 - 43	Cush-A-Clip®	178
Channel 1-5/8" x 1-5/8" (41 x 41mm)	38 - 41, 268 - 269	Cush-a-Glide™	176
Channel 1-5/8" x 1" (41 x 25mm)	44 - 46	Cush-A-Grip	177
Channel 1-5/8" x 13/16" (41 x 21mm)	50 - 52	Cush-A-Nator®	153 - 157
Channel 1-5/8" x 2-7/16" (41 x 62mm)	53 - 55	Cush-A-Ring Clamps	146 - 147
Channel 1-5/8" x 3-1/4" (41 x 83mm)	56 - 59	Cush-A-Strip™	180
Channel 1-5/8" x 7/8" (41 x 22mm)	47 - 49	Cush-A-Therm®	163 - 165
Channel 13/16" x 13/16" (21 x 21mm)	60 - 61	Cushion Washer	199
Channel 13/16" x 13/32" (21 x 10mm)	62 - 63	Cushioned Clamps	139, 153 - 180

Custom Channel	33
Deflection	36
Descending Order of Strength	30
Design & Dimensional Information	299, 301 - 302
Design Bolt Torque	66
Diamond Back Extended Riser Bracket	119, 123
Double Adjustable Angle Brace Fitting	92
Double Axle Cable Reel Support	118
Double Channel Stand/Wall Flush	104
Double Conveyor Adjusting Nut	71
Double Post Base	282
Electrical Accessories	205 - 206
Electrical Fittings	197 - 208
Electrical Installation	308
Electrical Instructions	299
EMT Strut Clamp	141
End Caps	206 - 207, 248
Example Combination Channel	32
Extended Profile Diamond Back with Horizontal Riser Strut	124
Extended Reach U-Bolts	286
Fender Washers	75, 274
Fiber Wire Retainer	206
Fiberglass Channel	266 - 271
Fiberglass Framing System	263 - 298
Finish or Material Ordering Codes	23
Five Hole Corner Gusset	278
Five Hole Cross	278
Five Hole Splice	276
Five Hole Tee	277
Five Hole Tee Gusset	278
Fixture Hangers	197 - 199
Fixture Spacer	199
Fixture Stud	199
Flanged Hex Bolts	273
Flat Plate Fittings	78 - 83, 263, 275 - 279
Flat Washer	75
Flathead Machine Screws	74
Floor Adapter	189
Florida Strut to Wesanco Cross References	321 - 325
Flush Type Raceway Splice Assemblies	201
Form Fit Plastic End Caps	207, 248
Formed Steel Beam Clamps	125, 127
Four Hole 45° Angle	279
Four Hole 90° Angle	280
Four Hole Corner	276
Four Hole Corner Gusset	277
Four Hole Self 90° Angle	281
Four Hole Splice	276
Four Hole Tee	277
Four Wheel Trolley [Full Wheel]	107, 108
Fraction Conversion Table	313
GAMMA Anti-Vibration Pads	261 - 262
General Beam Clip Application	283
General Fittings	77 - 108
General Information	24
Handrail Stand-Off Bracket	117
Heavy Beam ½" Rod Suspension Clamps	129
Heavy Duty Flanged Hex Nuts	274
Heavy Duty Rod Suspension Clamps Wide Jaw	129
Heavy Duty Slotted Angle	64
Hex Head Cap Screw	74

Hex Nut	75
Hinged Channel Hanger	198
Hinged Fluorescent Fixture Hanger	198
Hot Dip Galvanized	23, 24, 27, 65
Indexes	299
ISO - Cube	262
J-Hanger	150
J-Hook Beam Clamp	126
Junction Boxes	197
Kep Nuts	75
Klosure Insulation	166 - 169
Ladder Assembly Fitting	93
Large Beam Clamp	284
Large Bracket	123
Light Duty Channel Nut	73
Light Duty Slotted Angle	64
Light Duty Stud Nut	73
Light Duty U-Bolt	134
Lock Washers	75
Long Straight Intersplice	202
Loop Hangers	145
Low Profile Diamond Back with Horizontal Strut Riser	119
Malleable Iron Rod Support Beam Clamps	128
Malleable Iron Universal Beam Clamps	130, 132
Material Specifications	299
Materials & Finish Specs	24 - 25
Medium Duty Slotted Angle	64
MIG Welded To Meet Specific Engineering Request	33
Mill-Galvanized (Pre-Galvanized)	23, 24, 27, 65
Mini Nut with Short Spring	69
Mini Nut with Standard Spring	69
Misc. Conversion Tables	311 - 312
Notched or Window Type Beam Clamps	125
Nuts & Washers	75
O.D. Strut Clamp	142
Omega Series™	172 - 173
One Hole Washer	275
One Piece Purlin Beam Clamp	135
Outlet Box Connection Fitting	201
Paint-Green Powder Coating	23, 24, 27, 65
Parallel Pipe Clamps	148
Part Number Index	330 - 339
Pictorial Table of Contents	31
Pierced Channel	31
Pipe & Conduit Supports	291 - 294
Pipe Clamps	287 - 290
Pipe Coupling Fitting	145
Pipe Hangers	145 - 150
Pipe Insulation Saddles	139, 181 - 194
Pipe Riser Clamps	148
Pipe Rollers	151 - 152
Pipe Strap	144
Pipe, Tube and Conduit Supports	136 - 196
Polyester and Vinyl Ester Resins	266
Polyurethane End Caps	207, 248
Porc-A-Clamp®	197, 208
Post Bases	103 - 106, 282
Pre-Cut Channel	41, 46, 49, 52, 55, 59
Premier Cushion Clamp	160 - 161
Purlin Clamps	135
Quick-Clip	177

Raceway Box Assemblies	203	Standard Strut Beta Clamps	195 - 196
Raceway Grounding Kit	201	Standard U-Bolts	285
Raceway Splice Assemblies	197	Stop-Lock Kit	272
Raceway Splices & Boxes	200 - 203	Strap Back Extended Riser Bracket	120, 121
Rack Arms	294	Structural Attachment	209, 220 - 230
Receptacle Boxes	197, 204	Strut Clamps	139 - 143
Rectangular Plates	103, 106	Strut Mount Adapter	187
Reel Supports	118	Strut Serpent®	140
Right Angle Clamps	136	Strut to Beam Clamps	132 - 133, 135-138
Rigid Conduit One Piece Pipe Clamp	144	Strut to Beam Spreader Caps	125, 1333
Rigid Pipe Clamps	287	Stud Channel Nuts	71 - 73
Rigid Strut Clamp	141	Stud Nuts with Long Spring	71 - 72
Riser Clamps & Pipe Hangers	139	Stud Type Raceway Splice Assemblies	201
Rod Coupling	73	Stud Wall Apps	209, 231 - 236
Rod Suspension Beam Clamps	125, 128 - 130	SuperHanger™	292
Roundhead Machine Screws	74	SuperLoop™	293
Saddle-Up	193	Support Brackets	209, 117
Safe Thru-Bolting	299, 306	Support Conditions	36 - 37
Scissor Square Washer Nut	73	Swing Clevis Adapter	98
Screws & Threaded Rod	73 - 75	Swivel Fittings	76
Seismic Rod Stiffener	70	Swivel Nut for use with All Purpose Beam Clamp	126
Seven Hole Cross Gusset	279	Technical Data	263, 299 - 339
Shelf Brackets	109, 113 - 116	Tee Intersplice	202
Shoulder Bolt 3/8"-16 x 2"	205	The Metal Framing System	26
Side Opening Hangers	149	Threaded Rod	74, 274
Silva-Guard	23, 24	Threaded Rod Couplers	73, 274
Silver Claw	131	Three Hole "U" Shape Support	281
Single Adjustable Angle Brace Fitting	91	Three Hole 90° Angle	280
Single Axle Cable Reel Support	118	Three Hole Corner	276 - 277
Single Post Base	282	Three Hole Splice	275
Six Hole Tee Gusset	278	TITAN® Insulation Riser Clamp	162
Slip And Pull-Out Load Data	66	Trapeze Application Using Beam Clips	283
Slotted Angle	64	Trapeze Information	299
Slotted Indented Hex Machine Screw	75	Trolley	77, 107 - 108
Slotted Shelf Brackets	116	Tubing Clamps	144
Small Beam Clamp	284	Tubing Clamps & Hangers	139
Snap-A- Box	204	Twist-Nut Channel Nut	70
Snap-A-Clip™	192	Two Hole 90° Angle	280
Snap-A-Cover™	190	Two Hole Pipe Straps	289
Snap-A-Saddle Pro Multi™	185 - 192	Two Hole Splice	275
Snap-A-Saddle Pro™	183 - 184	Two Hole Swivel Plate	279
Snap-A-Saddle®	194	Two Piece Purlin Beam Clamp	135
SnapShock™	191	Two Wheel Trolley	107 - 108
Special Coatings	23, 24, 27, 65	U-Bolt Clamps	125, 134 - 138, 285 - 286
Special Metals	300	U-Fitting Trolley Support	107
Specifications	265	Universal 90° Angle	281
SPH Cush-A-Ring Clamps	146	Universal Beam Clamps	125
Spot Concrete Insert	242	Universal Clamps	130 - 132
SPP Cush-A-Ring Clamps	147	Universal Corner Angle	87
Spring Nut Hex Bolts	273	Universal Strut Clamp	143
Spring Steel	209 - 240	Utility Brackets	109, 119 - 124
Square Nuts	75	Utility Vault Ladder Rung	93
Square Tube Stand Off	123	Versabar to Wesanco Cross References	313 - 320
Square Washers	78	Washers	274
Stabilizer	189	Wide Bracket with Brace	115
Standard Adjustable Clevis Hangers	149	Wide Mouth Malleable Iron Universal Beam Clamps	130
Standard Beam Clip Assembly - Sold in Pairs	283	Wide Mouth Rod Suspension Beam Clamps	128
Standard Duty Polyurethane Nuts	274	Window Type Clamps	132
Standard Duty U-Bolt	134	Wing Fittings	100 - 103
Standard Raceway Stud Plate	200	Wireway End Cap	206
Standard Straight Intersplice	202	Z-Purlin C-Clamps	135

004M007 - 106M114 . . .173	APC300PU288	BCLCCP12HM213	CBMPH10259
004T008 - 022T026 . . .159	AR-18262	BCLCCP12VM213	CBMPH11259
006CC018 - 072CC080 208	AR-2262	BCLCCP16HM213	CBMPH12259
024T028 - 050N056 . . .159	AR-3262	BCLCCP16VM213	CBMPH13259
053N050 - 138NS146 . . .159	AR-4262	BCLCCP8HM213	CBMPH14259
100025 - 100650161	AR-6262	BCLCCP8VM213	CBMPH2259
200025 - 200800160	AS-18262	BCS250VF-2283	CBMPH3259
20MMHZ - 160MMHZ .160	AS-2262	BCS375VF-2283	CBMPH4259
225B2S - 825B2S 181, 182	AS1179	BCS500VF-2283	CBMPH5259
225W2S - 825W2S181, 182	AV-18262	BCZ037135	CBMPH6259
703025 - 703212170	AV-2262	BHK050145	CBMPH7259
704037 - 704412170	AV-3262	BHK075145	CBMPH8259
706025 - 706412170	AV-4262	BHK100145	CBMPH9259
708062 - 708362170	AV-6262	BHK125145	CBMPP10260
723025 - 723212167	B18 CC16218	BHK150145	CBMPP11260
724025 - 724412167	B18 CC6218	BHK200145	CBMPP12260
726025 - 726412167	B18 CC8-12218	BHK250145	CBMPP2260
728025 - 728412167	B18 CCP12218	BHK300145	CBMPP3260
729031 - 729412167	B18 CCP16218	BHK400145	CBMPP4260
824050 - 828262168	B18 CCP8218	BHK500145	CBMPP5260
922062 - 922412169	BB16SM232	BHK600145	CBMPP6260
922212 - 922362168	BBSM231	BHK800145	CBMPP7260
924062 - 924212169	BBSM6231	BMU050144	CBMPP8260
924084 - 924190168	BC500VFPU-SN-2 . . .283	BMU075144	CBMPP9260
928062 - 928512169	BC8037130	BMU100144	CBMTRH2260
928084 - 928512168	BC8050130	BMU125144	CBMTRH3260
928M25 - 928M110 . . .169	BC8062130	BMU150144	CBMTRH4260
929084 - 929412168	BC8075130	BMU200144	CBMTRH5260
929087 - 929412169	BC81037130	BMU250144	CBN252
929M25 - 929M90 . . .169	BC81050130	BMU300144	CBN1-DSFW257
AB04224	BC81062130	BMU350144	CBN10-DSFW257
AB06224	BC81075130	BMU400144	CBN11-DSFW257
ABCC6225	BC9025128	BR1012217	CBN12-DSFW257
ABCC812225	BC9037128	BR1020217	CBN12EX254
ABCCP12225	BC9050128	BR1032217	CBN13-DSFW257
ABCCP8225	BC91025132	BR2520217	CBN14-DSFW257
ABPCH037050226	BC92025EG230	BR2520WS217	CBN15-DSFW257
ABPCH075226	BC92037EG230	BR2532217	CBN16-DSFW257
ABPCH100226	BC9325128	BR2532WS217	CBN16EX254
ABRH4226	BC9337128	BS18 CC16S218	CBN1D253
ABRH4T227	BC9350128	BS18 CC6S218	CBN1RB256
ABRH6226	BCC16HM212	BS18 CC8-12S218	CBN1RD253
ABRH6T227	BCC16VM212	BS18 CCP12S218	CBN1S253
ABRTH6227	BCC20CM212	BS18 CCP16S218	CBN2-DSFW257
ABSN100PU290	BCC20HM212	BS18 CCP8S218	CBN28BR252
ABSN200PU290	BCC24HM212	CAC12 - CAC34178	CBN2D253
AC-18262	BCC24VM212	CAGB04 - CAGB34 . . .176	CBN2RB256
AC-2262	BCC32HM212	CBB251	CBN2RD253
AC-3262	BCC32VM212	CBM258	CBN2S253
AC-4262	BCC6HM212	CBM10REX259	CBN3-DSFW257
AC-6262	BCC6VM212	CBM12REX259	CBN36BR252
APC050PU288	BCC812HM212	CBM1D258	CBN3D253
APC100PU288	BCC812VM212	CBM1S258	CBN3RB256
APC200PU288	BCL131, 230	CBMPH1259	CBN3RD253

CBN3S.....253	CL-14.....171	CN22.....155	CN56.....155
CBN4-DSFW.....257	CL-18.....171	CN22S6.....155	CN56P.....155
CBN42BR.....252	CLS-04.....171	CN22SS.....155	CN56PS6.....155
CBN4D.....253	CLS-06.....171	CN24.....155	CN56PSS.....155
CBN4RB.....256	CLS-08.....171	CN24S6.....155	CN56S6.....155
CBN4RD.....253	CLS-10.....171	CN24SS.....155	CN56SS.....155
CBN4S.....253	CLS-12.....171	CN26.....155	CN64.....155
CBN5-DSFW.....257	CLS-14.....171	CN26S6.....155	CN64P.....155
CBN50BR.....252	CLS-18.....171	CN26SS.....155	CN64PS6.....155
CBN6-DSFW.....257	CN04.....155	CN28.....155	CN64PSS.....155
CBN60BR.....252	CN04S6.....155	CN28S6.....155	CN64S6.....155
CBN7-DSFW.....257	CN04SS.....155	CN28SS.....155	CN64SS.....155
CBN8-DSFW.....257	CN06.....155	CN30.....155	CN66.....155
CBN8EX.....254	CN06S6.....155	CN30P.....155	CN66S6.....155
CBN9-DSFW.....257	CN06SS.....155	CN30PS6.....155	CN66SS.....155
CBNPRB.....255	CN08.....155	CN30PSS.....155	CN72.....155
CC16.....210	CN08S6.....155	CN30S6.....155	CN72P.....155
CC16CC16.....216	CN08SS.....155	CN30SS.....155	CN72PS6.....155
CC16CC20.....216	CN10.....155	CN32.....155	CN72PSS.....155
CC16CC24.....216	CN10S6.....155	CN32M.....155	CN72S6.....155
CC16CC32.....216	CN10SS.....155	CN32MS6.....155	CN72SS.....155
CC16CC6.....216	CN110M.....155	CN32MSS.....155	CN75M.....155
CC16CC812.....216	CN110MS6.....155	CN32S6.....155	CN75MS6.....155
CC20.....210	CN110MSS.....155	CN32SS.....155	CN75MSS.....155
CC24.....210	CN12.....155	CN34.....155	CN90M.....155
CC32.....210	CN125M.....155	CN34S6.....155	CN90MS6.....155
CC6.....210	CN125MS6.....155	CN34SS.....155	CN90MSS.....155
CC812.....210	CN125MSS.....155	CN36.....155	CN96.....155
CCMS.....236	CN12S6.....155	CN36S6.....155	CN96S6.....155
CCP12.....210	CN12SS.....155	CN36SS.....155	CN96SS.....155
CCP12CCP12.....216	CN14.....155	CN38.....155	CS028 - CS110.....180
CCP12CCP16.....216	CN14P.....155	CN38P.....155	CSSTS.....234
CCP16.....210	CN14PS6.....155	CN38PS6.....155	CT084PP50.....290
CCP16CCP16.....216	CN14PSS.....155	CN38PSS.....155	CTS812.....235
CCP8.....210	CN14S6.....155	CN38S6.....155	CTS816D.....235
CCP8CCP12.....216	CN14SS.....155	CN38SS.....155	EBH.....238
CCP8CCP16.....216	CN16.....155	CN40.....155	EBH24.....238
CCP8CCP8.....216	CN160M.....155	CN40S6.....155	EBH24HD.....238
CCT16.....210	CN160MS6.....155	CN40SS.....155	EJ330081.....202
CCT20.....210	CN160MSS.....155	CN42.....155	EJ330162.....202
CCT24.....210	CN16S6.....155	CN42S6.....155	EMT-1.....171
CCT32.....210	CN16SS.....155	CN42SS.....155	EMT-1/2.....171
CCT812.....210	CN17P.....155	CN46.....155	EMT-3/4.....171
CFC2D.....215	CN17PS6.....155	CN46P.....155	EMTS-1.....171
CFC4D.....215	CN17PSS.....155	CN46PS6.....155	EMTS-1/2.....171
CFC4E.....215	CN18.....155	CN46PSS.....155	EMTS-3/4.....171
CFC8D.....215	CN18S6.....155	CN46S6.....155	FCH24.....220
CFC8E.....215	CN18SS.....155	CN46SS.....155	FCH24S.....220
CG-10 - CG-40.....177	CN20.....155	CN48.....155	FCH58.....220
CL-04.....171	CN20S6.....155	CN48S6.....155	FCH58S.....220
CL-06.....171	CN20SS.....155	CN48SS.....155	FCH912.....220
CL-08.....171	CN21P.....155	CN50.....155	FCH912S.....220
CL-10.....171	CN21PS6.....155	CN50S6.....155	FEN25.....75
CL-12.....171	CN21PSS.....155	CN50SS.....155	FEN31.....75

Introduction

Channel

Channel Nuts
& HardwareGeneral
Fittings

Brackets

Beam
ClampsPipe & Conduit
SupportsElectrical
FittingsSpring
SteelConcrete
InsertsRooftop
SupportsFiberglass
SystemTechnical
Data

FEN37	75	FH912RH6T	223	FHZRH4T	224	LBC500PU	284
FEN50	75	FH912RHP4	222	FHZRH6	223	LBCR375PU	284
FEN75X225PU	274	FH912RHP6	222	FHZRH6T	224	LBCR500PU	284
FH23CC20	213	FHN31PU - FHN100PU	274	FHZRTH6	224	LVMN	232
FH24B18 CC16	219	FHS24CC16	214	FHZSHP	228	LVMP	233
FH24B18 CC6	219	FHS24CC20	214	FHZSHR	228	LVMS	233
FH24B18 CC812	219	FHS24CC24	214	FLMS25X062	74	LW25	75
FH24B18 CCP12	219	FHS24CC32	214	FLMS25X075	74	LW31	75
FH24B18 CCP16	219	FHS24CC6	214	FLMS31X100	74	LW37	75
FH24B18 CCP8	219	FHS24CC812	214	FLMS37X100	74	LW50	75
FH24CC16	213	FHS24CCP12	215	FLMS37X200	74	LW62	75
FH24CC24	213	FHS24CCP16	215	FLMS37X225	74	MFC	221
FH24CC32	213	FHS24CCP8	215	FLMS37X250	74	MFC B18 CC16	218
FH24CC6	213	FHS24SHP	228	FSM24	220	MFC B18 CC6	218
FH24CC812	213	FHS24SHR	228	FSM58	220, 229	MFC B18 CC8-12	218
FH24CCP12	214	FHS58CC16	214	FSM912	220, 229	MFC B18 CCP12	218
FH24CCP16	214	FHS58CC20	214	FW25	75	MFC B18 CCP16	218
FH24CCP8	214	FHS58CC24	214	FW25PU - FW100PU	274	MFC B18 CCP8	218
FH24RH4T	223	FHS58CC32	214	FW31	75	MFC16	212
FH24RH6	223	FHS58CC6	214	FW37	75	MFC6	212
FH24RH6T	223	FHS58CC812	214	FW50	75	MFC812	212
FH24RHP4	222	FHS58CCP12	215	FW62	75	MFCCCP12	212
FH24RHP6	222	FHS58CCP16	215	FW75	75	MFCCCP16	212
FH58B18 CC16	219	FHS58CCP8	215	HHCS Series	74	MFCCCP8	212
FH58B18 CC6	219	FHS58SHP	228	HHCS - PU Series	273	MFCS	221
FH58B18 CC812	219	FHS58SHR	228	HHCS - S6 Series	273	MSCCC16	234
FH58B18 CCP12	219	FHS912CC16	214	HHFB - PU Series	273	MSCCC20	234
FH58B18 CCP16	219	FHS912CC20	214	HIT004M007 -		MSCCC6	234
FH58B18 CCP8	219	FHS912CC24	214	HIT106M114	173	MSCCC8-12	234
FH58CC16	213	FHS912CC32	214	HIT04 - HIT96	157	MSCCCP12	234
FH58CC20	213	FHS912CC6	214	HIT04S6 - HIT96S6	157	MSCCCP16	234
FH58CC24	213	FHS912CC812	214	HIT04SS - HIT96SS	157	MSCCCP8	234
FH58CC32	213	FHS912CCP12	215	HITUB1/2PA -		NBCC6	225
FH58CC6	213	FHS912CCP16	215	HITUB12PA	175	NBCC812	225
FH58CC812	213	FHS912CCP8	215	HITUB7/8TA -		NBCCP12	225
FH58CCP12	214	FHS912SHP	228	HITUB6TA	174	NBCCP8	225
FH58CCP16	214	FHS912SHR	228	HN25	75	NBPCH037050	226
FH58CCP8	214	FHV3	221	HN25PU - HN75PU	274	NBPCH075	226
FH58RH4T	223	FHV3CC16	215	HN25S6 - HN75S6	274	NBPCH100	226
FH58RH6	223	FHV3CC6	215	HN31	75	NG028C - NG110C	180
FH58RH6T	223	FHV3CC812	215	HN37	75	NS008 - NS026	180
FH58RHP4	222	FHV3RH4	223	HN50	75	PCH037050	211
FH58RHP6	222	FHV3RH4T	224	HN62	75	PCH075	211
FH912CC16	213	FHV3RH6	223, 224	HN75	75	PCH075PCH037050	217
FH912CC20	213	FHV3RH6T	224	HT004M007 -		PCH075PCH075	217
FH912CC24	213	FHV3SHP	228	HT106M114	173	PCH075PCH100	217
FH912CC32	213	FHV3SHR	228	HT04 - HT96	156	PCH075PCH125	217
FH912CC6	213	FHV4	221	HT04S6 - HT96S6	156	PCH075PCHE125	217
FH912CC812	213	FHV4RH4	223	HT04SS - HT96SS	156	PCH100 - PCH400	211
FH912CCP12	214	FHV4RH4T	224	HTUB1/2PA - HTUB12PA175		PCHE125	211
FH912CCP16	214	FHV4RH6	223, 224	HTUB7/8TA - HTUB6TA	174	PSP2-6	229
FH912CCP8	214	FHV4RH6T	224	KN25	75	PSPA	229
FH912RH4T	223	FHZ	221	KN31	75	QC12 - QC34	177
FH912RH6	223	FHZRH4	223	KN37	75	QN25	73
				LBC375PU	284		

QN37	73	SAS225B -		SCT15	237	SQN37	75
QN50	73	SAS825B	183, 184	SD150	193	SQN50	75
R087100 - R412150	162	SAS225W - SAS825W	183, 184	SD200	193	SQN62	75
RA1400NY	294	SAS825B	190	SD250	193	SSEMT050	140
RA1400PU	294	SAS825W	190	SD300	193	SSEMT075	140
RA2000NY	294	SASM1050G	189	SD350	193	SSEMT100	140
RA2000PU	294	SASM1250G	189	SD450	193	SSEMT125	140
RCL050	148	SASM250G - SASM1250G	186	SD550	193	SSEMT150	140
RCL075	148	SASM30X30G	187	SD650	193	SSEMT200	140
RCL100	148	SASM31X43G	187	SH001 - SH010	292	SSGRC050	140
RCL125	148	SASM40X38G	187	SHB1	196	SSGRC075	140
RCL150	148	SASM42X166G	187	SHB1 - SHB7	196	SSGRC100	140
RCL200	148	SASM42X20G	187	SHH050	145	SSGRC125	140
RCL250	148	SASM42X42G	187	SHH075	145	SSGRC150	140
RCL300	148	SASM42X84G	187	SHH100	145	SSGRC200	140
RCL350	148	SASM4D21G	187	SHH125	145	SW225 - SW825	194
RCL400	148	SASM4D22G	187	SHH150	145	TBC1	239
RCL500	148	SASMCLEVISG	189	SHH200	145	TBC1C16	239
RCL600	148	SASMFLOOR10-12G	189	SHH250	145	TBC1C6	239
RCL800	148	SASMSTAB1050G	189	SHH300	145	TBC1C812	239
RHMS25X050	74	SASMSTAB1250G	189	SHH350	145	TBC2	239
RHMS25X075	74	SASP050B - SASP225B	192	SHH400	145	TBC2C16	239
RHMS25X100	74	SB1 - SB7	196	SHP	227	TBC2C6	239
RHMS25X125	74	SB225 - SB825	194	SHR	227	TBC2C812	239
RHMS31X100	74	SBC375PU	284	SLA0150	64	TBCSMCCP12	240
RHMS31X125	74	SBC500PU	284	SLA0225	64	TBCSMCCP16	240
RHMS31X150	74	SCH050	149	SLA0300	64	TBCSMCCP8	240
RHMS37X100	74	SCH075	149	SLH1200 - SLH2400	293	TBCTMCCP12	240
RHMS37X125	74	SCH100	149	SLHHCS25X075	75	TBCTMCCP16	240
RHMS37X150	74	SCH100PE	291	SLHHCS31X100	75	TBCTMCCP8	240
RHMS37X250	74	SCH100PU	291	SLHHCS37X125	75	TCB16	237
RHP4	222	SCH125	149	SLK-375	272	TCS16	237
RHP6	222	SCH150	149	SLK-500	272	TCW4	237
RHT4T	222	SCH200	149	SM1006 - SM1012	195	TG008C - TG026C	180
RHT6	222	SCH200PE	291	SM2014 - SM2018	195	TRH-2	219
RHT6T	222	SCH200PU	291	SM3020 - SM3025	195	TRH-3	219
RPC-3/8 - RPC-1-1/8	178	SCH250	149	SM4030	195	TRH-4	219
RTA037 - RTA400	136	SCH300	149	SM5035	195	TRH-5	219
RW25	199	SCH300PE	291	SP1 - SP7	196	UB1/2PA - UB12PA	175
S-716	180	SCH300PU	291	SPA037PVC	272	UB7/8TA - UB6TA	174
S1004 - S1007	195	SCH350	149	SPA050PVC	272	USG	235
S1004C	196	SCH400	149	SPH-1 - SPH-14	146	UX1410 - UX41220	165
S2008 - S2011	195	SCH400PE	291	SPP-2 - SPP-14	147	UX1410S6 -	
S3012 - S3016	195	SCH400PU	291	SPR14	151	UX41220S6	165
S4017 - S4018	195	SCH500	149	SPRA10	151	UX1410SS -	
S5020 - S5027	195	SCH600	149	SPRA3	151	UX41220SS	165
S6028 - S6032	195	SCH600PE	291	SPRA4	151	UX1412 - UX41234	164
S7038 - S7048	195	SCH600PU	291	SPRA5	151	UX1412S6 -	
SAC825B	190	SCH800	149	SPRA6	151	UX41234S6	164
SAC825W	190	SCL037EG	131, 229	SPRA8	151	UX1412SS -	
SACL50G	190	SCP1	196	SPRHD18	152	UX41234SS	164
SACX25B	190	SCP1	196	SPRHD24	152	W1-0832	69
SACX25W	190	SCP2 - SCP7	196	SQN25	75	W1-10	69
SACX50G	190			SQN31	75	W1-1024	69
						W1-1032	69

W1-12	69	W101324	120	W10211210	124	W1031	117
W1-4	69	W10136	120	W10211212	124	W1032	117
W1-5	69	W10138	120	W10211216	124	W1033	117
W1-6	69	W101510	120	W10211218	124	W150	28, 30, 56, 57
W1-7	69	W101512	120	W10211224	124	W150EH	56
W1-8	69	W101516	120	W1021126	124	W150EH58	56
W10-112SN	71	W101518	120	W1021128	124	W150H	56
W10-112SNL	72	W101520	120	W10211610	124	W150SL	56
W10-112SNWS	72	W101524	120	W10211612	124	W151	28, 30, 56, 57
W10-137SN	71	W10156	120	W10211616	124	W151EH	56
W10-137SNL	72	W10158	120	W10211618	124	W151EH58	56
W10-137SNWS	72	W101610	121	W10211624	124	W2-0832	68
W100	28, 30, 53, 54	W101612	121	W1021166	124	W2-0832TL	70
W100710	123	W101616	121	W1021168	124	W2-0832WS	68
W100712	123	W101618	121	W10211810	124	W2-10	68
W100716	123	W101624	121	W10211812	124	W2-1024	68
W100718	123	W10166	121	W10211816	124	W2-1024TL	70
W100724	123	W10168	121	W10211818	124	W2-1024WS	68
W10076	123	W1017	122	W10211824	124	W2-1032	68
W10078	123	W1017A10	122	W1021186	124	W2-1032TL	70
W100EH	53	W1017A12	122	W1021188	124	W2-1032WS	68
W100H	53	W1017A16	122	W10212410	124	W2-10WS	68
W100SL	53	W1017A18	122	W10212412	124	W2-10WSNY	272
W101	28, 30, 53, 54	W1017A24	122	W10212416	124	W2-10WSPU	272
W101010	119	W1017A6	122	W10212418	124	W2-12	68
W101012	119	W1017A8	122	W10212424	124	W2-12WS	68
W101015	119	W1017AR	122	W1021246	124	W2-12WSNY	272
W101016	119	W1017ARA10	122	W1021248	124	W2-12WSPU	272
W101018	119	W1017ARA12	122	W1021610	124	W2-14	68
W101024	119	W1017ARA16	122	W1021612	124	W2-4	68
W10106	119	W1017ARA18	122	W1021616	124	W2-4CN	70
W10108	119	W1017ARA24	122	W1021618	124	W2-4FG	272
W101110	119	W1017ARA6	122	W1021624	124	W2-4NW	70
W101112	119	W1017ARA8	122	W102166	124	W2-4TL	70
W101116	119	W1017B	93	W102168	124	W2-4TN	70
W101118	119	W1017C	93	W1021810	124	W2-4WS	68
W101124	119	W1017D	93	W1021812	124	W2-5	68
W101130	119	W1017E	93, 123	W1021816	124	W2-5025	68
W101136	119	W1017F	93	W1021818	124	W2-5TL	70
W101140	119	W101910	119	W1021824	124	W2-5WS	68
W101148	119	W101912	119	W102186	124	W2-6	68
W10116	119	W101916	119	W102188	124	W2-6025	68
W10118	119	W101918	119	W102210X12	123	W2-6CN	70
W101210	120	W101924	119	W102210X16	123	W2-6FG	272
W101212	120	W10196	119	W102212X12	123	W2-6NW	70
W101216	120	W10198	119	W102281/8	123	W2-6TL	70
W101218	120	W101EH	53	W102281/8M	123	W2-6TN	70
W101224	120	W10211010	124	W102310	93	W2-6WS	68
W10126	120	W10211012	124	W102312	93	W2-6WSNY	272
W10128	120	W10211016	124	W102316	93	W2-6WSPU	272
W101310	120	W10211018	124	W102318	93	W2-7	68
W101312	120	W10211024	124	W102324	93	W2-7WS	68
W101316	120	W1021106	124	W10236	93	W2-8	68
W101318	120	W1021108	124	W10238	93	W2-8CN	70

W2-8FG	272	W300EH	42	W5-0832	69	W5012	79
W2-8NW	70	W300EH58	42	W5-10	69	W5013	79
W2-8TL	70	W300H	42	W5-100SN	71	W5014	81
W2-8TN	70	W300KO	42	W5-100SNWS	72	W5015	79
W2-8WS	68	W300SL	42	W5-1024	69	W5016	79
W2-8WSNY	272	W301	28, 30, 42, 43	W5-1032	69	W5017	80
W2-8WSPU	272	W301EH	42	W5-10WS	68	W5018	81
W200	29, 28, 30, 38, 39	W301EH58	42	W5-125SN	71	W5019	81
W200CX	38	W4-075SN	71	W5-125SNWS	72	W501EH	50
W200EH	38	W4-075SNWS	72	W5-12WS	68	W501EH58	50
W200EH58	38	W4-087SN	71	W5-150SN	71	W5020PF	277
W200EHPF	268	W4-087SNL	72	W5-150SNWS	72	W5020VF	277
W200EHVF	268	W4-087SNWS	72	W5-175SN	71	W5021	80
W200H	38	W4-100LDSN	73	W5-175SNWS	72	W5021PF	276
W200H15	38	W4-100SN	71	W5-200SN	71	W5021VF	276
W200KO	38	W4-100SNWS	72	W5-200SNWS	72	W5022	81
W200PF	268, 269	W4-112SN	71	W5-3SN	71	W5022MPF	277
W200SL	38	W4-112SNL	72	W5-4	69	W5022MVf	277
W200VF	268	W4-112SNWS	72	W5-4FG	272	W5022PF	277
W201	29, 28, 30, 38, 39	W4-125SN	71	W5-5	69	W5022VF	277
W201EH	38	W4-125SNWS	72	W5-6	69	W5023	82
W201EH58	38	W4-137SN	71	W5-6025	69	W5023PF	278
W201EHPF	268	W4-137SNL	72	W5-6FG	272	W5023VF	278
W201EHVF	268	W4-137SNWS	72	W5-8	69	W5024	81
W201H	38	W4-150SN	71	W5-8FG	272	W5024PF	277
W201PF	268, 269	W4-150SNWS	72	W5-8TL	70	W5024VF	277
W201VF	268	W4-175SN	71	W5-8WS	68	W5025	80
W202	32	W4-175SNWS	72	W500	29, 30, 50, 51	W5025PF	276
W203	32	W4-200SN	71	W5002	78, 78	W5025VF	276
W203B3	32	W4-200SNWS	72	W5003	78	W5026	81
W204	32	W4050	150	W5004	78	W5027	82
W204A3	32	W4050H	149	W5005	78	W5027PF	278
W205	32	W4075	150	W5006	78	W5027VF	278
W206	32	W4075H	149	W5007	78	W5028	82
W207	32	W4100	150	W5007PF	275	W5028PF	278
W208	32	W4100H	149	W5007VF	275	W5028VF	278
W209	32	W4125	150	W5008	79	W5029	83
W210	29, 30, 38, 40	W4125H	149	W5008PF	275	W5029PF	279
W210EH	38	W4150	150	W5008VF	275	W5029VF	279
W210EH58	38	W4150H	149	W5009	80	W5030	80
W210H	38	W4200	150	W5009PF	276	W5031	80
W210H15	38	W4200H	149	W5009VF	276	W5032PF	278
W210KO	38	W4250	150	W500EH	50	W5032VF	278
W210SL	38	W4250H	149	W500EH58	50	W5035PF-375	279
W211	29, 30, 38, 40	W4300	150	W500H	50	W5035PF-500	279
W211EH	38	W4300H	149	W500KO	50	W5035VF-375	279
W211EH58	38	W4350	150	W500SL	50	W5035VF-500	279
W211H	38	W4350H	149	W501	29, 30, 50, 51	W5036	82
W220	32	W4400	150	W5010	82	W5037	82
W221	32	W4400H	149	W5010PF	276	W5051	78
W222	32	W5-044	69	W5010VF	276	W5052	78
W247050	145	W5-075	69	W5011	79	W5052U	78
W2486	70	W5-075SN	71	W5011PF	279	W5053	78
W300	28, 30, 42, 43	W5-075SNWS	72	W5011VF	279	W5053PF	275

W5053T	78	W5135	84	W5320	95	W5461	90
W5053U	78	W5136	84	W5321	95	W5462	90
W5053VF	275	W5137	85	W5322	96	W5463	90
W5054	78	W5138	85	W5323	97	W5464	90
W5054PF	275	W5139	85	W5324	95	W5465	90
W5054U	78	W5140	85	W5325	95	W5466	90
W5054VF	275	W5141	85	W5326	95	W5470-075	89
W5055	78	W5142	83	W5327	95	W5470-15	89
W5055PF	275	W5143	83	W5328	95	W5470-225	89
W5055T	78	W5144	83	W5329	97	W5470-30	89
W5055U	78	W5146	100	W5330	97	W5470-375	89
W5055VF	275	W5147	100	W5340	98	W5470-45	89
W5056	78	W5148	102	W5342	99	W5470-525	89
W5056PF	275	W5149	102	W5343	99	W5470-60	89
W5056U	78	W5152	86	W5344	99	W5470-675	89
W5056VF	275	W5153	88	W5345	99	W5470-75	89
W5057	78	W5154	87	W5346	99	W5470-825	89
W5101	84	W5156	87	W5347	99	W5471	93
W5102	83	W5157	87	W5348	98	W5472	93
W5103	83	W5158	87	W5349	98	W5473	93
W5103PF	280	W5159	87	W5350	98	W5474	93
W5103VF	280	W5160	83	W5351	98	W5475	93
W5104	84	W5202	95	W5410	90	W5480	91
W5105	88	W5203	94	W5411	90	W5485	92
W5106	88	W5205	95	W5412	90	W5490	91
W5107	88	W5209	94	W5413	90	W5491	91
W5108	88	W5210	94	W5414	90	W5492	91
W5109	85	W5211	94	W5415	90	W5495	91
W5109PF	281	W5212	94	W5416	90	W5496	92
W5109VF	281	W5213	94	W5417	90	W5497	92
W5110	85	W5214	94	W5420	89	W5498	92
W5111	88	W5215	94	W5421	89	W5510	100
W5112	84	W5218	94	W5422	89	W5511	100
W5113	84	W5224	94	W5423	89	W5512	100
W5113PF	280	W5225	94	W5424	89	W5513	100
W5113VF	280	W5226	94	W5425	89	W5514	101
W5115	84	W5227	94	W5426	89	W5515	101
W5117	87	W5228	94	W5427	89	W5516	102
W5118	86	W5301	98	W5428	89	W5517	101
W5121	86	W5305	96	W5429	89	W5518	100
W5122	86	W5307	96	W5430	89	W5519	100
W5123	86	W5308	96	W5431	90	W5520	102
W5124	87	W5310	96	W5440	89	W5521	102
W5124PF	281	W5311	95	W5441	89	W5522	101
W5124PU	281	W5312	96	W5442	89	W5523	101
W5124W	87	W5312PF	281	W5443	89	W5524	101
W5125	86	W5312PU	281	W5444	89	W5524L	102
W5125MPF	280	W5313	95	W5445	89	W5524R	102
W5125MVf	280	W5314	95	W5446	89	W5525	103
W5125PF	280	W5315	95	W5447	89	W5531	102
W5125VF	280	W5316	95	W5448	89	W5562L	90
W5126	85	W5317	96	W5449	89	W5562R	90
W5133	86	W5318	95	W5450	89	W5601	116
W5134	86	W5319	97	W5460	90	W5602	116

W5603	116	W5662	112	W5742	128	W5781	127
W5604	116	W5663	112	W5743	128	W5782	127
W5605	116	W5664	112	W5744	128	W5783	127
W5606	116	W5669	113	W5745	128	W5784	127
W5607	116	W5671	113	W5746	129	W5785	127
W5608	116	W5673	114	W5747	129	W5786	127
W5609	116	W5673D	115	W5748	129	W5790	133
W5610	116	W5675	114	W5749	129	W5791	133
W5611	116	W5675D	115	W5750	126	W5792-12	129
W5612	116	W5677	114	W5751	126	W5792-15	129
W5613	116	W5678	114	W5752-10	126	W5792-6	129
W5614	116	W5678D	115	W5752-12	126	W5792-9	129
W5615	116	W5679	114	W5752-6	126	W5810	103
W5616	116	W5679D	115	W5752-9	126	W5810FL	103
W5617	116	W5681	115	W5753-25	126	W5811	106
W5618	116	W5682	113	W5753-37	126	W5812	106
W5619	116	W5683	113	W5753-50	126	W5813	104
W5620	116	W5684	113	W5756-12EG	126	W5813FL	103
W5621	116	W5685	113	W5756-4EG	126	W5813SQ	104
W5622	116	W5686	113	W5756-6EG	126	W5814	104
W5623	116	W5687	113	W5756-9EG	126	W5814FL	103
W5624	116	W5688	113	W5760	133	W5814SQ	104
W5625	116	W5702	132	W5761	137	W5814SQPE	282
W5626	116	W5705	132	W5761-12	137	W5814SQPU	282
W5631	111	W5707	129	W5761-15	137	W5815	105
W5632	111	W5708	136	W5761-18	137	W5815FL	104
W5633	111	W5709	136	W5761-9	137	W5815SQ	105
W5633M	111	W5710	135	W5770	136	W5816	105
W5634	111	W5711	135	W5771-12	137	W5816FL	104
W5635	111	W5712	132	W5771-15	137	W5816SQ	105
W5636	111	W5713	132	W5771-18	137	W5816SQPE	282
W5637	111	W5714	129	W5771-6	137	W5816SQPU	282
W5638	111	W5715	131	W5771-9	137	W5817	105
W5639L	118	W5716	131	W5772-12	137	W5818	106
W5639R	118	W5717	131	W5772-15	137	W5821	106
W5640L	118	W5721	127	W5772-18	137	W5900-M	207, 248
W5640R	118	W5722	127	W5772-6	137	W5900PLASTIC	207, 248
W5641	110	W5723	127	W5772-9	137	W5908	207, 248
W5642	110	W5724	127	W5773-12	138	W5909	207, 248
W5643	118	W5725	127	W5773-15	138	W5910	207, 248
W5644	118	W5726	127	W5773-6	138	W5920PLASTIC	207, 248
W5645	110	W5727	127	W5773-9	138	W5925PLASTIC	207, 248
W5646	110	W5728	127	W5774-12	138	W5930	207, 248
W5647	110	W5729	127	W5774-15	138	W5930-M	207, 248
W5648	110	W5731	127	W5774-6	138	W5930PLASTIC	207, 248
W5650	117	W5732	127	W5774-9	138	W5931	207, 248
W5651	117	W5733	127	W5777-12	138	W5933	207, 248
W5652	112	W5734	127	W5777-15	138	W5935	207, 248
W5653	112	W5735	127	W5777-4	138	W5935-M	207, 248
W5654	112	W5736	127	W5777-6	138	W5935PLASTIC	207, 248
W5655	112	W5737	127	W5777-9	138	W5936	207, 248
W5656	112	W5738	127	W5779	132	W5938	207, 248
W5661	112	W5739	127	W5779A	132	W5940	206
W5661M9	112	W5741	128	W5780	130	W5941	206

Introduction

Channel

Channel Nuts
& HardwareGeneral
Fittings

Brackets

Beam
ClampsPipe & Conduit
SupportsElectrical
FittingsSpring
SteelConcrete
InsertsRooftop
SupportsFiberglass
SystemTechnical
Data

W5942	206	W6009	148	W620037A	142	W620612A	142
W5943	206	W601	29, 30, 60, 61	W620037ACP	143	W620612ACP	143
W5944	206	W6010	148	W620050A	142	W620625A	142
W5945	206	W6011	148	W620050ACP	143	W620637A	142
W5946	206	W6012	148	W620062A	142	W620650A	142
W5947	206	W6013	148	W620062ACP	143	W620662A	142
W5951	248	W6014	148	W620075A	142	W620675A	142
W5952	248	W6015	148	W620075ACP	143	W620687A	142
W5953	248	W6025A	141	W620087A	142	W620700A	142
W5958	248	W6026A	141	W620087ACP	143	W620712A	142
W5959	248	W6028A	141	W620100A	142	W620725A	142
W6-0112SNWS	72	W6030A	141	W620112A	142	W620737A	142
W6-075SN	71	W6032A	141	W620112ACP	143	W620750A	142
W6-075SNWS	72	W6034A	141, 142	W620125A	142	W620762A	142
W6-0832	69	W6038A	141	W620137A	142	W620775A	142
W6-0836	69	W6056A	143	W620137ACP	143	W620787A	142
W6-087SN	71	W6058A	143	W620150A	142	W620800A	142
W6-087SNL	72	W6060A	143	W620162A	142	W620812A	142
W6-087SNWS	72	W6062A	143	W620162ACP	143	W620812ACP	143
W6-100SN	71	W6064A	143	W620187A	142	W620825A	142
W6-100SNWS	72	W6068A	143	W620200A	142	W620837A	142
W6-1024	69	W6125A	141	W620212A	142	W620850A	142
W6-1032	69	W6126A	141	W620212ACP	143	W620862A	142
W6-112SN	71	W6126APU	287	W620225A	142	W620887A	142
W6-112SNL	72	W6128A	141	W620250A	142	W621000A	142
W6-125SN	71	W6128APU	287	W620262A	142	W621075A	142
W6-125SNWS	72	W6130A	141	W620262ACP	143	W621137A	142
W6-137SN	71	W6130APU	287	W620275A	142	W621200A	142
W6-137SNL	72	W6132A	141	W620300A	142	W621275A	142
W6-137SNWS	72	W6132APU	287	W620312A	142	W6304	134
W6-150SN	71	W6134A	141	W620312ACP	143	W6304FG	285
W6-150SNWS	72	W6134APU	287	W620325A	142	W6306	134
W6-162SN	71	W6138A	142	W620337A	142	W6306FG	285
W6-162SNL	72	W6138A	142, 141	W620362A	142	W6308	134
W6-162SNWS	72	W6138APU	287	W620362ACP	143	W6308ERFG	286, 286
W6-175SN	71	W6142A	143, 142	W620375A	142	W6308FG	285
W6-175SNWS	72	W6142A	143, 142, 141	W620387A	142	W6310	134
W6-187SN	71	W6142APU	287	W620412A	142	W6310FG	285
W6-187SNL	72	W6146A	143, 142	W620412ACP	143	W6312	134
W6-187SNWS	72	W6146A	143, 142, 141	W620425A	142	W6312ERFG	286, 286
W6-200SN	71	W6146APU	287	W620437A	142	W6312FG	285
W6-200SNWS	72	W6150A	143, 142	W620462A	142	W6314	134
W6-212SN	71	W6150A	143, 142, 141	W620475A	142	W6314ERFG	286, 286
W6-212SNL	72	W6154A	143, 142	W620487A	142	W6314FG	285
W6-212SNWS	72	W6154A	143, 142, 141	W620500A	141	W6316	134
W6-225SN	71	W6154APU	287	W620500A	141, 142	W6316FG	285
W6-225SNWS	72	W6162A	141	W620512A	142	W6318	134
W6-250SN	71	W6162APU	287	W620512ACP	143	W6318ERFG	286, 286
W6-250SNWS	72	W6170A	141	W620525A	142	W6318FG	285
W6-4	69	W6170APU	287	W620537A	142	W6320	134
W600	29, 30, 60, 61	W6174A	141	W620550A	142	W6320FG	285
W6005	148	W6174APU	287	W620562A	142	W6322	134
W6006	148	W6176A	141	W620575A	142	W6322ERFG	286, 286
W6007	148	W6178A	141	W620587A	142	W6322FG	285
W6008	148	W620025A	142	W620600A	142	W6324	134

W6326	134	W6603	107	W7265EPF	295	W8-275SN	71
W6326ERFG	286, 286	W6604	107	W7265EVF	295	W8-275SNWS	72
W6328	134	W6605	107	W7300 Series	245	W8-300SN	71
W6330	134	W6606	107	W7565EPF	295	W8-300SNWS	72
W6332	134	W6607	108	W7565EVF	295	W8-325SN	71
W6334	134	W6607N	108	W7724	144	W8-325SNWS	72
W6336	134	W6608	71	W7724A	144	W800 . . . 29, 28, 30, 44, 45	
W6338	134	W6610	108	W7725	144	W800CX	44
W6340	134	W6610N	108	W7726	144	W800EH	44
W6342	134	W6704 - W6728	134	W7727	144	W800EH58	44
W6344	134	W6905	76	W7728	144	W800EHPF	270
W6400	205	W6906	76	W7729	144	W800EHVF	270
W6401	199	W6910	76	W7730	144	W800H	44
W6402	199	W6911	76	W7800 Series	246	W800PF	270, 271
W6403	201	W6915	76	W7826	144	W800SL	44
W6404	201	W6916	76	W7828	144	W800VF	270
W6415	202	W6920	76	W7830	144	W801 . . . 29, 28, 30, 44, 45	
W6416	202	W6921	76	W7832	144	W801EH	44
W6417	202	W7-0832	69	W7834	144	W801EH58	44
W6418	202	W7-0836	69	W7838	144	W801EHPF	270
W6419	198	W7-1024	69	W7842	144	W801EHVF	270
W6420	198	W7-1032	69	W7846	144	W801PF	270, 271
W6422	198	W7-4	69	W7846PU	289	W801VF	270
W6426	198	W700 29, 30, 62, 63		W7850	144	W900 28, 30, 47, 48	
W6432	201	W7000	242	W7854	144	W900EH	47
W6435	201	W701 30, 62, 63, 29		W7854PU	289	W900H	47
W6439	200	W7050A	135	W7862	144	W900SL	47
W6440	200	W7050B	135	W7870	144	W901 28, 30, 47, 48	
W6442	200	W7124 - W7131	74	W7870PU	289	W901EH	47
W6443	200	W7125STS612FT	274	W7900 Series	247	W901H	47
W6445	204	W7125VE8FT	274	W7938PU	289	WC12 - WC20	211
W6445S	204	W7126STS612FT	274	W8-062SN	71	WC8	211
W6446	200	W7126VE8FT	274	W8-062SNWS	72	WCBW	211
W6447	200	W7127STS612FT	274	W8-087SN	71	WCN25	242
W6449	201	W7127VE8FT	274	W8-087SNWS	72	WCN31	242
W6450	203	W7128STS612FT	274	W8-112SN	71	WCN37	242
W6451	203	W7128VE8FT	274	W8-112SNL	72	WCN37+RP	242
W6452	203	W7131STS612FT	274	W8-112SNWS	72	WCN50	242
W6453	203	W7131VE8FT	274	W8-137SN	71	WCN50-RP	242
W6454	203	W7134	73	W8-137SNL	72	WCN62	242
W6460	199	W7134A	73	W8-137SNWS	72	WCN75	242
W6461	73	W7135	73	W8-162SN	71	WCN87	242
W6462	205	W7135PU	274	W8-162SNL	72	WSF101668	121
W6463	205	W7135S6	274	W8-162SNWS	72	ZBA18PG	231
W6469	206	W7136	73	W8-187SN	71	ZBA26PG	231
W6500	204	W7136PU	274	W8-187SNL	72	ZSA1-8	196
W6500PLASTIC	204	W7136S6	274	W8-187SNWS	72		
W6600	108	W7137	73	W8-212SN	71		
W6600N	108	W7137PU	274	W8-212SNL	72		
W6600NSS	108	W7137S6	274	W8-212SNWS	72		
W6601	107	W7138	73	W8-225SN	71		
W6602	108	W7138PU	274	W8-225SNWS	72		
W6602N	108	W7138S6	274	W8-250SN	71		
W6602NSS	108	W7200 Series	244	W8-250SNWS	72		



IDEALTRIDONGROUP.COM • SUPPORT.SECURE.CONNECT.

GLOBAL HEADQUARTERS

8100 TRIDON DRIVE SMYRNA , TN USA 800.251.3220 | 615.459.5800

USA | CANADA | MEXICO | CHINA | POLAND | ITALY | IRELAND | NETHERLANDS | UK

ZSI

1751 Summit Dr • Auburn Hills, MI 48326 US
Customer Service: (800) 323-7053

Wesanco, CA

12822 Monarch Street • Garden Grove, CA 92841
Customer Service: (714) 739-4989

Wesanco, FL

6100 SE 78th St • Ocala, FL 34472
Customer Service: (877) 245-7581

Wesanco, NJ

100 Maltese Drive • Totowa, NJ 07512
Customer Service: (800) 228-3772

Wesanco-ZSi.com | 800-323-7053

ZSi & Wesanco are part of the Ideal Tridon Group. Learn more at idealtridongroup.com

© Copyright 2026 Ideal Tridon Group / Printed & Designed in the USA / 5k / 07-26-S2-R3 (Revised 7-16-2026)