

Porce-A-Clamp®
Cable Clamp



Replaces Porcelain and Maple Cable Clamp. Assembly consists of thermoplastic elastomer cushion with plated or stainless steel clamp. Plated steel and stainless are both supplied with Silicon Bronze bolt and nut.

- Non-breakable material
- Chemical and UV resistant
- **U.L. Listed** - Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar with no flaming drips.
- Plated Steel, or Stainless steel clamps
- Tapered flange to protect cable
- Dielectric strength 640 volts per mil
- One piece cushion design, available with Flame retardant / Halogen Free cushions
- Silicon Bronze Hardware used to Breakup the Magnetic field around the Cable at the Clamping Location.

The hinged cushion allows easy installation of the wire, but the components will not get separated and lost or broken.

Standard Finish: Electro Galvanized (EG) • Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Hot Rolled Plate	A 575	See Finishes Below	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting (Steel)	A 366 or A 36	See Finishes Below	Steel carbon, cold rolled sheet, commercial quality structural steel.
Electroplated	ASTM B 633	EG	Fittings and hardware supplied as "Electro-Galvanized"
Hot Dip Galvanized After Fabrication	ASTM A 123, ASTM A153, or ASTM A386.	HG	Channel and fittings which are hot dip galvanized after fabrication.
Paint-Green Powder Coating	--	GR	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Plain	--	PL	Other commercially available finishes can be supplied per specification when required to protect applications.
Special Coatings Yellow Passivate (Trivalent Chromium)	ASTM B63	YC	Fittings and hardware supplied as "Electro-Galvanized", with a "Yellow" Dichromate conversion coat versus the clear conversion coat of the EG finish.
Stainless Steel:	A 240 TYPE 304	S4	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	S6	
Aluminum	B 221 TYPE 6063 T6	AL	Aluminum alloy extruded bar, rod, wire, shape and tube.


PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		



Porce-A-Clamp®

Cable Clamp

Part No.	Dimensions (In.)			Total Assy. Height - H
	Hole Dia.	A	R	
006CC018	3/8"	1.12" (28mm)	0.56" (14mm)	1.82" (46mm)
008CC018	1/2"			
010CC018	5/8"			
012CC026	3/4"	1.62" (41mm)	0.81" (21mm)	2.34" (59mm)
014CC026	7/8"			
016CC026	1"			
018CC026	1-1/8"	2.12" (54mm)	1.06" (27mm)	2.86" (73mm)
020CC034	1-1/4"			
022CC034	1-3/8"			
024CC034	1-1/2"	2.62" (67mm)	1.31" (33mm)	3.50" (89mm)
026CC034	1-5/8"			
028CC042	1-3/4"			
030CC042	1-7/8"	3.12" (79mm)	1.56" (40mm)	4.05" (103mm)
032CC042	2"			
034CC042	2-1/8"			
036CC050	2-1/4"	3.62" (92mm)	1.81" (46mm)	4.75" (121mm)
038CC050	2-3/8"			
040CC050	2-1/2"			
042CC050	2-5/8"	4.12" (105mm)	2.06" (52mm)	5.125" (130mm)
044CC058	2-3/4"			
046CC058	2-7/8"			
048CC058	3"	4.62" (117mm)	2.31" (59mm)	5.54" (141mm)
050CC058	3-1/8"			
052CC066	3-1/4"			
054CC066	3-3/8"	5.00" (127mm)	2.50" (64mm)	5.92" (150mm)
056CC066	3-1/2"			
058CC066	3-5/8"			
060CC074	3-3/4"	5.00" (127mm)	2.50" (64mm)	5.92" (150mm)
062CC074	3-7/8"			
064CC074	4"			
066CC074	4-1/8"	5.00" (127mm)	2.50" (64mm)	5.92" (150mm)
068CC080	4-1/4"			
070CC080	4-3/8"			
072CC080	4-1/2"			

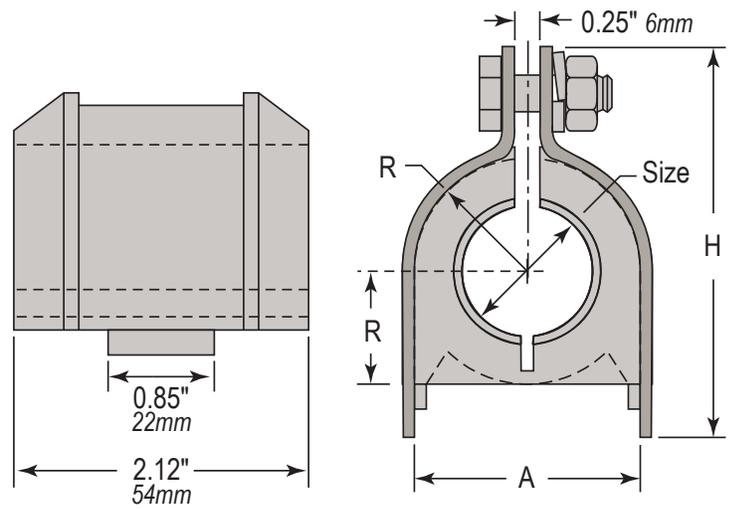

<p>Note: All clamps have Silicon Bronze Hardware</p>			
SUFFIX	Clamp	Cushion	Example
Z	Plated Steel	Flame Retardant	006CC018Z
S	Stainless Steel		006CC018S
ZH	Plated Steel	Flame Retardant Halogen Free	006CC018ZH
SH	Stainless Steel		006CC018SH

