


Fiberglass Beam Clamps

Small Beam Clamp

- Wesanco Beam Clamps provide a simple and secure method for attaching strut channel and or trapeze configurations to various size of beams
- Beam Clamps are offered in two sizes, Large or Small
- Beam Clamps come with either 3/8" or 1/2" (10mm or 13mm) thread for threaded rod, sold separately
- Material of construction is Glass Filled Polyurethane

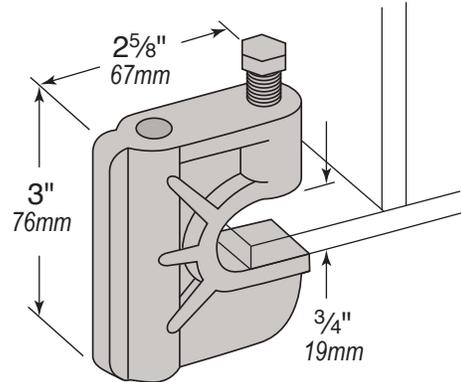

Beam Clamp Order Information

- Included with each Beam Clamp is a SS bolt to secure clamp to beam
- See threaded rod section for your application requirements, sold separately

Part No.	Description	Load Rating
SBC375PU	Small Beam Clamp for 3/8" -16 Rod	600 lb (2.7kN)
SBC500PU	Small Beam Clamp for 1/2" -19 Rod	600 lb (2.7kN)

Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-5/8" (41mm); Width: 1-5/8"(41mm); Thickness: 1/4" (6mm)

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

SBC375PU