
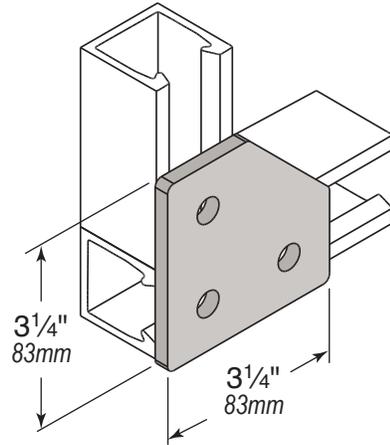


Fiberglass Flat Plate Fittings

Three Hole Corner Gusset

- Industry standard channel fittings for fabricating structures with Wesanco channel
- Fittings can be attached with channel nuts or through bolted to strut back of side walls
- No Special Tools Required
- Highly Corrosion Resistant. See Chemical Resistant Guide in the fiberglass catalog on pages 35 - 37
- Standard fitting material is either:
 - Polyester (PF) FRP Gray
 - Vinyl Ester (VF) FRP Beige
 - Injection Molded Thermoplastics
 - Polyurethane (PU)
 - Polyester (PE);
- NOTES: When attaching fittings to side walls of channels, through bolting requires a channel spacer to prevent wall compression under heavy load conditions. Order part # SPA037PVC for $\frac{3}{8}$ " (10mm) bolts and part # SPA050PVC for $\frac{1}{2}$ " (13mm) bolts.

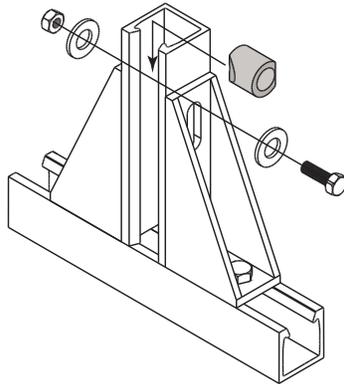

Part No.	Material
W5020PF	Polyester Fire Rated FRP Gray
W5020VF	Vinyl Ester Fire Rated FRP Beige

Hole Diameter: $\frac{7}{16}$ " (11mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{5}{8}$ " (41mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		