
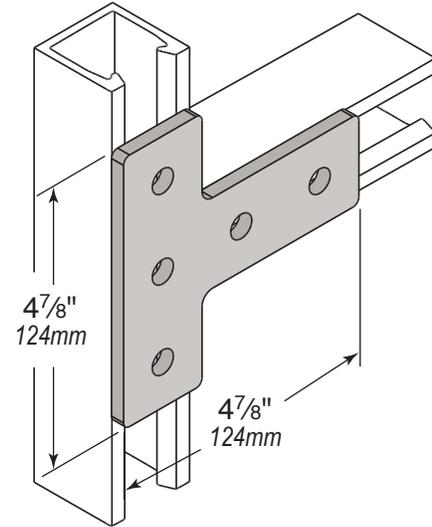


# Fiberglass Flat Plate Fittings

## Five Hole Tee

- Industry standard channel fittings for fabricating structures with Wesanco channel
- Fittings can be attached with channel nuts or through bolted to strut back of side walls
- No Special Tools Required
- Highly Corrosion Resistant. See Chemical Resistant Guide in the fiberglass catalog on pages 35 - 37
- Standard fitting material is either:
  - Polyester (PF) FRP Gray
  - Vinyl Ester (VF) FRP Beige
  - Injection Molded Thermoplastics
  - Polyurethane (PU)
  - Polyester (PE);
- NOTES: When attaching fittings to side walls of channels, through bolting requires a channel spacer to prevent wall compression under heavy load conditions. Order part # SPA037PVC for 3/8" (10mm) bolts and part # SPA050PVC for 1/2" (13mm) bolts.

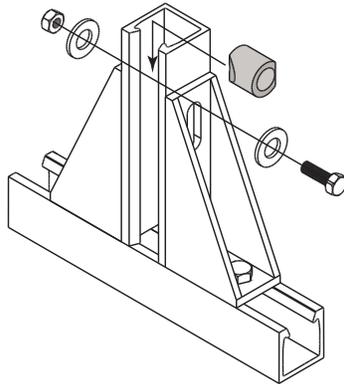

Part No.	Material
W5022MPF	Polyester Fire Rated FRP Gray
W5022MVF	Vinyl Ester Fire Rated FRP Beige

Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-5/8" (41mm); Width: 1-5/8"(41mm); Thickness: 1/4" (6mm)

PROJECT INFORMATION:		APPROVAL STAMP:
<b>Project:</b>		
<b>Date:</b>	<b>Phone:</b>	
<b>Architect / Engineer:</b>		
<b>Contractor:</b>		
<b>Address:</b>		
<b>Notes 1:</b>		