
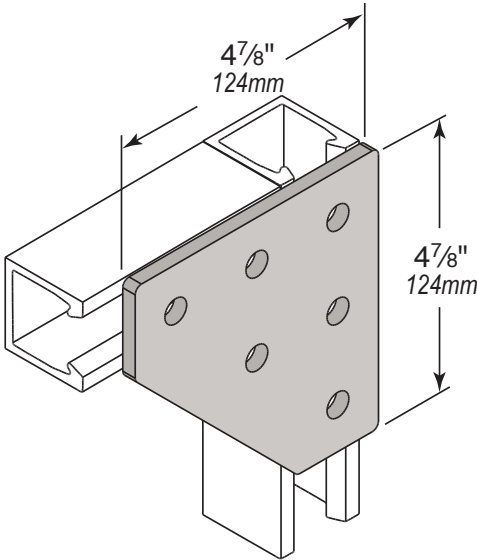


Fiberglass Flat Plate Fittings

Five Hole Corner Gusset

- Industry standard channel fittings for fabricating structures with Wesanco channel
- Fittings can be attached with channel nuts or through bolted to strut back of side walls
- No Special Tools Required
- Highly Corrosion Resistant. See Chemical Resistant Guide in the fiberglass catalog on pages 35 - 37
- Standard fitting material is either:
 - Polyester (PF) FRP Gray
 - Vinyl Ester (VF) FRP Beige
 - Injection Molded Thermoplastics
 - Polyurethane (PU)
 - Polyester (PE);
- NOTES: When attaching fittings to side walls of channels, through bolting requires a channel spacer to prevent wall compression under heavy load conditions. Order part # SPA037PVC for 3/8" (10mm) bolts and part # SPA050PVC for 1/2" (13mm) bolts.

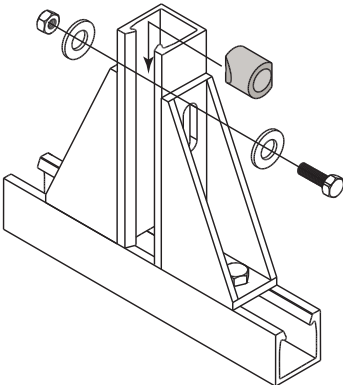

Part No.	Material
W5028PF	Polyester Fire Rated FRP Gray
W5028VF	Vinyl Ester Fire Rated FRP Beige

Hole Diameter: 7/16" (11mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 5/8" (41mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)	
PROJECT INFORMATION:	
Project:	
Date:	Phone:
Architect / Engineer:	
Contractor:	
Address:	
Notes 1:	
APPROVAL STAMP:	

