


Fiberglass Post Bases

Double Post Base

- Wesanco Post Bases can be attached with channel nuts or through bolted to strut back or side walls
- Highly Corrosion Resistant. See Chemical Resistant Guide in Fiberglass catalog on pages 35 - 37
- Standard fitting material is either Injection molded Polyester PE (Black) or Polyurethane PU (Gray)
- Holes on both opposing sides

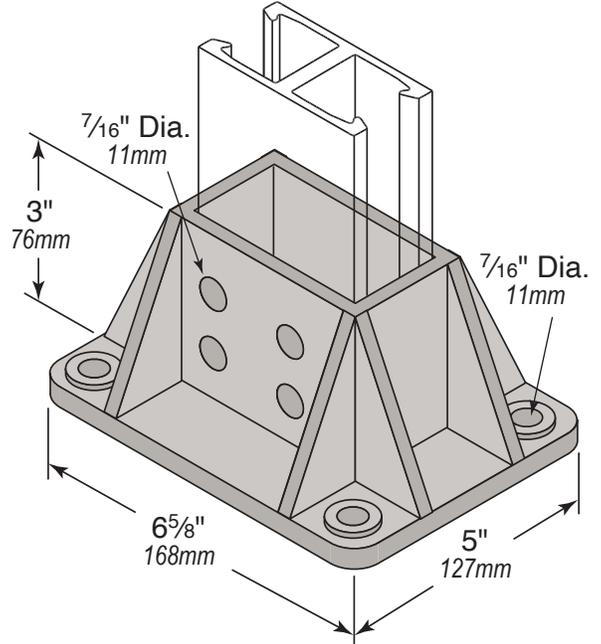

Part No.	Material
W5816SQPE	Polyester Black (PE)
W5816SQPU	Polyurethane Gray (PU)

Hole Diameter: $\frac{7}{16}$ " (11mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{5}{8}$ " (41mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

W5816SQPE