


Flat Plate Fittings

4-Hole Extended Flat Angle

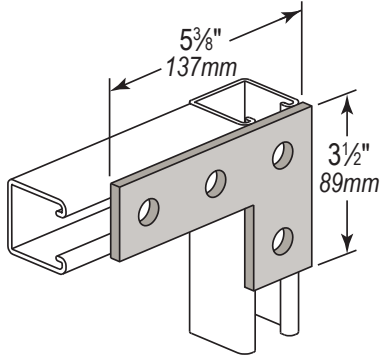

SPECIFYING Brand & Part No.	DISCONTINUED Brands & Part No.	
	VERSABAR	FLORIDA STRUT
 WESANCO		
W5025	VF1406A	F51

Standard Finish: Electro Galvanized (EG) • Hole Diameter: $\frac{9}{16}$ " (14mm); Hole Spacing - From End: $\frac{13}{16}$ " (21mm); Hole Spacing - On Center: $1\frac{7}{8}$ " (48mm); Width: $1\frac{5}{8}$ " (41mm); Thickness: $\frac{1}{4}$ " (6mm)

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Hot Rolled Plate	A 575	See Finishes Below	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting (Steel)	A 366 or A 36	See Finishes Below	Steel carbon, cold rolled sheet, commercial quality structural steel.
Electroplated	ASTM B 633	EG	Fittings and hardware supplied as "Electro-Galvanized"
Hot Dip Galvanized After Fabrication	ASTM A 123, ASTM A153, or ASTM A386.	HG	Channel and fittings which are hot dip galvanized after fabrication.
Paint-Green Powder Coating	--	GR	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Plain	--	PL	Other commercially available finishes can be supplied per specification when required to protect applications.
Special Coatings Yellow Passivate (Trivalent Chromium)	ASTM B63	YC	Fittings and hardware supplied as "Electro-Galvanized", with a "Yellow" Dichromate conversion coat versus the clear conversion coat of the EG finish.
Stainless Steel:	A 240 TYPE 304	S4	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	S6	
Aluminum	B 221 TYPE 6063 T6	AL	Aluminum alloy extruded bar, rod, wire, shape and tube.

PROJECT INFORMATION:		APPROVAL STAMP:	
Project:			
Date:	Phone:		
Architect / Engineer:			
Contractor:			
Address:			
Notes 1:			

W5025

D08/24 - 16



WARNING: Cancer and Reproductive Harm Warning.
For more information go to www.P65Warnings.ca.gov.

www.ZSIINC.com