

Cush-A-Grip

FEATURES:




- Ten sizes of tube, five sizes of pipe
- Diameters from .25" to 1.31"

ADVANTAGES:

- Reduces inventory SKU's
- Simplifies take-offs and requirements on projects using both tube and pipe sizes
- Easy installation, non-conducting
- Permissible outdoors
- Temp. range: -40°F to +380°F (-40°C to 193°C)
- No galvanic reaction, Will not rust

BENEFITS:

- Lowers overall inventory costs
- Works with screw or nut driver
- Resists vibration
- Use in place of steel clamps with steel tube
- Multi-environmental
- Covers a wide range of applications and maintains thermal barrier
- For use on copper tube
- Use in place of stainless, aluminum, PVC or hot dipped galvanized clamps

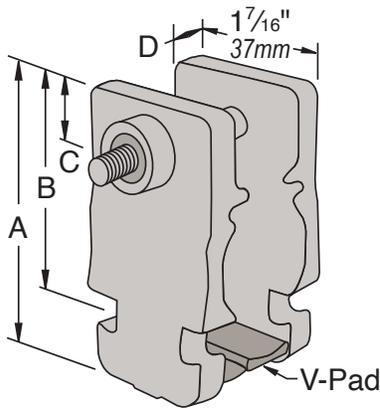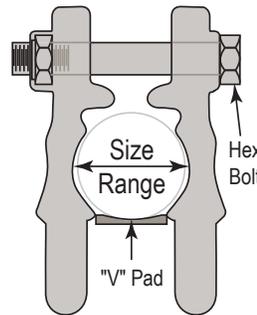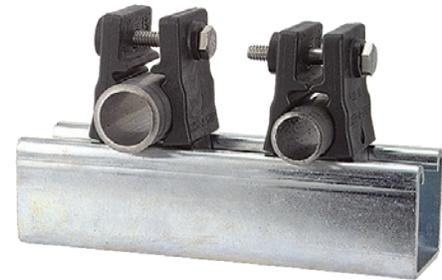

Part No.	O.D. Tube Sizes		Pipe Sizes	Metric Sizes	Diameters (in)
CG-10	1/4"	3/8"	1/2"	6mm - 14mm	0.25 - 0.54
CG-20	5/8"	3/4"	7/8"	15mm - 22mm	0.62 - 0.87
CG-30	7/8"	1"	1-1/8"	22mm - 28mm	0.87 - 1.12
CG-40	1"	1-1/8"	1-1/4"	26mm - 32mm	1.00 - 1.31

Part No.	Nominal Pipe Size	Dimensions				Hex Head Cap Screw & Lock Nut
		"A"	"B"	"C"	"D"	
CG-10	1/4"	1-15/16" (49mm)	1-3/8" (35mm)	3/8" (10mm)	3/16" (5mm)	1/4"-20 x 1-1/2"
CG-20	3/8"	2-3/8" (60mm)	1-5/8" (41mm)	7/16" (11mm)	1/4" (6mm)	1/4"-20 x 2"
CG-30	1/2"	2-9/16" (65mm)	1-13/16" (46mm)	7/16" (11mm)	5/16" (8mm)	1/4"-20 x 2"
CG-40	3/4"	2-11/16" (68mm)	1-15/16" (49mm)	7/16" (11mm)	5/16" (8mm)	1/4"-20 x 2"

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		