


# Pipe Hangers

## SPP Cush-A-Ring Clamps

SPP Cush-A-Ring Clamp for PEX, CPVC, or PVC Pipe

The **Cush-A-Ring** is a unique rubber lined hanger for PEX, CPVC, and PVC pipe. The SPP-1 thru SPP-10 has a two-part clamp with a hinged side and a single screw locking system. The quick locking system is easy to close with one hand, which makes it easier and faster for installation. The noise insulating rubber lining is made of UV-resistant EPDM rubber. The Cush-A-Ring is zinc plated for corrosion resistance.

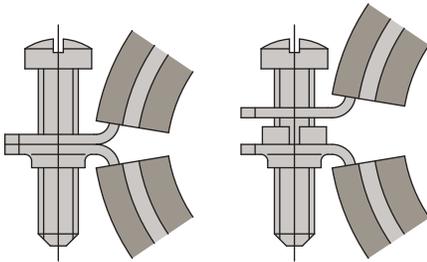

- With quick locking system
- Clamp easy to close with one hand
- Specially formulated, green, UV, and age resistant EPDM rubber lining
- Perfect for PEX, Fusion, CPVC, and PVC pipe
- ASTM E-84
- Complies with MSS SP-58 and SP-69
- Material steel, zinc plated

Standard Finish: Electro Galvanized (EG) • Hole Diameter:  $\frac{9}{16}$ " (14mm); Hole Spacing - From End:  $\frac{13}{16}$ " (21mm); Hole Spacing - On Center:  $1\frac{7}{8}$ " (48mm); Width:  $1\frac{5}{8}$ " (41mm); Thickness:  $\frac{1}{4}$ " (6mm)

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Hot Rolled Plate	A 575	See Finishes Below	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting (Steel)	A 366 or A 36	See Finishes Below	Steel carbon, cold rolled sheet, commercial quality structural steel.
Strip Steel: Pipe Clamps	A 569	See Finishes Below	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Electroplated	ASTM B 633	<b>EG</b>	Fittings and hardware supplied as "Electro-Galvanized"
Hot Dip Galvanized After Fabrication	ASTM A 123, ASTM A153, or ASTM A386.	<b>HG</b>	Channel and fittings which are hot dip galvanized after fabrication.
Paint-Green Powder Coating	--	<b>GR</b>	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Plain	--	<b>PL</b>	Other commercially available finishes can be supplied per specification when required to protect applications.
Special Coatings Yellow Passivate (Trivalent Chromium)	ASTM B63	<b>YC</b>	Fittings and hardware supplied as "Electro-Galvanized", with a "Yellow" Dichromate conversion coat versus the clear conversion coat of the EG finish.
Stainless Steel:	A 240 TYPE 304	<b>S4</b>	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	<b>S6</b>	
Aluminum	B 221 TYPE 6063 T6	<b>AL</b>	Aluminum alloy extruded bar, rod, wire, shape and tube.

PROJECT INFORMATION:		APPROVAL STAMP:
<b>Project:</b>		
<b>Date:</b>	<b>Phone:</b>	
<b>Architect / Engineer:</b>		
<b>Contractor:</b>		
<b>Address:</b>		
<b>Notes 1:</b>		

Cush-A-Ring-SPP


G08/24 - 16 **WARNING:** Cancer and Reproductive Harm Warning. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

# Pipe Hangers


## SPP Cush-A-Ring Clamps

SPP Cush-A-Ring Clamp for PEX, CPVC, or PVC Pipe

SPP-2 thru SPP-10

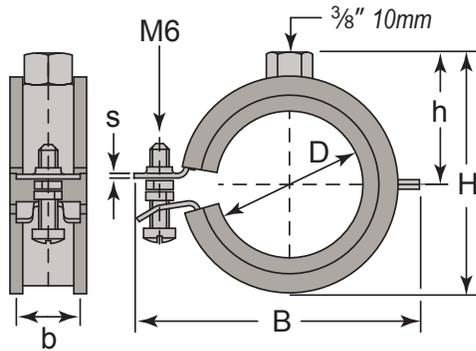

SPP-11 thru SPP-14

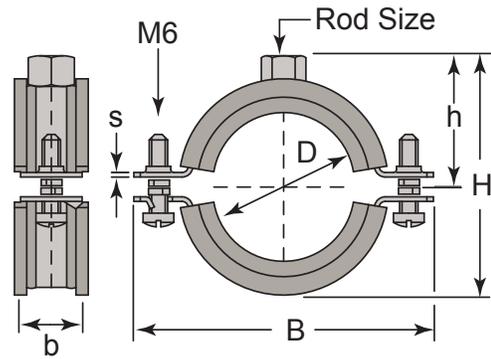

Part No.	Dimensions (in)						
	D	IP	CT	B	H	h	Rod Size
SPP-2	15 – 18	3/8" (10mm)	1/2" (13mm)	1.9" (48mm)	1.4" (36mm)	0.87" (22mm)	3/8" (10mm)
SPP-3	20 – 23	1/2" (13mm)	3/4" (19mm)	2.2" (56mm)	1.7" (43mm)	0.94" (24mm)	
SPP-4	25 – 28	3/4" (19mm)	1" (25mm)	2.4" (61mm)	1.9" (48mm)	1.0" (25mm)	
SPP-5	31 – 35	1" (25mm)	1-1/4" (32mm)	2.6" (66mm)	2.2" (56mm)	1.2" (30mm)	
SPP-6	40 – 43	1-1/4" (32mm)	1-1/2" (38mm)	3.0" (76mm)	2.6" (66mm)	1.3" (33mm)	
SPP-7	48 – 53	1-1/2" (38mm)	-	3.3" (84mm)	3.0" (76mm)	1.5" (38mm)	
SPP-8	54 – 56	-	2" (51mm)	3.5" (89mm)	3.0" (76mm)	1.6" (41mm)	
SPP-9	60 – 65	2" (51mm)	-	4.3" (109mm)	3.4" (86mm)	1.7" (43mm)	
SPP-10	70 – 76	2-1/2" (64mm)	-	4.9" (124mm)	4.1" (104mm)	2.2" (56mm)	
Below parts have 2 bolt configurations							
SPP-11	86 – 91	3" (76mm)	-	5.4" (137mm)	4.6" (117mm)	2.4" (61mm)	3/8" (10mm)
SPP-12	110 – 114	4" (102mm)	-	6.3" (160mm)	5.8" (147mm)	2.9" (74mm)	
SPP-13	124 – 132	-	-	6.8" (173mm)	5.9" (150mm)	3.1" (79mm)	1/2" (13mm)
SPP-14	155 – 160	-	-	8.0" (203mm)	7.4" (188mm)	3.9" (99mm)	