


Strut Clamps



Universal Strut Clamp

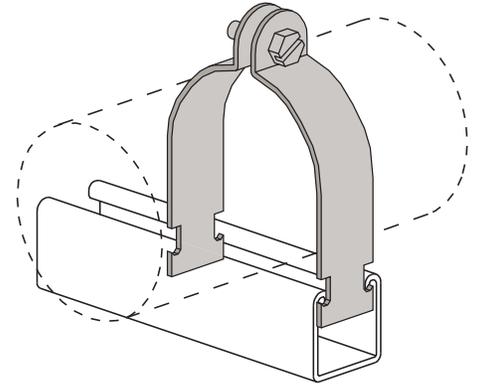

SPECIFYING Brand & Part No.	Nominal Size	O.D. Size	Gauge	Allowable Load Lbs. (kN) (ea.)	DISCONTINUED Brands & Part No.	
					VERSABAR	FLORIDA STRUT
WESANCO W6056A	1/2" (13mm)	0.701 - 0.875 (18-22mm)	16	400 (1.78 kN)	VP9050	SCU0050
W6058A	3/4" (19mm)	0.917 - 1.081 (23-27mm)	16	600 (2.67 kN)	VP9075	SCU0075
W6060A	1" (25mm)	1.125 - 1.375 (28-35mm)	14		VP9100	SCU0100
W6062A	1-1/4" (32mm)	1.500 - 1.691 (38-43mm)	14		VP9125	SCU0125
W6064A	1-1/2" (38mm)	1.735 - 1.931 (44-49mm)	14		VP9150	SCU0150
W6068A	2" (51mm)	2.192 - 2.400 (58-61mm)	12	800 (3.56 kN)	VP9200	SCU0200
W6142A	2-1/2" (64mm)	2.875" (73mm)			VP9250	--
W6146A	3" (76mm)	3.500" (89mm)			VP9300	--
W6150A	3-1/2" (89mm)	4.000" (102mm)	11		VP9350	--
W6154A	4" (102mm)	4.500" (114mm)		VP9400	--	

* These clamps are designed to fit both pipe (rigid conduit) and thin walled tubing (EMT) in the corresponding sizes.

Standard Finish: Electro Galvanized (EG) • Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Hot Rolled Plate	A 575	See Finishes Below	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting (Steel)	A 366 or A 36	See Finishes Below	Steel carbon, cold rolled sheet, commercial quality structural steel.
Strip Steel: Pipe Clamps	A 569	See Finishes Below	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Electroplated	ASTM B 633	EG	Fittings and hardware supplied as "Electro-Galvanized"
Hot Dip Galvanized After Fabrication	ASTM A 123, ASTM A153, or ASTM A386.	HG	Channel and fittings which are hot dip galvanized after fabrication.
Paint-Green Powder Coating	--	GR	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Plain	--	PL	Other commercially available finishes can be supplied per specification when required to protect applications.
Special Coatings Yellow Passivate (Trivalent Chromium)	ASTM B63	YC	Fittings and hardware supplied as "Electro-Galvanized", with a "Yellow" Dichromate conversion coat versus the clear conversion coat of the EG finish.
Stainless Steel:	A 240 TYPE 304	S4	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	S6	
Aluminum	B 221 TYPE 6063 T6	AL	Aluminum alloy extruded bar, rod, wire, shape and tube.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		