



# Insulation Saddles

## Snap-A-Saddle®

Strut Mount Plastic Insulation Saddle



Snaps easily into channel

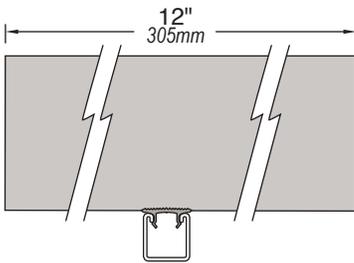

Part No.		Nominal Inside Opening
Black	White	
SB225	SW225	2 1/4" (57mm)
SB325	SW325	3 1/4" (83mm)
SB425	SW425	4 1/4" (108mm)
SB525	SW525	5 1/4" (133mm)
SB625	SW625	6 1/4" (159mm)
SB825	SW825	8 5/8" (219mm)

The Snap-A-Saddle provides an easy way to attach insulated pipes to support channel, with one step, tool-free installation.

- Temp Range: -50° to 275°F (-46° to 135° C)
- Available in both black and white
- UL94-HB1 Rated TPV Material
- Made in USA
- Easy Installation
- Standard 12" (305mm) lengths. Special lengths available upon request

Snap-A-Saddle Size Guide - Copper Tubing					
Tubing Size	Insulation Thickness				
	1/2" (13mm)	3/4" (19mm)	1" (25mm)	1 1/2" (38mm)	2" (51mm)
1/4"	S*225	S*225	S*325	S*425	S*525
3/8"					
1/2"		S*325			
5/8"					
3/4"					
1"	S*325	S*425	S*525	S*625	
1-1/4"					
1-1/2"					
2"	S*425	S*525	S*625	S*825	
2-1/2"					
3"	S*425	S*525	S*625	S*825	
3-1/2"					
4"					

\* Add "B" for Black or "W" for White

Snap-A-Saddle Size Guide - Schedule 40/80 Pipe					
Pipe Size	Insulation Thickness				
	1/2" (13mm)	3/4" (19mm)	1" (25mm)	1 1/2" (38mm)	2" (51mm)
1/4"	S*225	S*225	S*325	S*425	S*525
3/8"					
1/2"		S*325			
3/4"					
1"					
1-1/4"	S*325	S*425	S*525	S*625	
1-1/2"					
2"	S*425	S*525	S*625	S*825	
2-1/2"					
3"	S*425	S*525	S*625	S*825	
3-1/2"					
4"					

\* Add "B" for Black or "W" for White

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

Saddle-A-Saddle

G08/24 - 77 **WARNING:** Cancer and Reproductive Harm Warning. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).