

# Insulation Saddles

## SnapShock™



### Applications:

Refrigeration, Air Conditioning and Plumbing

### Installation:



Tool-Free, clips directly into the Clevis adapter of the Snap-A-Saddle Pro Multi™

### Certification:

UL classified for USA (UL-723 (ASTM E 84) and ULC listed for Canada (ULC-S102.2).


### Material:

- Polypropylene 20% glass filled
- UV resistant
- Operating temperature -40° to 178°F (-40° to 81°C)

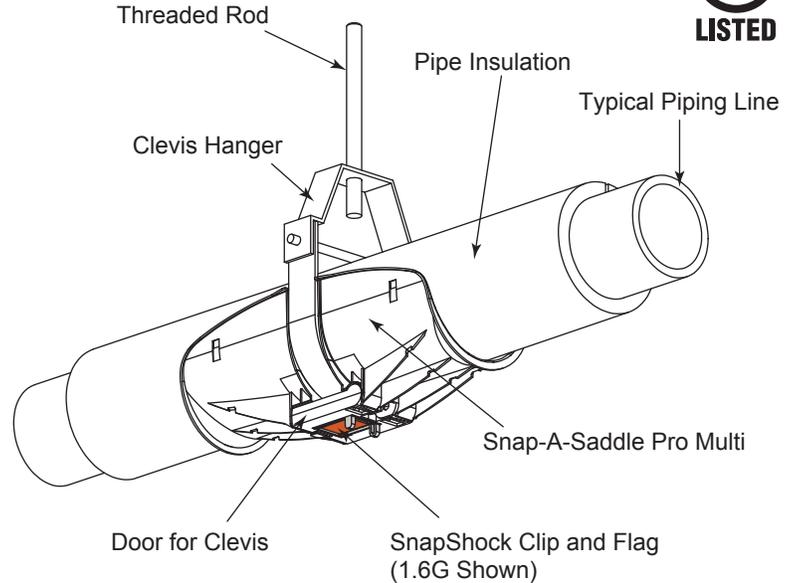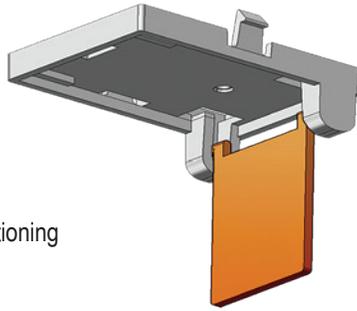

Each color coded flag will trigger at a different shock intensity. Flags are easily interchangeable for different shock tolerance. Flag thickness varies by shock intensity.

- 1.8G (Downward Allowable Stress Design)
- 1.6G (Downward Allowable Stress Design)
- 1.4G (Downward Allowable Stress Design)

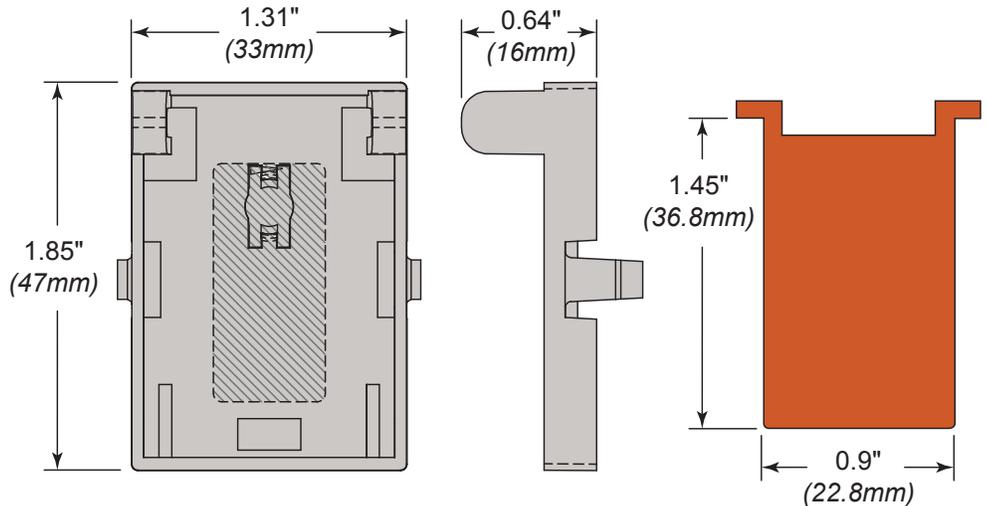

SnapShock is sold by the set. Each set is supplied complete with all three flags.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		