
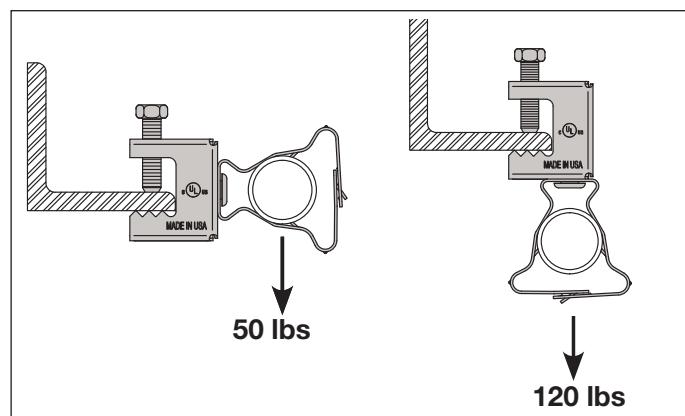


Conduit and Cable Supports

BCC

Beam Clamp with Conduit Clip

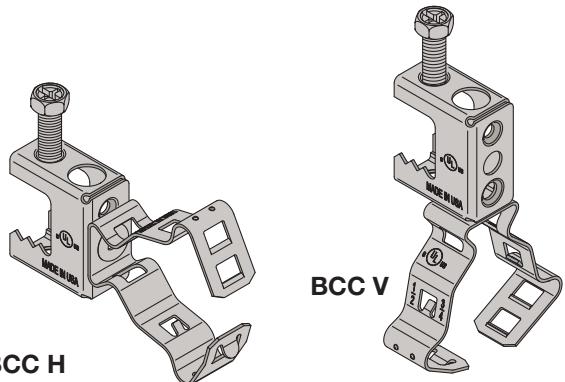

Part No.	Conduit Size
BCC6HM *	3/8" Flexible Conduit
BCC812HM	1/2" & 3/4" EMT, Rigid
BCC16HM	1" EMT, Rigid
BCC20HM	1-1/4" EMT, Rigid
BCC24HM	1-1/2" EMT, Rigid
BCC32HM	2" EMT, Rigid
BCC6VM	3/8" Flexible Conduit
BCC812VM	1/2" & 3/4" EMT, Rigid
BCC16VM	1" EMT, Rigid
BCC20CM	1-1/4" EMT, Rigid
BCC24VM	1-1/2" EMT, Rigid
BCC32VM	2" EMT, Rigid

* Not a UL Listed Product



- Eliminates offset bending of conduit.
- For installation on 1/2" maximum flanges.
- Included combo head screw allows Robertson, Phillips/Slotted and Hex drivers.
- Conduit clip rotates 360 degrees.
- For support of conduit per NEC 344.30(B).
- **Material:** Spring Steel
- **Finish:** Silva-Guard

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	SG	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	EG	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	PG	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

BCC

H08/24 - 44

WARNING: Cancer and Reproductive Harm Warning.
For more information go to www.P65Warnings.ca.gov.www.ZSIINC.com