


SUBMITTAL SHEETS

Spring Steel




Structural Attachment

BCL
Beam Clamp

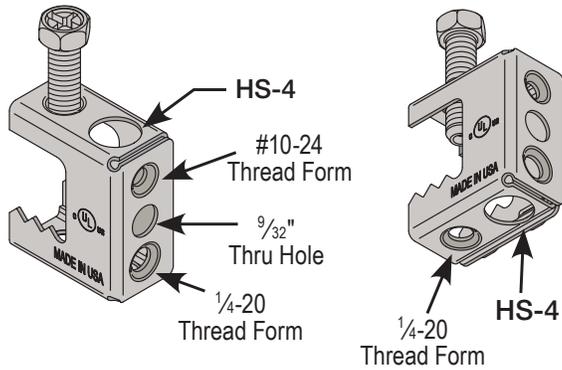

- UL Listed for box support.
- For installation on 1/2" maximum beam flanges.
- Included combo head set screw allows Robertson, Phillips/Slotted and Hex drivers.
- Accepts "S" hooks, threaded rod and bridal rings.
- **Material:** Spring Steel
- **Finish:** Silva-Guard

Part No.	Max. Flange Thickness	HS-4
BCL	1/2"	13/32" Thru Hole for 1/4" or 3/8" Rod

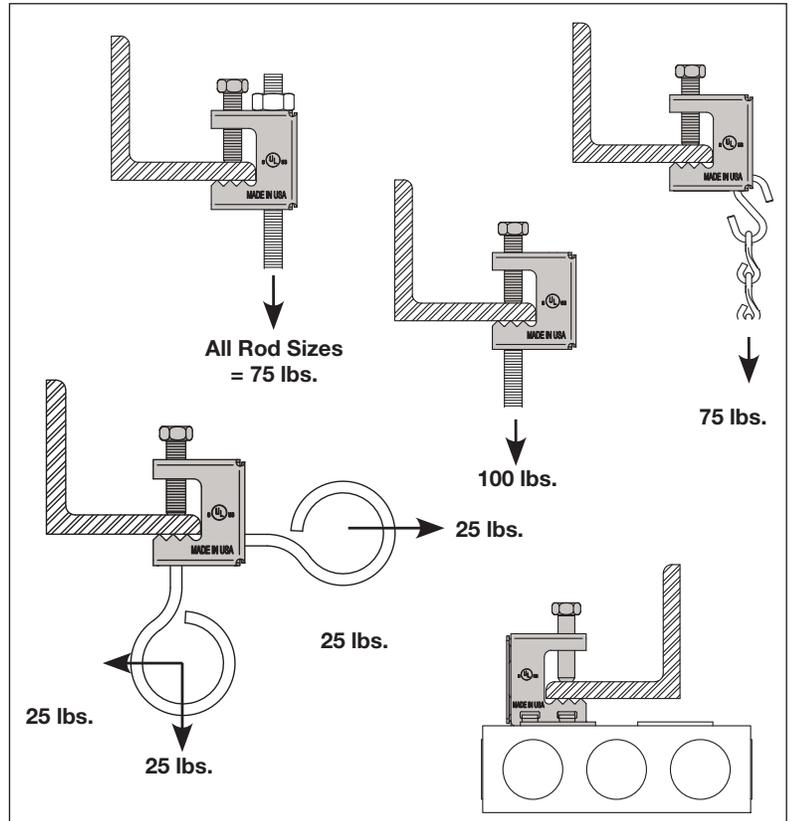

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	SG	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	EG	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	PG	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

BCL

H08/24 - 82

WARNING: Cancer and Reproductive Harm Warning. For more information go to www.P65Warnings.ca.gov.

www.ZSIINC.com

