

SUBMITTAL SHEETS


Spring Steel




Stud Wall Applications

CSSTS

Cable Support Strap for Wood or Metal Studs

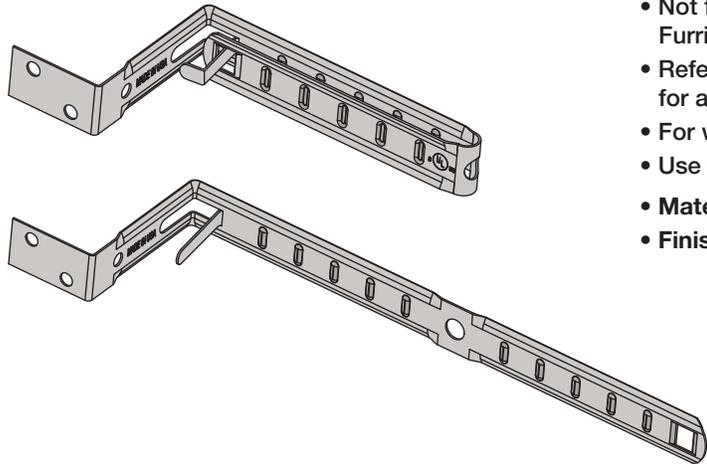

- Not for use with Hat Channel or Furring Strips.
- Reference NEC 1990 Article 300-4d for application
- For wet or dry applications.
- Use with SDTSLP8X1/2 screws
- **Material:** Steel
- **Finish:** Pregalvanized

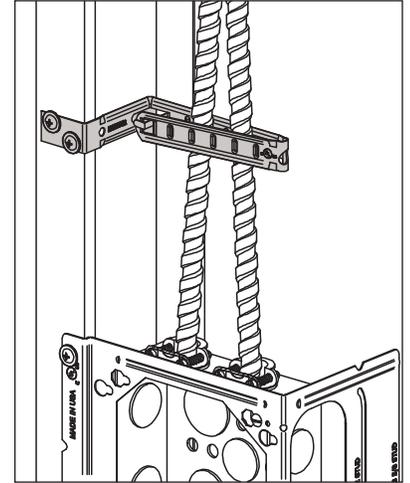

Part No.	Cable Type	Cable Size	Cables per Fastener	Description
CSSTS	Romex™ and Non-Metallic Sheathed Cable	14-2, 12-2, 10-2, 14-3, 12-3, and 10-3 with ground	6 Max.	To Attach Romex Non-Metallic Sheathed Cable, AC, BX, and MC Cable to Wood or Metal Stud
		8-2 and 6-2 with ground	4 Max.	
	Metal Clad (MC) Cable	14-2, 12-2, 10-2, 14-3, 12-3, 10-3, 14-4, 12-4, and 10-4 with ground	4 Max.	

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	SG	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	EG	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	PG	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

CSSTS

H08/24 - 90

WARNING: Cancer and Reproductive Harm Warning. For more information go to www.P65Warnings.ca.gov.

www.ZSIINC.com

