

SUBMITTAL SHEETS


Spring Steel



Stud Wall Applications


CTS

Conduit Clip to Wood or Metal Stud

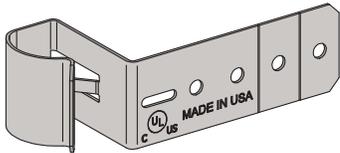


- Use with low profile screws SDTSLP8X1/2
- For positioning only.
- For wet or dry applications..
- **Material:** Spring Steel
- **Finish:** Silva-Guard

CTS812

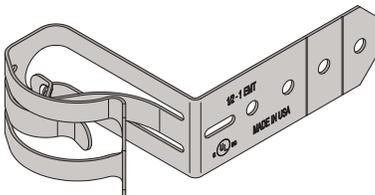

CTS816D

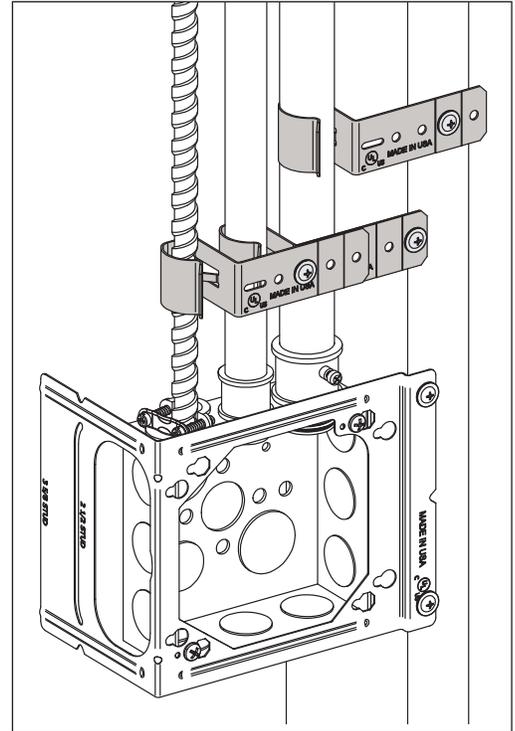

Part No.	Box Depth	MC/AC Cable Size	Conduit Size
CTS812	1-1/2" (38mm)	14-2, 14-3,	1/2" or 3/4" EMT MC/AC (13mm or 19mm)
CTS816D	2-1/8" (54mm)	12-2, 12-3	1/2" or 1" EMT (13mm or 25mm)

Finish or Material Order Codes

Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	SG	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	EG	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	PG	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

CTS

H08/24 - 91

WARNING: Cancer and Reproductive Harm Warning. For more information go to www.P65Warnings.ca.gov.

www.ZSIINC.com

