

# SUBMITTAL SHEETS


## Spring Steel




### Conduit and Cable Supports

#### FH C

Flange Clip with Conduit Clip

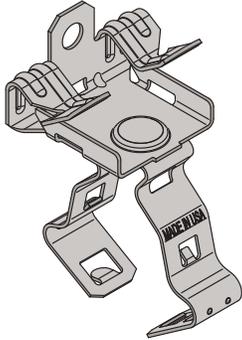

- Supports pipe and conduit from beam flanges.
- Conduit clip rotates 360 degrees.
- Flange thickness range stamped on part.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Silva-Guard

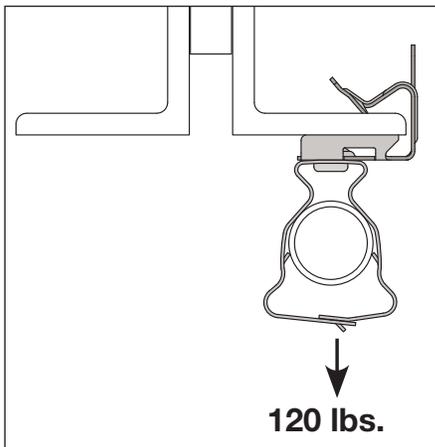

Part No.	Min. - Max. Flange Thickness	Conduit Size
FH24CC6 *	1/8" - 1/4" (3mm - 6mm)	3/8" Flexible Conduit
FH58CC6 *	5/16" - 1/2" (8mm - 13mm)	
FH912CC6 *	9/16" - 3/4" (14mm - 19mm)	
FH24CC812	1/8" - 1/4" (3mm - 6mm)	1/2" & 3/4" EMT, Rigid
FH58CC812	5/16" - 1/2" (8mm - 13mm)	
FH912CC812	9/16" - 3/4" (14mm - 19mm)	
FH24CC16	1/8" - 1/4" (3mm - 6mm)	1" EMT, Rigid
FH58CC16	5/16" - 1/2" (8mm - 13mm)	
FH912CC16	9/16" - 3/4" (14mm - 19mm)	
FH23CC20	1/8" - 1/4" (3mm - 6mm)	1-1/4" EMT, Rigid
FH58CC20	5/16" - 1/2" (8mm - 13mm)	
FH912CC20	9/16" - 3/4" (14mm - 19mm)	
FH24CC24	1/8" - 1/4" (3mm - 6mm)	1-1/2" EMT, Rigid
FH58CC24	5/16" - 1/2" (8mm - 13mm)	
FH912CC24	9/16" - 3/4" (14mm - 19mm)	
FH24CC32	1/8" - 1/4" (3mm - 6mm)	2" EMT, Rigid
FH58CC32	5/16" - 1/2" (8mm - 13mm)	
FH912CC32	9/16" - 3/4" (14mm - 19mm)	

\* Not a UL Listed Product

#### Finish or Material Order Codes

Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	<b>SG</b>	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	<b>EG</b>	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	<b>PG</b>	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

#### PROJECT INFORMATION:

#### APPROVAL STAMP:

<b>Project:</b>		
<b>Date:</b>	<b>Phone:</b>	
<b>Architect / Engineer:</b>		
<b>Contractor:</b>		
<b>Address:</b>		
<b>Notes 1:</b>		

FH-C

H08/24 - 46

**WARNING:** Cancer and Reproductive Harm Warning. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ZSIINC.com](http://www.ZSIINC.com)

