
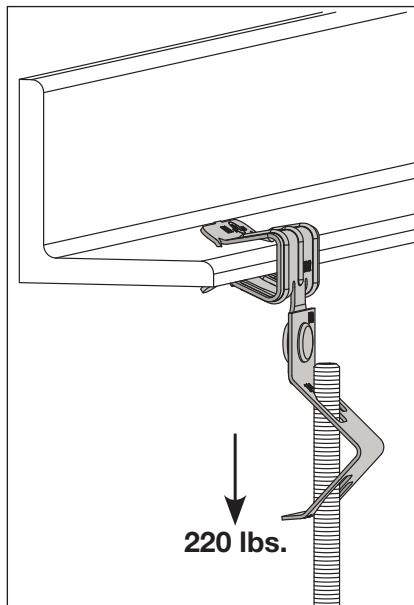


Structural Attachment

FH P

Flange Clip Side Mount with Rod Hanger Push Install

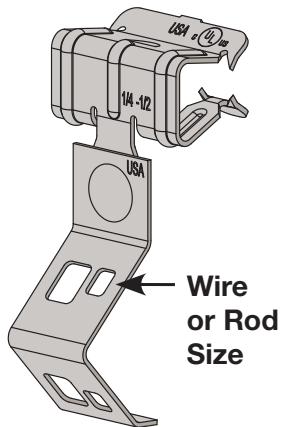

- Suspends plain and threaded rod from beam flanges.
- Easy adjustment of rod after installation.
- Flange thickness range stamped on part.
- Only a hammer required for installation.
- **Material: Spring Steel**
- **Finish: Silva-Guard**

Part No.	Minimum - Maximum Flange Thickness	Wire/ Rod Size
FH24RHP4	1/8" - 1/4" (3mm - 6mm)	#8 Wire or 1/4" Rod
FH58RHP4	5/16" - 1/2" (8mm - 13mm)	
FH912RHP4	9/16" - 3/4" (14mm - 19mm)	
FH24RHP6	1/8" - 1/4" (3mm - 6mm)	3/8" Rod
FH58RHP6	5/16" - 1/2" (8mm - 13mm)	
FH912RHP6	9/16" - 3/4" (14mm - 19mm)	

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	SG	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	EG	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	PG	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

FH-P

H08/24 - 65

WARNING: Cancer and Reproductive Harm Warning.
For more information go to www.P65Warnings.ca.gov.www.ZSIINC.com