

SUBMITTAL SHEETS


Spring Steel




Conduit and Cable Supports

FHS C

Flange Clip Side Mount with Conduit Clip

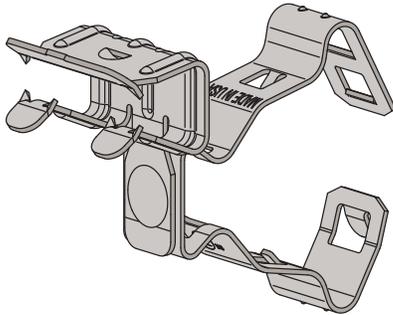

- Supports pipe and conduit from beam flanges.
- Flange thickness range stamped on part.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Silva-Guard

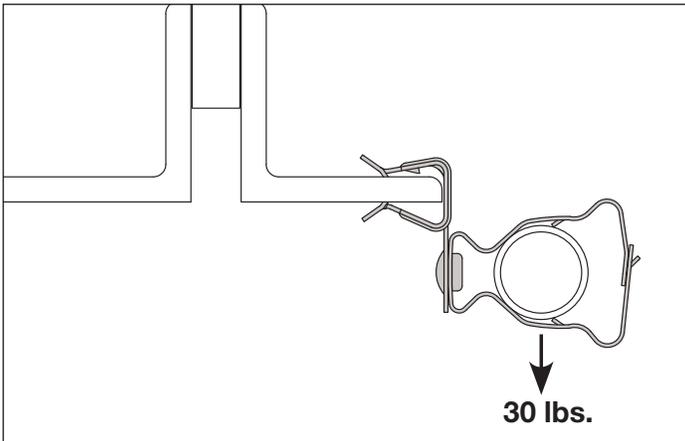

Part No.	Min. - Max. Flange Thickness	Conduit Size
FHS24CC6 *	1/8" - 1/4" (3mm - 6mm)	3/8" Flexible Conduit
FHS58CC6 *	5/16" - 1/2" (8mm - 13mm)	
FHS912CC6 *	9/16" - 3/4" (14mm - 19mm)	
FHS24CC812	1/8" - 1/4" (3mm - 6mm)	1/2" & 3/4" EMT, Rigid
FHS58CC812	5/16" - 1/2" (8mm - 13mm)	
FHS912CC812	9/16" - 3/4" (14mm - 19mm)	
FHS24CC16	1/8" - 1/4" (3mm - 6mm)	1" EMT, Rigid
FHS58CC16	5/16" - 1/2" (8mm - 13mm)	
FHS912CC16	9/16" - 3/4" (14mm - 19mm)	
FHS24CC20	1/8" - 1/4" (3mm - 6mm)	1-1/4" EMT, Rigid
FHS58CC20	5/16" - 1/2" (8mm - 13mm)	
FHS912CC20	9/16" - 3/4" (14mm - 19mm)	
FHS24CC24	1/8" - 1/4" (3mm - 6mm)	1-1/2" EMT, Rigid
FHS58CC24	5/16" - 1/2" (8mm - 13mm)	
FHS912CC24	9/16" - 3/4" (14mm - 19mm)	
FHS24CC32	1/8" - 1/4" (3mm - 6mm)	2" EMT, Rigid
FHS58CC32	5/16" - 1/2" (8mm - 13mm)	
FHS912CC32	9/16" - 3/4" (14mm - 19mm)	

* Not a UL Listed Product

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	SG	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	EG	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	PG	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

FHS-C

H08/24 - 48

WARNING: Cancer and Reproductive Harm Warning. For more information go to www.P65Warnings.ca.gov.

www.ZSIINC.com

