
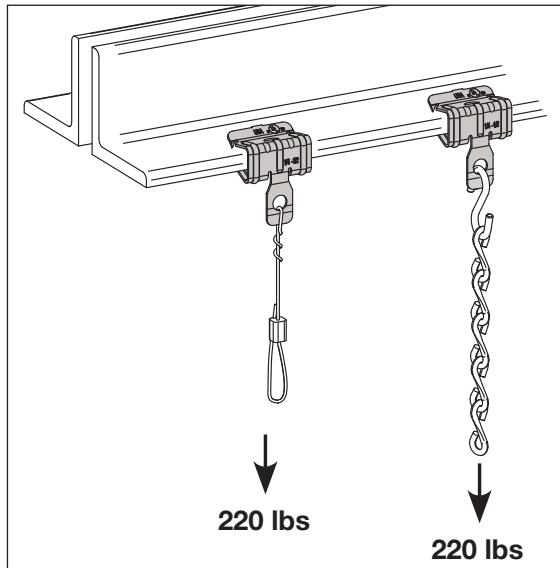
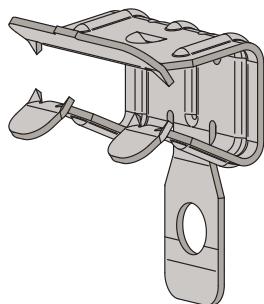


Structural Attachment

FSM

Flange Clip Side Mount

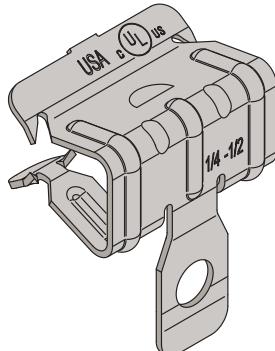

| Part No. | Flange Thickness | Hole Size |
|----------|----------------------------|---------------|
| FSM24 | 1/8" - 1/4" (3mm - 6mm) | |
| FSM58 | 5/16" - 1/2" (8mm - 13mm) | 9/32" (7.1mm) |
| FSM912 | 9/16" - 3/4" (14mm - 19mm) | |

- Beam clamp with hole for supporting tie wire and jack
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Silva-Guard

| Finish or Material Order Codes | | | |
|--------------------------------|---|-----------------------|--|
| Material/Finish | ASTM Designation | Material/Finish Codes | Description |
| Carbon Steel | ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B | See Finishes Below | Steel |
| Spring Steel | ASTM A684 Grade 1055 | See Finishes Below | Cold rolled Spring Steel sheet |
| Silva-Guard | -- | SG | Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat. |
| Electroplated | ASTM B 633 SC1 or SC3, Type III | EG | This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. |
| Pre-Galvanized | A 653 SS GR33 G90. | PG | Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills. |

| PROJECT INFORMATION: | | APPROVAL STAMP: |
|------------------------------|---------------|-----------------|
| Project: | | |
| Date: | Phone: | |
| Architect / Engineer: | | |
| Contractor: | | |
| Address: | | |
| Notes 1: | | |

