
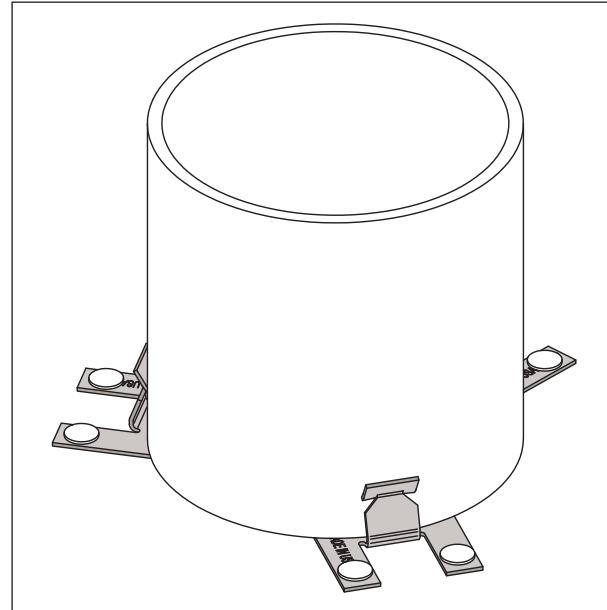


Structural Attachment

PSP, FSM

Pipe Sleeve Positioner

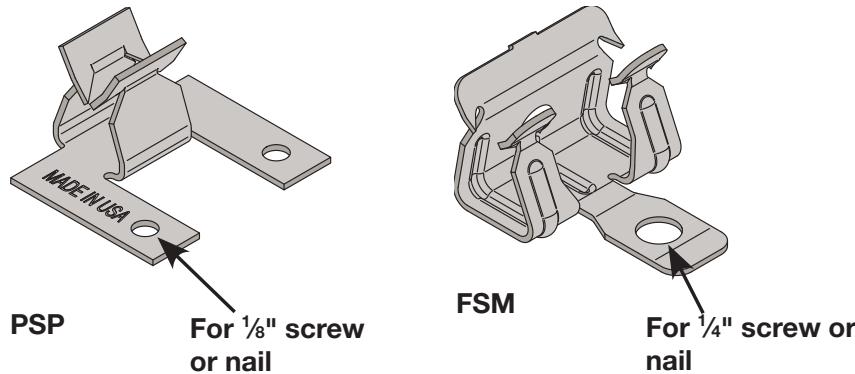

Part No.	Sleeve Diameter	Pipe Wall Thickness	Min./Max. Sleeve Thickness Range
PSP2-6	2" - 6" (51mm - 152mm)	Schedule #40 Pipe	0" - 5/16" (0 - 8mm)
PSPA	Any Dia.	Up to 5/16" (8mm)	
FSM58	6" (152mm)	Schedule #80 Pipe	1/4" - 1/2" (6mm - 13mm)
FSM58	8" - 10" (203mm - 254mm)	Schedule #40 Pipe	
FSM912	9" - 14" (229mm - 356mm)	Schedule #80 Pipe	1/2" - 3/4" (13mm - 19mm)

- Use to position pipe sleeves during concrete pours.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Silva-Guard

Finish or Material Order Codes

Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	SG	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	EG	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	PG	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

PROJECT INFORMATION:

APPROVAL STAMP:

Project:			
Date:			Phone:
Architect / Engineer:			
Contractor:			
Address:			
Notes 1:			

