


Structural Attachment

RHP RHT


Rod Hanger Push Install or Rod Hanger Thread Install

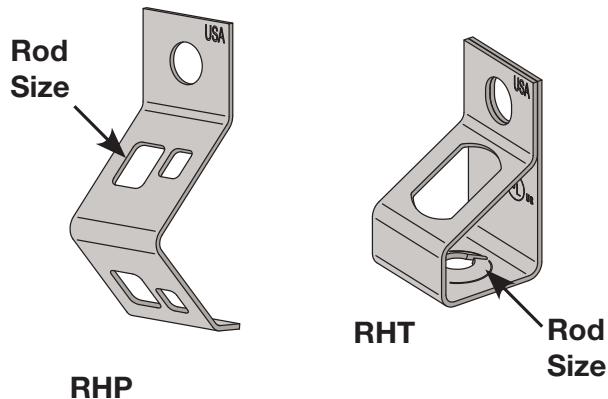

Part No.	Rod Size
RHP4	#8 Wire or 1/4" Plain or Threaded Rod
RHP6	3/8" Plain or Threaded Rod
RHT4T	1/4" - 20 Thread Form
RHT6T	3/8" - 16 Thread Form
RHT6 *	13/32" Thru Hole for 1/4" or 3/8" Threaded Rod

* Nuts sold separately

- **RHP:** Suspends plain and threaded rod from vertical surfaces, and provides easy adjustment of rod after installation.
- **RHT:** Suspends threaded rod from vertical surfaces.
- **Material:** Spring Steel
- **Finish:** Silva-Guard

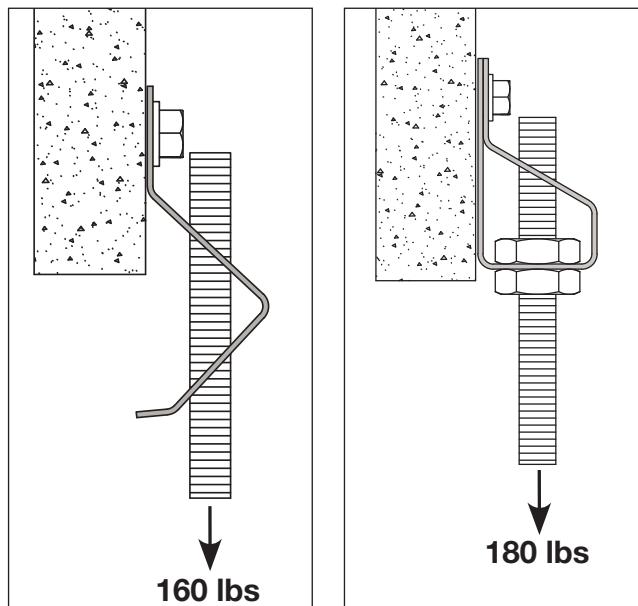

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	SG	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	EG	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	PG	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

