

# SUBMITTAL SHEETS


## Spring Steel




### Stud Wall Applications

#### SDTSLP8X1/2

Self Drilling and Tapping Screw



- #8 x 1/2" Long Self drilling and tapping, low profile screws
- Thin head prevents drywall bulge.
- #2 phillips driver for screw gun use.
- **Material:** Steel
- **Finish:** Electrogalvanized

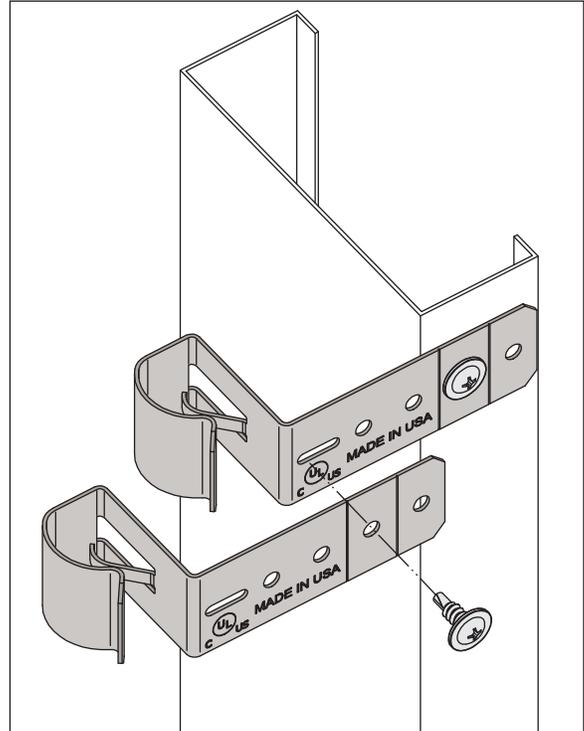

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	<b>SG</b>	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	<b>EG</b>	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	<b>PG</b>	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

PROJECT INFORMATION:		APPROVAL STAMP:
<b>Project:</b>		
<b>Date:</b>	<b>Phone:</b>	
<b>Architect / Engineer:</b>		
<b>Contractor:</b>		
<b>Address:</b>		
<b>Notes 1:</b>		

SDTSLP8X1-2

H08/24 - 94

**WARNING:** Cancer and Reproductive Harm Warning. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ZSIINC.com](http://www.ZSIINC.com)

