
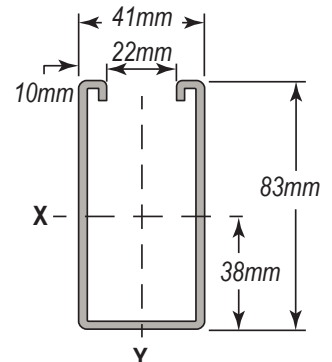
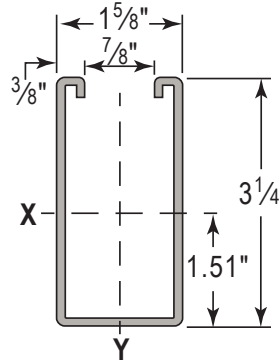



Channel

1-⁵/₈" x 3-¹/₄" (41mm x 83mm) Channel

12 Gauge with ⁹/₁₆" x 1-¹/₈" Short Slots on 2" center



SPECIFYING Brand & Part No.		DISCONTINUED Brands & Part No.		1- ⁵ / ₈ " x 3- ¹ / ₄ "
 WESANCO	Gauge	VERSABAR	FLORIDA STRUT	
		Channel with ⁹ / ₁₆ " x 1- ¹ / ₈ " Short Slots on 2" center		
W150EH	12 Ga.	VA11PLH	FS12314EH	

Standard Finish: Pre-Galvanized (PG) • Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Hot Rolled: Channel	A 1011SS GR33		Hot rolled carbon steel sheet and strip, structural quality.
Cold Rolled: Channel	A 1008SS GR33, A 1008		Cold rolled carbon sheet steel.
Electroplated	ASTM B 633	EG	Fittings and hardware supplied as "Electro-Galvanized"
Mill-Galvanized (Pre-Galvanized)	A 653 SS GR33 G90.	PG	Galvanized steel used in the manufacture of channel sections. Uncoated edges resulted from slitting, punching and channel cut off are present.
Hot Dip Galvanized After Fabrication	ASTM A 123, ASTM A153, or ASTM A386.	HG	Channel and fittings which are hot dip galvanized after fabrication.
Paint-Green Powder Coating	--	GR	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Plain	--	PL	Other commercially available finishes can be supplied per specification when required to protect applications.
Special Coatings Yellow Passivate (Trivalent Chromium)	ASTM B63	YC	Fittings and hardware supplied as "Electro-Galvanized", with a "Yellow" Dichromate conversion coat versus the clear conversion coat of the EG finish.
Stainless Steel:	A 240 TYPE 304	S4	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	S6	
Aluminum	B 221 TYPE 6063 T6	AL	Aluminum alloy extruded bar, rod, wire, shape and tube.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

W150EH

A08/24 - 198



WARNING: Cancer and Reproductive Harm Warning.
For more information go to www.P65Warnings.ca.gov.

www.ZSIINC.com


Page 1 of 3

Channel

1-5/8" x 3-1/4" (41mm x 83mm) Channel

12 Gauge with 9/16" x 1-1/8" Short Slots on 2" center

Channel Load Data

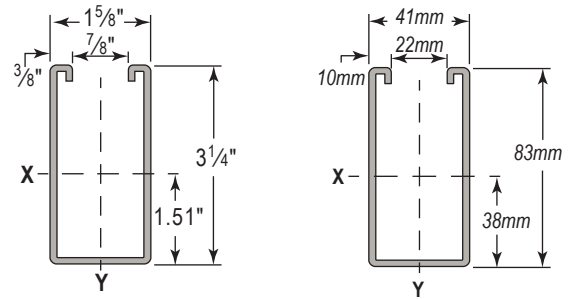

Section Properties

12 Gauge	Wt./Ft. Lbs. (Kg/M)	Area of Section Sq. in. (Sq. cm)	X-X Axis			Y-Y Axis			DISCONTINUED Brands & Part No.	
SPECIFYING Brand & Part No.			Ix in. ⁴ (Ix cm ⁴)	Sx in. ³ (Sx cm ³)	rx. in. (rx. cm)	Iy in. ⁴ (Iy cm ⁴)	Sy in. ³ (Sy cm ³)	ry in. (ry cm)		
ⓈWESANCO			VERSABAR	FLORIDA STRUT						
1 5⁄8" x 3 1⁄4" (41mm x 83mm) 12 Gauge Channel										
W150	3.07 (4.57)	0.902 (5.82)	1.113 (46.33)	0.639 (10.47)	1.111 (2.82)	0.435 (18.11)	0.536 (8.78)	0.695 (1.77)	VA11	FS12314NS

1 5/8" x 3 1/4" (41mm x 83mm) 12 Gauge Channel

Allowable Beam Loads

Span	Max. Uniform Load (W)	Deflection at Load (W)	Uniform Load at Deflection Span /240	Lateral Bracing Load Reduction Rate
In (mm)	Lbs (kN)	In (mm)	Lbs (kN)	
12 (305)	10,720 (47.7)	0.01 (0.3)	10,720 (47.7)	1.00
24 (610)	5,360 (23.8)	0.03 (0.8)	5,360 (23.8)	0.98
36 (914)	3,570 (15.9)	0.07 (1.8)	3,570 (15.9)	0.85
48 (1,219)	2,680 (11.9)	0.12 (3.0)	2,680 (11.9)	0.70
60 (1,524)	2,140 (9.5)	0.18 (4.6)	2,140 (9.5)	0.54
72 (1,829)	1,790 (8.0)	0.27 (6.9)	1,790 (8.0)	0.44
84 (2,134)	1,530 (6.8)	0.36 (9.1)	1,490 (6.6)	0.37
96 (2,438)	1,340 (6.0)	0.47 (11.9)	1,140 (5.1)	0.33
108 (2,743)	1,190 (5.3)	0.59 (15.0)	900 (4.0)	0.29
120 (3,048)	1,070 (4.8)	0.73 (18.5)	730 (3.2)	0.27
132 (3,353)	970 (4.3)	0.89 (22.5)	600 (2.7)	0.25
144 (3,658)	890 (4.0)	1.05 (26.8)	510 (2.3)	0.24
156 (3,962)	820 (3.6)	1.23 (31.4)	430 (1.9)	0.23
168 (4,267)	770 (3.4)	1.45 (36.8)	370 (1.6)	0.22
180 (4,572)	710 (3.2)	1.64 (41.7)	320 (1.4)	0.21
192 (4,877)	670 (3.0)	1.88 (47.8)	280 (1.2)	0.20
204 (5,182)	630 (2.8)	2.12 (53.9)	250 (1.1)	0.19
216 (5,486)	600 (2.7)	2.40 (60.9)	230 (1.0)	0.19
228 (5,791)	560 (2.5)	2.63 (66.9)	200 (0.9)	0.18
240 (6,096)	540 (2.4)	2.96 (75.2)	180 (0.8)	0.18

** KL/r > 200

Beam loads shown are total uniform load, including the channel weight, for a simple span supported at each end that is adequately laterally braced.

Refer to pages 34 - 36 for other beam support conditions.

Allowable Column Loads

Unbraced Height	Max. Slot Face Load	Max. Column Load Applied at C.G. K = 1.0
In (mm)	Lbs (kN)	Lbs (kN)
12 (305)	6,230 (27.7)	18,480 (82.2)
24 (610)	5,730 (25.5)	12,890 (57.3)
36 (914)	4,740 (21.1)	7,650 (34.0)
48 (1,219)	3,590 (16.0)	4,800 (21.4)
60 (1,524)	2,740 (12.2)	3,460 (15.4)
72 (1,829)	2,160 (9.6)	2,710 (12.1)
84 (2,134)	1,760 (7.8)	2,250 (10.0)
96 (2,438)	1,500 (6.7)	1,930 (8.6)
108 (2,743)	1,310 (5.8)	1,700 (7.6)
120 (3,048)	1,170 (5.2)	1,520 (6.8)
132 (3,353)	1,070 (4.8)	1,370 (6.1)
144 (3,658)	980 (4.4)	**
156 (3,962)	910 (4.0)	**
168 (4,267)	850 (3.8)	**
180 (4,572)	**	**
192 (4,877)	**	**
204 (5,182)	**	**
216 (5,486)	**	**
228 (5,791)	**	**
240 (6,096)	**	**

Beam Loading of Punched Channels

Load for punched channel is obtained by multiplying the loads shown by the following reduction factors:


Channel with Short Slots 0.90
Channel with Holes 0.95



Channel



1-5/8" x 3-1/4" (41mm x 83mm) Pre-Cut Channel
12 Gauge with 9/16" x 1-1/8" Short Slots on 2" center



1 5/8" x 3 1/4" (41mm x 83mm)
Short Slots Channel
Pre-Cut Lengths



Channel With Short Slots
9/16" x 1-1/8" (14mm x 29mm) Slots
are punched on 2" (51mm) centers.

Pre-Cut Length	Part Number Order Chart for Different Options	
	SPECIFYING Brand & Part No.	
	WESANCO	
6" (15.2cm)	W150 XXXXX XXXX	
12" (0.31m)	Style: W150 - Solid W150EH - Short Slots	Length:
18" (0.45m)		06IN 48IN
24" (0.61m)	Material/Finish: PG - Pre-Galvanized S4 - Stainless Steel Type 304 S6 - Stainless Steel Type 316	12IN 54IN
30" (0.76m)		18IN 60IN
36" (0.91m)		24IN 72IN
42" (1.07m)		30IN 80IN
48" (1.22m)		36IN 96IN
54" (1.37m)		42IN
60" (1.52m)	EXAMPLE: W150S648IN	
72" (1.83m)	1-5/8" x 3-1/4" W150 - Solid Channel	48IN - 48" Long
80" (2.03m)		S6 - 316 Stainless Steel
96" (2.44m)		
10' (3.05m)		
20' (6.10m)		

Note: Minimum order quantity is 100 pieces for any size under 10'.

Available in 10' & 20' standard lengths & pre-cut lengths • Custom cut lengths, combinations, and pierced channel available
Materials: Cold Rolled Steel, Stainless Steel 304 & 316, and Aluminum
Finishes: Pre-Galvanized, Paint-Green Powder Coating, Electroplated Zinc, Hot Dip Galvanized, Plain, and Special Coatings.