



# Trolleys

## Four Wheel Trolley [Full Wheel]

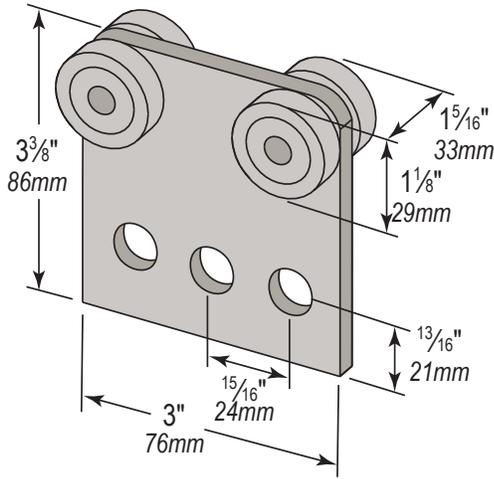

Safe load rating for steel bearing Trolley  
 600 lbs. (2.67 kN) @ 100 rpm  
 450 lbs. (2.00 kN) @ 300 rpm  
 300 lbs. (1.33 kN) @ 600 rpm

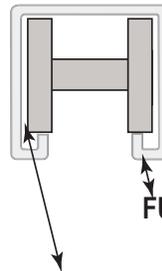

FULL Wheel sets on the inturned edge of the Strut

- Single tolerance on the face of the wheel
- Greater weight allowed on the trolley with the single edge on wheel

SPECIFYING Brand & Part No.	Description	DISCONTINUED Brands & Part No.	
		VERSABAR	FLORIDA STRUT
<b>WESANCO</b>			
<b>W6600</b>	All Steel Components	VX7027	R11
<b>W6600N</b>	Steel Trolley, Nylon Plain Bearings	VX7027N	--
<b>W6600NSS</b>	Stainless Steel Trolley, Nylon Plain Bearings	VX7027NSS	--

All Trolleys have carbon steel axles

Standard Finish: Electro Galvanized (EG) • Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Hot Rolled Plate	A 575	See Finishes Below	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting (Steel)	A 366 or A 36	See Finishes Below	Steel carbon, cold rolled sheet, commercial quality structural steel.
Electroplated	ASTM B 633	<b>EG</b>	Fittings and hardware supplied as "Electro-Galvanized"
Hot Dip Galvanized After Fabrication	ASTM A 123, ASTM A153, or ASTM A386.	<b>HG</b>	Channel and fittings which are hot dip galvanized after fabrication.
Paint-Green Powder Coating	--	<b>GR</b>	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Plain	--	<b>PL</b>	Other commercially available finishes can be supplied per specification when required to protect applications.
Special Coatings Yellow Passivate (Trivalent Chromium)	ASTM B63	<b>YC</b>	Fittings and hardware supplied as "Electro-Galvanized", with a "Yellow" Dichromate conversion coat versus the clear conversion coat of the EG finish.
Stainless Steel:	A 240 TYPE 304	<b>S4</b>	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	<b>S6</b>	
Aluminum	B 221 TYPE 6063 T6	<b>AL</b>	Aluminum alloy extruded bar, rod, wire, shape and tube.

PROJECT INFORMATION:		APPROVAL STAMP:
<b>Project:</b>		
<b>Date:</b>	<b>Phone:</b>	
<b>Architect / Engineer:</b>		
<b>Contractor:</b>		
<b>Address:</b>		
<b>Notes 1:</b>		

W6600

E08/24 - 74

**WARNING:** Cancer and Reproductive Harm Warning. For more information go to www.P65Warnings.ca.gov.

www.ZSIINC.com

