


Strut Clamps

O.D. Strut Clamp

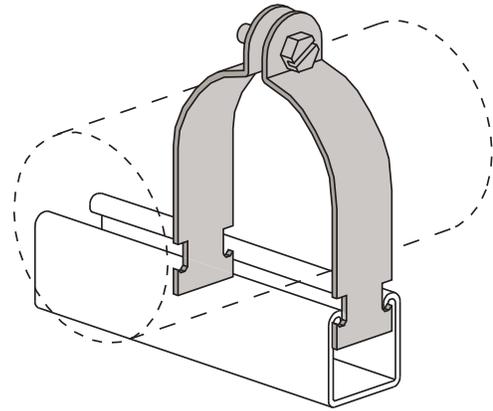

O.D. Size Range	Allowable Load (ea.)	Slotted Indented Hex Screw
1/4" (6mm) - 7/8" (22mm)	400 (1.78 kN)	1/4" x 3/4"
1" (25mm) - 1-5/8" (41mm)	600 (2.67 kN)	1/4" x 3/4"
1-3/4" (44mm) - 3-5/8" (92mm)	800 (3.56 kN)	5/16" x 1"
3-3/4" (95mm) - 12-3/4" (324mm)	1,000 (4.45 kN)	3/8" x 1-1/4"


Standard Finish: Electro Galvanized (EG) • Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-7/8" (48mm); Width: 1-5/8" (41mm); Thickness: 1/4" (6mm)

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Hot Rolled Plate	A 575	See Finishes Below	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Fitting (Steel)	A 366 or A 36	See Finishes Below	Steel carbon, cold rolled sheet, commercial quality structural steel.
Strip Steel: Pipe Clamps	A 569	See Finishes Below	Steel, sheet and strip, carbon drawing quality, special killed, hot rolled.
Electroplated	ASTM B 633	EG	Fittings and hardware supplied as "Electro-Galvanized"
Hot Dip Galvanized After Fabrication	ASTM A 123, ASTM A153, or ASTM A386.	HG	Channel and fittings which are hot dip galvanized after fabrication.
Paint-Green Powder Coating	--	GR	A dark green low gloss powder coating is applied and thoroughly baked after steel has been cleaned and phosphatized.
Plain	--	PL	Other commercially available finishes can be supplied per specification when required to protect applications.
Special Coatings Yellow Passivate (Trivalent Chromium)	ASTM B63	YC	Fittings and hardware supplied as "Electro-Galvanized", with a "Yellow" Dichromate conversion coat versus the clear conversion coat of the EG finish.
Stainless Steel:	A 240 TYPE 304	S4	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	A 240 TYPE 316	S6	
Aluminum	B 221 TYPE 6063 T6	AL	Aluminum alloy extruded bar, rod, wire, shape and tube.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

Strut Clamps

O.D. Strut Clamp



SPECIFYING Brand & Part No.	O.D. Size	Gauge	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W620025A	1/4" (6mm)	16	VT1025	SCO0025
W620037A	3/8" (10mm)		VT1037	SCO0037
W620050A	1/2" (13mm)		VT1050	SCO0050
W620062A	5/8" (16mm)		VT1062	SCO0062
W620075A	3/4" (19mm)		VT1075	SCO0075
W620087A	7/8" (22mm)		VT1087	SCO0087
W620100A	1" (25mm)	14	VT1100	SCO0100
W620112A	1-1/8" (29mm)		VT1112	SCO0112
W620125A	1-1/4" (32mm)		VT1125	SCO0125
W620137A	1-3/8" (35mm)		VT1137	SCO0137
W620150A	1-1/2" (38mm)		VT1150	SCO0150
W620162A	1-5/8" (41mm)		VT1162	SCO0162
W6034A	1-3/4" (44mm)	12	VT1175	SCO0175
W620187A	1-7/8" (48mm)		VT1187	SCO0187
W620200A	2" (51mm)		VT1200	SCO0200
W620212A	2-1/8" (54mm)		VT1212	SCO0212
W620225A	2-1/4" (57mm)		VT1225	SCO0225
W6138A	2-3/8" (60mm)		VT1237	SCO0237
W620250A	2-1/2" (64mm)	10	VT1250	SCO0250
W620262A	2-5/8" (67mm)		VT1262	SCO0262
W620275A	2-3/4" (70mm)		VT1275	SCO0275
W6142A	2-7/8" (73mm)		VT1287	SCO0287
W620300A	3" (76mm)		VT1300	SCO0300
W620312A	3-1/8" (79mm)		VT1312	SCO0312
W620325A	3-1/4" (83mm)	11	VT1325	SCO0325
W620337A	3-3/8" (86mm)		VT1337	SCO0337
W6146A	3-1/2" (89mm)		VT1350	SCO0350
W620362A	3-5/8" (92mm)		VT1362	SCO0362
W620375A	3-3/4" (95mm)		VT1375	SCO0375
W620387A	3-7/8" (98mm)		VT1387	SCO0387
W6150A	4" (102mm)	11	VT1400	SCO0400
W620412A	4-1/8" (105mm)		VT1412	SCO0412
W620425A	4-1/4" (108mm)		VT1425	SCO0425
W620437A	4-3/8" (111mm)		VT1437	SCO0437
W6154A	4-1/2" (114mm)		VT1450	SCO0450
W620462A	4-5/8" (118mm)		VT1462	SCO0462
W620475A	4-3/4" (121mm)	11	VT1475	SCO0475
W620487A	4-7/8" (124mm)		VT1487	SCO0487

SPECIFYING Brand & Part No.	O.D. Size	Gauge	DISCONTINUED Brands & Part No.	
			VERSABAR	FLORIDA STRUT
WESANCO				
W620500A	5" (127mm)	11	VT1500	SCO0500
W620512A	5-1/8" (130mm)		VT1512	SCO0512
W620525A	5-1/4" (133mm)		VT1525	SCO0525
W620537A	5-3/8" (137mm)		VT1537	SCO0537
W620550A	5-1/2" (140mm)		VT1550	SCO0550
W620562A	5-5/8" (143mm)		VT1562	SCO0562
W620575A	5-3/4" (146mm)	10	VT1575	SCO0575
W620587A	5-7/8" (149mm)		VT1587	SCO0587
W620600A	6" (152mm)		VT1600	SCO0600
W620612A	6-1/8" (156mm)		VT1612	SCO0612
W620625A	6-1/4" (159mm)		VT1625	SCO0625
W620637A	6-3/8" (162mm)		VT1637	SCO0637
W620650A	6-1/2" (165mm)	10	VT1650	SCO0650
W620662A	6-5/8" (168mm)		VT1662	SCO0662
W620675A	6-3/4" (172mm)		VT1675	SCO0675
W620687A	6-7/8" (175mm)		VT1687	SCO0687
W620700A	7" (178mm)		VT1700	SCO0700
W620712A	7-1/8" (181mm)		VT1712	SCO0712
W620725A	7-1/4" (184mm)	10	VT1725	SCO0725
W620737A	7-3/8" (187mm)		VT1737	SCO0737
W620750A	7-1/2" (191mm)		VT1750	SCO0750
W620762A	7-5/8" (194mm)		VT1762	SCO0762
W620775A	7-3/4" (197mm)		VT1775	SCO0775
W620787A	7-7/8" (200mm)		VT1787	SCO0787
W620800A	8" (203mm)	10	VT1800	SCO0800
W620812A	8-1/8" (206mm)		VT1812	SCO0812
W620825A	8-1/4" (210mm)		VT1825	SCO0825
W620837A	8-3/8" (213mm)		VT1837	SCO0837
W620850A	8-1/2" (216mm)		VT1850	SCO0850
W620862A	8-5/8" (219mm)		VT1862	SCO0862
W620887A	8-3/4" (222mm)	10	VT1887	SCO0875
W621000A	10" (254mm)		VT10000	SCO1000
W621075A	10-3/4" (273mm)		VT10075	SCO1075
W621137A	11-3/8" (289mm)		VT11037	SCO1137
W621200A	12" (305mm)		VT12000	SCO1200
W621275A	12-3/4" (324mm)		VT12075	SCO1275

W620025A

G08/24 - 5

WARNING: Cancer and Reproductive Harm Warning. For more information go to www.P65Warnings.ca.gov.