

SUBMITTAL SHEETS




Spring Steel



Stud Wall Applications

MSCCC, MSCCCP

Metal Stud Clip with Conduit Clip & Conduit "Push In" Clip

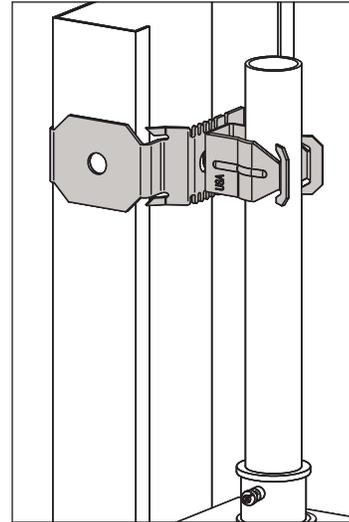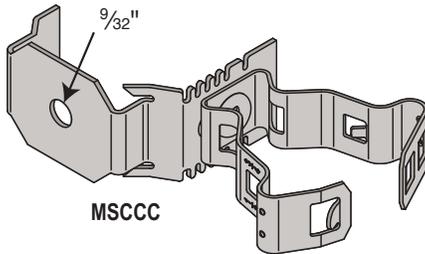

- Supports pipe and conduit to studs.
- Hole provided for additional support.
- Use with SDTSLP8X1/2 screws
- **Material:** Spring Steel
- **Finish:** Silva-Guard

Part No.	Hole Size	Conduit Size
* MSCCC6	9/32"	3/8" Flexible Conduit
* MSCCC8-12		1/2" or 3/4" EMT, Rigid
* MSCCC16		1" EMT, Rigid
* MSCCC20		1-1/4" EMT, Rigid
MSCCCP8	9/32"	1/2" EMT
MSCCCP12		3/4" EMT, 1/2" Rigid
MSCCCP16		1" EMT, 3/4" Rigid

* Not a UL Listed Product

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	SG	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	EG	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	PG	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

MSCCC-MSCCCP

H08/24 - 89



WARNING: Cancer and Reproductive Harm Warning. For more information go to www.P65Warnings.ca.gov.

www.ZSIINC.com

