


Fiberglass Clevis Hanger


Clevis Hanger

- Sizes 1" to 4" (25mm to 102mm) Injection molded Polyester PE (Black) Special Order or Polyurethane PU (Gray) Stocked
- Size 6" (152mm) Injection molded Polyurethane PU (Gray). Profile is different that 1" thru 4"
- See Chemical Resistant Guide in Fiberglass catalog on pages 35 - 37
- No special tools required

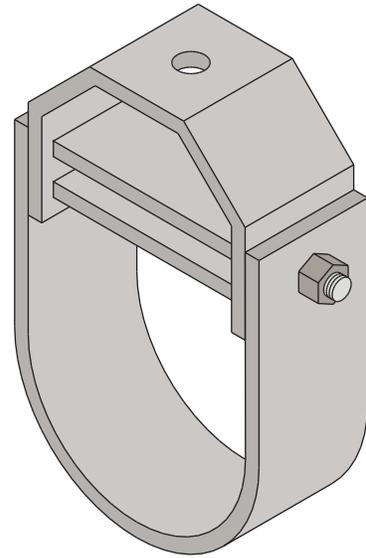

Part No.		Pipe Size	Hanger OD	Hanger Rod Diameter	Design Load Uniform
Polyester FRP Black (PE)	Polyurethane Gray (PU)				
SCH100PE	SCH100PU	1/2" (13mm) to 1" (25mm)	1-1/2" (38mm)	3/8" (10mm)	225 lb (1.0kN)
SCH200PE	SCH200PU	1-1/4" (32mm) to 2" (51mm)	2-1/2" (61mm)	1/2" (13mm)	280 lb (1.2kN)
SCH300PE	SCH300PU	2-1/2" (61mm) to 3" (76mm)	3-7/8" (98mm)	1/2" (13mm)	550 lb (2.5kN)
SCH400PE	SCH400PU	3-1/2" (89mm) to 4" (102mm)	5" (127mm)	1/2" (13mm)	650 lb (2.9kN)
SCH600PE	SCH600PU	4-1/2" (114mm) to 6" (152mm)	7" (178mm)	1/2" (13mm)	1,000 lb (4.5kN)

Design loads stated with a 3:1 safety factor.

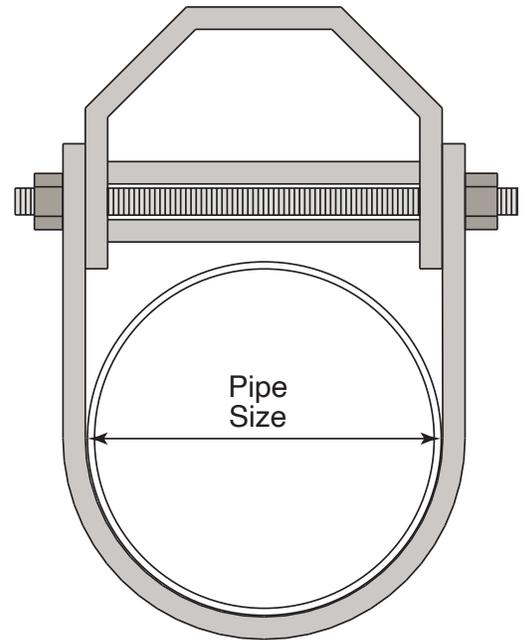

Hole Diameter: 1/16" (11mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1-5/8" (41mm); Width: 1-5/8"(41mm); Thickness: 1/4" (6mm)

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

SCH100PE

WARNING: Cancer and Reproductive Harm Warning. For more information go to www.P65Warnings.ca.gov.