

Cushioned Clamps




Cush-A-Strip™



- Manufactured from a thermoplastic elastomer, Cush-A-Strip is designed for use from -50°F to 275°F.
- Easy Stocking – Packaged in 20 foot rolls in an E-Z dispenser box for convenience in handling and storage. **Cush-A-Strip roll part number is S-716**
- Easy Measuring – Marked in 1/4" increments for fast measuring and cutting, while eliminating waste.
- Lock-lip edges ensure that Cush-A-Strip will remain in place with a balanced grip.
- Clamps ordered separately. They are available with a standard bolt and nylon lock nut in steel (electro-dichromate), and stainless steel, in sizes ranging from 1/4" tube to 6" pipe.




(1) Cut appropriate length strip using the cutting schedule shown on right.

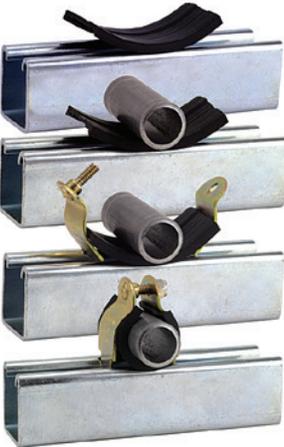

(2) Place the pipe on the Cush-A-Strip

(3) Insert the clamps in the strut

(4) Tighten the clamps.

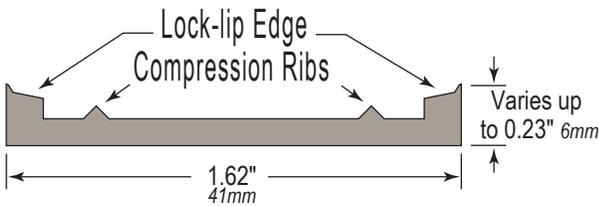

Cush-A-Strip™ Cutting Guide

Clamp Part No.		Dimensions (Inches)			
Gold Plated Steel	Stainless Steel Type 304	Clamp Size O.D.	Tube Size O.D.	Pipe Size (Nom.)	Cutting Schedule
TG008C	NS008	1/2"	1/4"	–	7/8" (22mm)
TG010C	NS010	5/8"	3/8"	–	1-1/8" (29mm)
TG012C	NS012	3/4"	1/2"	1/4"	1-1/2" (38mm)
TG014C	NS014	7/8"	5/8"	3/8"	2" (51mm)
TG016C	NS016	1"	3/4"	–	2-1/4" (57mm)
TG018C	NS018	1-1/8"	7/8"	1/2"	3" (76mm)
TG020C	NS020	1-1/4"	1"	3/4"	3-1/4" (83mm)
TG022C	NS022	1-3/8"	1-1/8"	–	3-5/8" (92mm)
TG024C	NS024	1-1/2"	1-3/16"	–	3-7/8" (98mm)
TG024C	NS024	1-1/2"	1-1/4"	1"	4" (102mm)
TG026C	NS026	1-5/8"	1-3/8"	–	4-1/2" (114mm)
NG028C	CS028	1-3/4"	1-1/2"	–	4-7/8" (124mm)
NG030C	CS030	1-7/8"	1-5/8"	1-1/4"	5-1/4" (133mm)
NG032C	CS032	2"	1-3/4"	–	5-1/2" (140mm)
NG034C	CS034	2-1/8"	1-7/8"	1-1/2"	6" (152mm)
NG036C	CS036	2-1/4"	2"	–	6-3/8" (162mm)
NG038C	CS038	2-3/8"	2-1/8"	–	6-3/4" (172mm)
NG040C	CS040	2-1/2"	2-1/4"	–	7-1/4" (184mm)
NG042C	CS042	2-5/8"	2-3/8"	2"	7-1/2" (191mm)
NG044C	CS044	2-3/4"	2-1/2"	–	8" (203mm)
NG048C	CS048	3"	2-3/4"	–	8-3/4" (222mm)
NG050C	CS050	3-1/8"	2-7/8"	2-1/2"	9-1/4" (235mm)
NG054C	CS054	3-1/4"	3"	–	9-1/2" (241mm)
NG060C	CS060	3-3/4"	3-1/2"	3"	11" (279mm)
NG068C	CS068	4-1/4"	4"	3-1/2"	12-1/4" (311mm)
NG076C	CS076	4-3/4"	4-1/2"	4"	14" (356mm)
NG092C	CS092	5-3/4"	–	5"	15-1/2" (394mm)
NG110C	CS110	6-7/8"	–	6"	18-1/2" (470mm)

* Gold Plated Steel Clamps Supplied with Fixed Stud and Nylon Lock Nut
 * Stainless Steel Clamps Supplied with fixed Stud and Nylon Lock Nut from 1/2" through 1-3/4" Sizes and 1-7/8" through 6-7/8" Sizes are supplied with a Loose Bolt and Hex Nut

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		