

SUBMITTAL SHEETS



Spring Steel



Structural Attachment

ABCC, NBCC

Angle Bracket and Nail Bracket with Conduit Clip

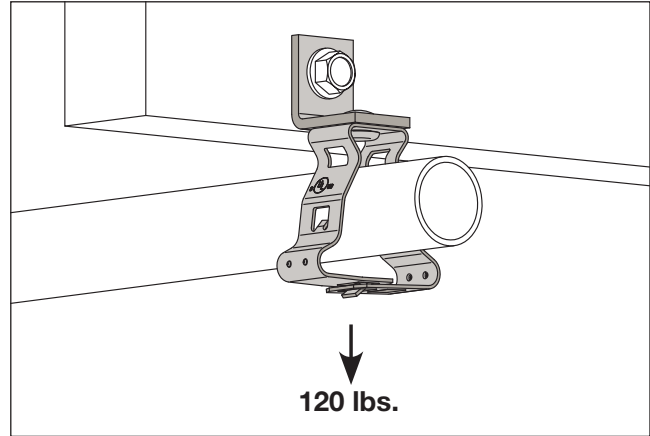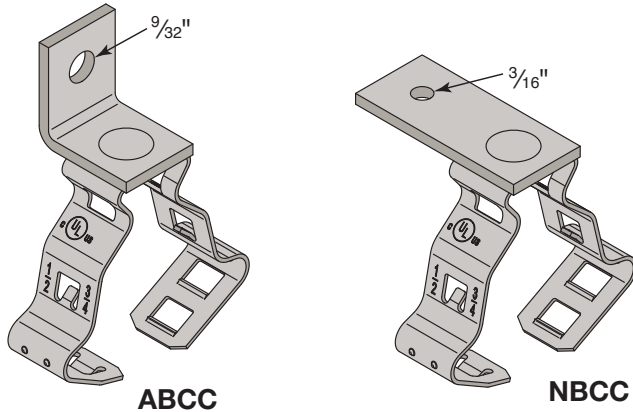

- **ABCC:** Supports horizontal runs of conduit through metal studs and prevents conduit from rattling in wall.
- **NBCC:** Attaches conduit to wood, concrete and steel, works with power tools and nails.
- Conduit clip rotates 360 degrees.
- **Material:** Steel & Spring Steel
- **Finish:** Pregalvanized & Silva-Guard

Part No.	Conduit Size
ABCC6 *	3/8" Flexible Conduit
ABCC812	1/2" or 3/4" EMT, Rigid
NBCC6 *	3/8" Flexible Conduit
NBCC812	1/2" or 3/4" EMT, Rigid
* Not a UL Listed Product	

Finish or Material Order Codes			
Material/Finish	ASTM Designation	Material/Finish Codes	Description
Carbon Steel	ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B	See Finishes Below	Steel
Spring Steel	ASTM A684 Grade 1055	See Finishes Below	Cold rolled Spring Steel sheet
Silva-Guard	--	SG	Silva-Guard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. Silva-Guard coating is WEEE, ELV and RoHS compliant. SG Finish is approved for outdoor as well as indoor applications. It is a chrome free duplex coating system that combines an inorganic zinc-rich base coat with an aluminum-rich organic topcoat.
Electroplated	ASTM B 633 SC1 or SC3, Type III	EG	This coating is standard for most products. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts.
Pre-Galvanized	A 653 SS GR33 G90.	PG	Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		

ABCC-NBCC

H08/24 - 70



WARNING: Cancer and Reproductive Harm Warning.
For more information go to www.P65Warnings.ca.gov.

www.ZSIINC.com

